Resource Request from Cordova Applications

Overview

MobileFirst applications can access resources using the `WLResourceRequest` REST API.
The REST API works with all adapters and external resources, and is supported in the following Cordova platforms: iOS, Android, Windows 8.1 Universal and Windows 10 UWP.

Prerequisites:

- Ensure you have added the MobileFirst Platform SDK (../../adding-the-mfpf-sdk/adding-the-mfpf-sdk-to-android-applications) to your Cordova application.
- Learn how to create adapters (../../adapters/adapters-overview/).

WLResourceRequest

The `WLResourceRequest` class handles resource requests to adapters or external resources.

```
var resourceRequest = new WLResourceRequest(
    "/adapters/RSSReader/getFeedFiltered",
    WLResourceRequest.GET
);
```

The parameters for the constructor are:

- **request URL**:
  - For JavaScript adapters, the URL should be `/adapters/{AdapterName}/{procedureName}`
  - For Java adapters, the URL should be `/adapters/{AdapterName}/{path}`
  - To access resources outside of the project, use the full URL
- **HTTP method**: Most commonly `WLResourceRequest.GET` or `WLResourceRequest.POST`
- **timeout**: Optional, request timeout in milliseconds

setQueryParameter

By using the `setQueryParameter` method, you can include query (URL) parameters in the REST request.

- In JavaScript adapters, which use ordered nameless parameters, pass an array of parameters with the name `params`:

  ```
  resourceRequest.setQueryParameter("params", "['param1', 'param2']");
  ```

- In Java adapters or external resources, use `setQueryParameter` for each parameter:

  ```
  resourceRequest.setQueryParameter("param1", "value1");
  resourceRequest.setQueryParameter("param2", "value2");
  ```

send(body)

The `send()` method triggers the request. It takes an optional parameter to set a body to the HTTP request, which could be a JSON object or a simple string.

```
resourceRequest.send().then(
    onSuccess,
    onFailure
)
```

Using JavaScript promises, you can define `onSuccess` and `onFailure` functions.

sendFormParameters(json)

To send URL-encoded form parameters, use the `sendFormParameters(json)` method instead. This method converts the JSON to a URL encoded string, sets the content-type to `application/x-www-form-urlencoded`, and sets it as the HTTP body.

> For more information about `WLResourceRequest`, see the API reference in the user documentation.

The response

Both the `onSuccess` and `onFailure` callbacks receive a `response` object, which typically contains the following properties:

- **`status`**: The HTTP response status
- **`responseJSON`**: An object that contains the data that is returned by the called resource, and additional information about the resource call

The `response` object is returned to the corresponding success/failure handler.

```
{
  "errors": [],
  "info": [],
  "warnings": [],
  "isSuccessful": true,
  "responseHeaders": {
    "Cache-Control": "no-cache, must-revalidate, post-check=0, pre-check=0"
  },
  "responseTime": 491,
  "statusCode": 200,
  "statusReason": "OK",
  "totalTime": 592,
  "Items": [{
    "creator": "Jon Fingas",
    "link": "http:\/\/www.engadget.com\/2014\/11\/10\/harvard-used-cameras-to-check-attendance\/?ncid=rss
_truncated",
    "pubDate": "Mon, 10 Nov 2014 02:21:00 -0500",
    "title": "Harvard used cameras to track attendance without telling students"
  }, {
    "creator": "Jon Fingas",
    "link": "http:\/\/www.engadget.com\/2014\/11\/10\/bmw-ev-charging-street-lights\/?ncid=rss_truncated",
    "pubDate": "Mon, 10 Nov 2014 00:10:00 -0500",
    "title": "BMW's new street lights will charge your electric car"
  }, {
    "creator": "Daniel Cooper",
    "link": "http:\/\/www.engadget.com\/2014\/11\/09\/hwyc-lumia-925\/?ncid=rss_truncated",
    "pubDate": "Sun, 09 Nov 2014 22:43:00 -0500",
    "title": "How would you change Nokia's Lumia 925?"
  }]
}
```


- `errors`, `info`, and `warnings` are optional arrays of strings that contain messages.
- The `isSuccessful` property is set to `true` if the resource call succeeded (even if no data was retrieved), or to `false` otherwise.
- The response can contain other metadata such as `responseHeaders`, `responseTime`, `statusCode`, `statusReason`, and `totalTime`.

Handling the response

The rest of the resource call result depends on what was retrieved from the back-end system. In this example, the `Items` element is a JSON representation of the XML code that was received from the back end, after the rules in the XSL file were applied.

```
function loadFeedsSuccess(result){
    WL.Logger.debug("Feed retrieve success");
    if (result.responseJSON.Items.length > 0)
        displayFeeds(result.responseJSON.Items);
}
```

For more information

> For more information about WLResourceRequest, refer to the user documentation.

Sample application

The ResourceRequestSwift project contains a Cordova application that makes a resource request using a Java adapter.
The adapter Maven project contains the Java adapter to be used during the resource request call.

Click to download (https://github.com/MobileFirst-Platform-Developer-Center/ResourceRequestCordova/tree/release80) the MobileFirst project.
Click to download (https://github.com/MobileFirst-Platform-Developer-Center/Adapters/tree/release80) the adapter Maven project.

Sample usage

1. From the command line, navigate to the Cordova project.
2. Add a platform by running the `cordova platform add` command.
3. Prepare and run the Cordova application by running the `cordova prepare` command followed by the `cordova run` command.

- The sample uses the `JavaAdapter` contained in the Adapters Maven project. Use either Maven or MobileFirst Developer CLI to build and deploy the adapter (../../creating-adapters/).

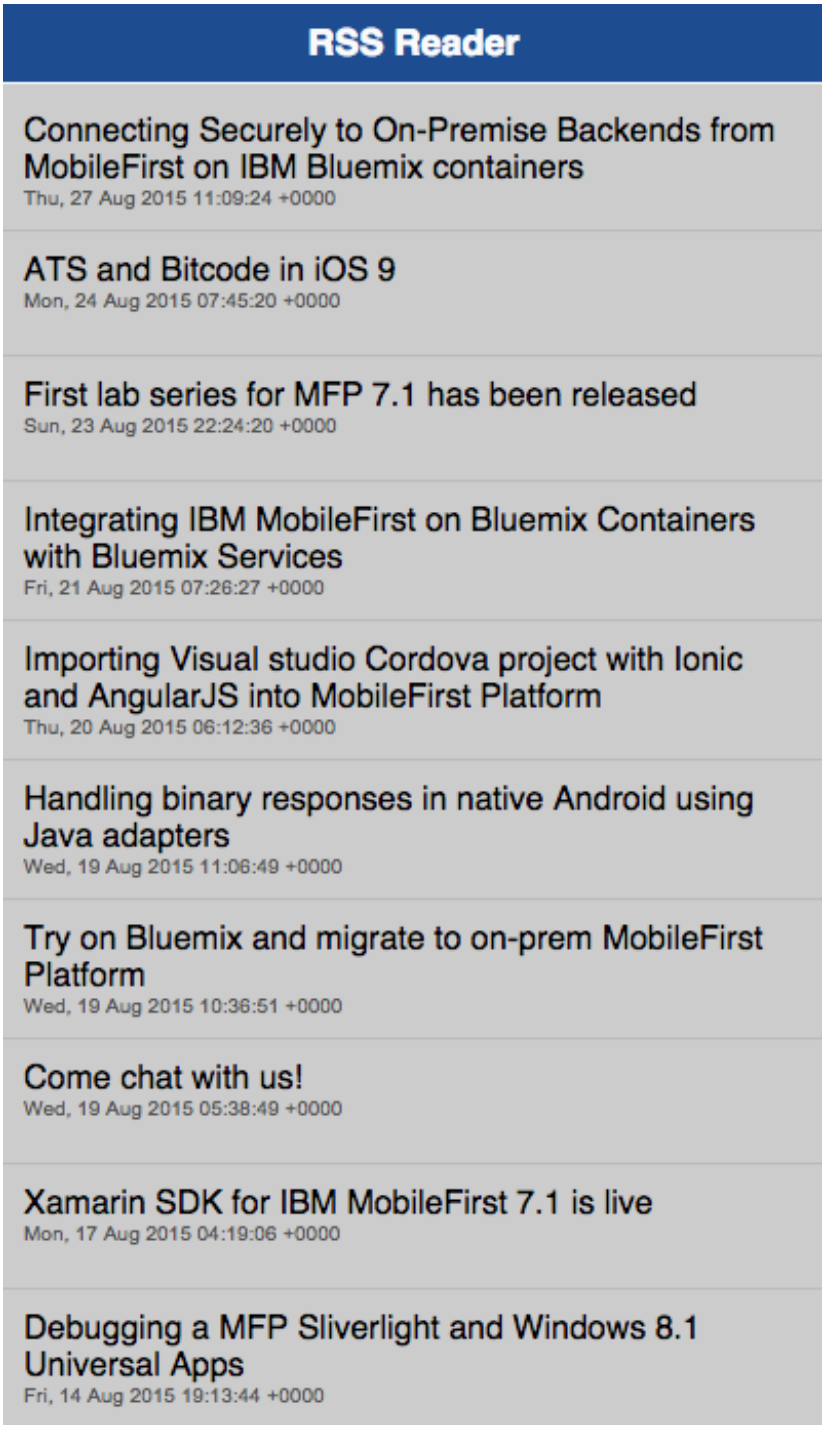
RSS Reader
Connecting Securely to On-Premise Backends from MobileFirst on IBM Bluemix containers
Thu, 27 Aug 2015 11:09:24 +0000
ATS and Bitcode in iOS 9
Mon, 24 Aug 2015 07:45:20 +0000
First lab series for MFP 7.1 has been released
Sun, 23 Aug 2015 22:24:20 +0000
Integrating IBM MobileFirst on Bluemix Containers with Bluemix Services
Fri, 21 Aug 2015 07:26:27 +0000
Importing Visual studio Cordova project with Ionic and AngularJS into MobileFirst Platform
Thu, 20 Aug 2015 06:12:36 +0000
Handling binary responses in native Android using Java adapters
Wed, 19 Aug 2015 11:06:49 +0000
Try on Bluemix and migrate to on-prem MobileFirst Platform
Wed, 19 Aug 2015 10:36:51 +0000
Come chat with us!
Wed, 19 Aug 2015 05:38:49 +0000
Xamarin SDK for IBM MobileFirst 7.1 is live
Mon, 17 Aug 2015 04:19:06 +0000
Debugging a MFP Sliverlight and Windows 8.1 Universal Apps
Fri, 14 Aug 2015 19:13:44 +0000