

Android - Using native pages

Overview

This tutorial explains how to integrate native and web "pages" in an Android application by using the `WL.NativePage.show()` API to open a native page from JavaScript.

With this method, data can be sent from JavaScript to the opened native page. You can specify a callback to be called after the native page closes.

This tutorial covers the following topics:

- Connecting to the plugin from the JavaScript code
- Creating a native page
- Returning control to the web view
- Sample application

Connecting to the plugin from the JavaScript code

1. Implement the `WL.NativePage.show()` method to open the native page:

```
function openNativePage() {  
    var params = {  
        nameParam : $('#nameInput').val()  
    };  
    WL.NativePage.show(nativePageClassName, backFromNativePage, params);  
}
```

- `nativePageClassName`: The name of a native Android Class to start.
- `backFromNativePage`: A callback function to call when the native page closes.
- `params`: An optional custom parameters object to pass to the native code.

2. To handle the callback function:

```
function backFromNativePage(data) {  
    alert("Received phone number is: " + data.phoneNumber);  
}
```

The `backFromNativePage(data)` function passes data back to the web part of an application after the native page closes.

Creating a native page

In Android, the native page must be implemented as an Android Activity, or extend an existing Activity.

1. Declare the native page in the `AndroidManifest.xml` file, as you would any Activity. For example:

```
<activity android:name=".HelloNative"></activity>
```

2. To retrieve custom data parameters that are passed from the web view, use an `Intent` object:

```
protected void onCreate(Bundle savedInstanceState) {  
    super.onCreate(savedInstanceState);  
    String name = getIntent().getStringExtra("nameParam");  
}
```

Returning control to the web view

When the native page switches back to the web view, the `finish()` function is called for the Activity. You can pass data back to the web view by using an `Intent` object. For example:

Java:

```
String phoneNumber = editText.getText().toString();
Intent phoneNumberInfo = new Intent();
phoneNumberInfo.putExtra("phoneNumber", phoneNumber);
setResult(RESULT_OK, phoneNumberInfo);
finish();
```


JavaScript:

```
function backFromNativePage(data) {
    alert("Received phone number is: " + data.phoneNumber);
}
```

Sample application

Click to download

(<http://public.dhe.ibm.com/software/products/en/MobileFirstPlatform/docs/v700/UsingNativePagesInHybridAppsProject.zip>) the Studio project.

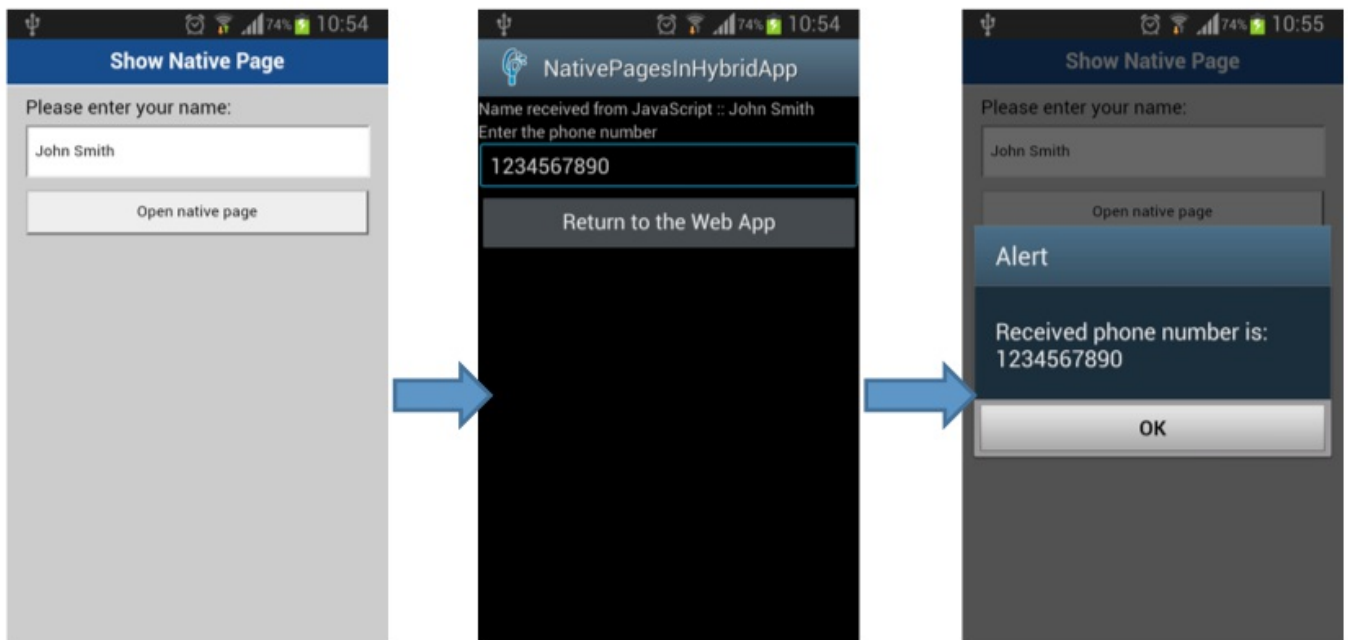

Last modified on November 09, 2016