Using a MobileFirst Hybrid application as a container for server-generated pages

fork and edit tutorial (https://github.ibm.com/MFPSamples/DevCenter/tree/master/tutorials/en/foundation/7.1/advanced-topics/using-a-mobilefirst-application-as-a-container-for-server-generated-pages.html) | report issue (https://github.ibm.com/MFPSamples/DevCenter/issues/new)

This tutorial covers the following topics:

- Migrating applications to IBM MobileFirst Platform Foundation
- Running your application on the Android emulator
- Running your application on the iOS emulator
- Sample application

Migrating applications to IBM MobileFirst Platform Foundation

- By using mobile web technology, you can deploy applications to the widest variety of devices.
- The existence of public application stores, such as Apple iTunes and Google Play, changes the way applications are hosted and marketed. These changes make traditional methods of distribution less relevant.
- IBM MobileFirst Platform Foundation provides the solution to build cross-platform applications that can be distributed through the application stores by using the hybrid application programming model.
- In the hybrid model, developers typically package the application HTML, CSS, and JavaScript™ code as part of the application that is deployed to the application store.
- This tutorial shows the remote loading of dynamic content capability, where the HTML, CSS, and JavaScript code is hosted externally from the natively packaged hybrid.

Creating MobileFirst applications

CLI

From a terminal window, use the following CLI commands to add a project and application:

```
mfp create UsingApplicationAsAContainer
cd UsingApplicationAsAContainer
mfp add hybrid UsingApplicationAsAContainer
```

Next, add a required environment, for example Android:

```
cd UsingApplicationAsAContainer
mfp add environment android
```

Studio

In MobileFirst Studio, create a new project, "UsingApplicationAsAContainer"

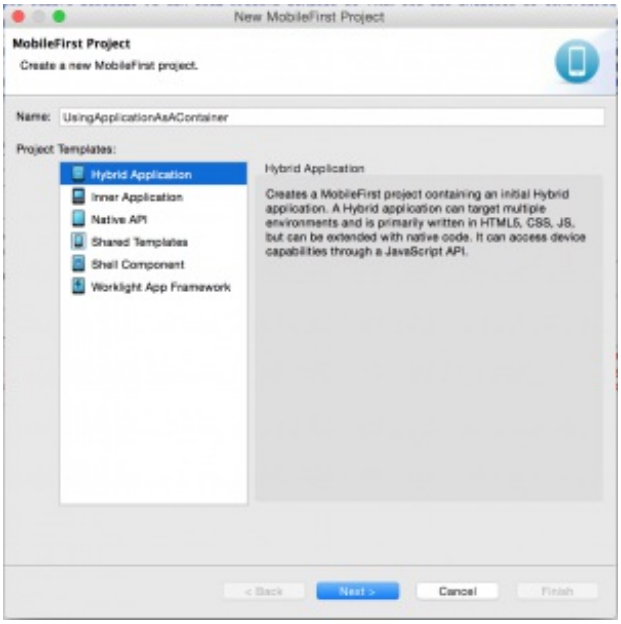

A project might host multiple applications. However, in this tutorial, you use only one app: `UsingApplicationAsAContainer`

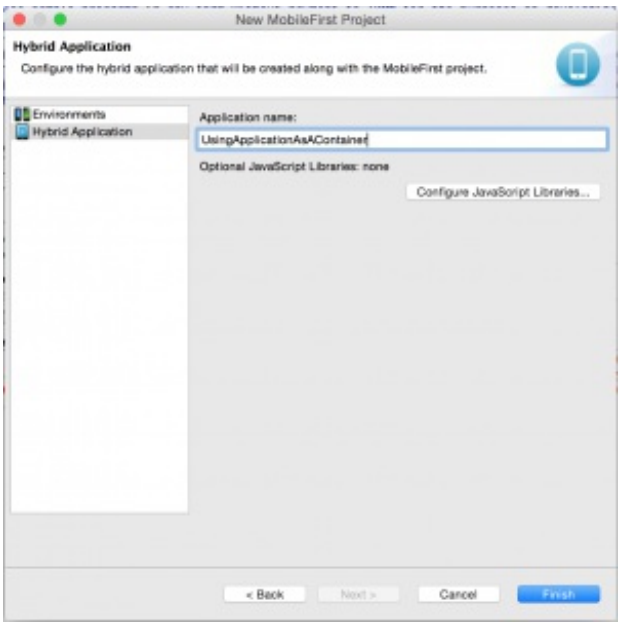

You can set the target environments either while you are working in the **MobileFirst Project** wizard, or later.

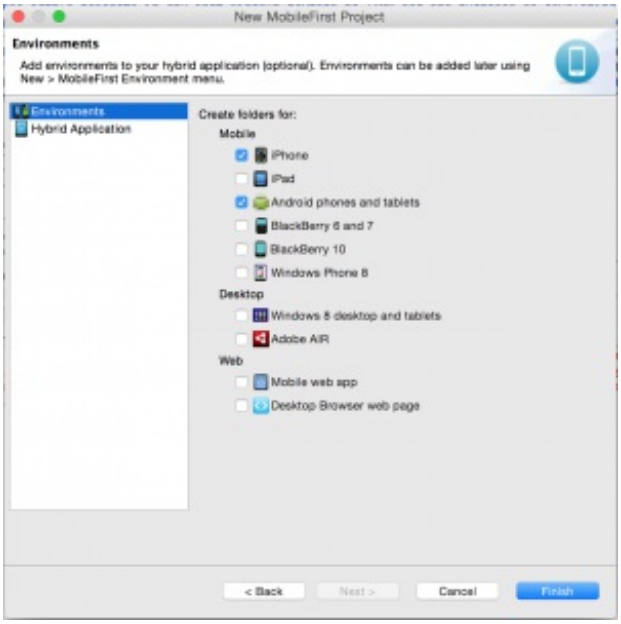

IBM MobileFirst environments

- IBM MobileFirst Foundation provides a model for organizing the application project structure for each target environment (for example, Android, iPhone, iPad).
- You select your target environment through the **MobileFirst Environment** wizard.

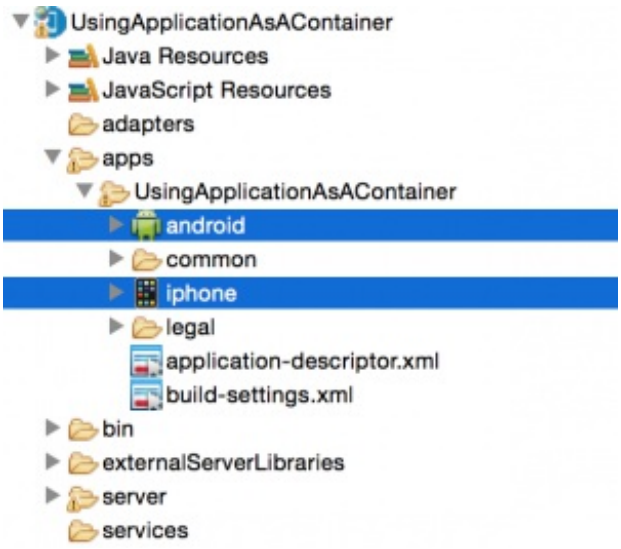

IBM MobileFirst Common environment

- The simplest way to use MobileFirst apps as containers for server-generated pages is through the Common environment.
- Open the `application-descriptor.xml` file and edit the `mainFile` tag to point to `http://m.ibm.com`.

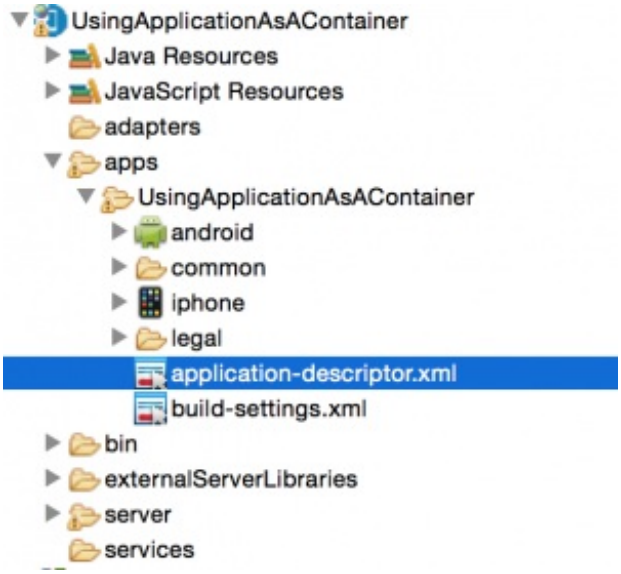

```
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<application xmlns="http://www.worklight.com/application-descriptor" id="UsingApplicationAsAContainer
" platformVersion="6.3.0.00.20141003-1438">
   <displayName>UsingApplicationAsAContainer</displayName>
   <description>UsingApplicationAsAContainer</description>
   <author>
      <name>application's author</name>
      <email>application author's e-mail</email>
      <homepage>http://mycompany.com</homepage>
      <copyright>Copyright My Company</copyright>
   </author>
   <mainFile>http://m.ibm.com</mainFile>
   <features/>
   <thumbnailImage>common/images/thumbnail.png</thumbnailImage>
   <iphone bundleId="com.UsingApplicationAsAContainer" version="1.0">
      <worklightSettings include="false"/>
      <security>
         <encryptWebResources enabled="false"/>
         <testWebResourcesChecksum enabled="false" ignoreFileExtensions="png, jpg, jpeg, gif, mp4,
mp3"/>
      </security>
   </iphone>
   <android version="1.0">
      <worklightSettings include="false"/>
      <security>
         <encryptWebResources enabled="false"/>
         <testWebResourcesChecksum enabled="false" ignoreFileExtensions="png, jpg, jpeg, gif, mp4,
mp3"/>
         <publicSigningKey/>
         <packageName/>
      </security>
   </android>
</application>
```

Running your application on the Android emulator

1. Build the Android environment.
2. Deploy the application.
3. Right-click the generated Android project and click **Run As** > **Android Application**.

You can see that the `http://m.ibm.com` URL is displayed in your Android emulator.

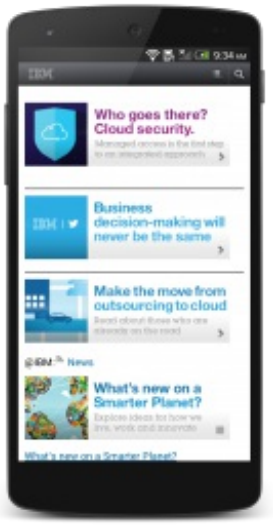

Running your application on the iOS emulator

1. Deploy the application to your iOS emulator.
2. Right-click the IOS environment and click **Run As** > **Xcode project**.

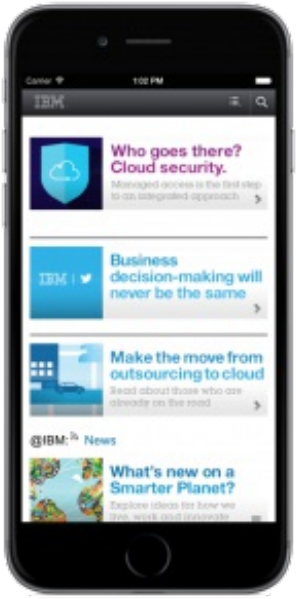

Sample application

Click to download (https://github.com/MobileFirst-Platform-Developer-Center/UsingApplicationAsAContainer/tree/release71) the sample.