

# Using a MobileFirst Hybrid application as a container for server-generated pages

Relevant to:

- Native iOS
- Native Android
- Hybrid
- Download MobileFirst project (<https://github.com/MobileFirst-Platform-Developer-Center/UsingApplicationAsAContainer>)

This tutorial covers the following topics:

- Migrating applications to IBM MobileFirst Platform Foundation
- Running your application on the Android emulator
- Running your application on the iOS emulator
- Sample application

## Migrating applications to IBM MobileFirst Platform Foundation

- By using mobile web technology, you can deploy applications to the widest variety of devices.
- The existence of public application stores, such as Apple iTunes and Google Play, changes the way applications are hosted and marketed. These changes make traditional methods of distribution less relevant.
- IBM MobileFirst Platform Foundation provides the solution to build cross-platform applications that can be distributed through the application stores by using the hybrid application programming model.
- In the hybrid model, developers typically package the application HTML, CSS, and JavaScript™ code as part of the application that is deployed to the application store.
- This tutorial shows the remote loading of dynamic content capability, where the HTML, CSS, and JavaScript code is hosted externally from the natively packaged hybrid.

## Creating MobileFirst applications

### CLI

From a terminal window, use the following CLI commands to add a project and application:

[code]

```
mfp create UsingApplicationAsAContainer
cd UsingApplicationAsAContainer
mfp add hybrid UsingApplicationAsAContainer
```

[/code]

Next, add a required environment, for example Android:


[code]

```
cd UsingApplicationAsAContainer
```


mfpm add environment android  
[/code]

## Studio

In MobileFirst Studio, create a new project, "UsingApplicationAsAContainer"

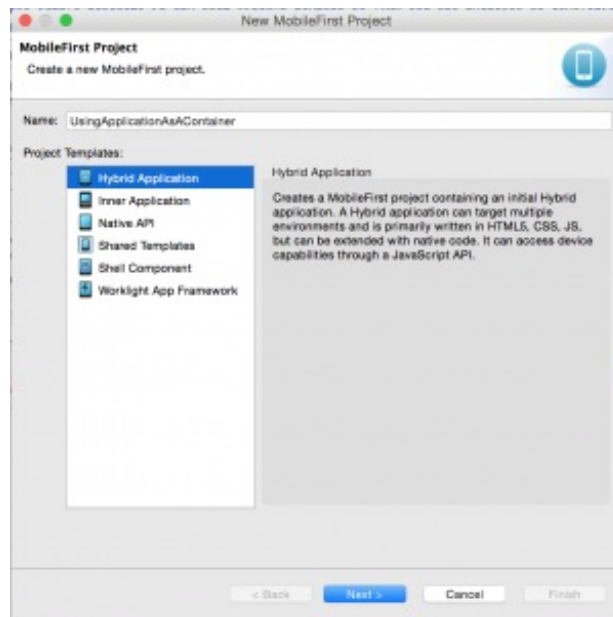

A project might host multiple applications. However, in this tutorial, you use only one app: UsingApplicationAsAContainer

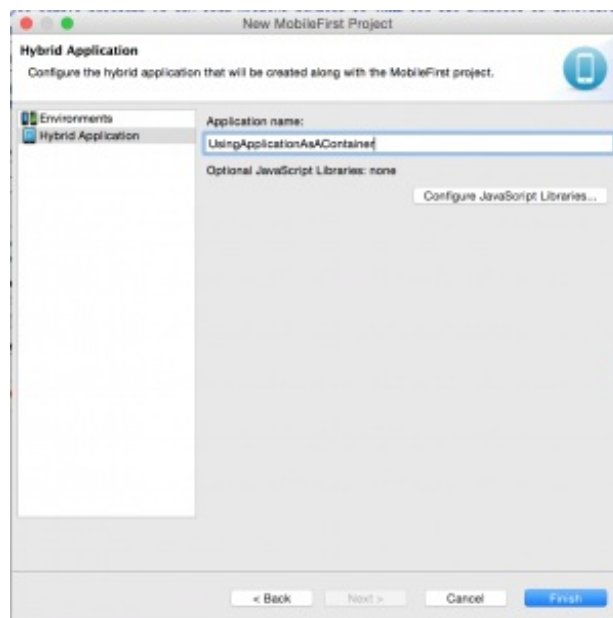

You can set the target environments either while you are working in the **MobileFirst Project** wizard, or later.



## IBM MobileFirst environments

- IBM MobileFirst Foundation provides a model for organizing the application project structure for each target environment (for example, Android, iPhone, iPad).
- You select your target environment through the **MobileFirst Environment** wizard.





## IBM MobileFirst Common environment

- The simplest way to use MobileFirst apps as containers for server-generated pages is through the Common environment.
- Open the application-descriptor.xml file and edit the mainFile tag to point to <http://m.ibm.com>.



```
[code lang="xml" highlight="11"]
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<application xmlns="http://www.worklight.com/application-descriptor"
id="UsingApplicationAsAContainer" platformVersion="6.3.0.00.20141003-1438">
<displayName>UsingApplicationAsAContainer</displayName>
<description>UsingApplicationAsAContainer</description>
<author>
<name>application's author</name>
<email>application author's e-mail</email>
<homepage>http://mycompany.com</homepage>
<copyright>Copyright My Company</copyright>
</author>
```

```
<mainFile>http://m.ibm.com</mainFile>
<features/>
<thumbnailImage>common/images/thumbnail.png</thumbnailImage>
<iphone bundleId="com.UsingApplicationAsAContainer" version="1.0">
<worklightSettings include="false"/>
<security>
<encryptWebResources enabled="false"/>
<testWebResourcesChecksum enabled="false" ignoreFileExtensions="png, jpg, jpeg, gif, mp4,
mp3"/>
</security>
</iphone>
<android version="1.0">
<worklightSettings include="false"/>
<security>
<encryptWebResources enabled="false"/>
<testWebResourcesChecksum enabled="false" ignoreFileExtensions="png, jpg, jpeg, gif, mp4,
mp3"/>
<publicSigningKey/>
<packageName/>
</security>
</android>
</application>
[/code]
```

## Running your application on the Android emulator

1. Build the Android environment.
2. Deploy the application.
3. Right-click the generated Android project and click **Run As > Android Application**.

You can see that the `http://m.ibm.com` URL is displayed in your Android emulator.





## Running your application on the iOS emulator

1. Deploy the application to your iOS emulator.
2. Right-click the IOS environment and click **Run As > Xcode project**.





## Sample application

Click to download (<https://github.com/MobileFirst-Platform-Developer-Center/UsingApplicationAsAContainer>) the sample.