

Previewing your application on BlackBerry 10

Overview

Prerequisite: Make sure to read [Previewing the web resources of your application \(../../hello-world/previewing-applications-web-resources/\)](#).

This tutorial covers the following topics.

- Previewing the application in the BlackBerry Ripple Emulator
- Running the application in a physical device or simulator

Previewing the application in the BlackBerry Ripple Emulator

Prerequisite: To be able to preview the application in the Ripple Emulator, you must first install Ripple. Ripple is a Chrome extension that can be downloaded and installed from the [Chrome Web Store](#). After Ripple is installed, follow these steps.

CLI


From a terminal window, use the `mfp console` command to open MobileFirst Console.

MobileFirst Studio

1. To preview the BlackBerry environment from the MobileFirst Operations Console, click the **eye** icon and then click **Open Simple Preview**.


Mobile Browser Simulator

The Mobile Browser Simulator displays mobile web pages in a variety of mobile browser sizes and shapes.

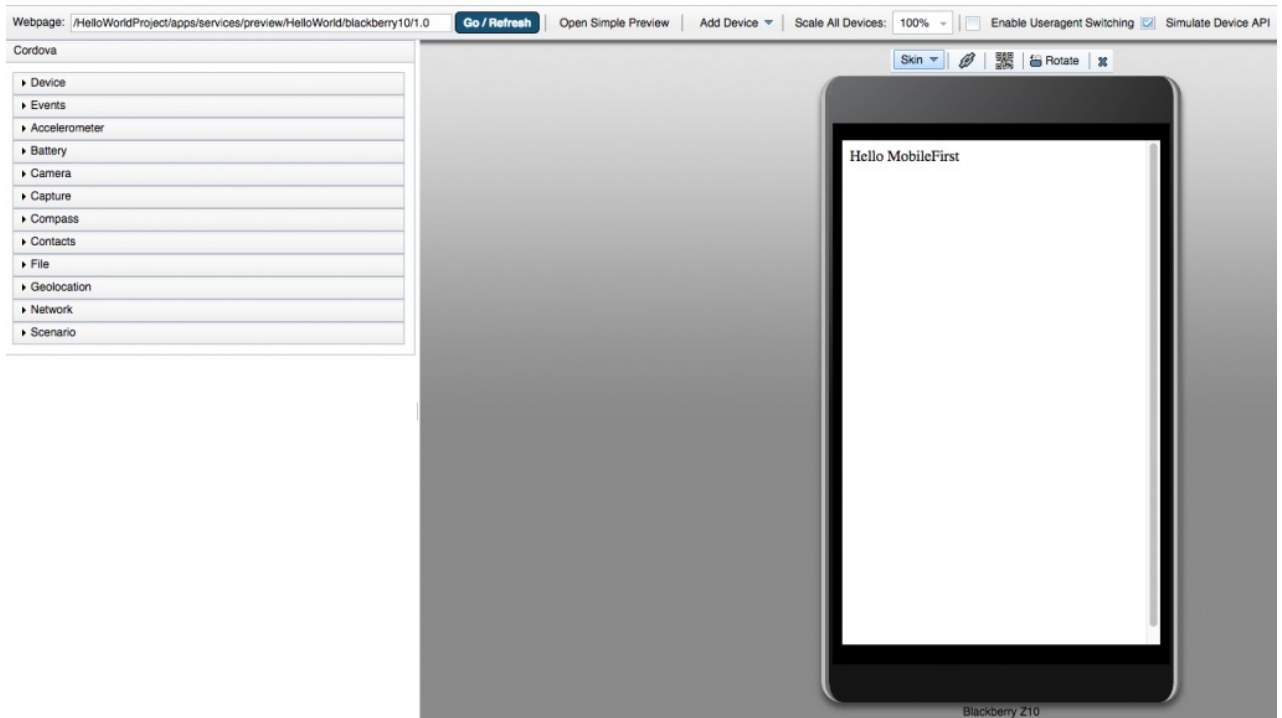

2. Enable Ripple by clicking **Enable** from the extension menu in Chrome.
3. If you get the following screen, select **BlackBerry 10 WebWorks (1.0.0)** to proceed with previewing


the application.

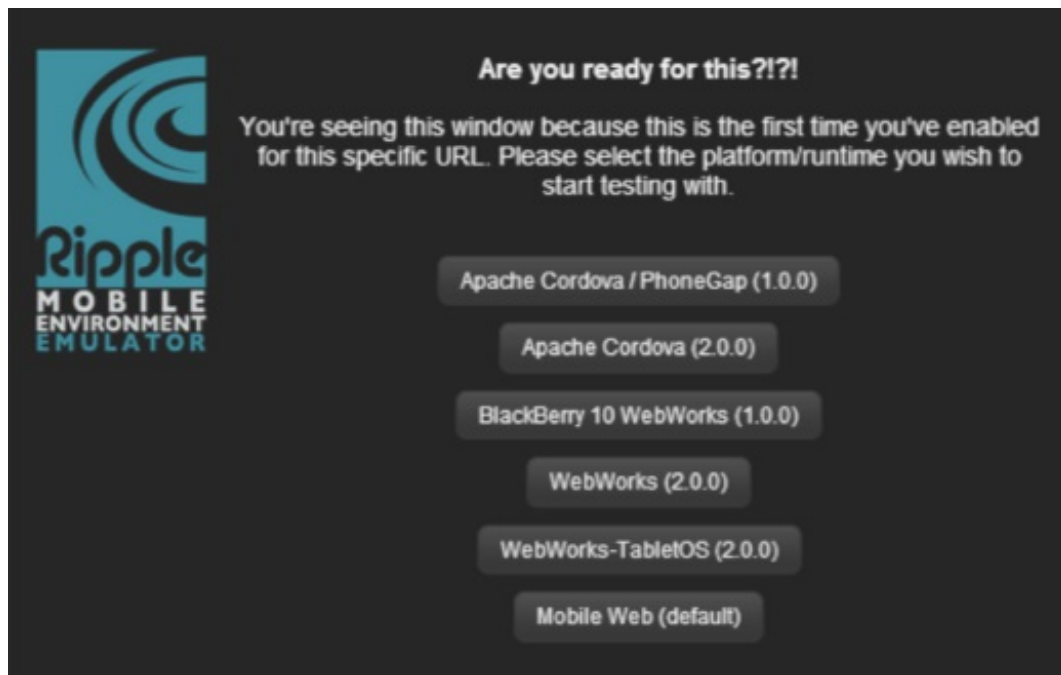

The page autorefreshes and the environment web resources are displayed in the Ripple Emulator.




Running the application in a physical device or simulator

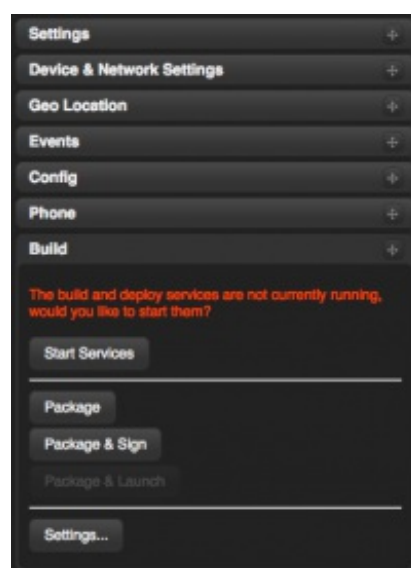

Prerequisite: Before proceeding, you must have the BlackBerry WebWorks SDK installed. For more information, see [Setting up your BlackBerry 10 development environment \(../setting-up-your-development-environment/setting-blackberry-10-development-environment/\)](#).

1. In Ripple, on the right menu, click **Build**, and then click the **Settings...** button at the bottom.

2. Enter the following package settings.

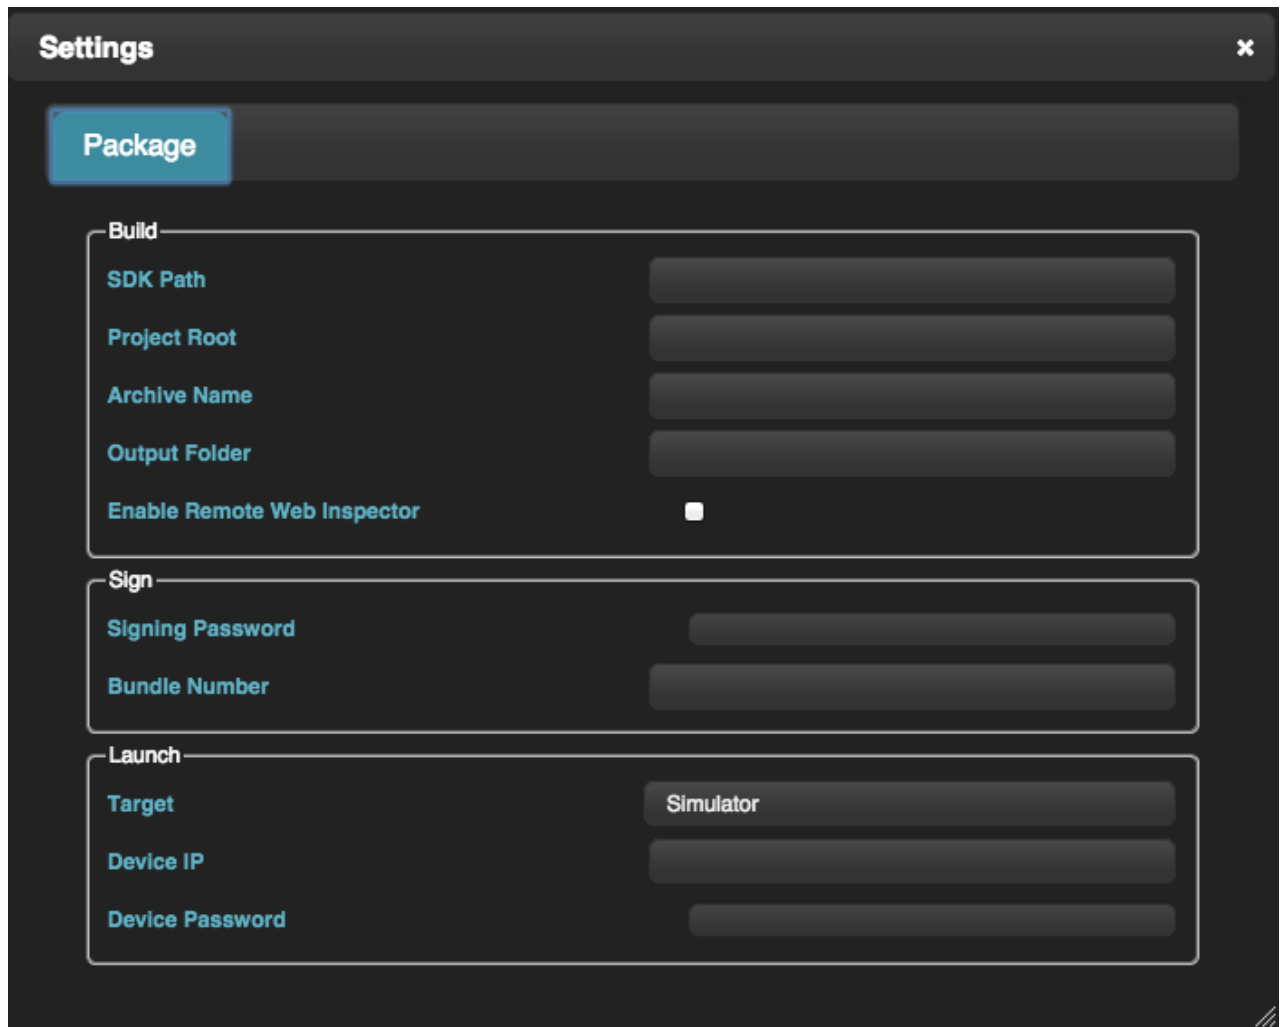

The screenshot shows a 'Settings' dialog box with a 'Package' tab selected. The dialog is divided into three sections: 'Build', 'Sign', and 'Launch'. The 'Build' section contains fields for 'SDK Path', 'Project Root', 'Archive Name', 'Output Folder', and a checkbox for 'Enable Remote Web Inspector'. The 'Sign' section contains fields for 'Signing Password' and 'Bundle Number'. The 'Launch' section contains a dropdown for 'Target' (set to 'Simulator'), and fields for 'Device IP' and 'Device Password'.

Section	Field	Value
Build	SDK Path	
	Project Root	
	Archive Name	
	Output Folder	
	Enable Remote Web Inspector	<input type="checkbox"/>
Sign	Signing Password	
	Bundle Number	
Launch	Target	Simulator
	Device IP	
	Device Password	

SDK Path: The path where BlackBerry WebWorks SDK is installed.

Project root: The root folder of your project. To find the root folder, right-click the native folder in your Eclipse blackberry environment and select **Properties**.

Archive Name: The name for your archive.

Output Folder: The folder where to output the application. Specify a folder outside your project.

Signing Password: Sign your app with a BlackBerry 10 developer certificate to run it on a BlackBerry 10 handset. Specify your certificate password here. Signing is NOT required to run the application in the BlackBerry 10 Simulator.

Launch: You can find the Device IP address from the BlackBerry Desktop Manager or in the device settings.

3. After the package settings are defined, open the Ripple menu in Chrome and click **start services**.
4. Select one of the Packaging options.