

Form-based authentication in native iOS applications

Overview

This tutorial explains how to implement the client-side of form-based authentication in native iOS.


Prerequisite: Make sure that you read the Form-based authentication (../) tutorial first.

Implementing the client-side authentication

Create a native iOS application and add the MobileFirst native APIs as explained in the Configuring a native iOS application with the MobileFirst Platform SDK (../../hello-world/configuring-a-native-ios-application-with-the-mfp-sdk/) tutorial.

Storyboard

In your storyboard, add a View Controller containing a login form.

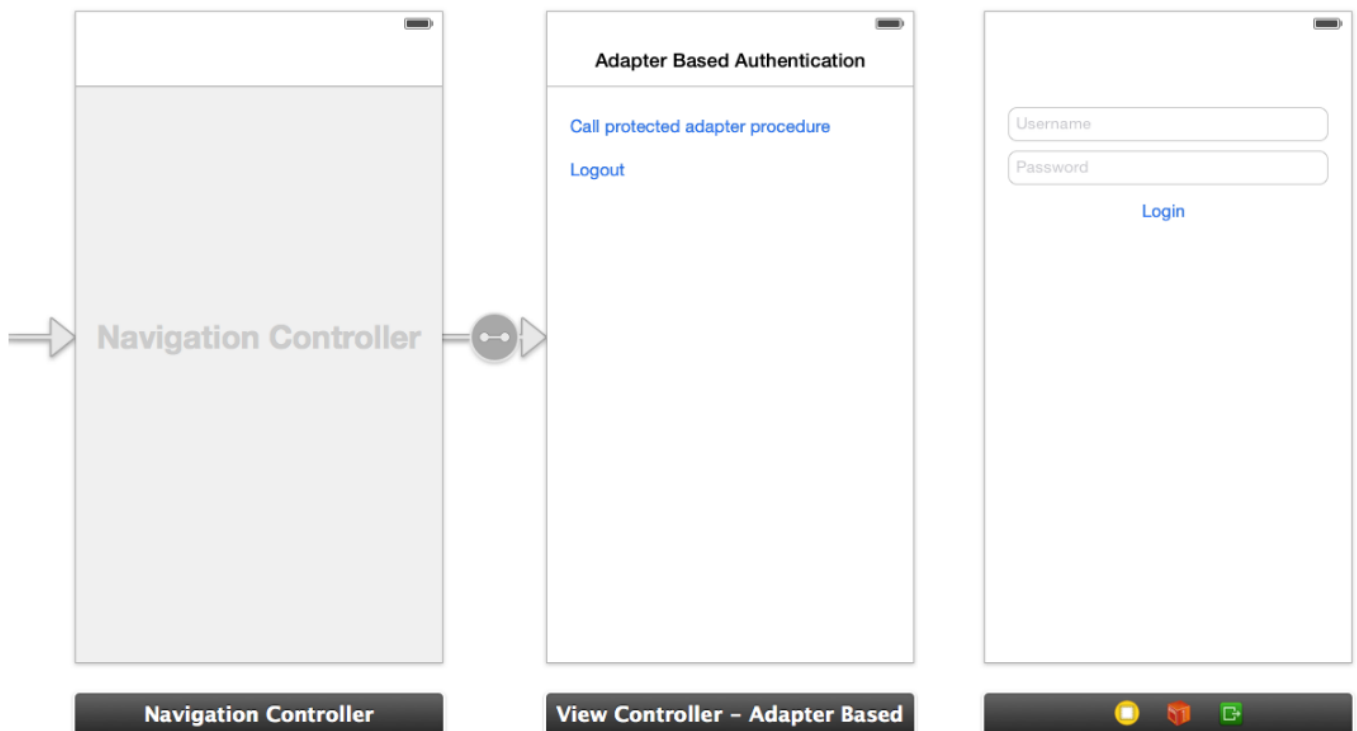

Challenge Handler

- Create a `MyChallengeHandler` class as a subclass of `ChallengeHandler`.

```
@interface MyChallengeHandler : ChallengeHandler
```

- Call the `initWithRealm` method:

```

@implementation MyChallengeHandler
//...
-(id)init:{
    self = [self initWithRealm:@"SampleAppRealm"];
    return self;
}

```

- Add an implementation of the following `ChallengeHandler` methods to handle the form-based challenge:

1. `isCustomResponse` method:

The `isCustomResponse` method is invoked each time a response is received from the MobileFirst Server. It is used to detect whether the response contains data that is related to this challenge handler. It must return either `true` or `false`.

The default login form that returns from the MobileFirst Server contains the `j_security_check` string. If the response contains the string, the challenge handler returns `true`.

```

-(BOOL) isCustomResponse:(WLResponse *)response {
    if(response && response.responseText){
        if ([response.responseText rangeOfString:@"j_security_check" options:NSCaseInsensitiveSearch].location != NSNotFound) {
            NSLog(@"Detected j_security_check string - returns true");
            return true;
        }
    }
    return false;
}

```

2. `handleChallenge` method:

If `isCustomResponse` returns `true`, the framework calls the `handleChallenge` method.

This function is used to perform required actions, such as hiding the application screen and showing the login screen.

```

-(void) handleChallenge:(WLResponse *)response {
    NSLog(@"A login form should appear");
    LoginViewController* loginController = [self.vc.storyboard instantiateViewControllerWithIdentifier:@"LoginViewController"];
    loginController.challengeHandler = self;
    [self.vc.navigationController pushViewController:loginController animated:YES];
}

```

3. `onSuccess` and `onFailure` methods:

At the end of the authentication flow, `onSuccess` or `onFailure` will be triggered

Call the `submitSuccess` method in order to inform the framework that the authentication process completed successfully and for the `onSuccess` handler of the invocation to be called.

Call the `submitFailure` method in order to inform the framework that the authentication process failed and for the `onFailure` handler of the invocation to be called.

```

- (void) onSuccess:(WLResponse *)response {
    NSLog(@"Challenge succeeded");
    [self.vc.navigationController popViewControllerAnimated:YES];
    [self submitSuccess:response];
}
- (void) onFailure:(WLFailResponse *)response {
    NSLog(@"Challenge failed");
    [self submitFailure:response];
}

```

submitLoginForm

In your login View Controller, when the user taps to submit the credentials, call the `submitLoginForm` method to send the `j_security_check` string and the credentials to the MobileFirst Server.

```

@implementation LoginViewController
//...
- (IBAction)login:(id)sender {
    [self.challengeHandler submitLoginForm:@"j_security_check"
     requestParameters:@{@"j_username": self.username.text, @"j_password": self.password.text}
     requestHeaders:nil
     requestTimeoutInMilliseconds:0
     requestMethod:@"POST"];
}
@end

```

The Main ViewController

In the sample project, in order to trigger the challenge handler we use the `WLClient invokeProcedure` method.

The protected procedure invocation triggers MobileFirst Server to send the challenge.

- Create a `WLClient` instance and use the `connect` method to connect to the MobileFirst Server:

```

MyConnectListener *connectListener = [[MyConnectListener alloc] init]
;
[[WLClient sharedInstance] wlConnectWithDelegate:connectListener];

```

- In order to listen to incoming challenges, make sure to register the challenge handler by using the `registerChallengeHandler` method:

```

[[WLClient sharedInstance] registerChallengeHandler:[MyChallengeHandler alloc] initWithViewController:self];

```

- Invoke the protected adapter procedure:

```

NSURL* url = [NSURL URLWithString:@"adapters/AuthAdapter/getSecretData"];
WLResourceRequest* request = [WLResourceRequest requestWithURL:url method:WLHttpMethodGet];
[request sendWithCompletionHandler:^(WLResponse *response, NSError *error) {
    ...
}];

```

Sample application

Click to download (<https://github.com/MobileFirst-Platform-Developer-Center/FormBasedAuth/tree/release71>) the MobileFirst project.

Click to download (<https://github.com/MobileFirst-Platform-Developer-Center/FormBasedAuthObjC/tree/release71>) the Objective-C project.

Click to download (<https://github.com/MobileFirst-Platform-Developer-Center/FormBasedAuthSwift/tree/release71>) the Swift project.

- The `FormBasedAuth` project contains a MobileFirst native API that you can deploy to your MobileFirst server.
- The `FormBasedAuthObjC` and `FormBasedAuthSwift` projects contains a native iOS application that uses a MobileFirst native API library.
- Make sure to update the `worklight.plist` file in the native project with the relevant server settings.

