Custom Authenticator and Login Module in native Android applications

This is a continuation of Custom Authenticator and Login Module (../).

Creating the client-side authentication components

Create a native Android application and add the IBM MobileFirst Platform Foundation native APIs following the documentation.
Add an Activity, *LoginCustomLoginModule*, that will handle and present the login form.
Remember to add this Activity to the *AndroidManifest.xml* file as well.

Create a *MyChallengeHandler* class as a subclass of *ChallengeHandler*.
MyChallengeHandler should implement 2 main methods:

- *isCustomResponse*
- *HandleChallenge*

In our sample we add another method to present and handle the received data from our form (*submitLogin*).

isCustomResponse

This method checks every custom response received from the MobileFirst Server to see if that's the challenge we are expecting.

```
public boolean isCustomResponse(WLResponse response) {
    if (response == null || response.getResponseJSON() == null)
{
        return false;
    }
    if(response.toString().indexOf("authStatus") > -1){
        return true;
    }
    else{
        return false;
    }
}
```

handleChallenge

This method is called after the *isCustomResponse* method returned *true*.
Here we use this method to present our login form.

```
public void handleChallenge(WLResponse response){
   try {
      if(response.getResponseJSON().getString("authStatus") == "complete"){
         submitSuccess(response);
      }
      else {
         cachedResponse = response;
         Intent login = new Intent(parentActivity, LoginCustomLoginModule.class)
;
         parentActivity.startActivityForResult(login, 1);
      }
   } catch (JSONException e) {
      e.printStackTrace();
   }
}
```

submitLogin

If the user asked to abort this action we use *submitFailure()* method, otherwise we send the information we collected from our login form to our custom authenticator using *submitLoginForm()* method.

```
public void submitLogin(int resultCode, String userName, String password, boolean back){
   if (resultCode != Activity.RESULT_OK || back) {
      submitFailure(cachedResponse);
   } else {
      HashMap<String, String> params = new HashMap<String, String>();
      params.put("username", userName);
      params.put("password", password);
      submitLoginForm("/my_custom_auth_request_url", params, null, 0, "post");<
   }
}
```

Main Activity

In the Main Activity class connect to the MobileFirst server, register your *challengeHandler* and invoke the protected adapter procedure.
The procedure invocation will trigger the MobileFirst server to send a challenge that will trigger our *challengeHandler*.

```
final WLClient client = WLClient.createInstance(this);
client.connect(new MyConnectionListener());
challengeHandler = new AndroidChallengeHandler(this, realm);
client.registerChallengeHandler(challengeHandler);
invokeBtn = (Button) findViewById(R.id.invoke);
invokeBtn.setOnClickListener(new View.OnClickListener() {
   @Override
   public void onClick(View v) {
      WLProcedureInvocationData invocationData = new WLProcedureInvocationData("DummyAdapter", "getSecretDat
a");
      WLRequestOptions options = new WLRequestOptions();
      options.setTimeout(30000);
      client.invokeProcedure(invocationData, new MyResponseListener(), options);
   }
});
```

Sample application
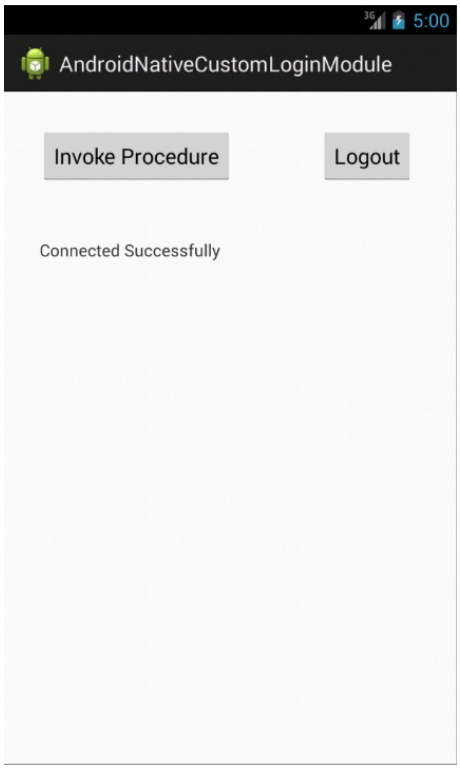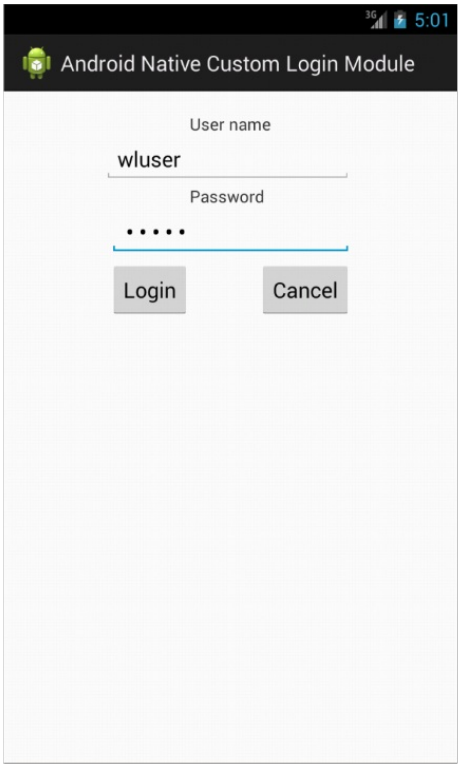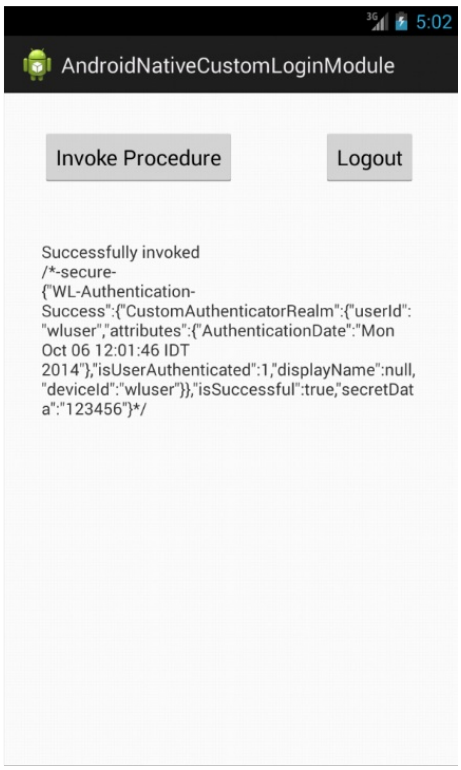
Click to download (http://public.dhe.ibm.com/software/products/en/MobileFirstPlatform/docs/v700/NativeCustomLoginModuleProject.zip) the Studio project.
Click to download (http://public.dhe.ibm.com/software/products/en/MobileFirstPlatform/docs/v700/AndroidNativeCustomLoginModuleProject.zip) the Native project.