

Cordova end-to-end demonstration

fork and edit tutorial (<https://github.ibm.com/MFPSamples/DevCenter/tree/master/tutorials/en/foundation/8.0/quick-start/cordova/index.md>)

| report issue (<https://github.ibm.com/MFPSamples/DevCenter/issues/new>)

Overview

The purpose of this demonstration is to experience an end-to-end flow where an application and an adapter are registered using the MobileFirst Operations Console, an "skeleton" Cordova project is downloaded and edited to call the adapter, and the result is displayed - verifying a successful connection with the MobileFirst Server.

Prerequisites:

- Xcode for iOS, Android Studio for Android or Visual Studio 2013/2015 for Windows 8.1 Universal / Windows 10 UWP
- MobileFirst Developer CLI (download
(file:///home/travis/build/MFPSamples/DevCenter/_site/downloads))
- Cordova 6.0 CLI
- *Optional.* Stand-alone MobileFirst Server (download
(file:///home/travis/build/MFPSamples/DevCenter/_site/downloads))

1. Starting the MobileFirst Server


If a remote server was already set-up, skip this step.

From a **Command-line** window, navigate to the server's folder and run the command: `./run.sh` in Mac and Linux or `run.cmd` in Windows.


2. Creating an application

In a browser window, open the MobileFirst Operations Console by loading the URL: `http://your-server-host:server-port/mfpconsole`. If running locally, use: `http://localhost:9080/mfpconsole` (`http://localhost:9080/mfpconsole`). The username/password are *admin/admin*.

1. Click on the "New" button next to **Applications**
 - Select a platform: **Android, iOS, Windows**
 - Enter **com.ibm.sample** as the **application identifier**
 - Enter **1.0** as the **version** value

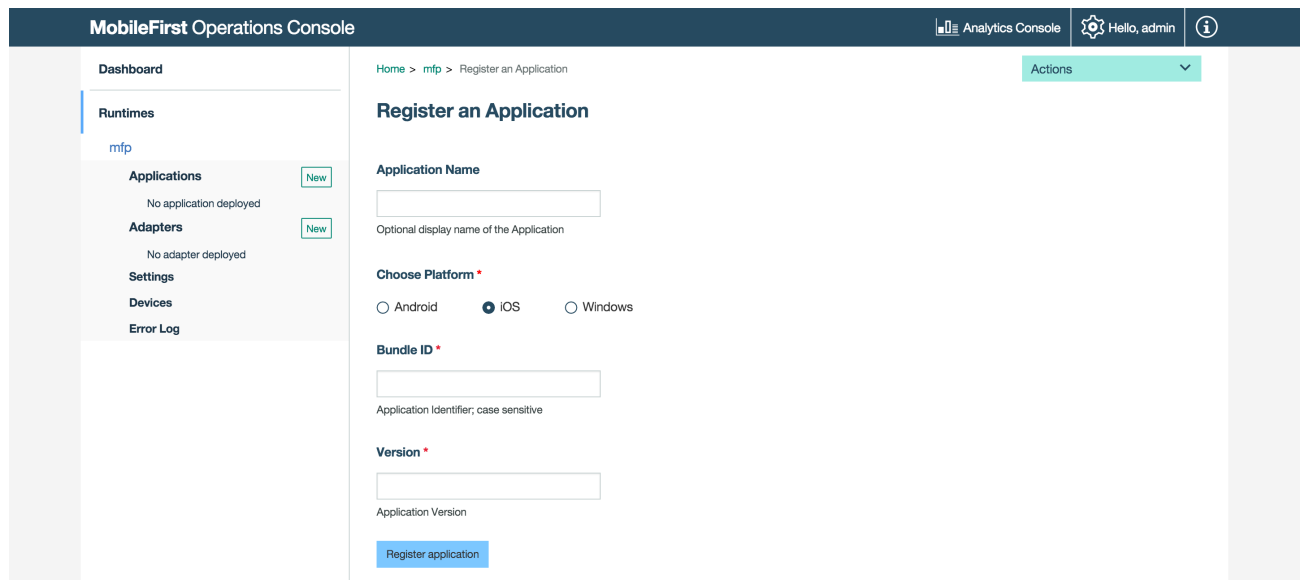

- Click on the **Get Starter Code** tile and select to download the Cordova mobile app scaffold.

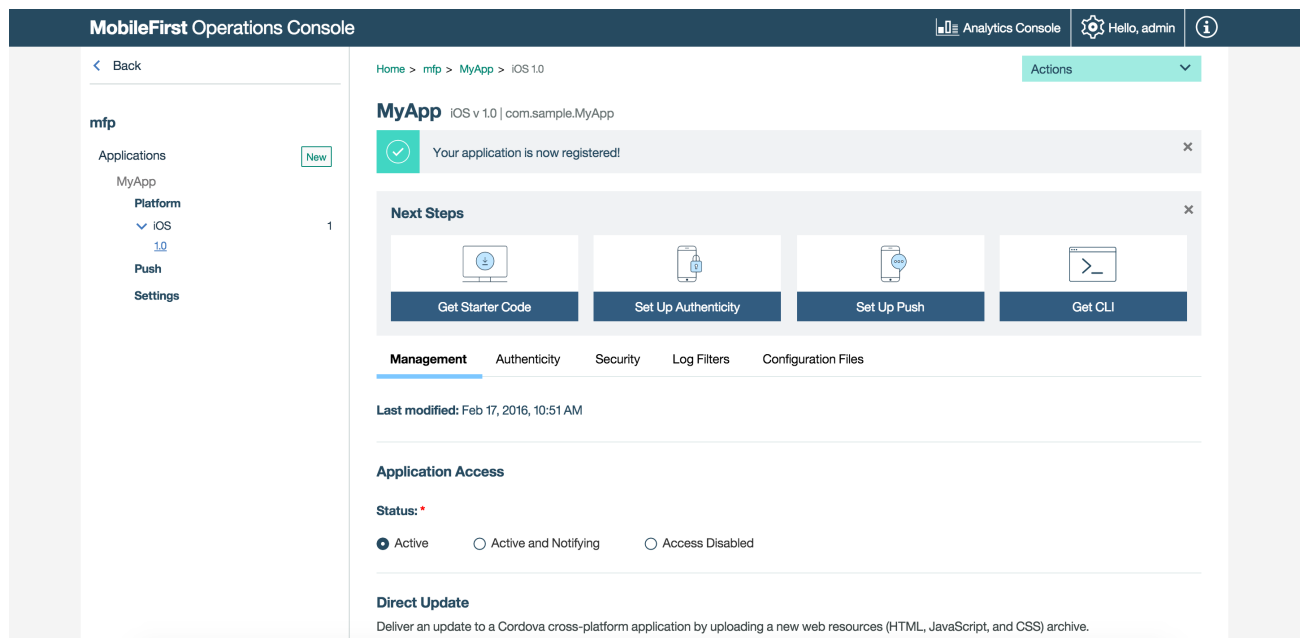

3. Editing application logic

- Open the Cordova project in your code editor of choice.
- Select the **www/js/index.js** file and paste the following code snippet, replacing the existing `wlCommonInit()` function:

```
function wlCommonInit() {
    var resourceRequest = new WLResourceRequest(
        "/adapters/javaAdapter/users/world",
        WLResourceRequest.GET
    );

    resourceRequest.send().then(
        function(response) {
            // Will display "Hello world" in an alert dialog.
            alert("Success: " + response.responseText);
        },
        function(response) {
            alert ("Failure: " + response.errorMsg);
        }
    );
}
```

4. Creating an adapter

1. Click on the "New" button next to **Adapters**

- Select the **Actions → Download sample** option. Download the **Java** adapter sample.

If Maven and MobileFirst CLI are not installed, follow the on-screen **Setting up your environment** instructions to install.

- From a **Command-line** window, navigate to the adapter's Maven project root folder and run the command:

```
mpfddev adapter build
```

- When the build finishes, deploy it from the MobileFirst Operations Console using the **Actions → Deploy adapter** action. The adapter can be found in the **[adapter]/target** folder.
- Alternatively, download this prepared .adapter artifact and deploy it from the MobileFirst Operations Console using the **Actions → Deploy adapter** action.

The screenshot shows the MobileFirst Operations Console interface. The left sidebar contains navigation links: Dashboard, Runtimes, mfp, Applications (with a 'New' button), MyApp, Adapters (with a 'New' button), Settings, Devices, and Error Log. The main content area is titled 'Create a new Adapter' and includes a 'Deploy Adapter' button. Below the title, there is a description: 'Adapters are used to securely connect back-end systems to client applications and cloud services. Adapters are built as Maven projects and can be written in JavaScript or Java.' A section titled 'Follow these steps to create an adapter' lists five steps: 1. Set up your development environment, 2. Create, 3. Develop, 4. Build, and 5. Deploy. Step 2 is currently active. Under step 2, there is a text box stating 'There are three ways to start developing adapter projects:' with three tabs: 'Console', 'CLI', and 'Maven'. Below this, there is a text input field with the placeholder 'Start with one of the packaged sample projects'.

5. Testing the application

1. In the Cordova project, select the **config.xml** file and edit the `<mfp:server ... url=" " />` value with the IP address of the MobileFirst Server.
2. From a **Command-line** window, navigate to the Cordova project root folder.
3. Run the command: `cordova platform add ios/android/windows` to add a platform.
4. Run the command: `cordova run`.

If a device is connected, the application will be installed and launched in the device, Otherwise the Simulator or Emulator will be used.

Next steps

- Review the Client-side development tutorials ([../using-the-mfpf-sdk/](#))
- Review the Server-side development tutorials ([../adapters/](#))
- Review the Authentication and security tutorials ([../authentication-and-security/](#))
- Review the Notifications tutorials ([../notifications/](#))
- Review All Tutorials ([../all-tutorials](#))

