

Windows Phone 8 - Implementing Apache Cordova plugin

Overview

In some cases, developers of a MobileFirst application might have to use a specific third-party native library or a device function that is not yet available in Apache Cordova.

With Apache Cordova, developers can create an Apache Cordova plug-in, which means that they create custom native code blocks, and call these code blocks in their applications by using JavaScript.

This tutorial demonstrates how to create and integrate a simple Apache Cordova plug-in for Windows Phone 8, in the following topics:


- Creating a plug-in
- Declaring a plug-in
- Implementing `cordova.exec()` in JavaScript
- Implementing the C# code of a Cordova plug-in
- Sample application

Note: In Cordova-based applications, developers must check for the `deviceready` event before they use the Cordova API set. In a MobileFirst application, however, this check is done internally.

Instead of implementing this check, you can place implementation code in the `wlCommonInit()` function in the `common\js\main.js` file.

Creating a plug-in

1. Declare the plug-in in the `config.xml` file.
2. Use the `cordova.exec()` API in the JavaScript code.
3. Create the plug-in class that will run natively in Windows Phone 8. The plug-in performs the required action and calls a JavaScript callback method that is specified during the call to `cordova.exec()`

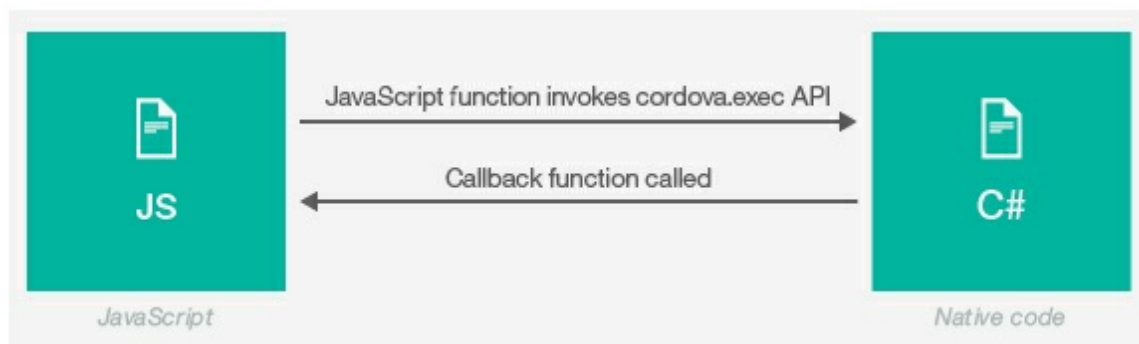

Declaring a plug-in

You must declare the plug-in in the project, so that Cordova can detect it. To declare the plug-in, add a reference to the `config.xml` file, located in the native folder of the Windows Phone 8 environment.

```
1 <feature name="sayHelloPlugin">
2   <param name="wp-package" value="sayHelloPlugin" />
3 </feature>
```

Implementing cordova.exec() in JavaScript

From the JavaScript code of the application, use the `cordova.exec()` method to call the Cordova plug-in:

```
1 function sayHello() {
2   var name = $("#NameInput").val();
3   cordova.exec(sayHelloSuccess, sayHelloFailure, "SayHelloPlugin", "sayHello", [name]);
4 }
```

- `sayHelloSuccess` - Success callback
- `sayHelloFailure` - Failure callback
- `SayHelloPlugin` - Plug-in name as declared in the `config.xml` file
- `sayHello` - Action name
- `[name]` - Parameters array

The plug-in calls the `success` and `failure` callbacks.

```
1 function sayHelloSuccess(data){
2   WL.SimpleDialog.show(
3     "Response from plug-in",
4     data,
5     [{text: "OK", handler: function() {WL.Logger.debug("Ok button pressed");}}]
6   );
7 }
8
9 function sayHelloFailure(data){
10  WL.SimpleDialog.show(
11    "Response from plug-in",
12    data,
13    [{text: "OK", handler: function() {WL.Logger.debug("Ok button pressed");}}]
14  );
15 }
```

Implementing the C# code of a Cordova plug-in

After you have declared the plug-in and the JavaScript implementation is ready, you can implement the Cordova plug-in. For this purpose, ensure that the project is built in Eclipse and opened in the Visual Studio IDE.

Step 1

1. Create a new C# class.
2. Add the new class to your project namespace and add the required import statements.

```

1  using System;
2  using System.Collections.Generic;
3  using System.Linq;
4  using System.Text;
5  using System.Threading.Tasks;
6  using WPCordovaClassLib.Cordova;
7  using WPCordovaClassLib.Cordova.Commands;
8  using WPCordovaClassLib.Cordova.JSON;
9
10 namespace Cordova.Extension.Commands {
11     public class SayHelloPlugin : BaseCommand {

```

Step 2

Implement the SayHelloPlugin class and the sayHello method.

1. The JavaScript wrapper calls the sayHello method and passes a single parameter. It returns a string back to JavaScript.

```

1      public void sayHello(string options) {
2          string optVal = null;
3
4          try {
5              optVal = JsonHelper.Deserialize<string[]>(options)[0];
6          }
7          catch (Exception) {
8              DispatchCommandResult(new PluginResult(PluginResult.Status.ERROR, "SayHelloPlugi
9          }
10     }

```

2. The DispatchCommandResult method returns the result to JavaScript, whether success or failure.

```

1          if (optVal == null) {
2              DispatchCommandResult(new PluginResult(PluginResult.Status.ERROR, "Got null value e
3          } else {
4              DispatchCommandResult(new PluginResult(PluginResult.Status.OK, "Hello " + optVal));
5          }
6      }
7  }
8  }

```

Sample application

Click to download

(<http://public.dhe.ibm.com/software/products/en/MobileFirstPlatform/docs/v700/ApacheCordovaPluginsProject.zip>)
the Studio project.

