

# Android - Cloudant NoSQL DB API

Relevant to:

- Native Android
- Download MobileFirst project (<https://github.com/MobileFirst-Platform-Developer-Center/BlueList-On-Premise>)

## Overview

This tutorial shows how to apply technology available in IBM MobileFirst Platform Foundation to store data for Android mobile applications. By using Cloudant NoSQL DB APIs, you can complete specific database operations, such as creating, reading, updating, deleting, and synchronizing data between local and remote databases. This tutorial provides a basic overview of these APIs and explains how to configure and run the sample, in the following topics:

- Using the IMFData SDK
- Creating local data stores
- Creating remote data stores
- Setting user permissions for remote stores
- Modeling data for Android applications
- Creating and updating data
- Supporting synchronization and offline storage
- Running the Android sample
- Obtaining and configuring the required SDKs
- Enabling encryption
- BlueList application flow

## Using the IMFData SDK

After the IMFData SDK is installed, you can begin to initialize and use the SDK in your native Android application.

```
[code lang="java"]
// Initialize the IMFDataManager
DataManager manager = DataManager.initialize(context, new URL(CLOUDANT_PROXY_URL));
[/code]
```

The value for `cloudantProxyUrl` is the URL of the MobileFirst Data Proxy which was configured during installation. The URL includes the IP address, host, and context root that you have defined.

For example: `http://localhost:10080/imf-data-proxy`.

In the native Android sample that comes with this tutorial, the value for the `cloudantProxyUrl` is set in the `bluelist.properties` file.

## Creating local data stores

You can create a `Store` object to allow your application to access a local database, which can be used even when the application is offline.

```
[code lang="java"]
// Using reference to IMFDataManager that you initialized above, create a local store using a bolts task
```

```
String name = "todosdb";
// Create local store
Task<Store> storeTask = manager.localStore(name);
storeTask.continueWith(new Continuation<Store, Void>() {
@Override
public Void then(Task<Store> task) throws Exception {
if(task.isFaulted()){
// Handle error
}else{
// Newly created store
Store localStore = task.getResult();
}
return null;
}
});
[/code]
```

## Creating remote data stores

You can also create a Store object to allow your application to access a remote database.

```
[code lang="java"]
// Create remote store
String name = "todosdb";
// Using reference to IMFDataManager that you initialized above, create a remote store using a bolts task
Task<Store> storeTask = manager.remoteStore(name);
storeTask.continueWith(new Continuation<Store, Void>() {
@Override
public Void then(Task<Store> task) throws Exception {
if(task.isFaulted()){
// Handle error
}else{
// Newly created store
Store remoteStore = task.getResult();
}
return null;
}
});
[/code]
```

## Setting user permissions for remote stores

You can set specific permissions for users to access remote stores.

```
[code lang="java"]
// Using reference to IMFDataManager that you initialized above, set the user permissions for the remote
store
Task<Boolean> permissionsTask =
manager.setCurrentUserPermissions(DataManager.DB_ACCESS_GROUP_MEMBERS, "todosdb");

permissionsTask.continueWith(new Continuation<Boolean, Object>() {
@Override
public Object then(Task<Boolean> task) throws Exception {
if(task.isFaulted()){
// Handle error
}
```

```

}else{
// setting permissions was successful
}
return null;
}
});
[/code]

```

**Note:** In the sample, the user is authenticated via OAuth. OAuth has been configured through adapter-based authentication. You can find further instructions on setting up access with OAuth capabilities and the MobileFirst Data Proxy in the topic about configuring OAuth security, in the user documentation.

## Modeling data for Android applications

In Android applications, you can use the `DataObjectMapper` class to map native objects to JSON document format. When you create a data store with the `DataManager` API, you can create a new `DataObjectMapper` to set on the `Store` object.

```

[code lang="java"]
localStorage.setMapper(new DataObjectMapper());
[/code]

```

In the sample, a custom `TodoItem` class allows you to store custom data as objects in our application. When creating a custom `DataObjectMapper` class, make sure that it meets the following requirements:

- Conform to the `IMFDDataObject` protocol.
- Have the `IMFDDataObject` protocol metadata property set on the class interface.
- Implements `DataObject`.

### TodoItem implementation (TodoItem.java)

```

[code lang="java"]
public class TodoItem implements DataObject {

private Metadata metadata = null;
private String name;
private Integer priority;

```

// NOTE: If you use a constructor with arguments, you will need to supply an empty constructor for the mapper to function properly

```

public TodoItem(){
this.name = "";
this.priority = 0;
}

```

```

public TodoItem(String name, Integer priority){
this.name = name;
this.priority = priority;
}

```

```

@Override
public Metadata getMetadata() {
return metadata;
}

```

```

@Override
public void setMetadata(Metadata metadata) {
this.metadata = metadata;
}

```

```
}  
}
```

```
[/code]
```

You must then register the class and data type with the `DataObjectMapper`. In the sample, the `DataStoreManager` instance does that after the store is created.

```
[code lang="java"]
```

```
//using the existing store with mapper
```

```
localStore.getMapper().setDataTypeForClassName("TodoItem", TodoItem.class.getCanonicalName());
```

```
[/code]
```

## Creating and updating data

Using the same operation, you can save new objects and save changes to existing objects in the local data store.

## Creating, saving, and updating Todo Items

```
[code lang="java"]
```

```
// You can create a new TodoItem to save here, or you can use an existing object from the localStore that  
you have made changes to
```

```
TodoItem todoItem = new TodoItem("Buy Groceries", 2);
```

```
// Use an existing store
```

```
Store store = localStore;
```

```
// Save automobile to store
```

```
Task<Object> saveTask = store.save(automobile);
```

```
saveTask.continueWith(new Continuation<Object, Void>() {
```

```
@Override
```

```
public Void then(Task<Object> task) throws Exception {
```

```
if (task.isFaulted()) {
```

```
// save was not successful, task.getError() contains the error
```

```
} else {
```

```
// use the result
```

```
TodoItem savedTodoItem = (TodoItem) task.getResult();
```

```
// Manipulate new item/add to your UI/whatever else you're doing with your data
```

```
.
```

```
.
```

```
.
```

```
}
```

```
return null;
```

```
}
```

```
});
```

```
[/code]
```

**Note:** When saving an object, it is good practice to use the new object that is returned by the `task.getResult()` method, to avoid errors caused by stale objects and to maintain a consistent experience.

## Deleting data

To delete an object in a data store, pass the object to the `LocalStore.delete(objectToDelete)` method.

```
[code lang="java"]
```

```
// Use an existing store and TodoItem
```

```

Store store = localStore;
// Pass the Item you'd like to delete from the local Data Store as the parameter
TodoItem todoItem = existingTodoItem;

// Delete the TodoItem from the store
Task<String> deleteTask = store.delete(todoItem);
deleteTask.continueWith(new Continuation<String, Void>() {
@Override
public Void then(Task<String> task) throws Exception {
if (task.isFaulted()) {
// delete was not successful, task.getError() contains the error
} else {
// use the result
String deletedTodoItemId = task.getResult();
}
return null;
}
});
[/code]

```

## Querying data

You can query for objects that have an object mapper. To run a query for objects, create a Cloudant query with the query filters on data type. Run the query against a Store object. For more information about query and related operations, see the topics about querying, in the user documentation.

## Supporting synchronization and offline storage

By using the data manager API, you can synchronize data between local storage on the device and remote store instances.

### Pull replication

When pull replication runs, the local database within the mobile device is updated with what exists in the remote database.

```

[code lang="java"]
// Use an existing store
Store store = localStore;

// create a pull replication task
// name is the database name of the store being replicated
Task<PullReplication> pullTask = manager.pullReplicationForStore(store.getName());
pullTask.continueWith(new Continuation<PullReplication, Object>() {
@Override
public Object then(Task<PullReplication> task) throws Exception {
if(task.isFaulted()){
// Handle error
}else{
// Start the replication
PullReplication pull = task.getResult();
Replicator replicator = ReplicatorFactory.oneway(pull);
replicator.start();
}
return null;
}
}

```

```
}  
});  
[/code]
```

## Push replication

When push replication runs, the data from the local database within the mobile device is sent to the remote database.

```
[code lang="java"]  
// Use an existing store  
Store store = localStore;  
  
// create a push replication task  
// name is the database name of the store being replicated  
Task<PushReplication> pushTask = manager.pushReplicationForStore(store.getName());  
pushTask.continueWith(new Continuation<PushReplication, Object>() {  
    @Override  
    public Object then(Task<PushReplication> task) throws Exception {  
        if(task.isFaulted()){  
            // Handle error  
        }else{  
            // Start the replication  
            PushReplication push = task.getResult();  
            Replicator replicator = ReplicatorFactory.oneway(push);  
            replicator.start();  
        }  
        return null;  
    }  
});  
[/code]
```

**Note:** The code snippets above might be different from the code that you can see in the sample. These snippets have been created to give the clearest and most understandable outline of the APIs and how they are used. For the sample to be easier to use, all the implementation for the above operations can be found in `DataStoreManager` and `MainActivity`.

## Running the Android sample

Make sure that you have properly configured and started the following instances:

- MobileFirst Server with `CloudantAuthenticationAdapter` and `AndroidBlueList Native API` deployed
- Cloudant Data Local Layer Edition
- MobileFirst Data Proxy Server configured against MobileFirst Server and the Cloudant Data Layer Local Edition

## Obtaining and configuring the required SDKs

Make sure that you have correctly installed and set up Gradle. If you have not done so, complete the following:

1. Download the current Gradle distribution from [www.Gradle.org](http://www.Gradle.org).
2. When importing the sample, select a `build.gradle` file.  
Android Studio then prompts you for a `GRADLE_HOME` variable.

3. Point to the Gradle distribution that you just downloaded.
4. After the project is open, check and update the following items:
  - In the `bluelist.properties` file, set the `cloudantProxyUrl` to your MobileFirst Data Proxy Server location.
  - In the `wlclient.properties` file, make sure to check and update the values to match the MobileFirst Server instance that you have deployed.

Now, you can run the sample on the simulators provided by Android or a supported Android device.

## Enabling encryption

It is possible to encrypt the local datastores in order to secure data that is being stored on the device. To begin the process of encrypting the local databases, you must first download the SQLCipher for Android v3.2 (<https://www.zetetic.net/sqlcipher/open-source/>) .jar and .so binary files and include them in your application as described below:

1. Add the downloaded binaries to the appropriate folders within your app structure:
  - Add the shared library files and SQLCipher JAR file to the `jniLibs` folder under your Android app directory.
  - Add the required ICU ZIP file to your app assets folder.
  - Add `sqlcipher.jar` as a file dependency. You can use the **Dependencies** tab under **Open Module Settings**, from the context menu of the Android Studio app folder.

2. To use SQLCipher commercially, you must obtain the necessary license (<https://www.zetetic.net/sqlcipher/>).

3. Initialize your local store for encryption with a key provider.

```
[code lang="java"]
```

```
// Initialize a key provider
```

```
KeyProvider keyProvider = new AndroidKeyProvider(getContext(),"passw0rd","user");
```

```
// Create local store using reference to IMFDataManager that you initialized above
```

```
String name = "todosdb";
```

```
Task<Store> storeTask = manager.localStore(name, keyProvider);
```

```
storeTask.continueWith(new Continuation<Store, Void>() {
```

```
@Override
```

```
public Void then(Task<Store> task) throws Exception {
```

```
if (task.isFaulted()) {
```

```
// Handle error
```

```
} else {
```

```
// Do something with Store
```

```
Store store = task.getResult();
```

```
}
```

```
return null;
```

```
}
```

```
});
```

```
[/code]
```

4. When replicating with an encrypted local store, you must pass a `KeyProvider` into `pullReplicationForStore()` or `pushReplicationForStore()`.

```
[code lang="java"]
// Using reference to IMFDataManager that you initialized above
String name = "todosdb";

// Initialize a key provider
KeyProvider keyProvider = new AndroidKeyProvider(getContext(),"passw0rd","user");

// pull replication
Task<PushReplication> pullTask = manager.pullReplicationForStore(name, keyProvider);

// push replication
Task<PushReplication> pushTask = manager.pushReplicationForStore(name, keyProvider);
[/code]
```

## BlueList application flow

When the application starts, the DataStoreManager instance initiates the connection to the MobileFirst Server instance and creates and registers the BlueListChallengeHandler instance.

```
[code lang="java"]
WLClient client = WLClient.createInstance(context);
client.registerChallengeHandler(blueListChallengeHandler);
[/code]
```

For simplicity, the sample silently logs in a user by calling CloudantAuthenticationAdapter with correct user name and password parameters. This is completed in the BlueListChallengeHandler.

```
[code lang="java"]
@Override
public void handleChallenge(WLResponse wLResponse) {
    Object[] parameters = new Object[]{UserName,UserPassword};
    WLProcedureInvocationData invocationData = new WLProcedureInvocationData(AdapterName,
    "submitAuthentication");
    invocationData.setParameters(parameters);
    WLRequestOptions options = new WLRequestOptions();
    options.setTimeout(30000);
    submitAdapterAuthentication(invocationData, options);
}
[/code]
```

After authentication, the database is configured in the DataStoreManager init method. This database configuration consists of the following steps:

- Initializing the SDK
- Creating the local and remote databases
- Setting permissions for the user that was created
- Setting the replicatorFactory, pullReplication, and pushReplication
- Registering the TodoItem class and data type with the DataObjectMapper

**Note:** For simplicity, the database name that is created is currently set to the variable DBName in the DataStoreManager, but you can change this name in the bluelist.properties file.

The MainActivity class provides functions for creating, updating, deleting, and listing items, and functions for push and pull replication.

After completing initialization, the application does an initial pull from the remote database. The user can



now create, update, and modify list items in the application, and modify the corresponding priority (red = high, yellow = medium, white = low). By design, the application starts synchronization only when the user manually pulls down the list. On pull down, the application first completes a pull replication from the remote database to the local. After this operation has completed, push replication occurs, which sends any updated local data to the remote database. The local and remote databases are then synchronized.



Grocery Shopping

Vacuum bedroom



Finish laundry

Grocery Shopping

Vacuum bedroom




Finish laundry

Grocery Shopping


Vacuum bedroom



## Initial List




## Adding an Item



## Updating Priority

([https://developer.ibm.com/mobilefirstplatform/wp-content/uploads/sites/32/2015/02/BlueList\\_Todos\\_13.png](https://developer.ibm.com/mobilefirstplatform/wp-content/uploads/sites/32/2015/02/BlueList_Todos_13.png))

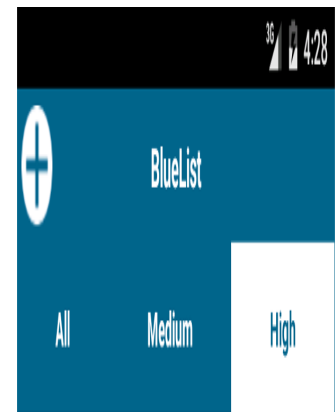

Pulling Items from Cloudant remote

Pushing Items to Cloudant remote



Pull Replication

Push Replication

Check Priority List

([https://developer.ibm.com/mobilefirstplatform/wp-content/uploads/sites/32/2015/02/BlueList\\_Todos\\_23.png](https://developer.ibm.com/mobilefirstplatform/wp-content/uploads/sites/32/2015/02/BlueList_Todos_23.png))