

Container for advanced pages

Overview

Note: This tutorial and its companion sample are intended for use with either the IBM MobileFirst Consumer or Enterprise Edition.

You cannot use the sample that is associated with this tutorial as is with the free IBM MobileFirst Developer Edition. This sample provides a WAR file that demonstrates the remote load functionality in this tutorial. This WAR file requires a servlet container, such as Apache Tomcat, WebSphere®Application Server Full profile, or WebSphere Application Server Liberty profile.

In this tutorial it is assumed that you know how to create a MobileFirst hybrid application and add Android and iPhone environments. For more information, see the following tutorials:

- [Creating your first hybrid application \(../../hello-world/creating-your-first-hybrid-application/\)](#)
- [Previewing your application on iOS \(../../hello-world/previewing-application-ios/\)](#)
- [Previewing your application on Android \(../../hello-world/previewing-application-android/\)](#)

The following tutorials are covered:

- Background of IBM Mobile Conference application
- Migrating applications to IBM MobileFirst Platform Foundation
- Extending IBM Mobile Conference app to IBM MobileFirst Platform Foundation
- Proxy considerations
- Sample application

Background of IBM Mobile Conference application

- Mobile web application
- Server programming model
 - JavaServer™ Pages (JSP)
 - JavaServer Pages Standard Tag Library (JSTL)
 - JavaServer Pages Expression Language (EL)
- Client programming model
 - Dojo Mobile
 - Dojo Mobile Device Theming
- Security
 - Container managed
 - Java™ Enterprise Edition (Java EE) form-based login

Mobile views

Dojo provides mobile widgets that developers can use to quickly generate mobile views.

```

1 <div id="locations" dojoType="dojox.mobile.ScrollableView" selected="true">
2   <h1 dojoType="dojox.mobile.Heading" label="Locations" fixed="top"></h1>
3   <div class="list-category" dojoType="dojox.mobile.RoundRectCategory">USA</div>
4   <ul dojoType="dojox.mobile.RoundRectList">
5     <c:forEach var="location" items="${applicationScope.locationRegistryList['usa']}">
6       <li dojoType="dojox.mobile.ListItem" class="mblVariableHeight"
7         url=".conferences.jsp?locationId=${location}"
8         urlTarget="conferences" transition="slide">
9         <div class="list-detail">
10          <div>${locationMap[location].city}, ${locationMap[location].state}</div>
11          </div>
12        </li>
13      </c:forEach>
14    </ul>
15  </div>

```

JSTL provides a simple API for iterating over lists to generate Dojox Mobile list items dynamically on the server.

Form-based authentication - client

IBM Mobile Conference application requires users to be registered and authenticated with the enterprise that is hosting the application. The application is protected by a form-based login, by using a mobile web form that is contained within a Dojox Mobile view.

```

1 <div dojoType="dojox.mobile.View">
2   <c:set var="conferences" scope="session"
3     value=""></c:set>
4   <!-- a sample heading -->
5   <h1 style="text-align: center;" dojoType="dojox.mobile.Heading">IBM Mobile Conference App</h1>
6   <form action="j_security_check" method="post" name="loginForm">
7     <div class="logonClass">
8       <div>
9         <span>Username </span> <input id="username" dojoType="dojox.mobile.TextBox"
10          name="j_username" />
11       </div>
12       <div>
13         <span>Password </span> <input id="password" type="password" name="j_password"
14          dojoType="dojox.mobile.TextBox"> </input>
15       </div>
16       <div style="text-align: center;">
17         <input id="login" type="submit" class="mblButton" value="Login"/>
18       </div>
19     </div>
20   </form>
21 </div>

```

Form-based authentication - server

IBM Mobile Conference application is configured to use Java Enterprise Edition Role Support.

- White list or pattern-based URIs of secured resources
- Support for logout in addition to Java Enterprise Edition standard logout functionality

```
1
2 <security-role>
3   <role-name>worklightadmin</role-name>
4 </security-role>
5 <security-constraint>
6   <display-name>SecurityConstraint</display-name>
7   <web-resource-collection>
8     <web-resource-name>Conference</web-resource-name>
9     <url-pattern>/common/location.jsp</url-pattern>
10    <url-pattern>/common/confs.jsp</url-pattern>
11    <url-pattern>/common/presenter.jsp</url-pattern>
12    <url-pattern>/common/sessions.jsp</url-pattern>
13  </web-resource-collection>
14  <auth-constraint>
15    <role-name>worklightadmin</role-name>
16  </auth-constraint>
17 </security-constraint>
18 <login-config>
19   <auth-method>FORM</auth-method>
20   <form-login-config>
21     <form-login-page>/common/logon.jsp</form-login-page>
22     <form-error-page>/common/logonError.jsp</form-error-page>
23   </form-login-config>
24 </login-config>
25
```

```
1
2 <div style="position: relative; float: left;">
3   <form method="post" action="conferenceLogout.jsp" name="logout">
4     <span data-dojo-type="dojox.mobile.ToolBarButton"
5       data-dojo-props='onClick:function(){
6         document.forms["logout"].submit();
7       },
8       transition:"slide">Logout</span>
9     <input type="hidden" name="logoutExitPage" value="/">
10   </form>
11 </div>
12
```

Simplified user registry and role configuration

1. Modify the `server.xml` file as follows, depending on which application server you use:
 - **MobileFirst Development Server** (Liberty)

```

1
2 <server description="new server">
3   <featureManager>
4     <feature>servlet-3.0</feature>
5     <feature>jndi-1.0</feature>
6     <feature>jdbc-4.0</feature>
7     <feature>localConnector-1.0</feature>
8     <feature>restConnector-1.0</feature>
9     <feature>jsp-2.2</feature>
10    <feature>appSecurity-1.0</feature>
11    <feature>ssl-1.0</feature>
12  </featureManager>
13  ...
14  <httpEndpoint host="*" httpPort="10080" httpsPort="10443" id="defaultHttpEndpoint">
15    <tcpOptions soReuseAddr="true"/>
16  </httpEndpoint>
17  ...
18  <applicationMonitor updateTrigger="mbean"/>
19  ...
20  <basicRegistry id="worklight" realm="worklightRealm">
21    <user name="demo" password="demo"/>
22    <user name="monitor" password="demo"/>
23    <user name="deployer" password="demo"/>
24    <user name="operator" password="demo"/>
25    <user name="admin" password="admin"/>
26  </basicRegistry>
27  ...
28  <webApplication contextRoot="conference" id="ContainerForAdvancedPagesWar" location="module_45_1_1">
29    <application-bnd>
30      <security-role name="worklightadmin">
31        <user name="admin"/>
32      </security-role>
33    </application-bnd>
34  </webApplication>
35  <application context-root="/ContainerForAdvancedPages" id="ContainerForAdvancedPages" location="ContainerForAdvancedPages">
36    <classloader commonLibraryRef="worklight-7.0.0">
37      <privateLibrary>
38        <fileset dir="{wlp.user.dir}/shared/resources" includes="org.hsqldb.hsqldb_2.2.5.jar"/>
39      </privateLibrary>
40    </classloader>
41  </application>
42  ...
43 </server>

```

◦ Tomcat

```

1 <GlobalNamingResources>
2 <!-- Editable user database that can also be used by
3      UserDatabaseRealm to authenticate users
4 -->
5 <Resource auth="Container"
6   description="User database that can be updated and saved"
7   factory="org.apache.catalina.users.MemoryUserDatabaseFactory"
8   name="UserDatabase"
9   pathname="conf/tomcat-users.xml"
10  type="org.apache.catalina.UserDatabase"/>
11 </GlobalNamingResources>

```

2. Add the role and user in the tomcat-users.xml file:

```
1 <role rolename="worklightadmin"/>
2 <user username="tomcat" password="tomcat" roles="worklightadmin"/>
```

Migrating applications to IBM MobileFirst Platform Foundation

By using mobile web technology, you can deploy applications to the widest variety of devices. The presence of application stores (for example: Apple App Store and Google Play) adds a dimension where the hosting and marketing of these applications makes broader-reaching applications less relevant. IBM MobileFirst Platform Foundation provides the hybrid application programming model as the solution to building cross platform applications that can be distributed through the application stores. In the hybrid model, developers typically package the application HTML, CSS, and JavaScript™ code as part of the application that is deployed to the application store. In this tutorial, you see the remote loading of dynamic content capability, where the HTML, CSS, and JavaScript code is hosted externally from the natively packaged hybrid application.

Working with IBM MobileFirst projects and environments

This tutorial comes with a MobileFirst project called **ContainerForAdvancedPages**, which contains an **AdvancedPages** hybrid application. This application already has the iPhone and Android environments added to it.



Running the sample on an Android environment

1. Make the following changes to the `AdvancedPages/android/nativeResources/src/com/AdvancedPages/AdvancedPages.java` file:

```
1 public void onInitWebFrameworkComplete(WLInitWebFrameworkResult result){
2     if (result.getStatusCode() == WLInitWebFrameworkResult.SUCCESS) {
3         WL.getInstance().hideSplashScreen();
4         super.loadUrl("http://localhost:10080/conference/common/location.jsp");
5     }
6     else {
7         handleWebFrameworkInitFailure(result);
8     }
9 }
```


2. If the application is running on a Tomcat application server, change the port to `8080`.
3. If the application is running on an actual Android device, replace `localhost` with the public IP address of your computer. Make sure that the device and your server are on the same network.
4. Right-click the WAR file and select **Run As > Run on Server**, and then select the MobileFirst Development Server.

- Right-click the hybrid application and select **Run As > Run on MobileFirst Development Server**.

Note: Due to some domain restrictions of the browser (web view), the remotely loaded application and MobileFirst Development Server must either be colocated on the same host and port, or have a common proxy host and port.

- Right-click the Android project and select **Run As > Android Application**.

After the application is installed, authenticate with a username and password, such as admin / admin, or whatever credentials you specified in your server.xml file. Each view for the IBM Mobile Conference app is loaded through Ajax XHR where each view is generated by the JSP responsible for each distinct view.

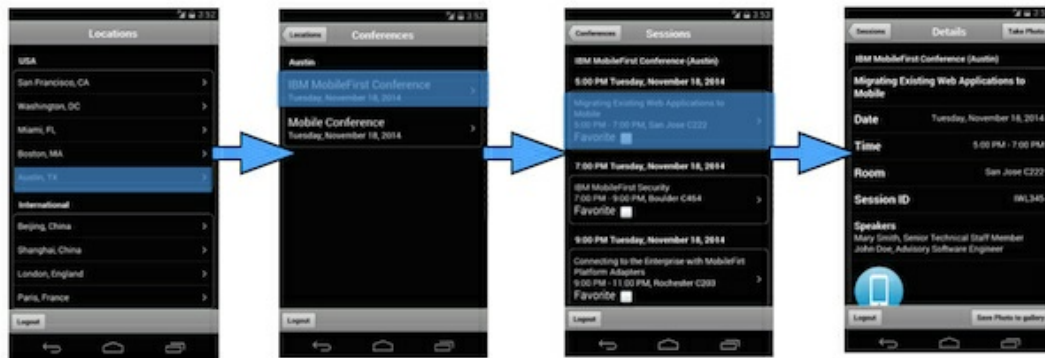

Running the sample on an iPhone environment

- Make the following changes to the AdvancedPages/iphone/nativeResources/Classes/AdvancedPages.m file:

```

1 -(void)wllnitDidCompleteSuccessfully {
2     [[WL sharedInstance] hideSplashScreen];
3     UIViewController* rootViewController = self.window.rootViewController;
4     // Create a Cordova View Controller
5     CDVViewController* cordovaViewController = [[CDVViewController alloc] init];
6     cordovaViewController.startPage = [[WL sharedInstance] mainHtmlFilePath];
7     // Adjust the Cordova view controller view frame to match its parent view bounds
8     cordovaViewController.view.frame = rootViewController.view.bounds;
9     // Display the Cordova view
10    [rootViewController addChildViewController:cordovaViewController];
11    [rootViewController.view addSubview:cordovaViewController.view];
12    NSString* remoteURLStr= @"http://localhost:10080/conference/common/location.jsp";
13    NSURL* remoteURL = [NSURL URLWithString:remoteURLStr];
14    NSURLRequest* request= [NSURLRequest requestWithURL:remoteURL];
15    [cordovaViewController.webView loadRequest:request];
16 }

```

- If the application is running on a Tomcat application server, change the port to 8080.
- Right-click the WAR file and select **Run As > Run on Server**, and then select the MobileFirst Development Server.
- Right-click the hybrid application and select **Run As > Run on MobileFirst Development Server**.

Note: Due to some domain restrictions of the browser (web view), the remotely loaded application and MobileFirst Development Server must either be colocated on the same host and port, or have a common proxy host and port.

- Right-click the iPhone folder and select **Run As > Xcode project**.
- Run the Xcode project on an iOS simulator or device running iOS 7 or later.


```
1 <c:choose>
2   <c:when test="{fn:contains(iOSClient, 'Android')}">
3     <link rel="stylesheet" type="text/css"
4       href="dojo/mobile/themes/android/android.css"></link>
5   </c:when>
6   <c:otherwise>
7     <link rel="stylesheet" type="text/css"
8       href="dojo/mobile/themes/iphone/iphone.css"></link>
9   </c:otherwise>
10 </c:choose>
11 </head>
12 <body id="content" onload="WL.Client.init({onSuccess:function success(){ console.info('WL init success...'); }, connectOnStar
13   <c:set var="locationMap" value="{applicationScope.locationRegistry}" scope="session"/>
14 ...
```




```

1 <c:choose>
2   <c:when test="{fn:contains(iOSClient, 'Android')}">
3     <script>
4       // Define WL namespace.
5       var WL = WL ? WL : {};
6       /**
7        * WLClient configuration variables.
8        * Values are injected by the deployer that packs the gadget.
9        */
10      WL.StaticAppProps = {
11        "APP_DISPLAY_NAME": "AdvancedPages",
12        "APP_ID": "AdvancedPages",
13        "APP_SERVICES_URL": "\apps\services\\"",
14        "APP_VERSION": "1.0",
15        "ENVIRONMENT": "android",
16        "LOGIN_DISPLAY_TYPE": "embedded",
17        "WORKLIGHT_NATIVE_VERSION": "3826723549",
18        "WORKLIGHT_PLATFORM_VERSION": "7.0.0.0",
19        "WORKLIGHT_ROOT_URL": "\apps\services\api\AdvancedPages\android\"
20      };
21    </script>
22    ...
23   </c:when>
24   <c:otherwise>
25     <script>
26       // Define WL namespace.
27       var WL = WL ? WL : {};
28       /**
29        * WLClient configuration variables.
30        * Values are injected by the deployer that packs the gadget.
31        */
32      WL.StaticAppProps = {
33        "APP_DISPLAY_NAME": "AdvancedPages",
34        "APP_ID": "AdvancedPages",
35        "APP_SERVICES_URL": "\apps\services\\"",
36        "APP_VERSION": "1.0",
37        "ENVIRONMENT": "iphone",
38        "LOGIN_DISPLAY_TYPE": "embedded",
39        "WORKLIGHT_NATIVE_VERSION": "270878231",
40        "WORKLIGHT_PLATFORM_VERSION": "7.0.0.0",
41        "WORKLIGHT_ROOT_URL": "\apps\services\api\AdvancedPages\iphone\"
42      };
43    </script>
44    ...</p>
45   <p> </c:otherwise>
46 </c:choose>
47

```

Encrypted Cache

The Encrypted Offline Cache (EOC) API is used for securely storing data by using HTML5 local cache. The Conference app uses EOC to save a list of favorite sessions in a secure way.



```

1
2 function __writeEOC(mykey, mydata, callback) {
3     WL.EncryptedCache.write(mykey, mydata, function() {
4         callback();
5     }, function() {
6         alert('An error occurred writing to the encrypted cache');
7     });
8 }
9 ...
10 function saveToCache(key, value) {
11     if (isEOCOpen == false) {
12         __openEOC(function() {
13             __writeEOC(key, value, function() {
14                 });
15             });
16     } else {
17         __writeEOC(key, value, function() {
18             }, function() {
19                 alert('Unable to write to encrypted cache');
20             });
21     }
22 }

```

Camera support

Use the IBM MobileFirst Client API to extend the application to take photos of the conference. The application has a social aspect, where users can view photos from the other conference attendees.



Proxy considerations

IBM MobileFirst Platform Foundation is compatible with most known proxy solutions.

- WebSphere HTTP Plug-in support: Requires a single shared `plugin-cfg.xml` file for routing requests to both the MobileFirst Development Server and the WebSphere Application Server instance that is hosting the IBM Mobile Conference App.
- Apache Web Server support: Requires a `mod_proxy` module to be loaded by the web server.

Sample application

Click to download

(<http://public.dhe.ibm.com/software/products/en/MobileFirstPlatform/docs/v700/ContainerForAdvancedPagesProject.zip>)
the Studio project.