

Simulation of Eliminating Physical Punishment With MICS Data

Andy Grogan-Kaylor

8 Sep 2020 10:36:28

Background

What would the world look like if we eliminated physical punishment? These are some quick calculations using MICS data.

Get The Data

```
. clear all  
  
. set seed 3846  
  
. cd "/Users/agrogan/Desktop/newstuff/MICS-eliminate-cp"  
/Users/agrogan/Desktop/newstuff/MICS-eliminate-cp  
  
. use "/Users/agrogan/Box Sync/MICS/Data/MICS.dta"
```

Are we using the most *up to date* data?

Descriptive Statistics on Physical Punishment

```
. tabulate d_phys_spank
```

Selected child spanked	Freq.	Percent	Cum.
0	122,373	56.68	56.68
1	93,512	43.32	100.00
Total	215,885	100.00	

Predict Aggression With A Multilevel Model

For demonstration purposes, I am only including a *limited* set of covariates. One could—and should—easily include more although including more covariates considerably lengthens the estimation time.

```
. melogit ec16 i.d_phys_spank cmale cage || country:  
Fitting fixed-effects model:  
Iteration 0: log likelihood = -142628.21
```

```

Iteration 1: log likelihood = -142431.02
Iteration 2: log likelihood = -142430.93
Iteration 3: log likelihood = -142430.93
Refining starting values:
Grid node 0: log likelihood = -135384.24
Fitting full model:
Iteration 0: log likelihood = -135384.24 (not concave)
Iteration 1: log likelihood = -135381.58 (backed up)
Iteration 2: log likelihood = -135380 (backed up)
Iteration 3: log likelihood = -135376.47
Iteration 4: log likelihood = -135368.83
Iteration 5: log likelihood = -135359.89
Iteration 6: log likelihood = -135351.72
Iteration 7: log likelihood = -135349.08
Iteration 8: log likelihood = -135349.08
Mixed-effects logistic regression
Group variable: country
Number of obs = 215,885
Number of groups = 62
Obs per group:
    min = 115
    avg = 3,482.0
    max = 20,451
Integration method: mvaghermite
Integration pts. = 7
Wald chi2(3) = 2481.66
Prob > chi2 = 0.0000
Log likelihood = -135349.08

```

	ec16	Coef.	Std. Err.	z	P> z	[95% Conf. Interval]	
1.d_phys_spank		.3466554	.0094956	36.51	0.000	.3280443	.3652665
cmale		.3010048	.0092288	32.62	0.000	.2829166	.3190929
cage		-.0060204	.000674	-8.93	0.000	-.0073415	-.0046993
_cons		-.6711418	.0895672	-7.49	0.000	-.8466903	-.4955932
country							
var(_cons)		.4282121	.0778397			.2998671	.6114895

LR test vs. logistic model: chibar2(01) = 14163.72 Prob >= chibar2 = 0.0000

Estimate Margins (Predicted Probabilities)

```

. margins d_phys_spank
Predictive margins
Model VCE : OIM
Expression : Marginal predicted mean, predict()
Number of obs = 215,885

```

	Delta-method					
	Margin	Std. Err.	z	P> z	[95% Conf. Interval]	
d_phys_spank						
0	.3251464	.0169289	19.21	0.000	.2919665	.3583264
1	.3979304	.0182745	21.78	0.000	.3621131	.4337478

Calculations

One could rely on commands such as the one below to do these calculations on the fly. In this example I have hand-coded the calculations, so the calculations may need to be rewritten every time more covariates are added to the model. On the other hand, writing out the calculations explicitly likely increases the transparency of the thought process below.

```
. * matrix b = r(b) // get matrix of results

. * matrix list b // list it out to double check
```

In a hypothetical sample of 100 children...

Aggressive Children Among Not Spanked Children

proportion not spanked * proportion aggressive * 100

```
. display round(.5668 * .3251464 * 100)
18
```

Non Aggressive Children Among Not Spanked Children

number not spanked – number aggressive

```
. display 57 - 18
39
```

Aggressive Children Among Spanked Children

proportion spanked * proportion aggressive * 100

```
. display round(.4332 * .3979304 * 100)
17
```

Non-Aggressive Children Among Spanked Children

number spanked – number aggressive

```
. display 43 - 17
26
```

Number Aggressive Children Among Spanked Children If They Were Not Spanked

```
. display round(.4332 * .3251464 * 100)
14
```

Reduction in Aggressive Children

```
. display 17 - 14 // this many fewer aggressive children / 100
3
```

Graph (*DRAFT*)

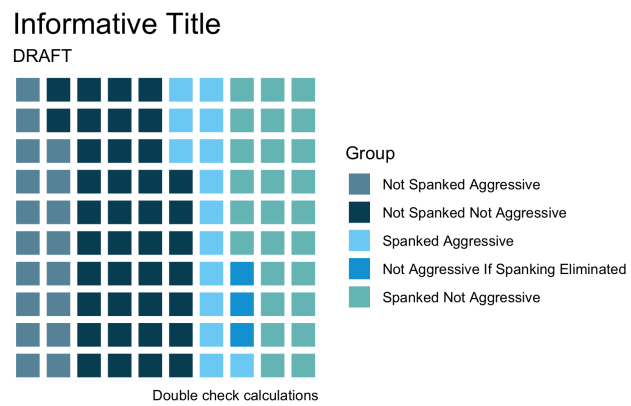


Figure 1: Graph