Computer Networks

Amir Mahdi Sadeghzadeh, Ph.D.

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

Packet delay: four sources

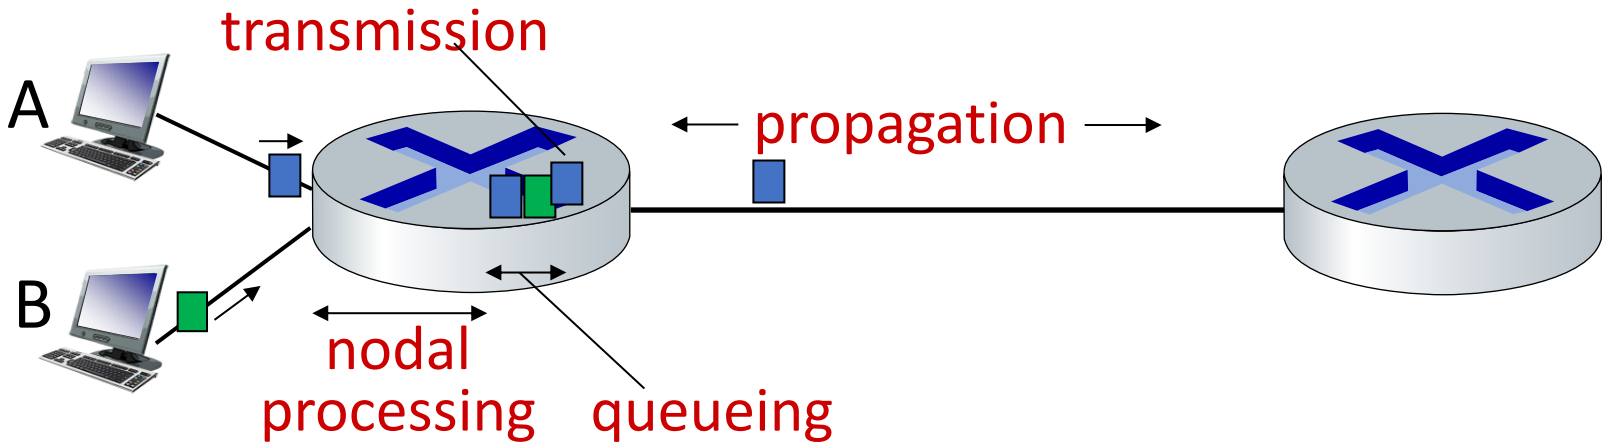

$$d_{nodal} = d_{proc} + d_{queue} + d_{trans} + d_{prop}$$

d_{proc}: nodal processing

- check bit errors
- determine output link
- typically < microsecs

d_{queue}: queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Packet delay: four sources

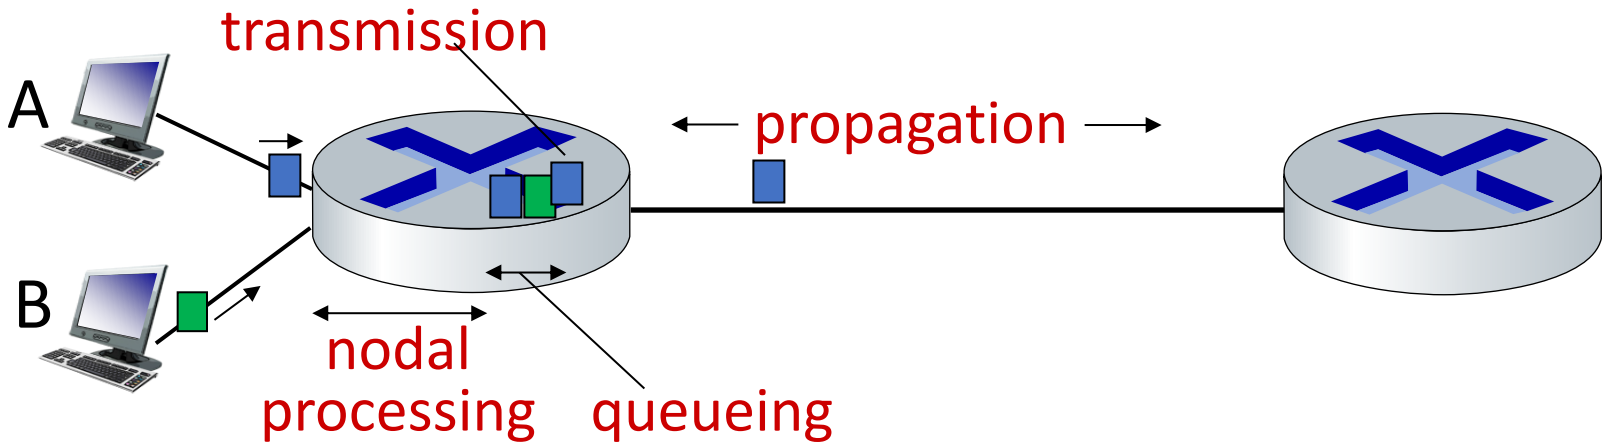

$$d_{nodal} = d_{proc} + d_{queue} + d_{trans} + d_{prop}$$

d_{trans}: transmission delay:

- L: packet length (bits)
- R: link *transmission rate (bps)*
- $d_{trans} = L/R$

d_{prop}: propagation delay:

- d: length of physical link
- s: propagation speed (~2×10^8 m/sec)
- $d_{prop} = d/s$

d_{trans} and d_{prop} *very* different

Throughput

- *throughput:* rate (bits/time unit) at which bits are being sent from sender to receiver
  - *instantaneous:* rate at given point in time
  - *average:* rate over longer period of time

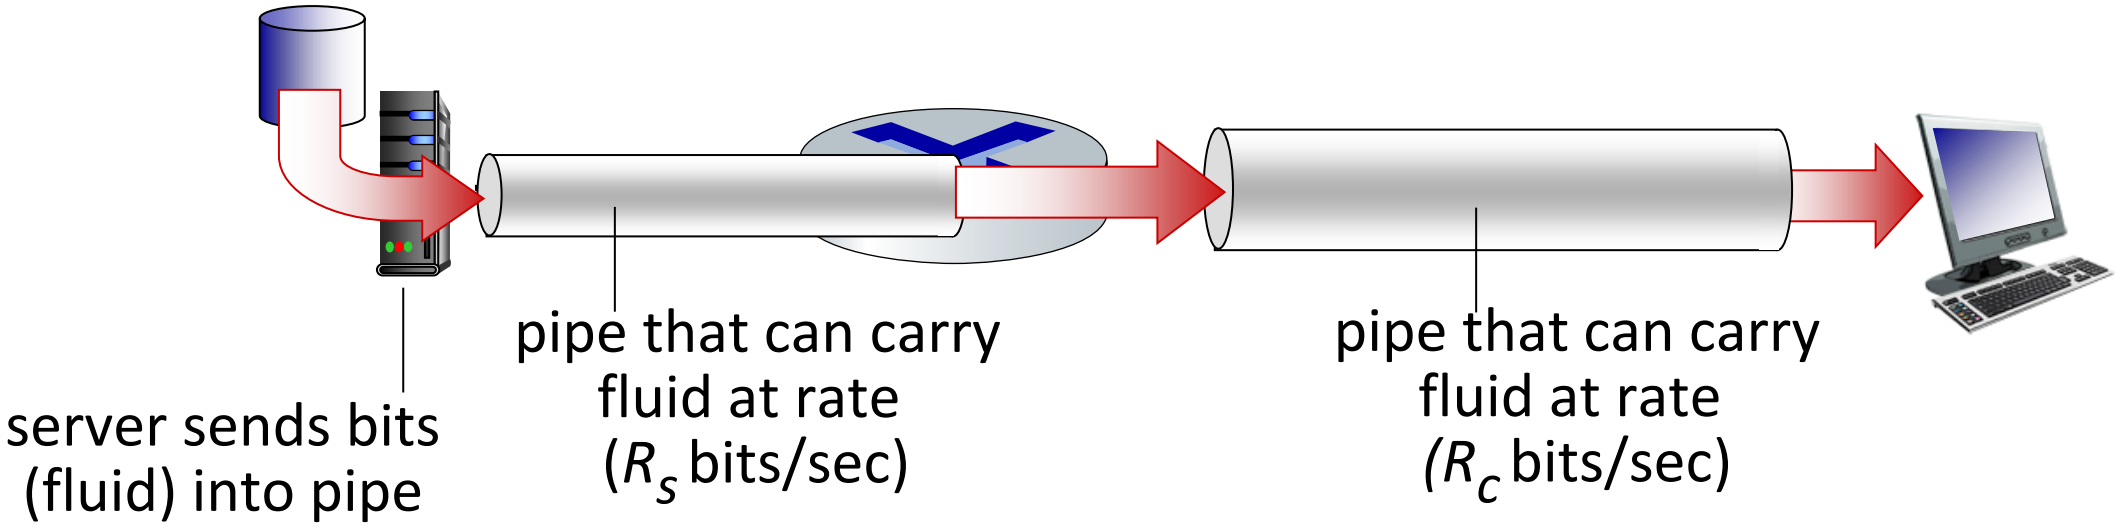

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- **Security**
- Protocol layers, service models
- History

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

Protocol “layers” and reference models

Networks are complex, with many “pieces”:

- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software

Question: is there any hope of *organizing* structure of network?

- and/or our *discussion* of networks?

Example: organization of air travel



end-to-end transfer of person plus baggage

ticket (purchase)

baggage (check)

gates (load)

runway takeoff

airplane routing

ticket (complain)

baggage (claim)

gates (unload)

runway landing

airplane routing

airplane routing

How would you *define/discuss* the *system* of airline travel?

- a series of steps, involving many services

Example: organization of air travel

layers: each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Why layering?

Approach to designing/discussing complex systems:

- explicit structure allows identification, relationship of system's pieces
  - layered *reference model* for discussion
- modularization eases maintenance, updating of system
  - change in layer's service *implementation*: transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system

Layered Internet protocol stack

- *application:* supporting network applications
  - HTTP, IMAP, SMTP, DNS
- *transport:* process-process data transfer
  - TCP, UDP
- *network:* routing of datagrams from source to destination
  - IP, routing protocols
- *link:* data transfer between neighboring network elements
  - Ethernet, 802.11 (WiFi), PPP
- *physical:* bits “on the wire”

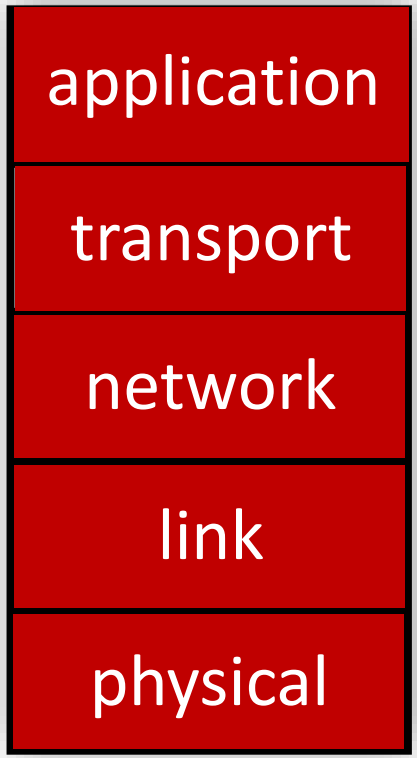

Services, Layering and Encapsulation

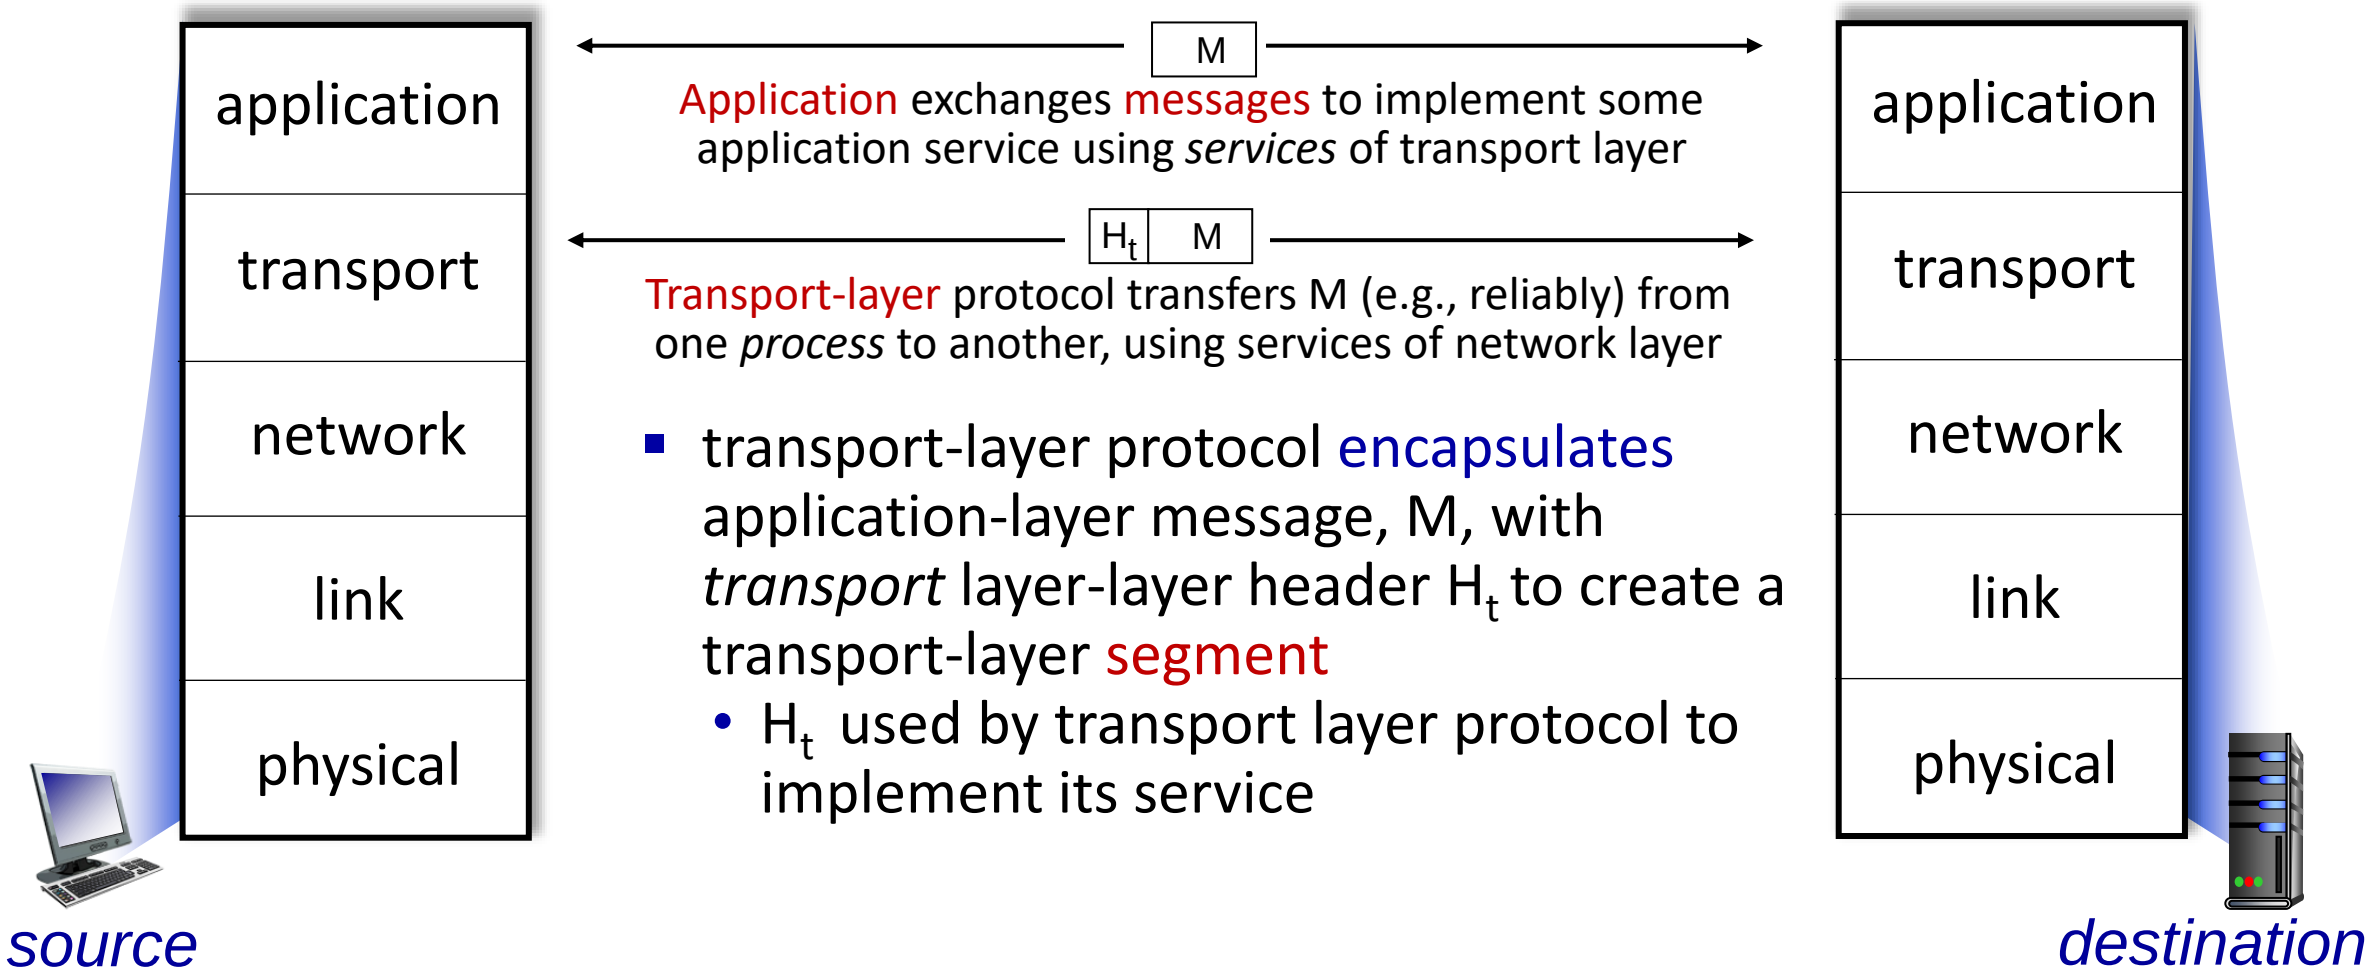

- transport-layer protocol encapsulates application-layer message, M, with *transport* layer-layer header H_t to create a transport-layer segment
  - H_t used by transport layer protocol to implement its service

Services, Layering and Encapsulation

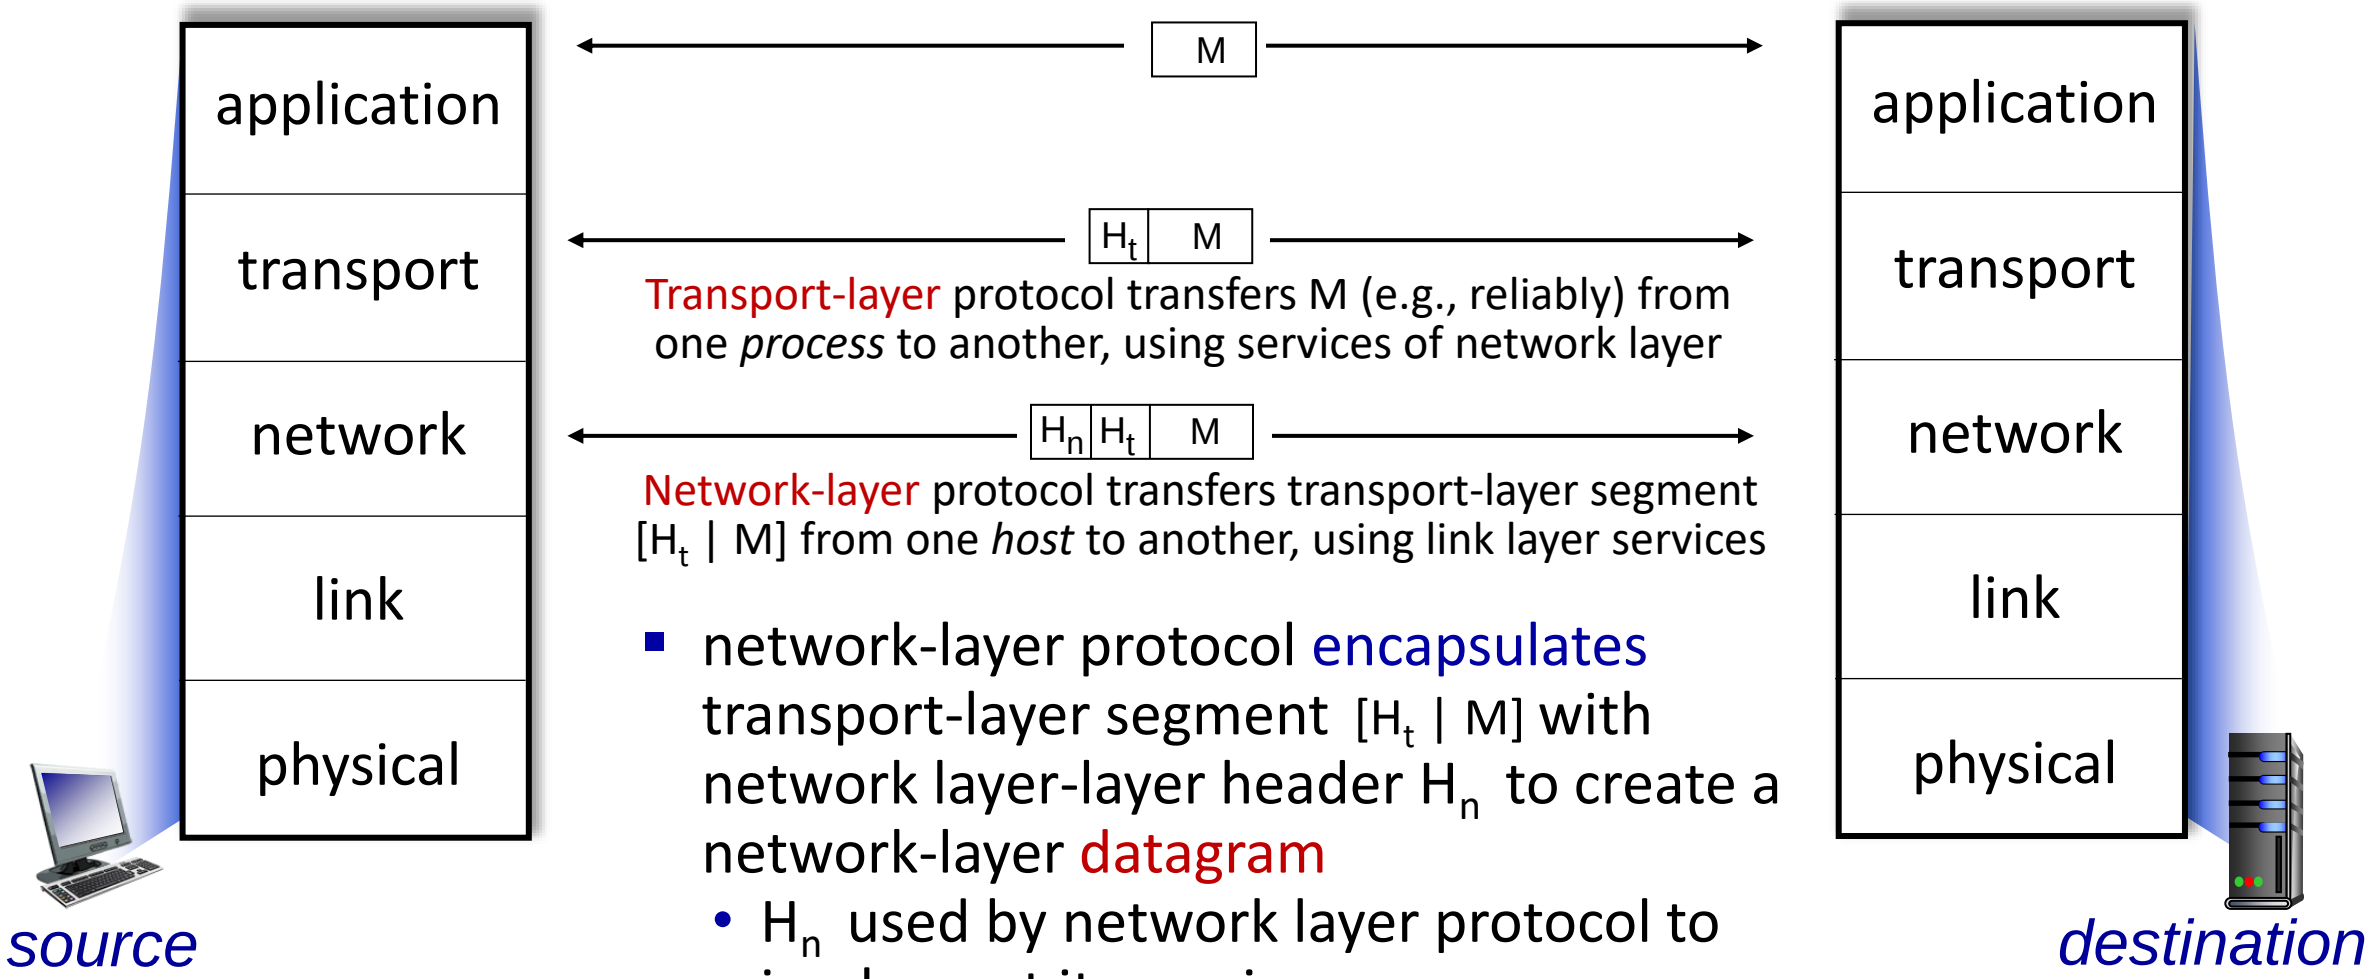

- network-layer protocol encapsulates transport-layer segment [H_t | M] with network layer-layer header H_n to create a network-layer datagram
  - H_n used by network layer protocol to implement its service

Services, Layering and Encapsulation

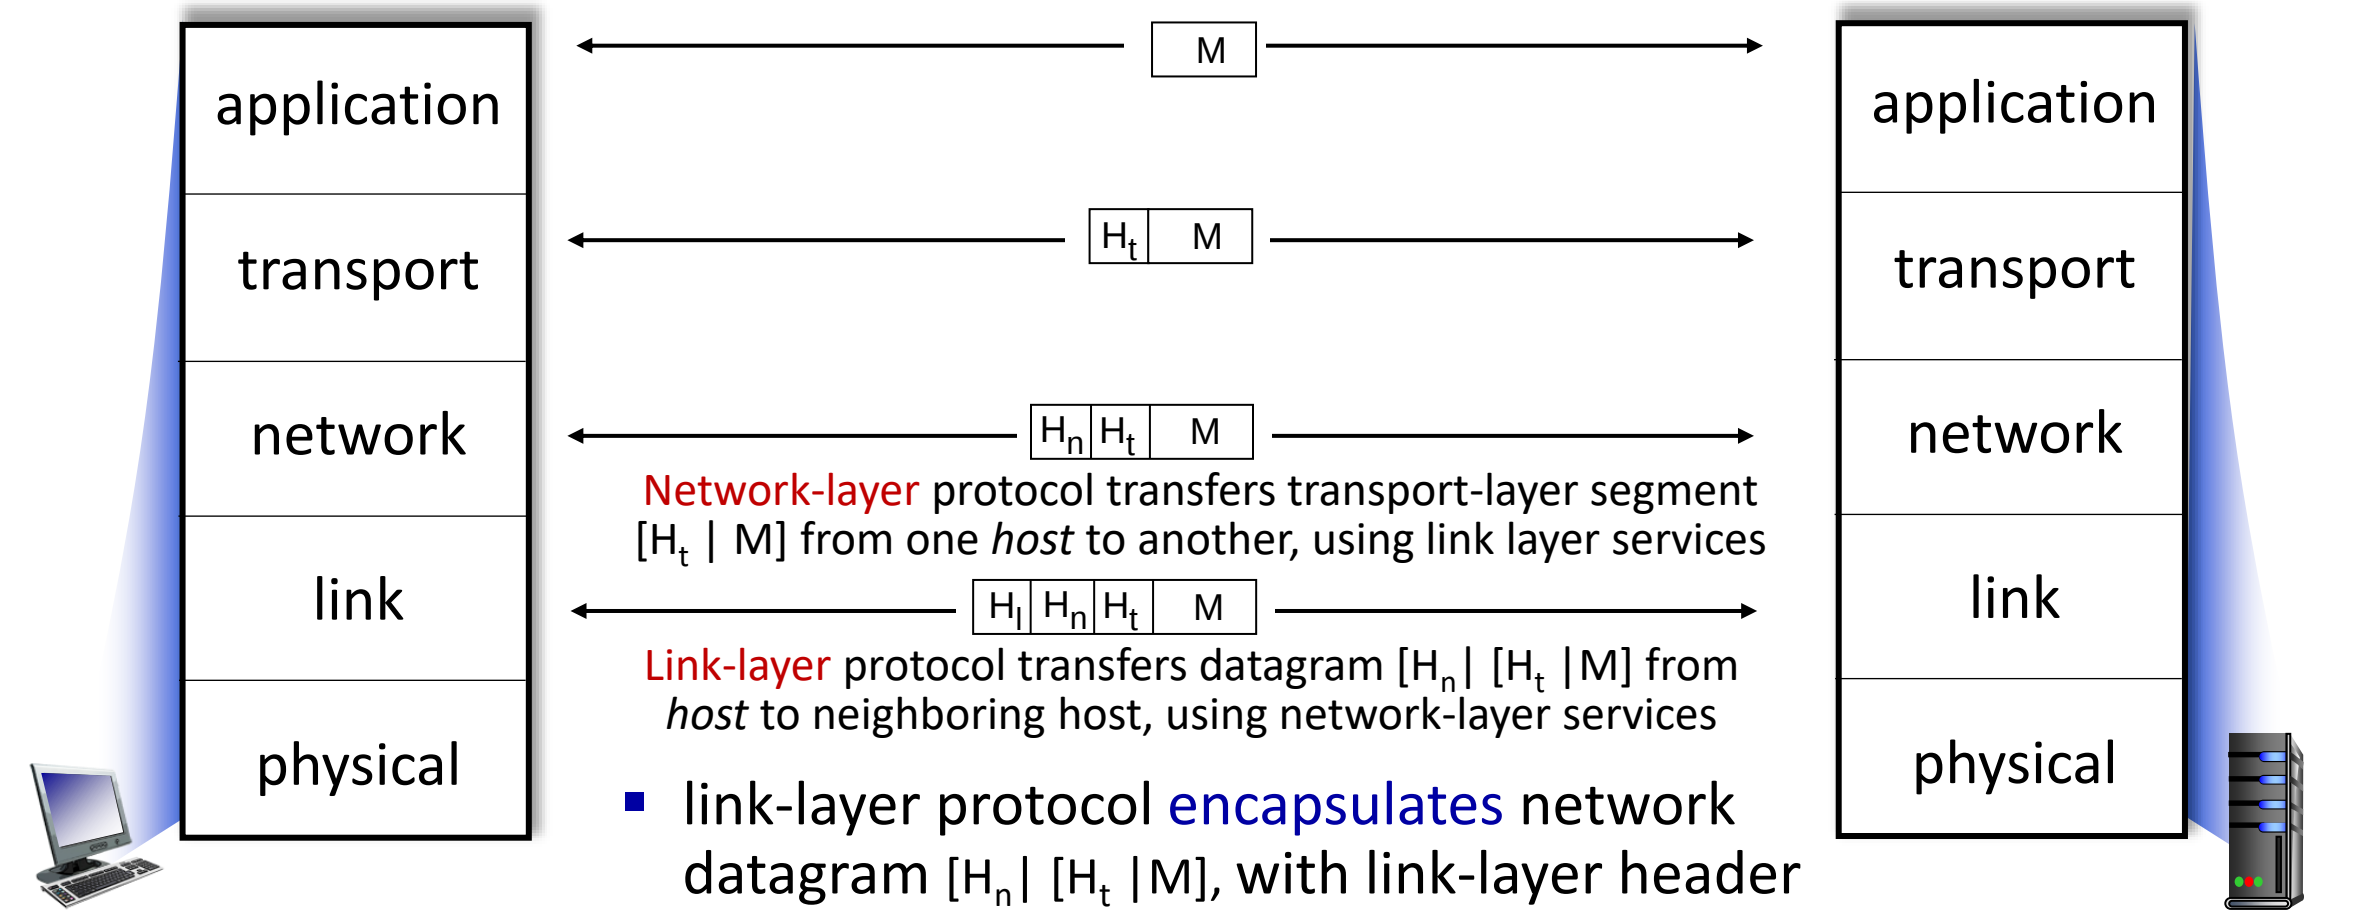

- link-layer protocol encapsulates network datagram [H_n| [H_t |M], with link-layer header H_l to create a link-layer frame

Encapsulation

Matryoshka dolls (stacking dolls)

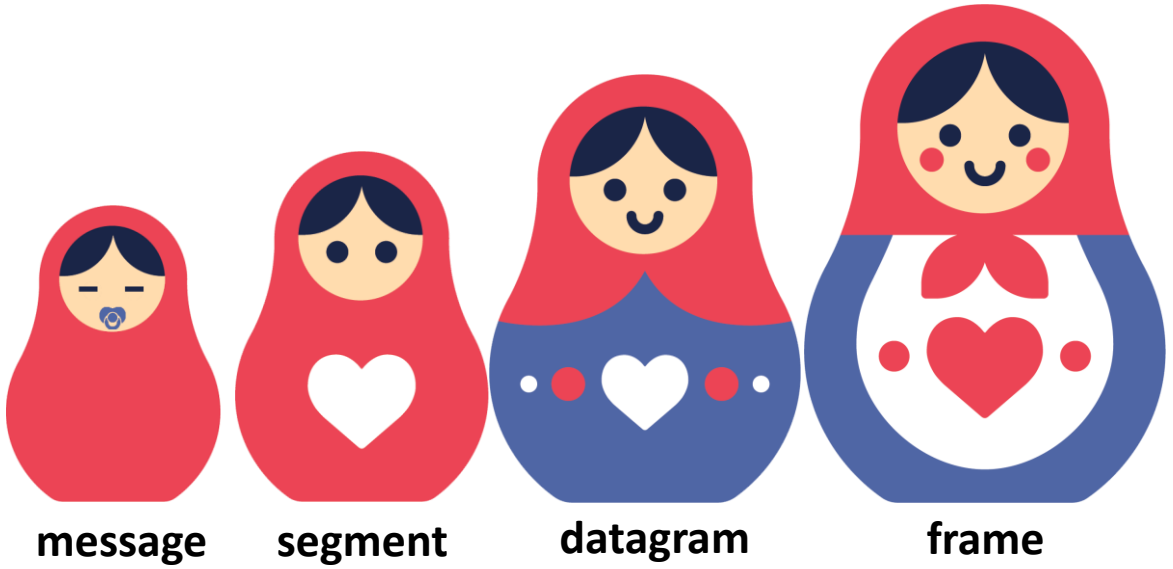

Credit: https://dribbble.com/shots/7182188-Babushka-Boi

Services, Layering and Encapsulation

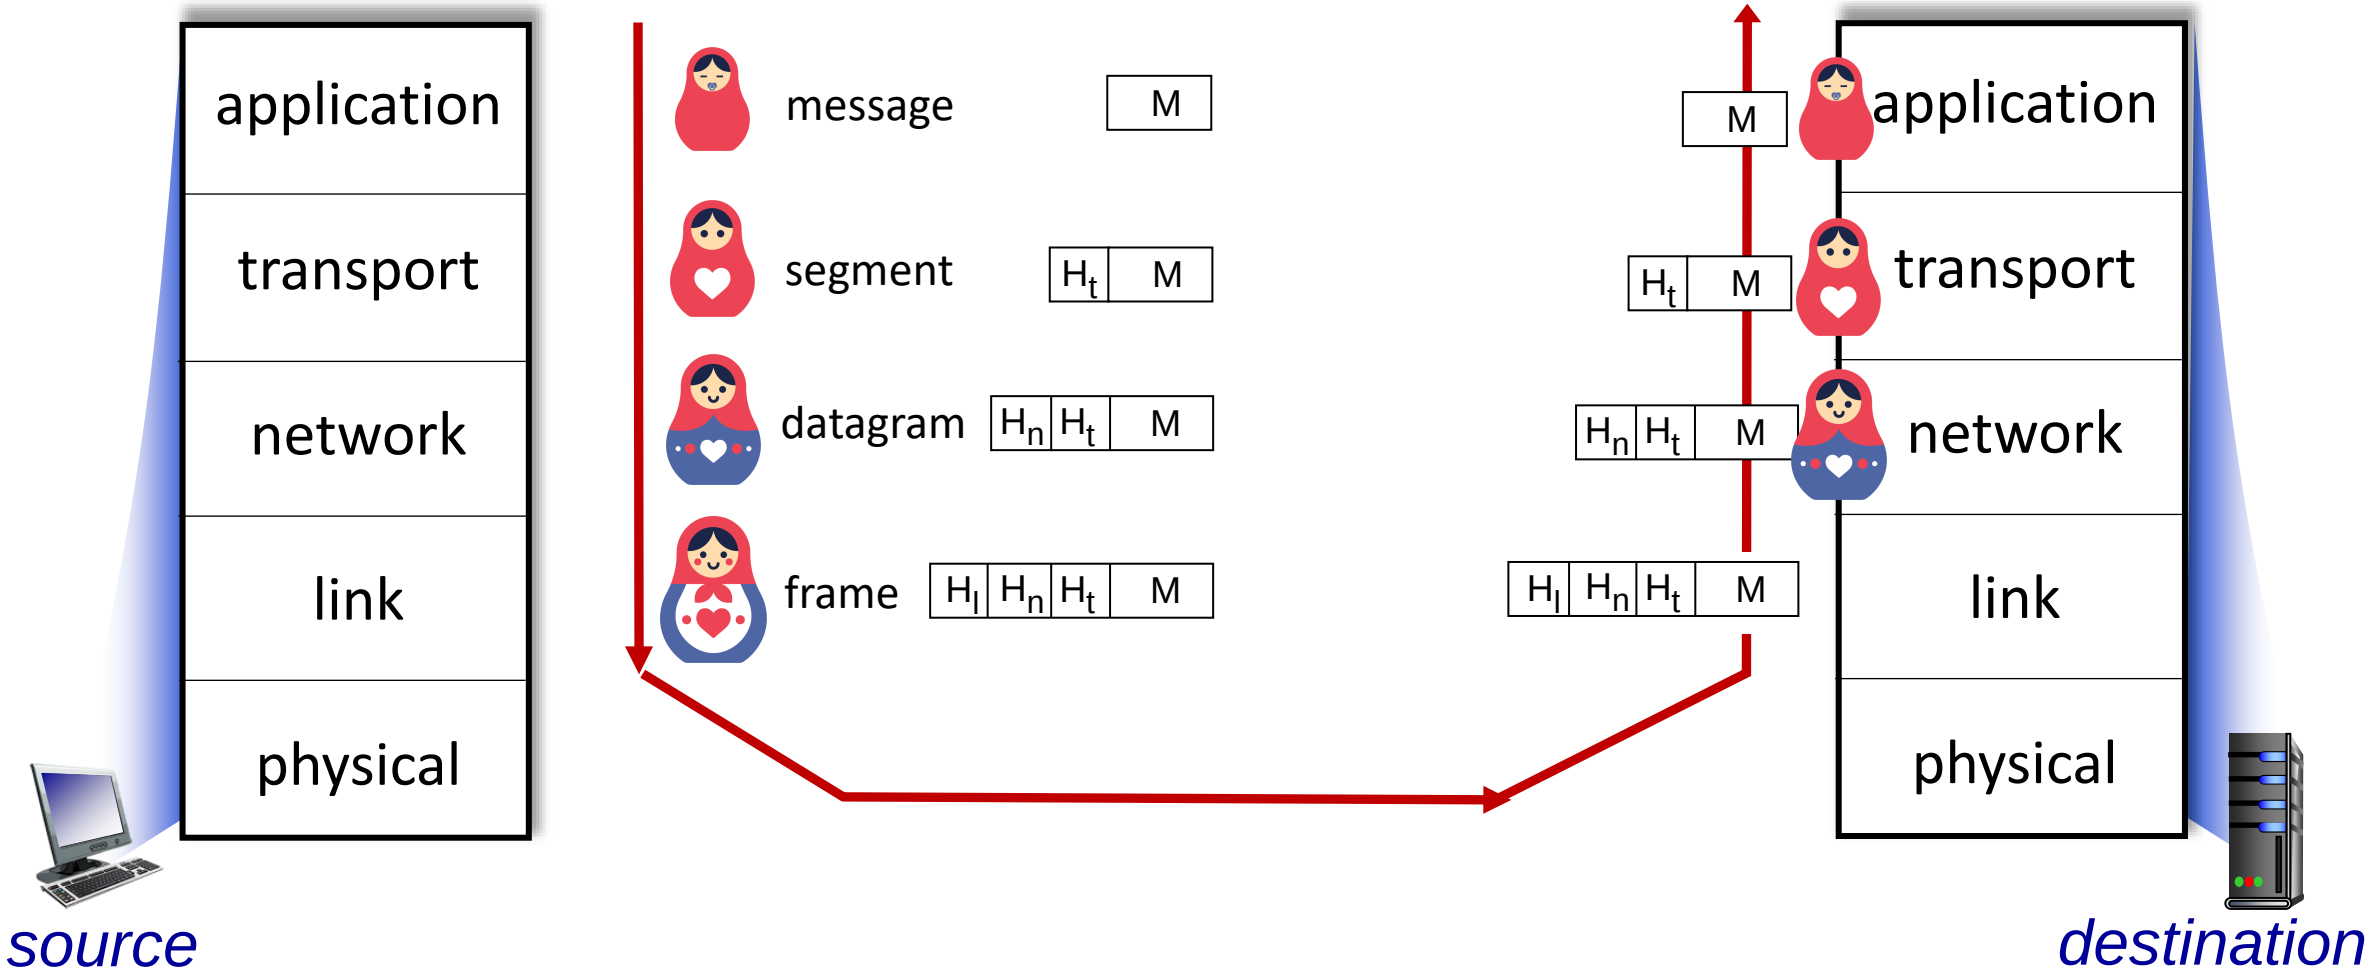

Encapsulation: an end-end view

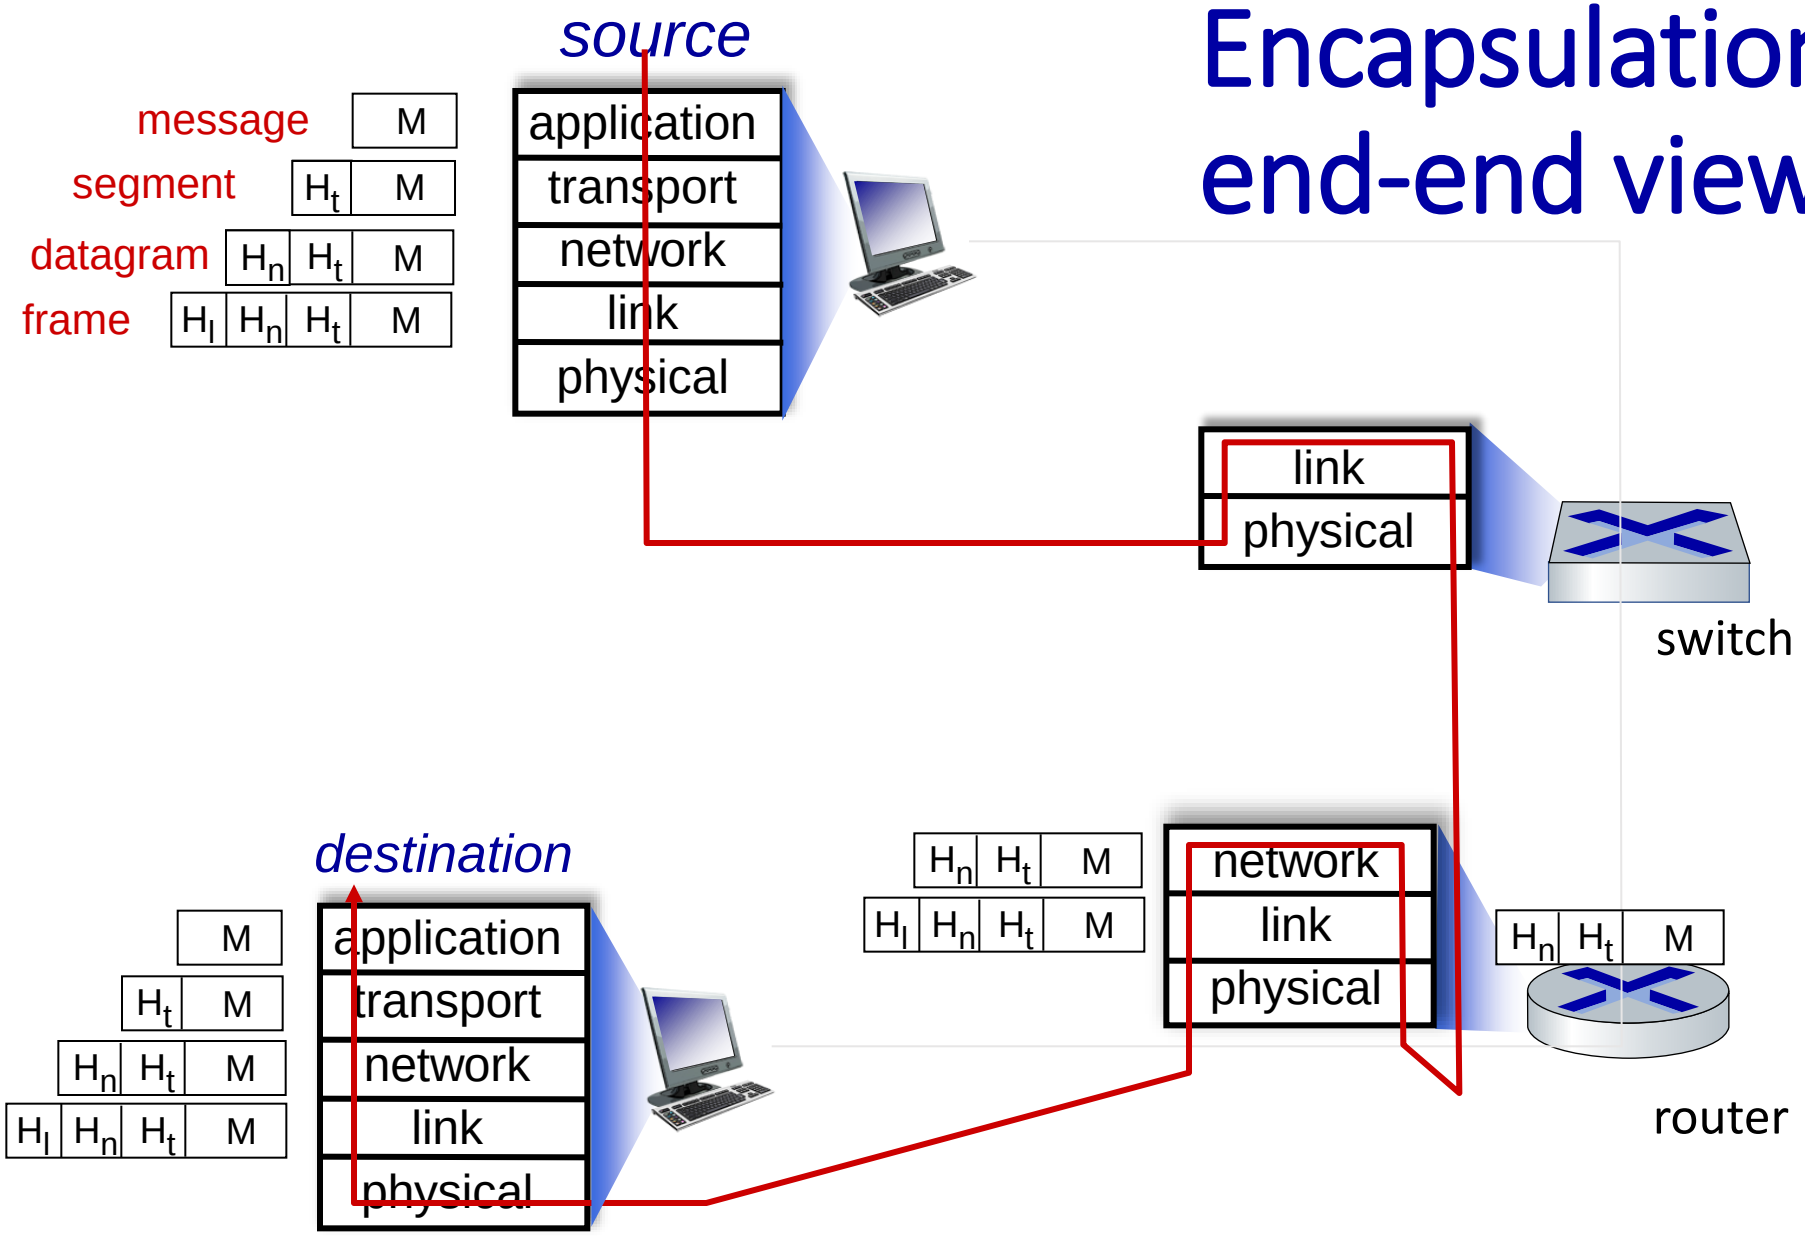

Chapter 2
Application Layer

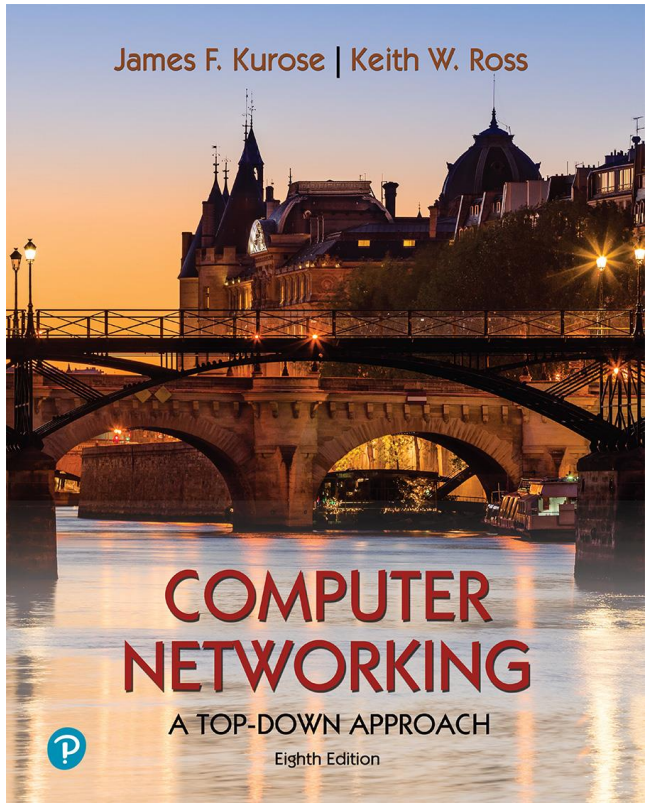

Computer Networking: A Top-Down Approach

8th edition n
Jim Kurose, Keith Ross
Pearson, 2020

Application layer: overview

- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System DNS

- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP

Application layer: overview

Our goals:

- conceptual *and* implementation aspects of application-layer protocols
  - transport-layer service models
  - client-server paradigm
  - peer-to-peer paradigm
- learn about protocols by examining popular application-layer protocols and infrastructure
  - HTTP
  - SMTP, IMAP
  - DNS
  - video streaming systems, CDNs
- programming network applications
  - socket API

Some network apps

- social networking
- Web
- text messaging
- e-mail
- multi-user network games
- streaming stored video (YouTube, Hulu, Netflix)
- P2P file sharing
- voice over IP (e.g., Skype)
- real-time video conferencing (e.g., Zoom)
- Internet search
- remote login
- …

Q: your favorites?

Creating a network app

write programs that:

- run on (different) end systems
- communicate over network
- e.g., web server software communicates with browser software

no need to write software for network-core devices

- network-core devices do not run user applications
- applications on end systems allows for rapid app development, propagation

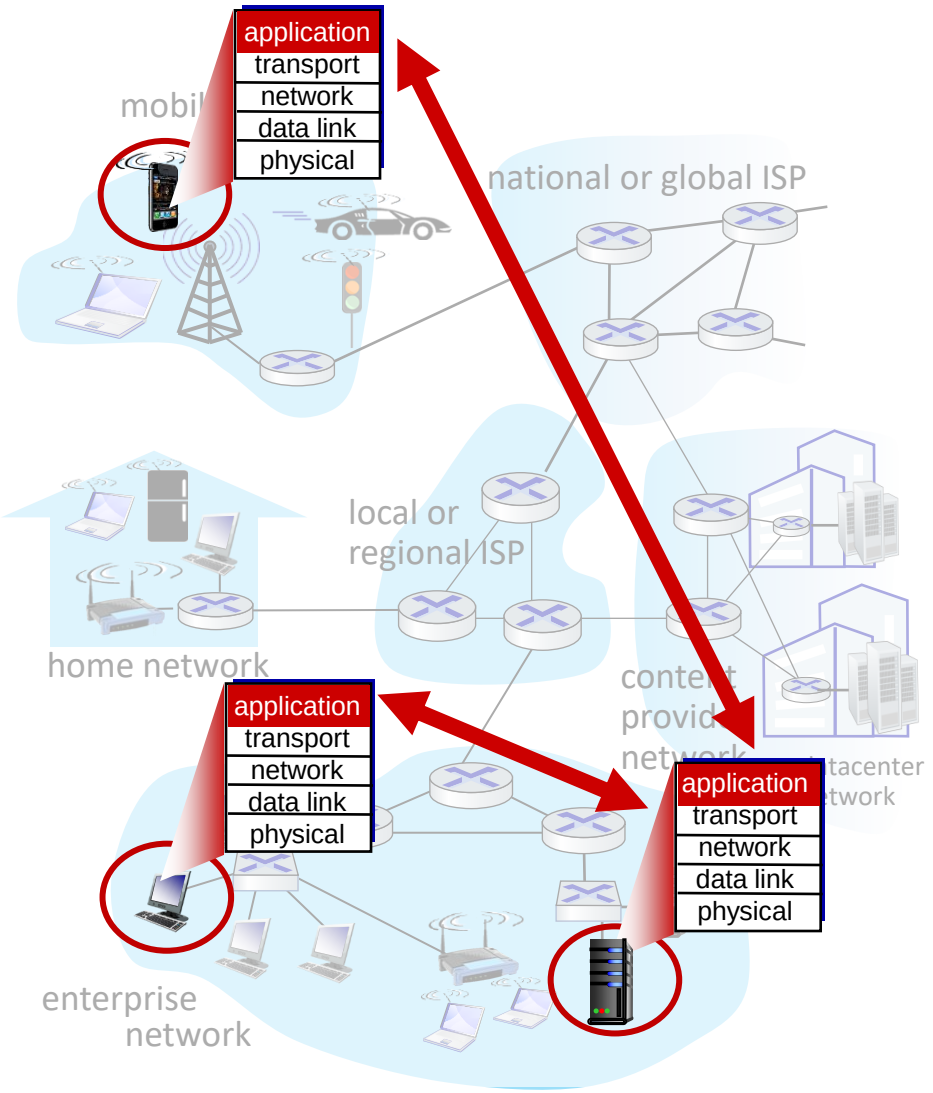

Client-server paradigm

server:

- always-on host
- permanent IP address
- often in data centers, for scaling

clients:

- contact, communicate with server
- may be intermittently connected
- may have dynamic IP addresses
- do *not* communicate directly with each other

- examples: HTTP, IMAP, FTP

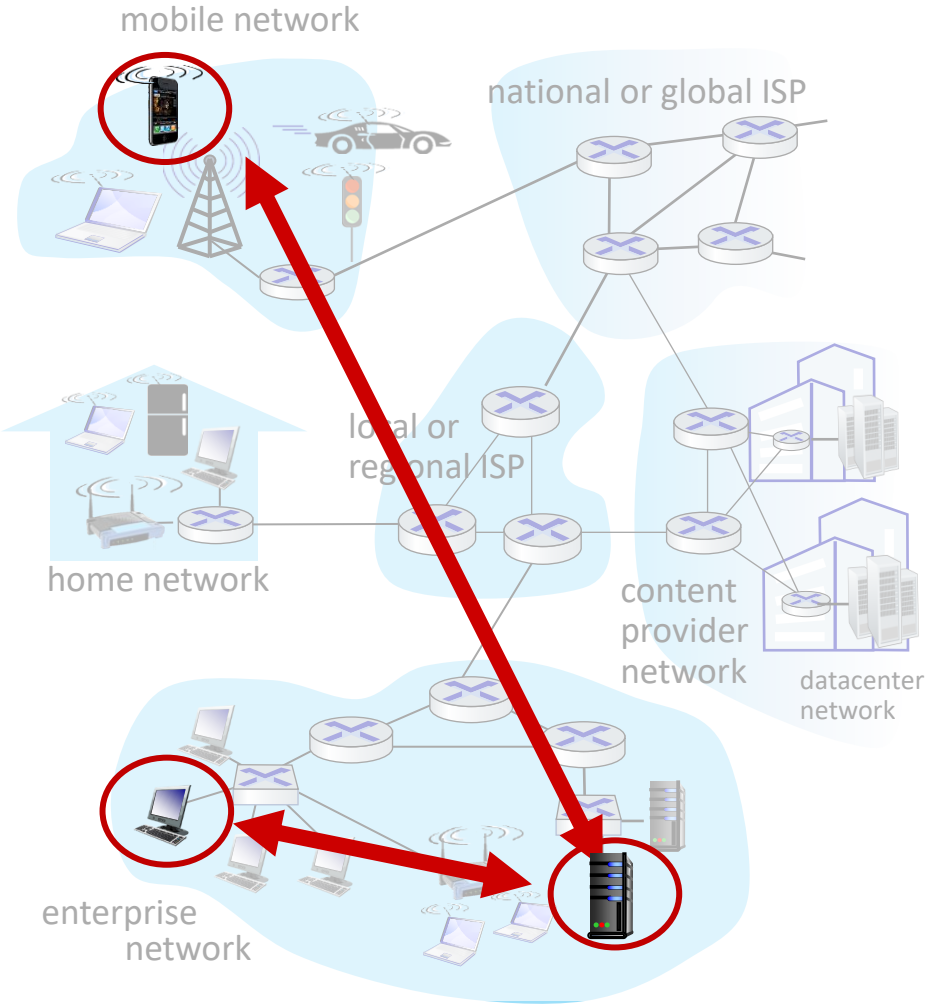

Peer-peer architecture

- *no* always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
  - *self scalability* – new peers bring new service capacity, as well as new service demands
- peers are intermittently connected and change IP addresses
  - complex management
- example: P2P file sharing [BitTorrent]

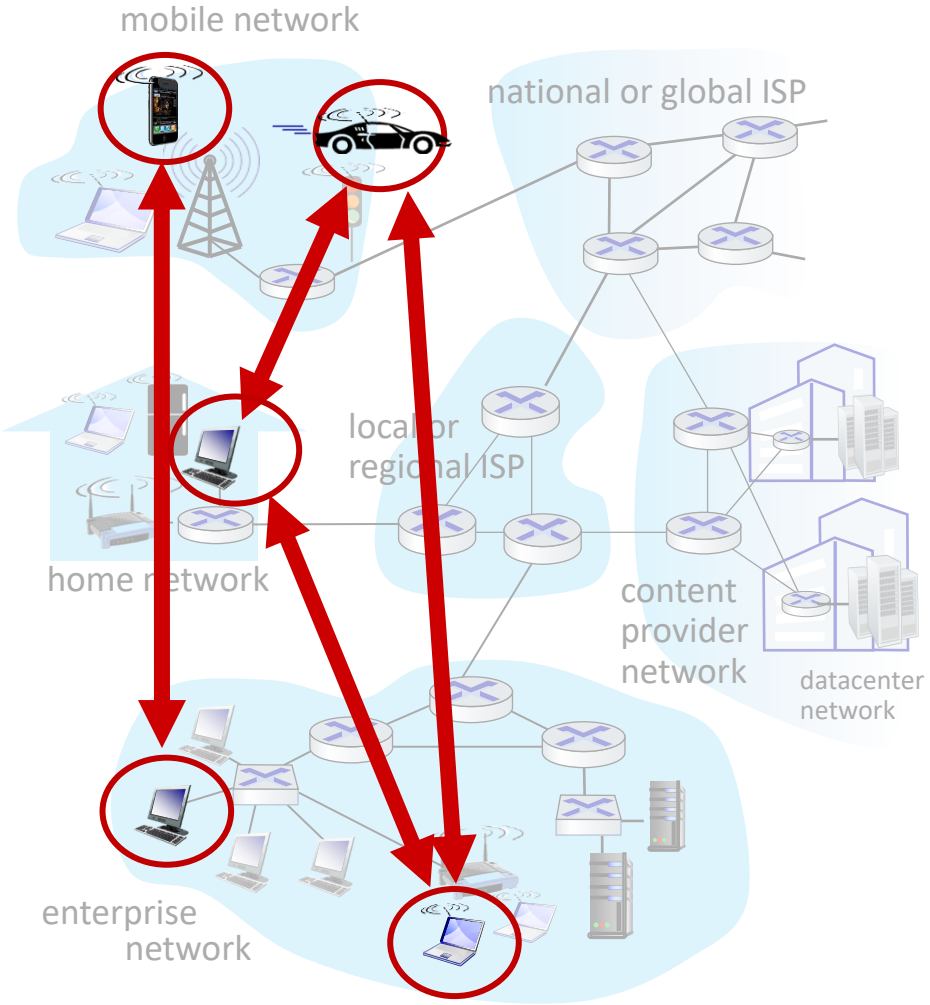

Processes communicating

process: program running within a host

- within same host, two processes communicate using inter-process communication (defined by OS)
- processes in different hosts communicate by exchanging messages

clients, servers

client process: process that initiates communication

server process: process that waits to be contacted

- note: applications with P2P architectures have client processes & server processes

Sockets

- process sends/receives messages to/from its socket
- socket analogous to door
  - sending process shoves message out door
  - sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process
  - two sockets involved: one on each side

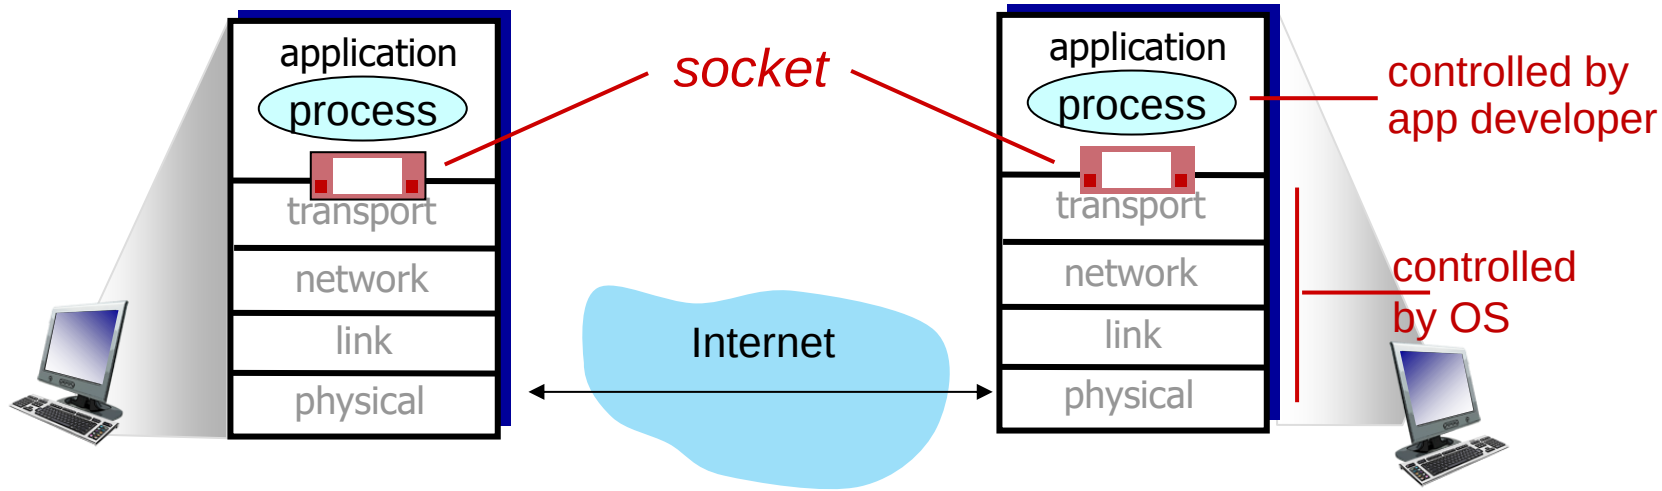

Addressing processes

- to receive messages, process must have *identifier*
- host device has unique 32-bit IP address
- *Q:* does IP address of host on which process runs suffice for identifying the process?
  - *A:* no, *many* processes can be running on same host

- *identifier* includes both IP address and port numbers associated with process on host.
- example port numbers:
  - HTTP server: 80
  - mail server: 25
- to send HTTP message to gaia.cs.umass.edu web server:
  - IP address: 128.119.245.12
  - port number: 80
- more shortly…