






Report

HTTP

Name /Mohammed Talal Alobaysi

R2

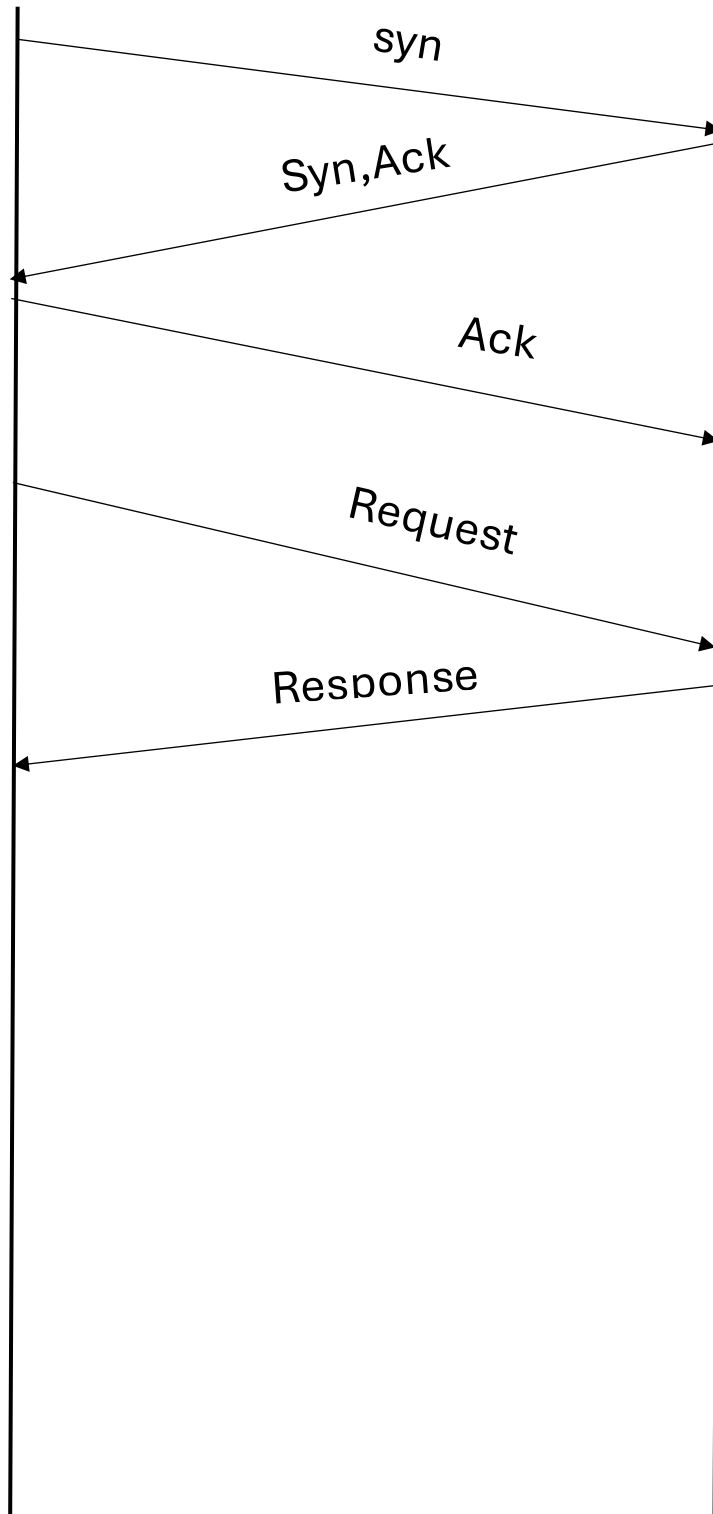

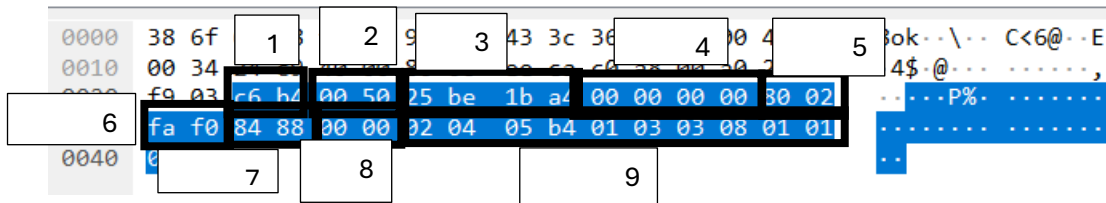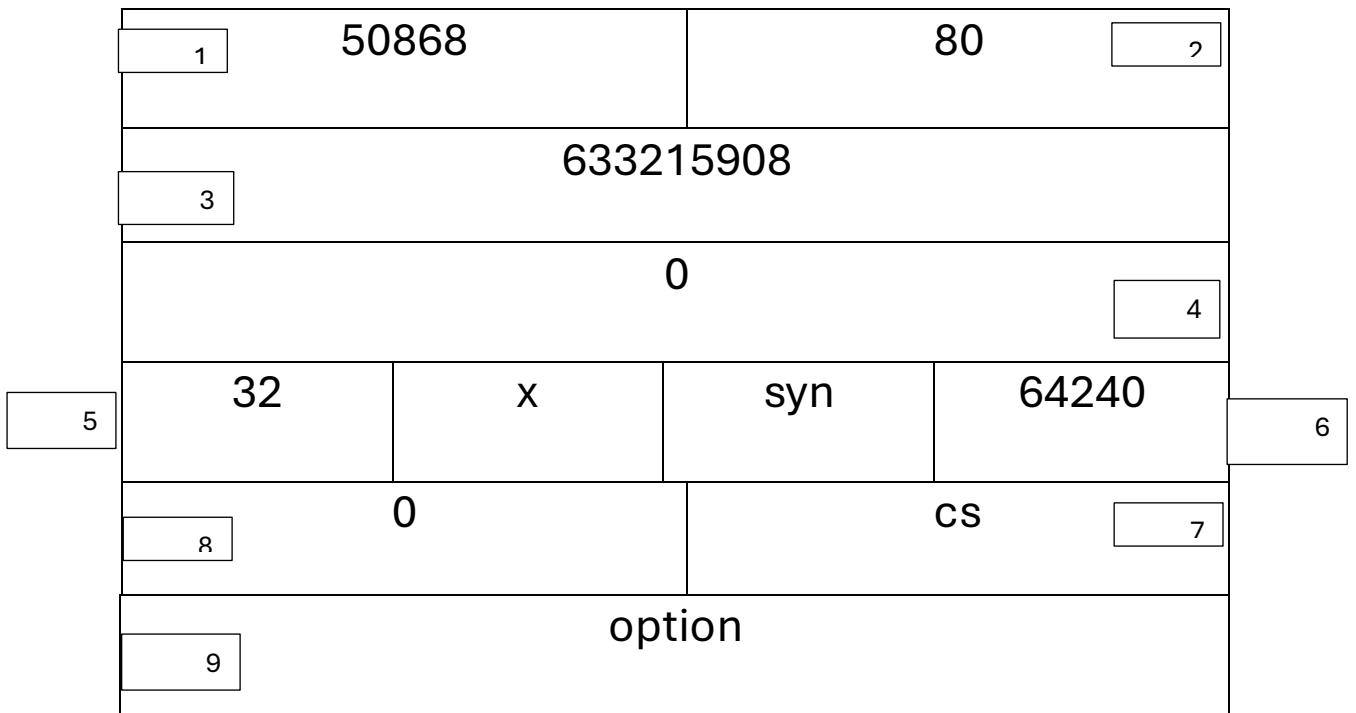

1		80		50868		2							
3		3005872343											
1+633215908						4							
5		32		x		Syn,ack		62727		6			
8		0			CS							7	
9		option											

Diagram illustrating a memory buffer layout with 16 slots (0-15). The buffer is divided into 8 groups of 2 bytes each. The slots are labeled 1 through 9, corresponding to the groups. The data in the buffer is shown in hexadecimal and ASCII.

Slot	Group	Hex Data	ASCII Data
1	0-1	94 bb	..C<6@8o k·.\··E·
2	2-3	36 8	-4·@·,· g·,·...
3	4-5	18 fd	-·P·...·)··%·...
4	6-7	00	·...·...·x·...·...
5	8-9	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	..
6	10-11	f5 07 de 9b 00 00 02 04 05 78 01 01 04 02 01 03	
7	12-13	03 07	
8	14-15	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	
9			

1		50868		80		2			
3		633215909							
		1+3005872343				4			
5		32	x	ack		131584		6	
8		0		CS				7	

6	0000	38 6f	1	2	94	3	B 3c 36	4	8 00	5	8ok.. \.. C<6@..E. .(\$.@..., ...P%.. ...)..P. ...8..
	0010	00 28	c6 b4 00 50	25 be 1b a5	b3 29 f8 d8	50 10					
7	02 02 12 38 00 00										
8											

1		50868		80		2							
3		633215909											
3005872344						4							
5		20		x		Ack,push		131584		6			
8		0				CS						7	

1	2	3	4	5
6	f9 03 c6 b4 00 50 25 be 1b a5 b3 29 f8 d8 50 18P%. ...)..P. 02 02 16 c3 00 00 47 45 54 20 2f 20 48 54 54 50GE T / HTTP 0040 2f 31 2e 51 0d 0a 48 6f 73 74 3a 20 77 77 77 2e /1.1--Ho st: www.			
7	8			

