An Awesome Introduction to Web Development

Assiut University

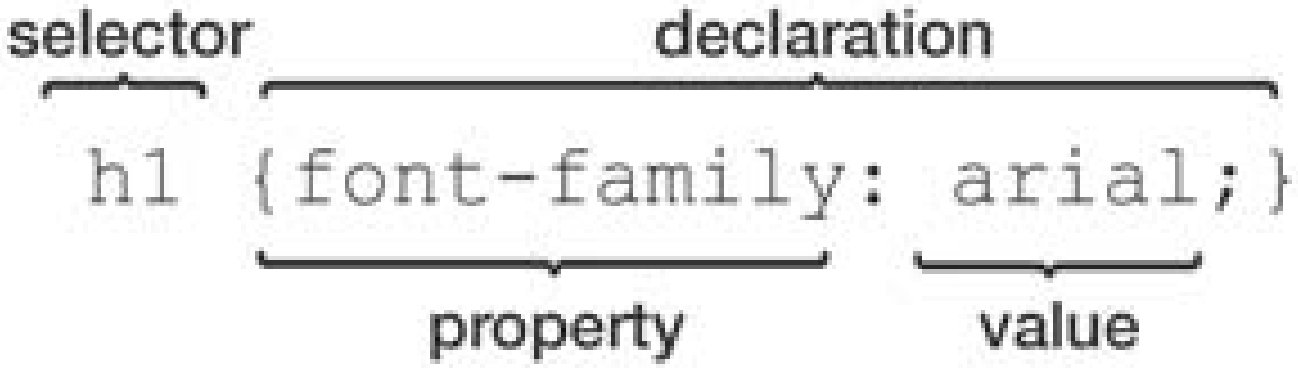

Cascading Style Sheets

Roadmap

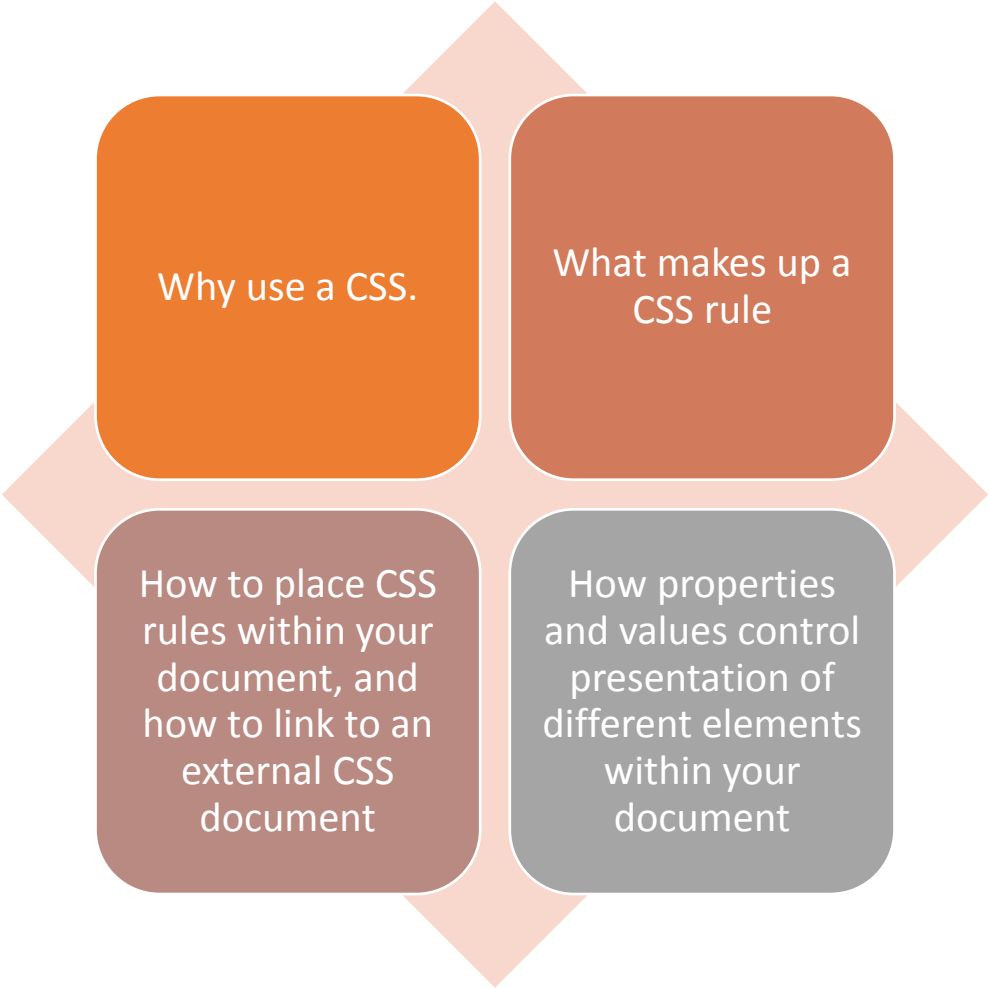
Why use a CSS.
What makes up a CSS rule
How to place CSS rules within your document, and how to link to an external CSS document
How properties and values control presentation of different elements within your document

Advantages of CSS

1. Greater page layout control.
2. Style is separate from structure.
3. Styles can be stored. This allows developers to separate the formatting from the content and allows you to change easily any property without going to the whole document.
4. Smaller documents Since formatting is separate from document which reduces the document size
5. No need for <font> tags
6. Easier site maintenance

Types of CSS

- Inline styles Coded in the body of the document of XHTML tag as an attribute , it applies only to this tag.
- Embedded styles Defined in the header of a web page applies to the entire document
- External styles Are coded in a separate text file with extension CSS and linked by <link/> in the header part.

CSS Syntax

Style sheets composed of rules that describe the styles to be applied.
Each rule consists of a ***selector*** and a ***declaration***

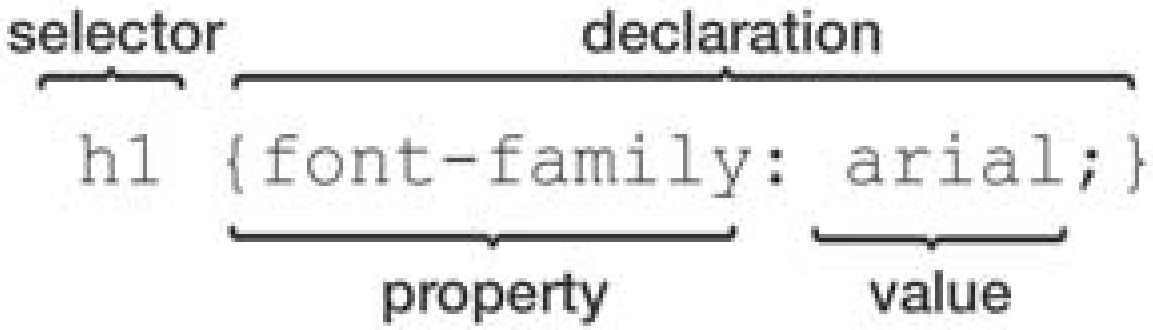

The *Selector*

indicates which element or elements the declaration applies to. (If it applies to more than one element, you can have a comma-separated list of several elements.)

The *Declaration*

Consists of two parts:

1. A *property*, which is the property of the selected element (s) that you want to affect, in this case it is the font-family property.
2. A *value*, which is a specification for this property; in this case it is the Arial typeface

An Example

```
h1, h2, h3 { color:#000000;
background-color:#FFFFFF;
font-family:arial, verdana, sans-serif;
font-weight:bold;}
```

Types of CSS

Inline Styles
Embedded Styles
External Styles
Imported styles

Types of CSS

Inline Styles
Embedded Styles
External Styles
Imported styles

Inline styles

Inline styles are coded as an attribute in XHTML. It is used with the property you want with the value you need to set e.g

General Syntax

<tagname style="property1: value1; property2: value2;"></tagname>

Example

<h1 style=“color:#CC0000 ; font-style:italic”>This is displayed as red heading in italic style</h1>

<h1 style=“background-color:green;color:white;font-family:Arial;font-size:14px>This paragraph uses an inline style</h1>

Advantages

- **Quick and easy**: Inline styles are useful for quick changes or when applying a unique style to a single element.
- Overrides other styles: Inline styles take priority over both internal and external styles (assuming no !important is used in other rules).
- Ideal for dynamic changes: Useful when styles need to be updated dynamically through JavaScript or other logic.

Disadvantages

- **Not reusable**: The same style needs to be written repeatedly for each element you want to apply it to.
- **Clutters HTML**: Embedding styles directly in HTML can make the code less readable and harder to maintain.
- **Lower maintainability**: For larger projects, inline styles make it difficult to manage consistent design and updates across the website.

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <style>
    p {
      color: blue !important; /* This will override inline style */
    }
  </style>
</head>
<body>
  <p style="color: red;">This text will be blue because the internal style uses !important
</body>
</html>
```

Some Properties

FONT

font
font-family
font-size
font-size-adjust
font-stretch
font-style
font-variant
font-weight

BACKGROUND

background
backgroundattachment
background-color
background-image
background-position
background-repeat

TEXT

color
direction
letter-spacing
text-align
text-decoration
text-indent
text-shadow
text-transform
unicode-bidi
white-space
word-spacing

BORDER

border
border-bottom
border-bottom-color
border-bottom-style
border-bottom-width
border-color
border-left
border-left-color
border-left-style
border-left-width
border-right
border-right-color
border-right-style
border-right-width
border-style
border-top
border-top-color
border-top-style
border-top-width
border-width

© BIS401

MARGIN	DIMENSIONS	TABLE
margin margin-bottom margin-left margin-right margin-top	height line-height max-height max-width min-height min-width width	border-collapse border-spacing caption-side empty-cells table-layout
PADDING	**POSITIONING**	**LIST and MARKER**
padding padding-bottom padding-left padding-right padding-top	bottom clip left overflow right top vertical-align z-index	list-style list-style-image list-style-position list-style-type marker-offset

© BIS401

Other Properties

Other properties can be found:

- http://www.w3.org/style/css/
- http://www.devguru.com/Technologies/css/quickref/css_index.html
- http://www.w3schools.com/css/css_reference.asp

Types of CSS

Inline Styles
Embedded Styles
External Styles
Imported styles

Embedded Style Sheets

Embedded style sheets (also called internal style sheets) allow you to define CSS styles within the <style> element of an HTML document. These styles are written in the <head> section of the HTML file and are applicable to the entire document or specific parts of it.

```
<head>
  <style>
    /* CSS rules go here */
    p {
      color: blue;
      font-size: 18px;
    }
    h1 {
      color: green;
      text-align: center;
    }
  </style>
</head>
```

https://codepen.io/pen

Advantages

- **Quick to apply for single pages**: Embedded styles are useful when you want to define styles for a single HTML document without needing an external stylesheet.
- **Scoped to the page**: The styles are only applied to the current HTML document and do not affect other pages.
- **No external files**: All styles are included within the same file, so there’s no need for additional HTTP requests to load stylesheets, which can improve page load speed in smaller projects.

Disadvantages

- The same as inline

Types of CSS

Inline Styles
Embedded Styles
External Styles
Imported styles

External Styles

- This is accomplished using external style sheet by using the <link/> element which is an empty element used to link to an external file whose extension should be *.css. The <link/> has attributes rel, type, and href.

```
<link rel="stylesheet" type="text/css"
href="../stylesheets/interface.css" />
```

Go up one level you will find the stylesheets folder

Attributes

In addition to the core attributes, the <link /> element can also take the following attributes:

charset dir href hreflang media **rel** rev style target type

The rel Attribute

The rel attribute is required and specifies the relationship between the document containing the link and the document being linked to. The key value for working with style sheets is stylesheet.

rel="stylesheet“

The type Attribute

The type attribute specifies the MIME type of the document being linked to:

type="text/css“

The href Attribute

The href attribute specifies the URL for the document being linked to.

```
href="../stylesheets/interface.css"
```

The value of this attribute can be an absolute or relative URL.

The hreflang Attribute

The hreflang attribute specifies the language that the resource specified is written in.

hreflang="en-US"

Our First CSS Example

```
<STYLE>
    BODY{background-color:lightblue;}
    H1{color:green; text-align: center;}
    P{background-color: lightgray;}
</STYLE>
```

Student Information

Razvan Mezei

Lorem ipsum dolor sit amet consectetur, adipisicing elit. Deleniti voluptatum excepturi tempora eius impedit cum nemo nesciunt tempore maxime corporis error non perspiciatis necessitatibus et, earum labore nihil vel? Quibusdam.

Lorem ipsum dolor sit amet consectetur adipisicing elit. Facilis, quisquam numquam! Laborum minima qui repellat repudiandae deleniti at dolorum sint inventore, rerum quidem nam? Magni quis mollitia accusantium non vero.

Lorem ipsum dolor sit amet consectetur adipisicing elit. Necessitatibus, id quisquam velit accusamus omnis dolores modi, iusto incidunt tempore magnam aliquid neque ducimus eum consectetur, sunt facere perferendis architecto veritatis.

Go to W3Schools Go to St. Martin University Go to the second page

Example

```
<?xml version="1.0" encoding="iso-8859-1"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" lang="en">
<head>
<title>CSS Example</title>
<link rel="stylesheet" type="text/css" href="ch09_eg01.css" />
</head>
<body>
<h1>Basic CSS Font Properties</h1>
<p>The following table shows you the basic CSS font properties that
  allow you to change the appearance of text in your documents.</p>
```

```
<table>
<tr>
<th>Property</th>
<th>Purpose</th>
</tr>
<tr>
<td class="code">font-family</td>
<td>Specifies the font used.</td>
</tr>
<tr>
<td class="code">font-size</td>
<td>Specifies the size of the font used.</td>
</tr>
<tr>
```

```
<td class="code">font-style</td>
<td>Specifies whether the font should be normal, italic or
  oblique.</td>
</tr>
<tr>
<td class="code">font-weight</td>
<td>Specifies whether the font should be normal, bold, bolder,
or lighter</td>
</tr>
</table>
</body>
</html>
```

The Cascaded Style Sheet

```
body {
color:#000000;
background-color:#ffffff;
font-family:arial, verdana, sans-serif; }
h1 {font-size:18pt;}
p {font-size:12pt;}
th {
background-color:#cccccc;
font-weight:bold;
padding:5px;}
td {padding:5px;}
td.code {font-family:courier, courier-new, serif; font-weight:bold;}
```

Before

Basic CSS Font Properties

The following table shows you the basic CSS font properties that allow you to change the appearance of text in your documents.

Property	Purpose
font-family	Specifies the font used.
font-size	Specifies the size of the font used.
font-style	Specifies whether the font should be normal, italic or oblique.
font-weight	Specifies whether the font should be normal, bold, bolder, or lighter

Untitled
Ali Hussein

HTML

```
<?xml version="1.0" encoding="iso-8859-1"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" lang="en">
<head>
```

CSS

```
body {
color:#000000;
background-color:#ffffff;
font-family:arial, verdana, sans-serif; }
h1 {font-size:18pt;}
p {font-size:12pt;}
th {
background-color:#cccccc;
```

ange the

Basic CSS Font Properties

The following table shows you the basic CSS font properties that allow you to change the appearance of text in your documents.

Property	Purpose
font-family	Specifies the font used.
font-size	Specifies the size of the font used.
font-style	Specifies whether the font should be normal, italic or oblique.
font-weight	Specifies whether the font should be normal, bold, bolder, or lighter

hter

Selectors

Selectors

The selector part of the CSS rule can be written using simply the name of the element or coma separated list of elements. This is not the only way to chose the selector.

Universal Selector

```
*{ }
```

is like the wildcard, it applies to all the elements of the document. Sometimes is used for font-size, font family,.. And applies to the whole document

The *Type* Selector

The type selector matches all of the elements specified in the comma-delimited list.

page, heading, paragraph {}

The *Class* Selector

The *class* selector allows you to match a rule with an element carrying a class attribute whose value you specify in the class selector.

.BackgroundNote {}

this rule applies to all elements carrying class attribute

p.BackgroundNote {}

Applies to this specific paragraph

The *ID* Selector

The id selector works just like a class selector, but works on the value of id attributes. But rather than using a period or full stop before the value of the id attribute, you use a hash or pound sign (#).

p.#abstract

it applies to content of one element,

The Child Selector

The child selector matches an element that is a direct child of another.

td > b {}

matches any <b> elements that are direct children of <td>.

The Descendent Selector

The descendent selector matches an element type that is a descendent of another specified element, at any level of nesting not just a direct child.

table b {}

matches all <b> in <th>, <td>

Conflicting CSS Specifications

- Conflicting CSS specifications occur when multiple CSS rules apply to the same element, leading to uncertainty about which styles should take precedence.
- This can happen due to a variety of factors, including specificity, the order of rules, and the use of !important. Here’s a detailed look at how these conflicts can arise and how to resolve them.

What I have to Do “as a browser” ?

- **1. Order of Rules**
- **2. Specificity**
- When two selectors have the same specificity, the last rule declared in the CSS will take precedence.
- 3. Use of !important

In this case, the text will appear green because the second rule overrides the first due to its later declaration.

```
<style>
  p {
    color: blue; /* First declaration */
  }
  p {
    color: green; /* Second declaration, takes precedence */
  }
</style>

<p>This text will be green.</p>
```

2. Specificity

- Universal Selector (*)
- Type Selector (e.g., div, p)
- Class Selector (e.g., .classname)
- Attribute Selector (e.g., [type="text"])
- Pseudo-class Selector (e.g., :hover)
- ID Selector (e.g., #idname)
- Inline Style (e.g., style="...")

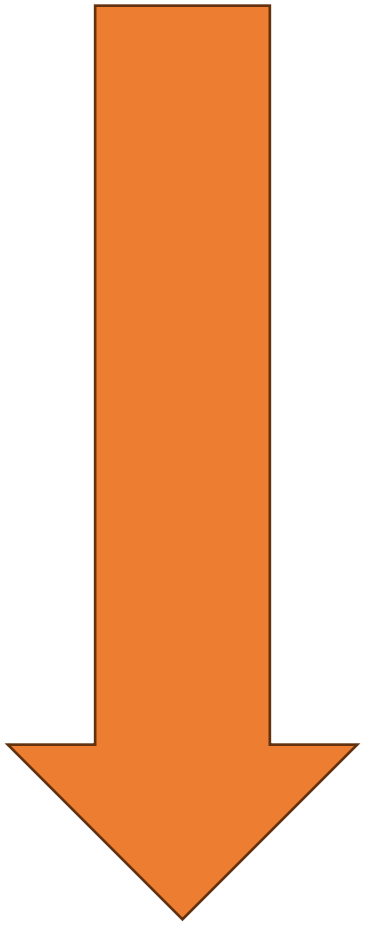

Example

- Here, the <p> tag will appear red due to the ID selector having higher specificity than both the class and type selectors.

html

Copy code

```html
<style>
  p {
    color: blue; /* Type selector */
  }
  .highlight {
    color: green; /* Class selector */
  }
  #unique {
    color: red; /* ID selector */
  }
</style>

<p class="highlight" id="unique">This text will be red.</p>
```

3. Use of !important

- The !important declaration can be used to force a style to take precedence over all other styles, including inline styles, unless another rule with !important and higher specificity is present.

```
<style>
  p {
    color: blue; /* Normal rule */
  }
  .highlight {
    color: green !important; /* Important rule */
  }
  #unique {
    color: red; /* Normal rule */
  }
</style>

<p class="highlight" id="unique">This text will be green due to !important.</p>
```

The text will be green because the class .highlight has the !important declaration, overriding the ID selector and the normal rule.

Conflicting CSS Specifications

The most specific wins, regardless of the order in which they are specified.

In particular, id selector > class selector > element selector.

- More specific id then
- Class then
- Element

CSS Selectors : Basic Selectors

- **Universal Selector** (`*`): Selects all elements on the page.

```
* {
  margin: 0;
  padding: 0;
}
```

- **Type Selector**: Selects all elements of a specified type (e.g., all `<p>` elements).

```
p {
  color: blue;
}
```

- **Class Selector** (`.`): Selects elements with a specific class. Multiple elements can share a class.

```
.highlight {
  background-color: yellow;
}
```

- **ID Selector** (`#`): Selects a single element with a specific ID. IDs should be unique within a page.

```
#header {
  font-size: 24px;
}
```

2. Grouping Selectors

You can group selectors to apply the same styles to multiple elements.

```
css                                                    Copy code

h1, h2, h3 {
  font-family: Arial, sans-serif;
}
```

3. Attribute Selectors

Select elements based on specific attributes or attribute values.

- **Exact match:**

```css
input[type="text"] {
  border: 1px solid gray;
}
```

- **Starts with:**

```css
img[src^="https://"] {
  border: 1px solid blue;
}
```

- **Partial match** (contains):

```css
a[href*="example"] {
  color: green;
}
```

- **Ends with:**

```css
a[href$=".pdf"] {
  font-weight: bold;
}
```

Thank U

4. Pseudo-classes

- :hover: Applies styles when the mouse is over the element.
- a:hover { text-decoration: underline; }
- :first-child: Selects the first child of a parent.
- p:first-child { font-weight: bold; }
- :nth-child(n): Selects the nth child of a parent.
- li:nth-child(2) { color: red; }
- .
- .

CSS Selectors

```
P::first-letter{color:red; font-weight: bold;}
```

Student Information

Razvan Mezei

Lorem ipsum dolor sit amet consectetur, adipisicing elit. Deleniti voluptatum excepturi tempora eius impedit cum nemo nesciunt tempore

Student Information

Razvan Mezei

Lorem ipsum dolor sit amet consectetur, adipisicing elit. Deleniti voluptatum excepturi tempora eius impedit cum nemo nesciunt tempore maxime corporis error non perspiciatis necessitatibus et, earum labore nihil vel? Quibusdam.

Lorem ipsum dolor sit amet consectetur adipisicing elit. Facilis, quisquam numquam! Laborum minima qui repellat repudiandae deleniti at dolorum sint inventore, rerum quidem nam? Magni quis mollitia accusantium non vero.

Lorem ipsum dolor sit amet consectetur adipisicing elit. Necessitatibus, id quisquam velit accusamus omnis dolores modi, iusto incidunt tempore magnam aliquid neque ducimus eum consectetur, sunt facere perferendis architecto veritatis.

Go to W3Schools Go to St. Martin University Go to the second page

CSS Properties: Length

You will come to need to specify lengths in several more CSS properties. Lengths can be measured in three different ways namely:

Absolute, Relative , and Percentages

Absolute

pt Point , it is 1/72 of an inch

in inches

cm centmeter

pc pica 1/12 inch

mm millimeter

Relative Units

Relative units and percentages can be very useful, but they also bring their own issues that you need to be aware that Users can increase and decrease the size of fonts on a Web browser and the rest of the page will scale to fit.

Percentages

Percentages give a value in relation to another value (the value depends upon the property in question).

Thank U

The Box Model

The Box Model

After knowing how to work with CSS properties, it is time to know how CSS is used in site layout and presentation.

It is the modern and advanced method to bring site layouts according to the w3c recommendations and it is more flexible.

When using CSS in layouts, every element is treated as a BOX , thus it is important to understand the box model in order to use it efficiently.

The other method is using tables to manage site layout.

The Box

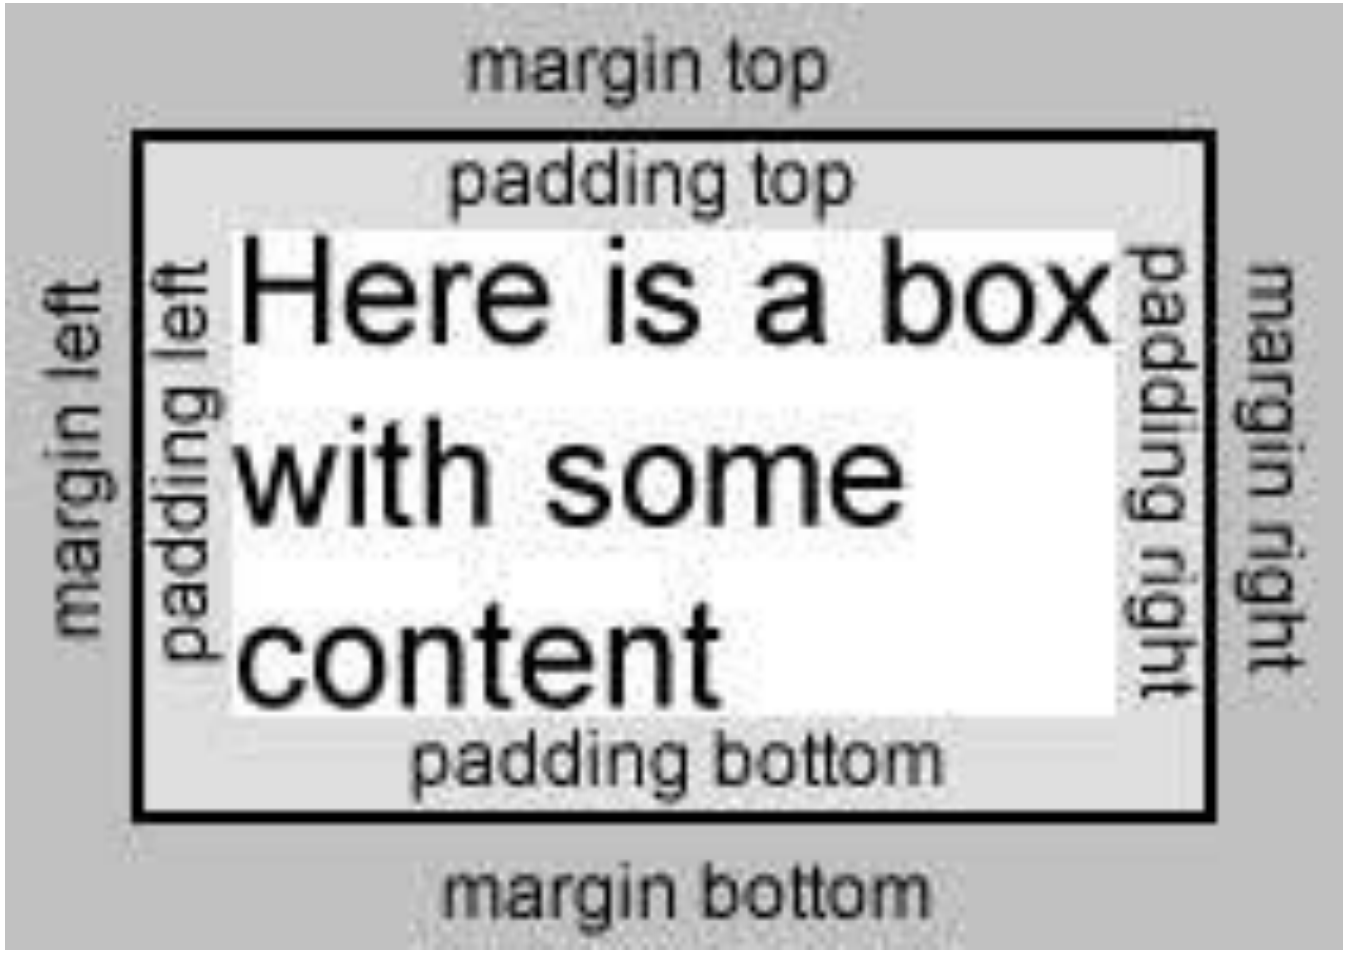
margin top
padding top
margin left
padding left
Here is a box
with some
content
padding right
margin right
padding bottom
margin bottom

Box Properties

Every Box has three properties:

Property	Description
Border	Even if you cannot see it, every box has a border. This is an area between margin and padding default to 0
margin	The margin is the distance between the edge of a box and the box next to it.
Padding	This padding is the space between the content of the box and its border.

There is, however, an interesting issue with margins:

when a bottom margin of one element meets the top margin of another, only the larger of the two will show (if they are the same size, then the margin will be equivalent to the size of just one of the margins).

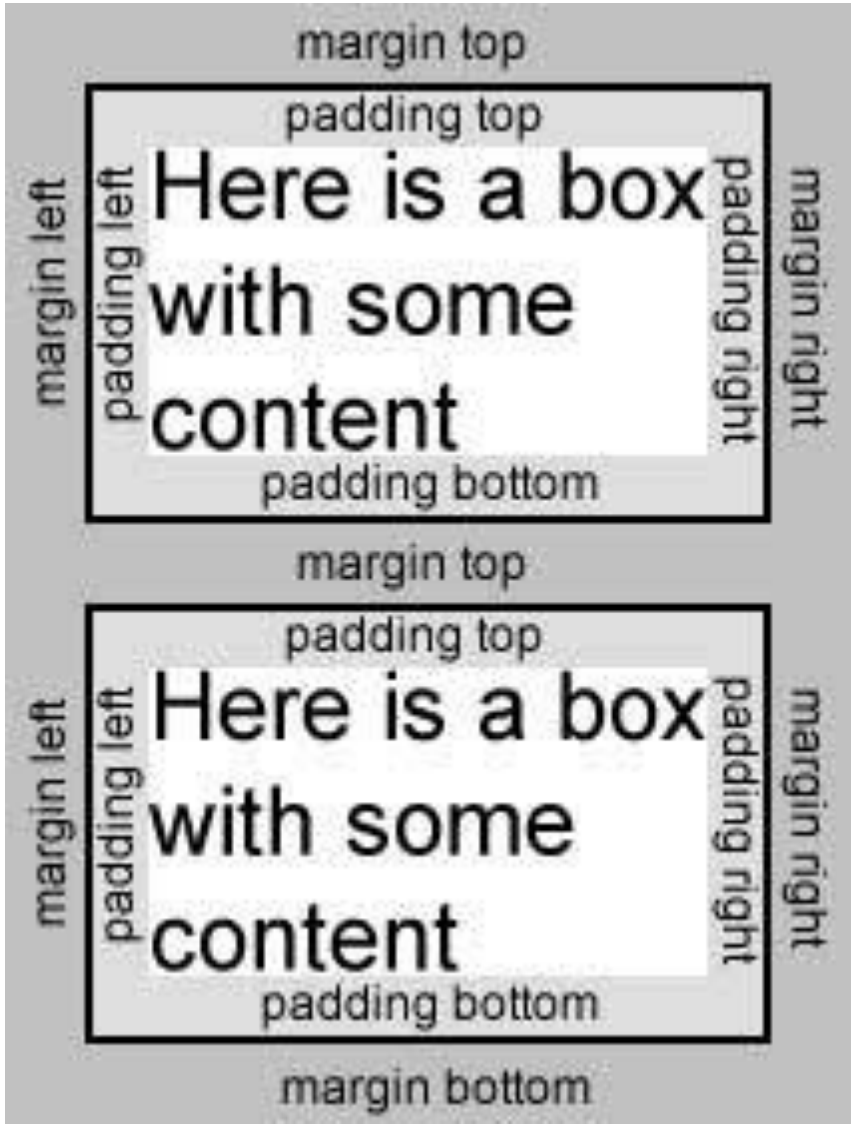

```
<?xml version="1.0" ?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" lang="en" xml:lang="en">
<head>
<title>Understanding the Box Model</title>
<link rel="stylesheet" type="text/css" href="boxmodel.css" />
</head>
<body>
<h1>Thinking Inside the Box</h1>
<p class="description">When you are styling a web page with CSS page you
must start to think in terms of <b>boxes</b>.</p>
<p>Each element is treated as if it generates a new box. Each box can have
new rules associated with it.</p>
<img src="images/boxmodel.gif" alt="How CSS treats a box" />
```

```
<p>As you can see from the diagram above, each box has a <b>border</b>.
Between the content and the border you can have <b>padding</b>, and
outside of the border you can have a <b>margin</b> to separate this box
from any neighboring boxes.</p>
</body>
</html>
```

The CSS file

```
body {
color:#000000;
background-color:#ffffff;
font-family:arial, verdana, sans-serif;
font-size:12px;}
body, h1, p, img, b {
border-style:solid;
border-width:2px;
border-color:#000000;
padding:2px;}
h1, b {background-color:#cccccc;}
```

Thinking Inside the Box

When you are styling a web page with CSS page you must start to think in terms of **boxes**.

Each element is treated as if it generates a new box. Each box can have new rules associated with it.

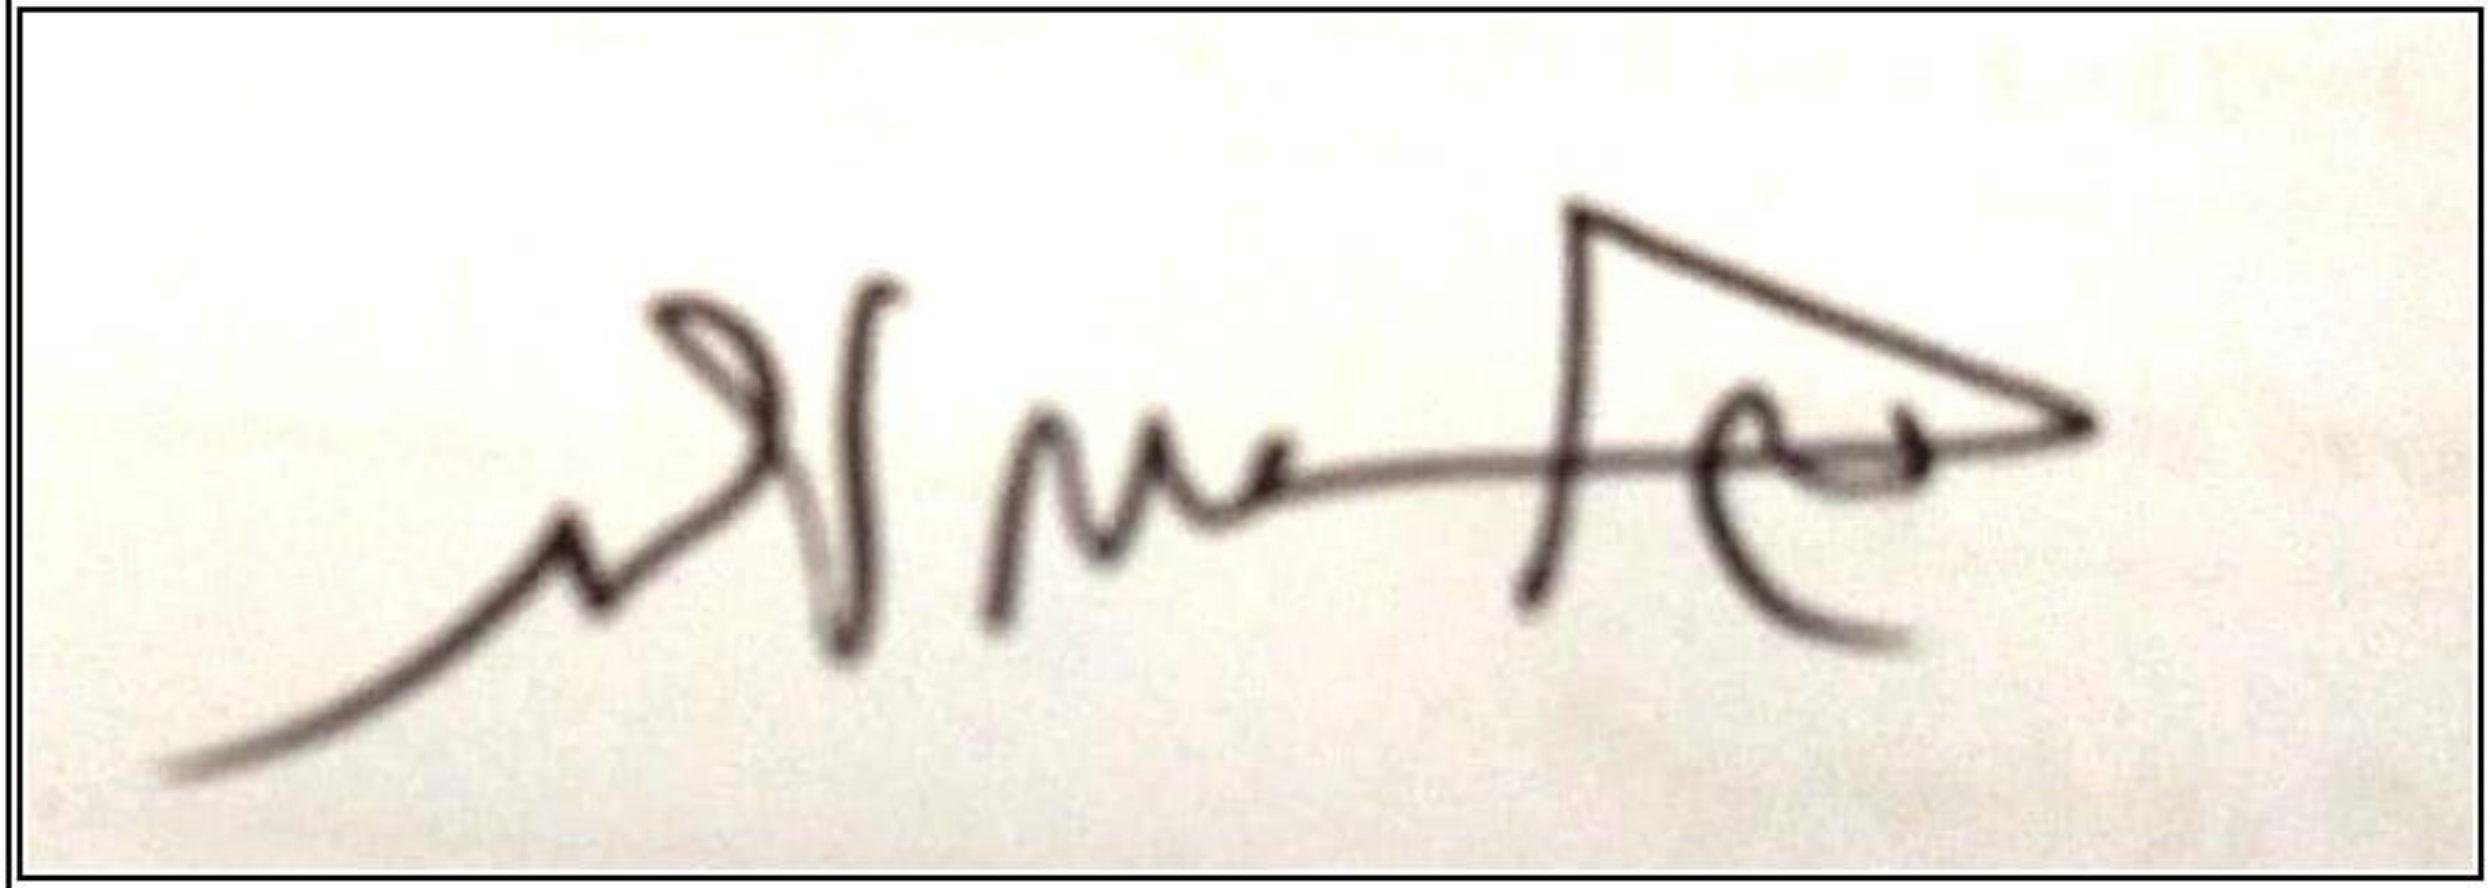

As you can see from the diagram above, each box has a **border**. Between the content and the border you can have **padding**, and outside of the border you can have a **margin** to separate this box from any neighboring boxes.

© BDATU

The Border Properties

It has the following main three properties:

1. border-color to indicate the color a border should be.
2. border-style to indicate whether a border should be solid, dashed line, double line, or one of the other possible values.
3. border-width to indicate the width a border should be.

The border-color property

Color Name	hex	RGB Values	RGB Percentages
red	#ff0000	rgb (255, 0, 0)	rgb (100%, 0, 0)
green	#00ff00	rgb (0, 255, 0)	rgb (0, 100%, 0)
blue	#0000ff	rgb (0, 0, 255)	rgb (0, 0, 100%)

The border-color property

You can individually change the color of the top, bottom, left, or right

- border-bottom-color
- border-right-color
- border-top-color
- border-left-color

The border-style Property

Value	Description
none	No border
solid	Single solid line
Dotted	Series of dots
Dashed	Series of short line
Double	Two solid line
Groove	Looks as it is carved into the page
Ridge	Oppisite of groove
Inset	The border is embbeded in the page
Outset	The border is coming out of the pag

The border-width property

Thin , medium, thick

border-width:4px

Or

border-width:medium

Expressing properties as **Shorthand** (any order)

P { border: 4px solid red }

© BIS401

The padding property

The padding property allows you to specify how much space should appear between the content of an element and its border:

```
td {padding:5px;}
```

© BIS401

The margin Property

The margin property is the gap between boxes, and its value is either a length, a percentage, or inherit, each of which has exactly the same meaning as it did for the padding property you just saw.

```
p {margin:20px;}
```

You can also set different values for the margin on each side of the box using the following properties:

- margin-bottom
- margin-top
- margin-left
- margin-right

Controlling the Dimension Property

You can control the dimension of a box by specifying the height and width properties!

You can also set minimum and maximum width and height

width:

height:

max-width:

max-height:

min-width:

min-height:

The line-height Property

The line-height property is one of the most important properties in laying out text.

```
p.one { line-height:16px;}
p.two { line-height:28px;}
```

Understanding the Box Model

File | C:/Users/AUC/Desktop/test/test.html

Bookmarks | Embassy of Japan i... | Inbox (234) - alihus... | Google | www.kfupm.edu.sa/... | All Bookmarks

Thinking Inside the Box

When you are styling a web page with CSS page you must start to think in terms of **boxes**.

When you are styling a web page with CSS page you must start to think in terms of **boxes**.

© BIS401

Positioning with CSS

you have learned how the content of each element is represented in CSS using a box and you've seen many of the properties you can use to affect the appearance of the box and its content.

Now it's time to look at how to control where the content of an element appears on the page by specifying where that box should be positioned within a page.

© BIS401

Before CSS

Before CSS, tables were often used to control precisely where the content of a page appeared, and the content was displayed in the order it appeared in the XHTML document.

Using CSS positioning, however, you can lay out your pages without the use of tables and even present information in a different order than it appeared in the XHTML document.

© BIS401

CSS2

In CSS2 there are three types of positioning to help control layout of a page: ***normal, float, and absolute*** positioning;

In the following sections you'll be seeing how you can use each of these positioning schemes to indicate where the content of an element should appear on the page.

© BIS401

Normal Flow

By default, elements are laid out on the page using what is known as normal flow.

In normal flow, the block level elements within a page will flow from top to bottom and inline elements will flow from left to right.

The position Property

The position property allows you to specify a position for a box. It can take the four values listed in the table that follows.

Value	Description
static	The same as normal flow
relative	Offset from normal flow
absolute	Uses x,y coord from upper left corner
fixed	Position from fixed point in browser position is fixed even scrolling

Box Offset Properties

When using fixed, relative or absolute , the box offset is used to indicate where in these boxes should be positioned.

```
p {border-style:solid;
border-color:#000000;
border-width:2px;
padding:5px;
width:200px;
background-color:#FFFFFF;}
p.two {
position:relative;
left: 40px;
top: -40px;}
```

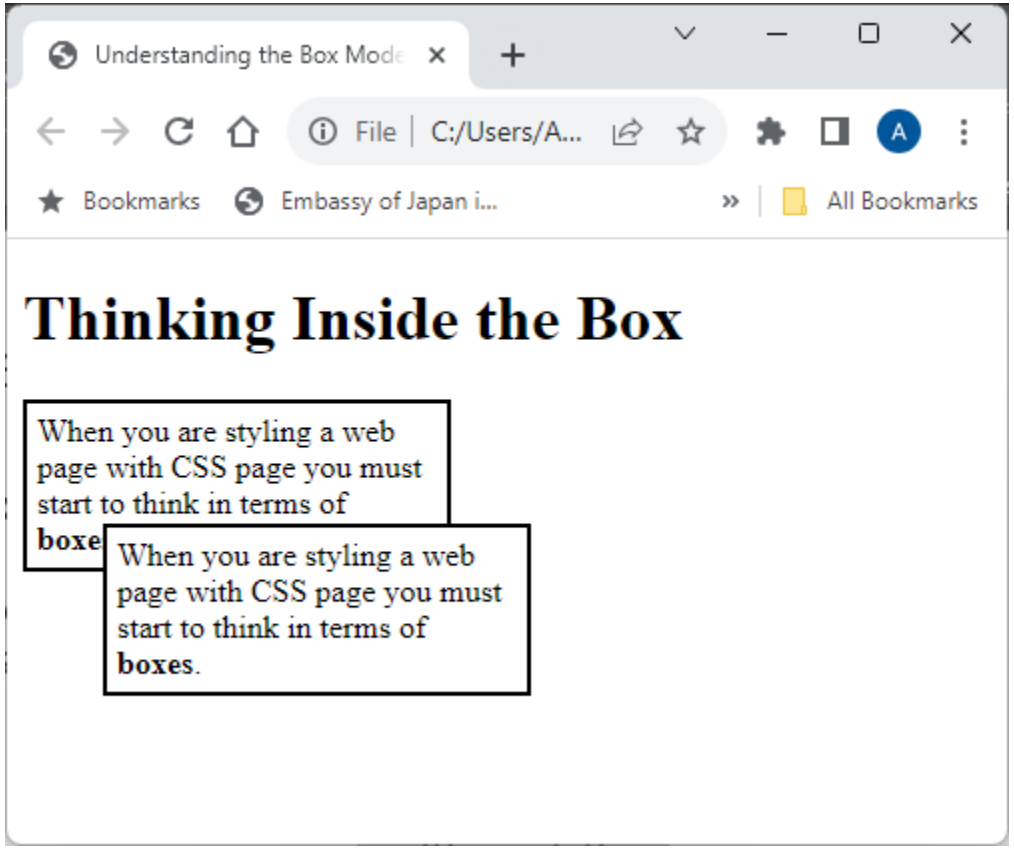
Understanding the Box Mode
File
C:/Users/A...
Bookmarks
Embassy of Japan i...
All Bookmarks
Thinking Inside the Box
When you are styling a web page with CSS page you must start to think in terms of boxe
When you are styling a web page with CSS page you must start to think in terms of boxes.

Absolute Positioning

Absolute positioning completely removes an element’s content from normal flow, allowing you to fix its position.

You can specify that an element’s content should be absolutely positioned by giving it the position property with a value of absolute; then you use the box offset properties to position it where you want.

The DIV Element

<DIV> elements can be used to define a division, or better named a section, in an HTML document.

We will use it as a container of elements (nest various elements inside a <DIV> element and style it using CSS).

Center Contents with <DIV> and CSS

```
<DIV class="CenterThoseLinks">
    <A href="https://www.w3schools.com/" class="btn btn-primary">Go to W3Schools</A>
    <A href="https://www.stmartin.edu/"  class="btn btn-primary">Go to St. Martin University</A>
    <A href="firstwebpage.html" class="btn btn-primary">Go to the first page</A>
</DIV>
```

```
.CenterThoseLinks{
    text-align: center;
}
```

© BIS401

Bootstrap

First Encounter with Bootstrap

There are free and open-source .css files that you can just learn how to use them and utilize in your web application.

One such file can be found at:

https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css.

Link .css file to our webpages

```
<LINK href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css"
rel="stylesheet">
```

Tables

Course ID	Course name	Course link
CSC200	Object Oriented Programming	Course link
CSC340	Data Structures and Algorithms	Course link
CSC495	ST ASP .Net Core MVC	Course link

Tables with Bootstrap 5 Styling

Course ID	Course name	Course link
CSC200	Object Oriented Programming	Course link
CSC340	Data Structures and Algorithms	Course link
CSC495	ST ASP .Net Core MVC	Course link

Using **.table** *class* selector

Tables with Bootstrap 5 Styling

Course ID	Course name	Course link
CSC200	Object Oriented Programming	Course link
CSC340	Data Structures and Algorithms	Course link
CSC495	ST ASP .Net Core MVC	Course link

class="table table-dark table-hover"

Bootstrap 5 Buttons and Links

Replace

```
<TD><a href="https://www.stmartin.edu/">Course link</a></TD>
```

With:

```
<TD><a href="https://www.stmartin.edu/"  class="btn btn-success" >Course link</a></TD>
```

Bootstrap 5 Buttons and Links

Course ID	Course name	Course link
CSC200	Object Oriented Programming	Course link
CSC340	Data Structures and Algorithms	Course link
CSC495	ST ASP .Net Core MVC	Course link