



## Conan: Finding missing people

Mohamed Atta Ibrahim

Mohamed Yasser Ahmed

Mahmoud Mohamed Benyamin

Hady Ashraf Ragab

Yousef Abdelbadea Ali

Supervisor: Dr. Mahmoud Khalil

Department of Computer and Systems Engineering

Faculty of Engineering at Ain Shams University

June 17, 2021

# Contents

Introduction	6
1 project description	7
2 Beneficiaries of the project	8
3 Detailed analysis	9
4 Detailed description of the adopted techniques	10
4.1 Image . . . . .	10
5 Time plan	11
6 System architecture	12
7 database design	13
8 System design	15
9 Testing scenarios and results	16
10 End user guide	19
11 Conclusion	26

## List of Figures

1	image system block diagram . . . . .	7
2	time plan . . . . .	11
3	System architecture class-diagram . . . . .	12
4	class-diagram . . . . .	12
5	DB EER Diagram . . . . .	13
6	Database Schema . . . . .	13
7	image feature extract diagram . . . . .	14
8	image query diagram . . . . .	14

## List of Tables

# **Abstract**

This paper presents imp DIP project

## **Introduction**

In this project the user can find missing people by search with the old pictures or young pictures of missing people. The project uses techniques that extract features from the pictures and check similarity between the query picture and the pictures in the dataset to retrieve the similar picture to the query picture.

# 1 project description

This is a python desktop application, it applies the Pattern Recognition and Digital Image Processing techniques to analyze, design, and implement multimedia retrieval system, where the media that we are going to use are the images .we have implemented many techniques belong Pattern Recognition and Digital Image Processing and AI techniques in retrieval and face Recognition. .

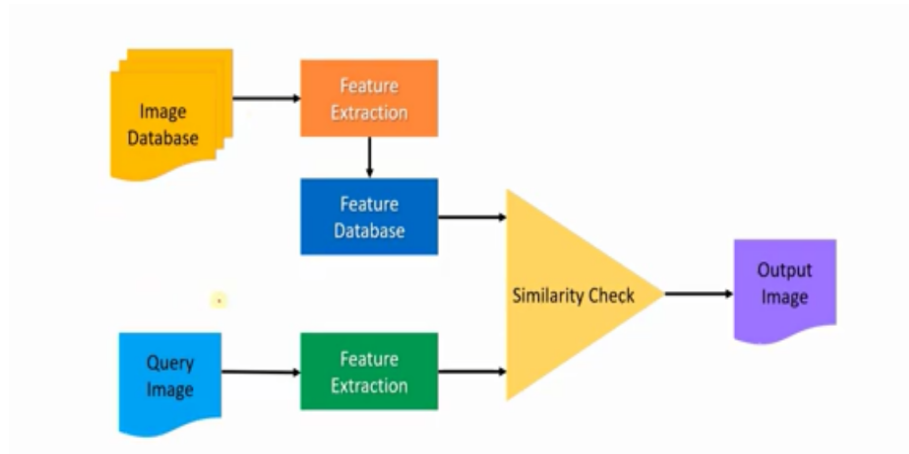


Figure 1: image system block diagram

## **2 Beneficiaries of the project**

The family who want to find any one of their members because of missing of him.  
Any one who the government wants to find from his traffic camera's pictures to detect his data and find him.



### 3 Detailed analysis

This project deals with Content Based video Retrieval (CBVR) and Content Based Image Retrieval (CBIR). For the CBIR, the adopted methods are color-based technique, texture-based technique, and shape-based technique. and then after the user select a technique and provide the image that he/she want to search for. The program extract features of the images dataset and save it then extract the features of the input image and compare the image with extracted feature database using the selected technique and by chi-squared distance. The chi-squared distance is distance measures that used to measures dissimilarity between two histograms. the following is an analysis for adopted technique in CBIR.

some distance that we used to measure similarity

- Absolute Distance

$$D_{Absolute}(h, \bar{h}) = \sum_{K=1}^K |h_K - \bar{h}_K| \quad (1)$$

- Euclidean Distance

$$D_{Euclidean}(h, \bar{h}) = \sqrt{\sum_{K=1}^K (h_K - \bar{h}_K)^2} \quad (2)$$

- Intersection Distance

$$D_{Intersection}(h, \bar{h}) = 1 - \sum_{K=1}^K in(h_K, \bar{h}_K) \quad (3)$$

## 4 Detailed description of the adopted techniques

### 4.1 Image

- **color based technique**

we use **mean color histogram**

A histogram represents the distribution of pixel intensities as pins (whether color or grayscale) in an image. It can be visualized as a graph (or plot) that gives a high-level intuition of the intensity (pixel value) distribution. We are going to assume a RGB color space in this example, so these pixel values will be in the range of 0 to 255 then we get the mean values. Histogram matching can best be thought of as a “transformation.” Our goal is to take an input image (the “source”) and update its pixel intensities such that the distribution of the input image histogram matches the distribution of a reference image(in the data set).

**steps**

1. We make picture to parts to make a better histogram
2. Make histogram for each part
3. Combine all histograms

**distance**

we use Mean squared error method to compare between the image we search for and images saved in database

## 5 Time plan

In Preparing Datasets phase, We search for qualified dataset that qualify project. In parallel, Extraction Features Algorithms design are finished. The software is developed and then make testing for all functionality of the program.

Conan

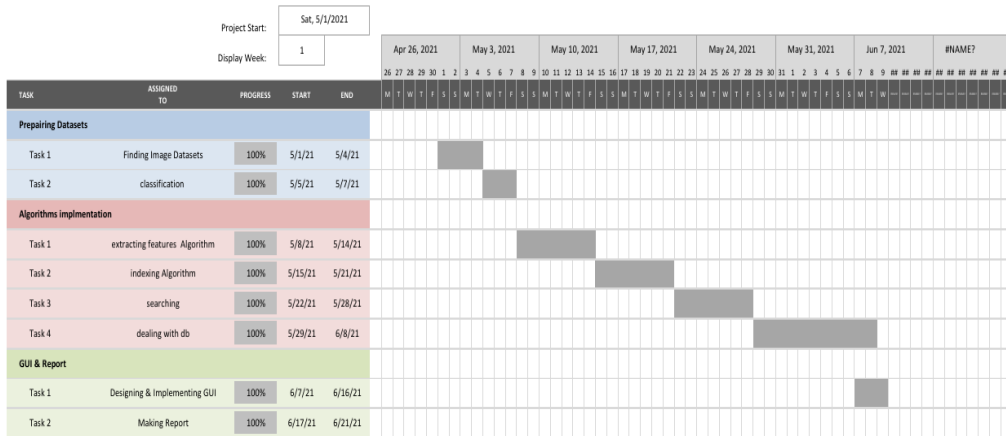


Figure 2: time plan

## 6 System architecture

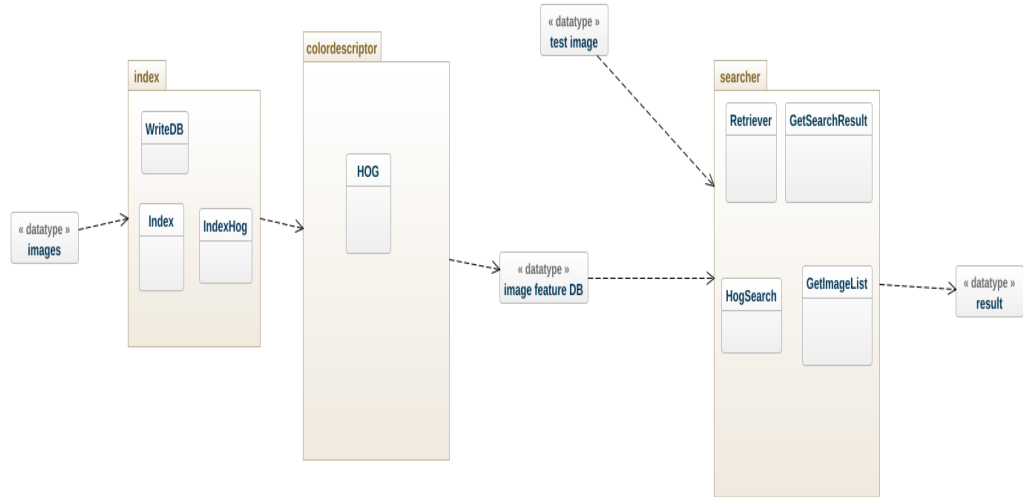


Figure 3: System architecture class-diagram

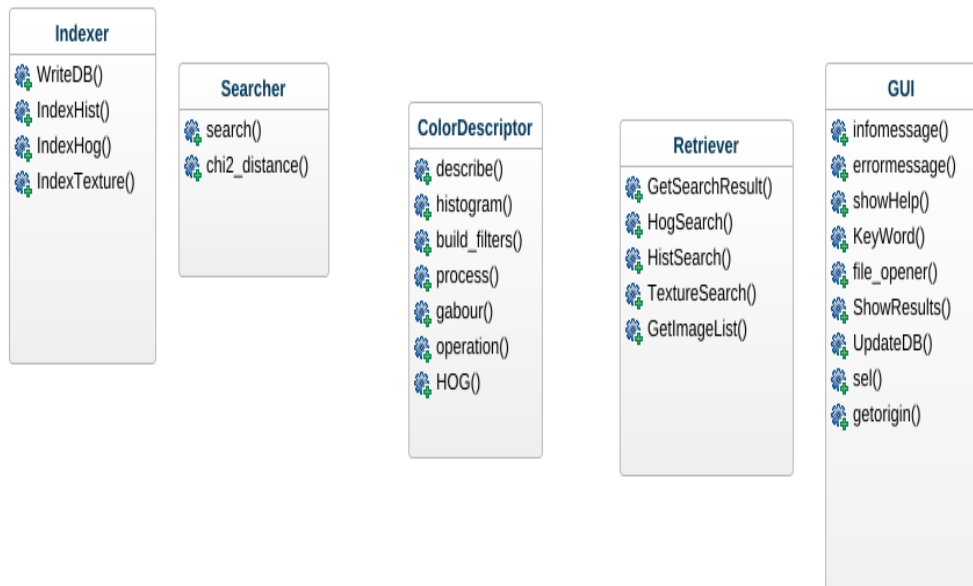


Figure 4: class-diagram

## 7 database design

- We implemented the schema in sqlite and store features in csv file which ID is the path of the image.

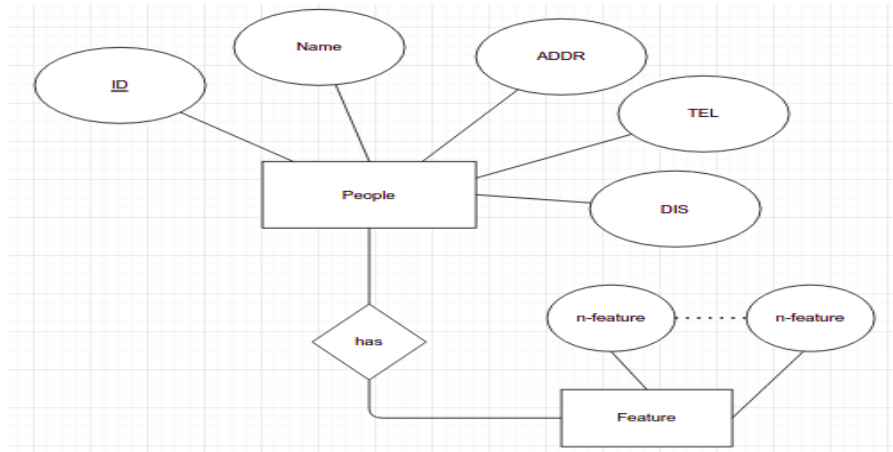


Figure 5: DB EER Diagram

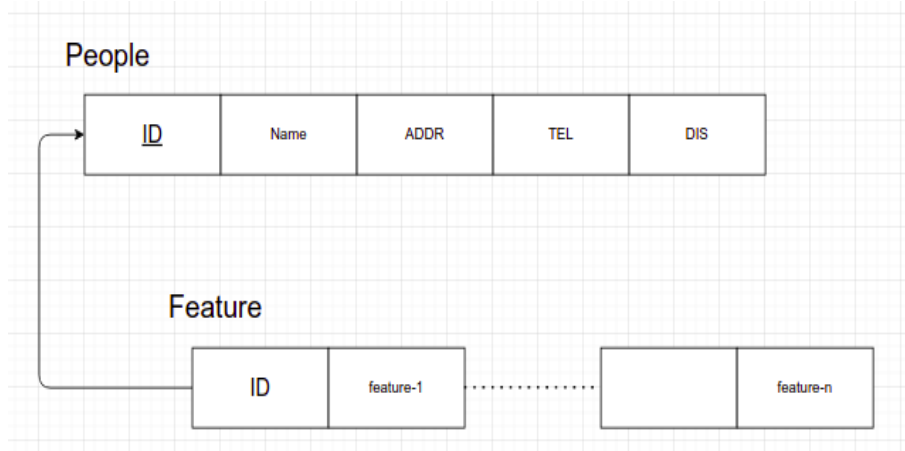


Figure 6: Database Schema

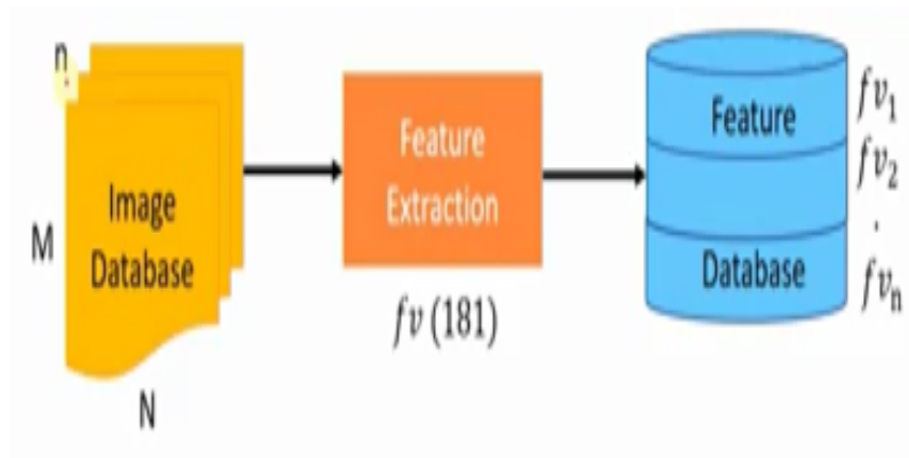


Figure 7: image feature extract diagram

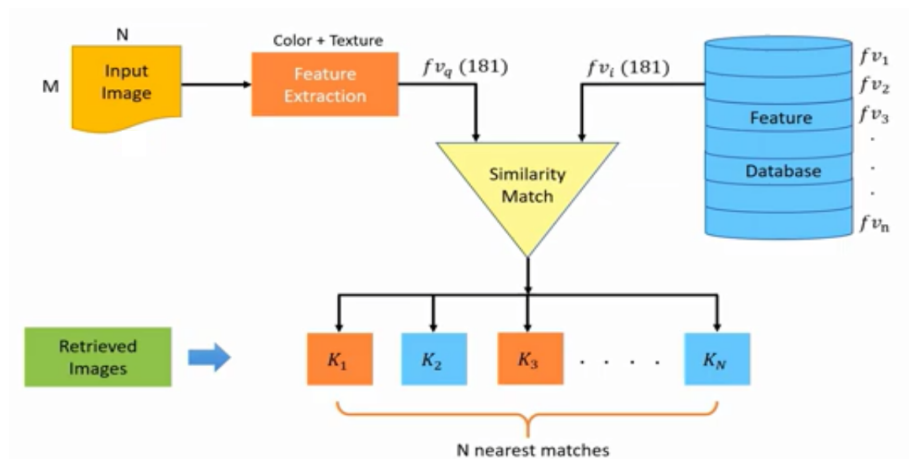


Figure 8: image query diagram

## 8 System design

1. **system database**

in this project we have a database for images which has a CSV file each one store features for all techniques.

2. **user UI**

this is a GUI the user interact with to make queries.




3. **the processing part**

this part is responsible to process images according to the selected technique.



4. **operating scenario**



first we build our database for images for all technique and then select from GUI image search if image user select the technique and the image want to search with. all data from GUI is passed to the processing part to give results and print it in the GUI

## 9 Testing scenarios and results

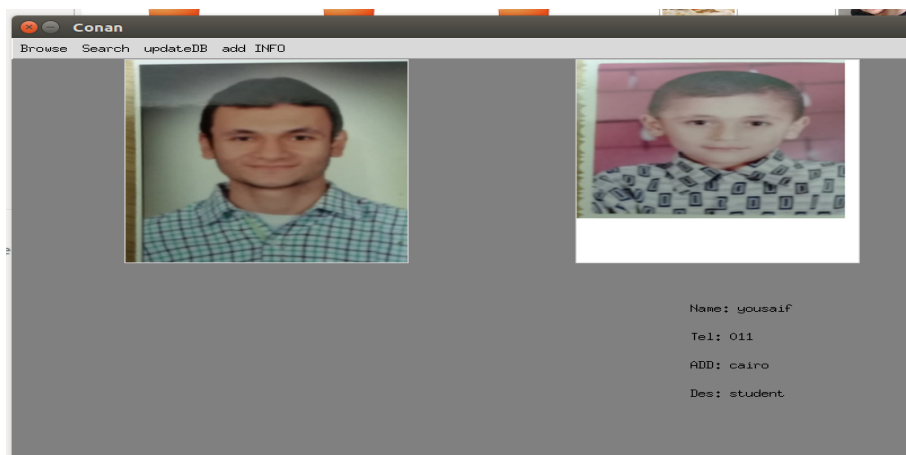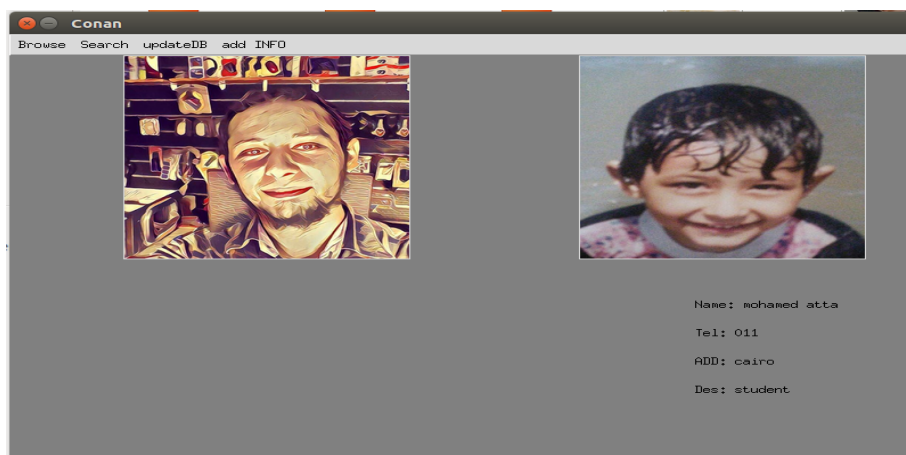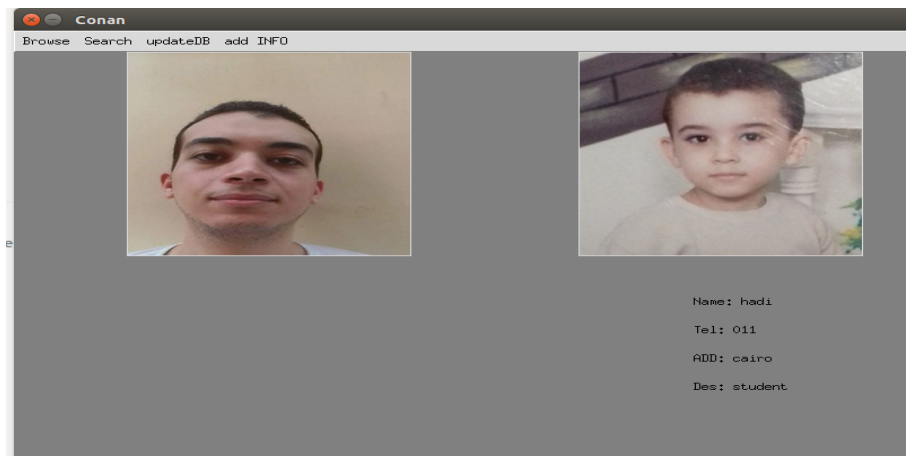




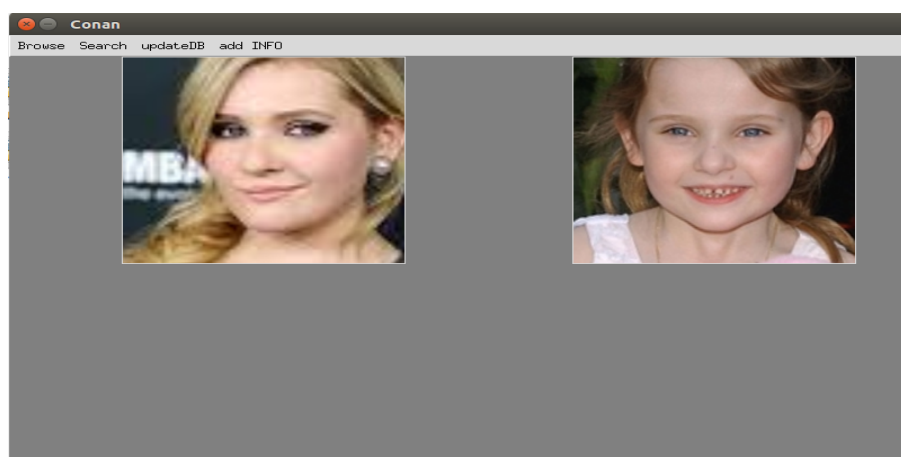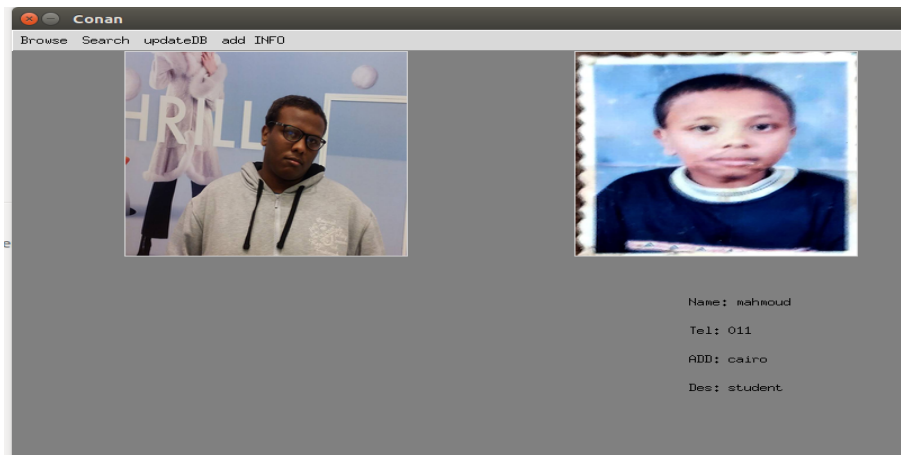

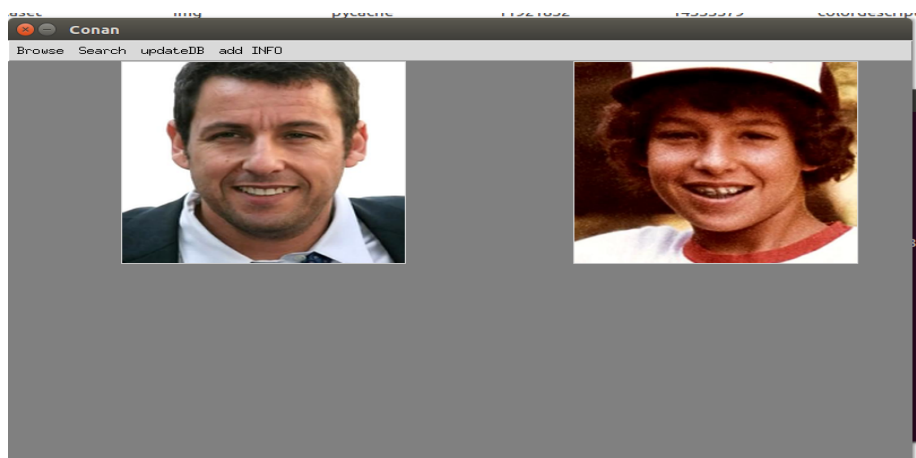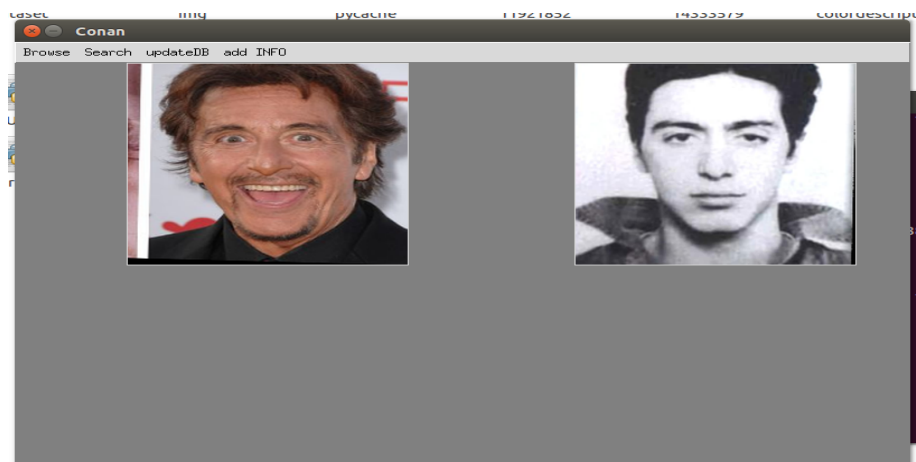


## 10 End user guide


1. This is the primitive user interface.

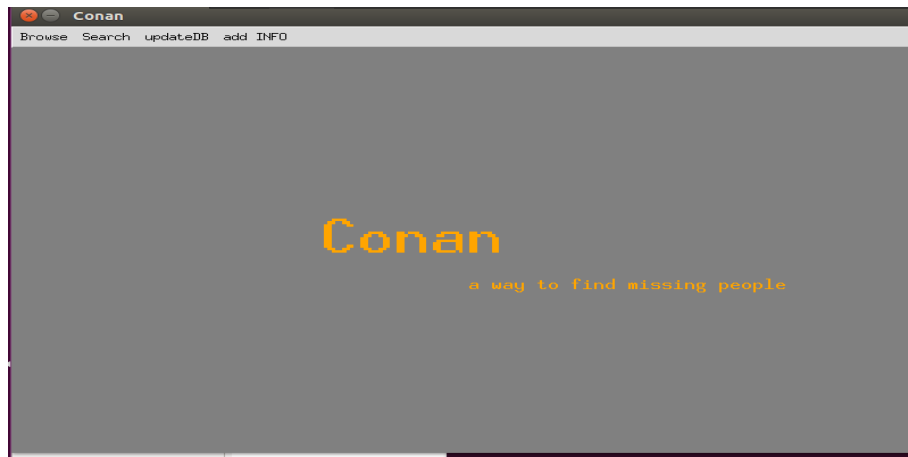


2. before to go in query we need to build database first so go from updateDB

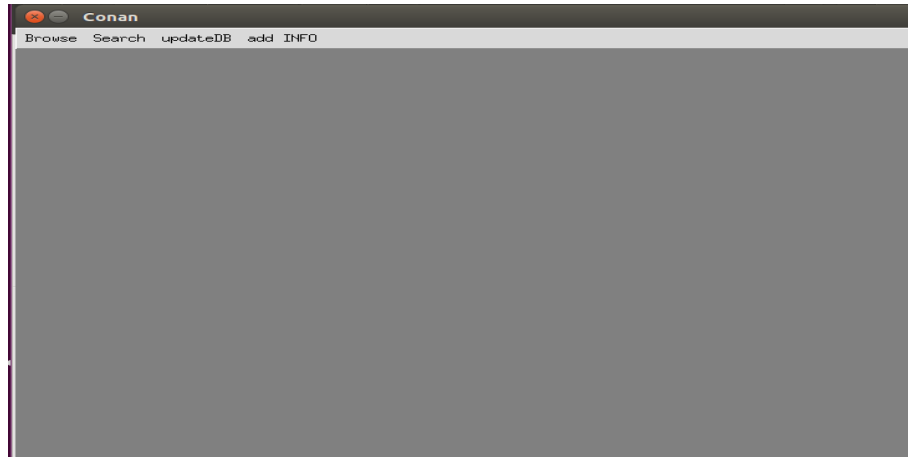


3. It may take a time and give you alert message for waiting.

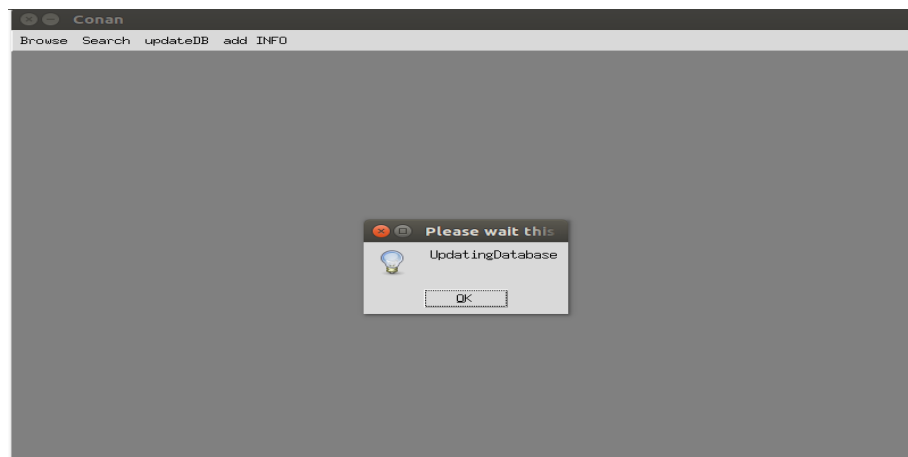


4. When the database is finished updating, a message Database Status will appear.

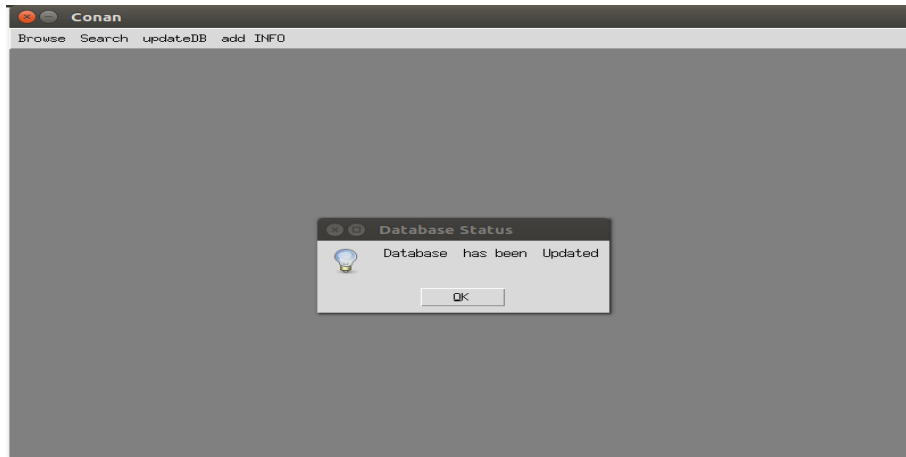


5. now we can search for any image we want From Browse choose Image ex Image.

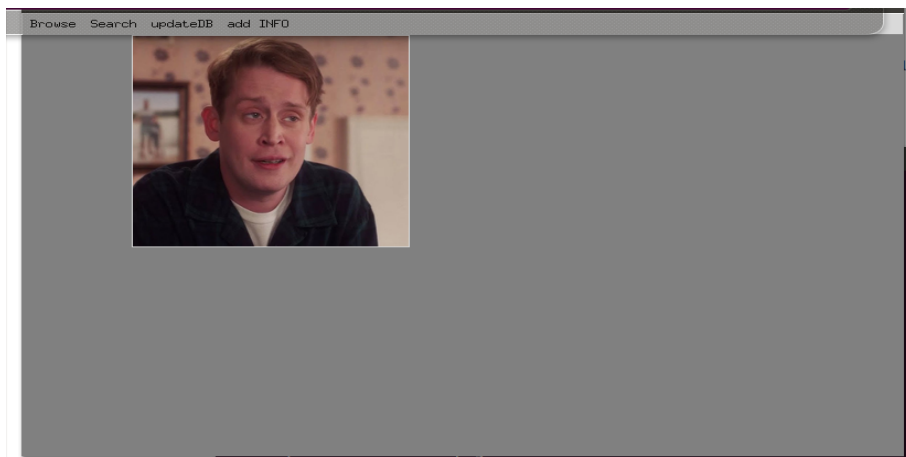


6. to get the result Click on search button and the result will appear in the area for displaying results, and when you click at any result image it will be standalone

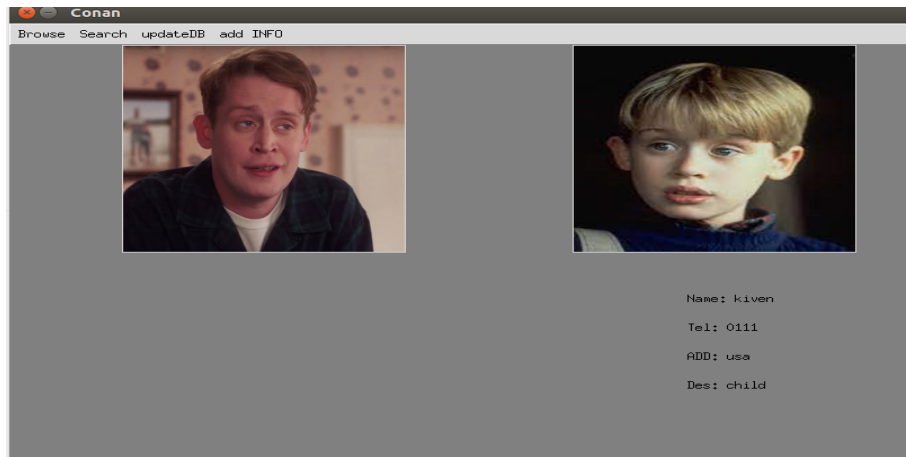


7. to enter information to image click to add INFO.

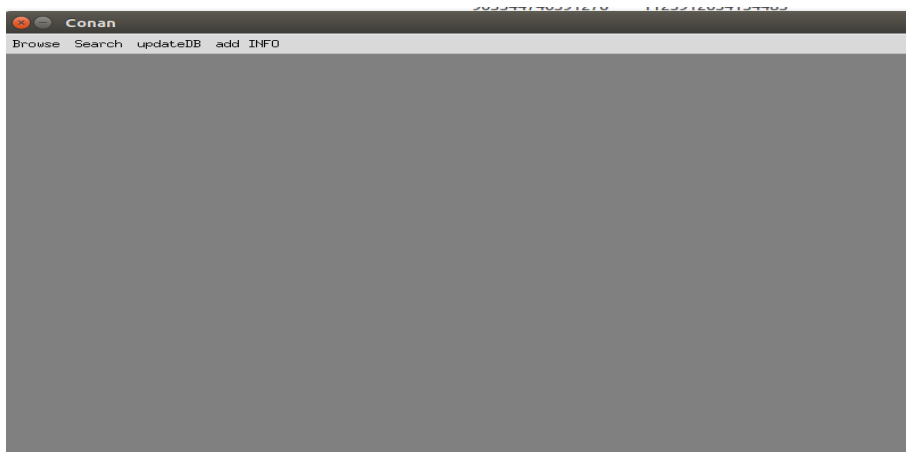


8. another page will appear to enter information in different fields.

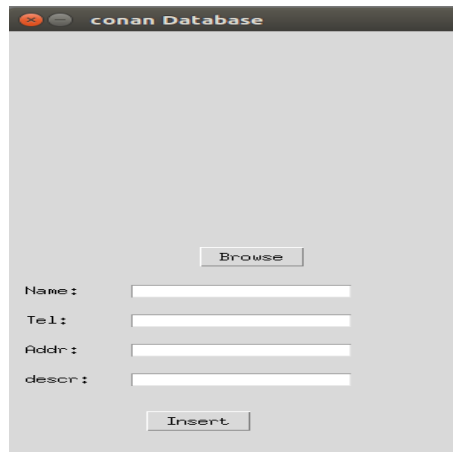




The screenshot shows a window titled "conan Database". Inside, there is a "Browse" button at the top. Below it are four text input fields labeled "Name:", "Tel:", "Addr:", and "descr:". At the bottom of the form is an "Insert" button.

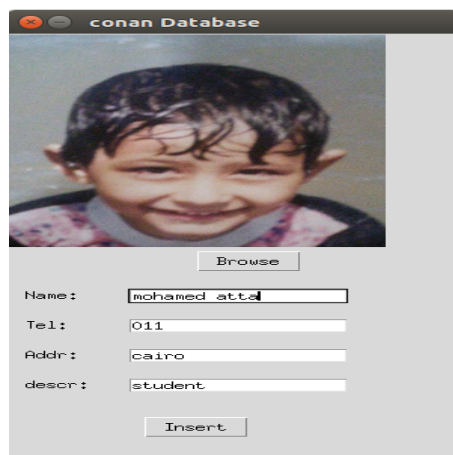


The screenshot shows the same "conan Database" window. A small image of a young boy is displayed in the top left. The form fields are now populated: "Name:" contains "mohamed atta", "Tel:" contains "011", "Addr:" contains "cairo", and "descr:" contains "student". The "Browse" and "Insert" buttons remain.

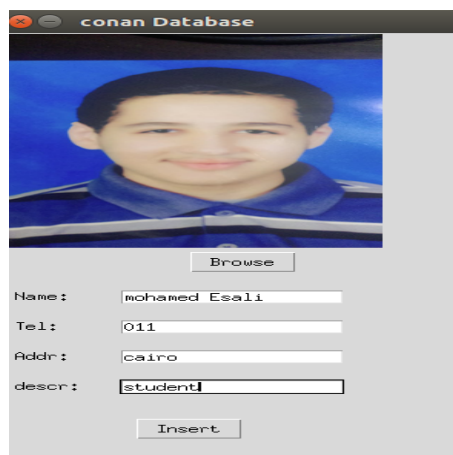

The screenshot shows the "conan Database" window with a different image of a young boy. The form fields are populated with: "Name:" contains "mohamed Esali", "Tel:" contains "011", "Addr:" contains "cairo", and "descr:" contains "student". The "Browse" and "Insert" buttons are still present.

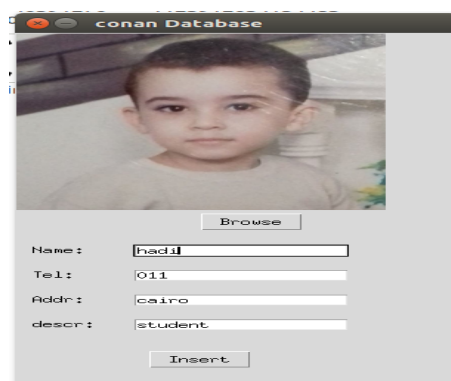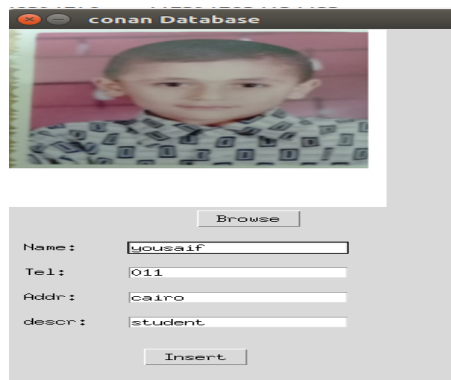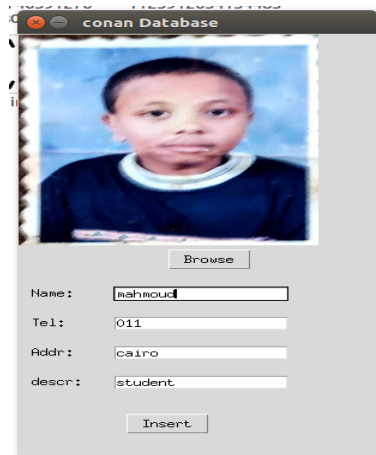

9. When finished entering info , a message Status will appear.

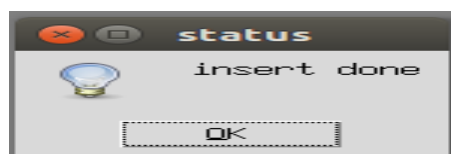



## 11 Conclusion

Finally, Conan application has been able to recongize missing people even if they have different ages.

