


1. Create the following hierarchy under your home directory:



2. Remove dir11 in one-step. What did you notice? And how did you overcome that?
3. Copy the /etc/passwd file to your home directory making its name is mypasswd.
4. Rename this new file (which at your home) to be oldpasswd
5. Write the command which display the man page of the passwd file"/etc/passwd".
6. Write the command which display a list of all the commands that contain the keyword "passwd" in their man/manual page.
7. You are in /usr/bin, list four ways to go to your home directory
8. The output of the command pwd was /home/<your_user_name>. Write the absolute and relative path for the file /etc/passwd
9. Show the total directory size of /home/<your_user_name>.
10. List all files at your /etc which end with .config
11. Create a folder called /tmp/myconfig and copy to it all .config files from etc to it
12. Remove the directory /tmp/myconfig
13. Display lines 1 to line 5 of /etc/passwd file

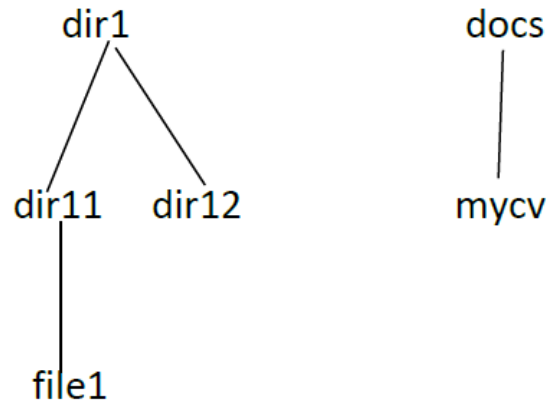