# The screener tools

The first program on the desk. Each **tool** watches the US market through its own set of TradingView screeners, turns every match into a **card** with everything known about the stock, freezes a **photo** of its cards once a day, measures how far each card moved afterwards, and keeps all of it as that tool’s own history. The aim is to learn, with evidence, **which screeners find stocks that move**.


Eleven tools are registered; five run today (T1, T2, T6, T7, T11). Stopped tools stay readable.

---

## Read in this order

| # | Document | Answers |
|---|---|---|
| 1 | METHODOLOGY.md | the research method, and what each tool hunts for and why |
| 2 | PAGES.md | every screen: the suite page, the comparison, the eight tabs of a tool |
| 3 | CARD.md | the card, top to bottom, and its display rules |
| 4 | CARD-FIELDS.md | every field on a card, its source, and when a blank is legitimate |
| 5 | DATA-PIPELINE.md | where every number comes from: each source and each processing stage |
| 6 | REGISTERS.md | what is frozen each day (R0–R4, shortlist), every column |
| 7 | MARKET-TAB.md | the Market tab: indexes, O’Neil model, regime, sectors, groups |
| 8 | SCREENER-BUILDER.md | how a screener is defined, checked, mirrored and sent to TradingView |
| 9 | SETTINGS.md | every setting: default, accepted values, what reads it |
| 10 | MONITOR.md | every scheduled job and the Monitor tab |
| 11 | DATACHECK.md | the data-source check: what makes a source ok, degraded or down |
| 12 | TOOL-LIFECYCLE.md | adding, starting, pausing, stopping, deleting tools |
| 13 | DATA-MODEL.md | every table and file a tool keeps, and what survives a restart |
| 14 | API.md | every route a tool answers |
| 15 | SCRIPTS.md | the helper scripts and the question each answers |
| 16 | SCORING-TODAY.md | today’s score and scorecard, and why not to copy them |
| 17 | IDEAS.md | the intent for the rebuilt score, builder and scorecard |
| 18 | KNOWN-ISSUES.md | every open finding, and what was fixed |

## A tool’s day, in one picture

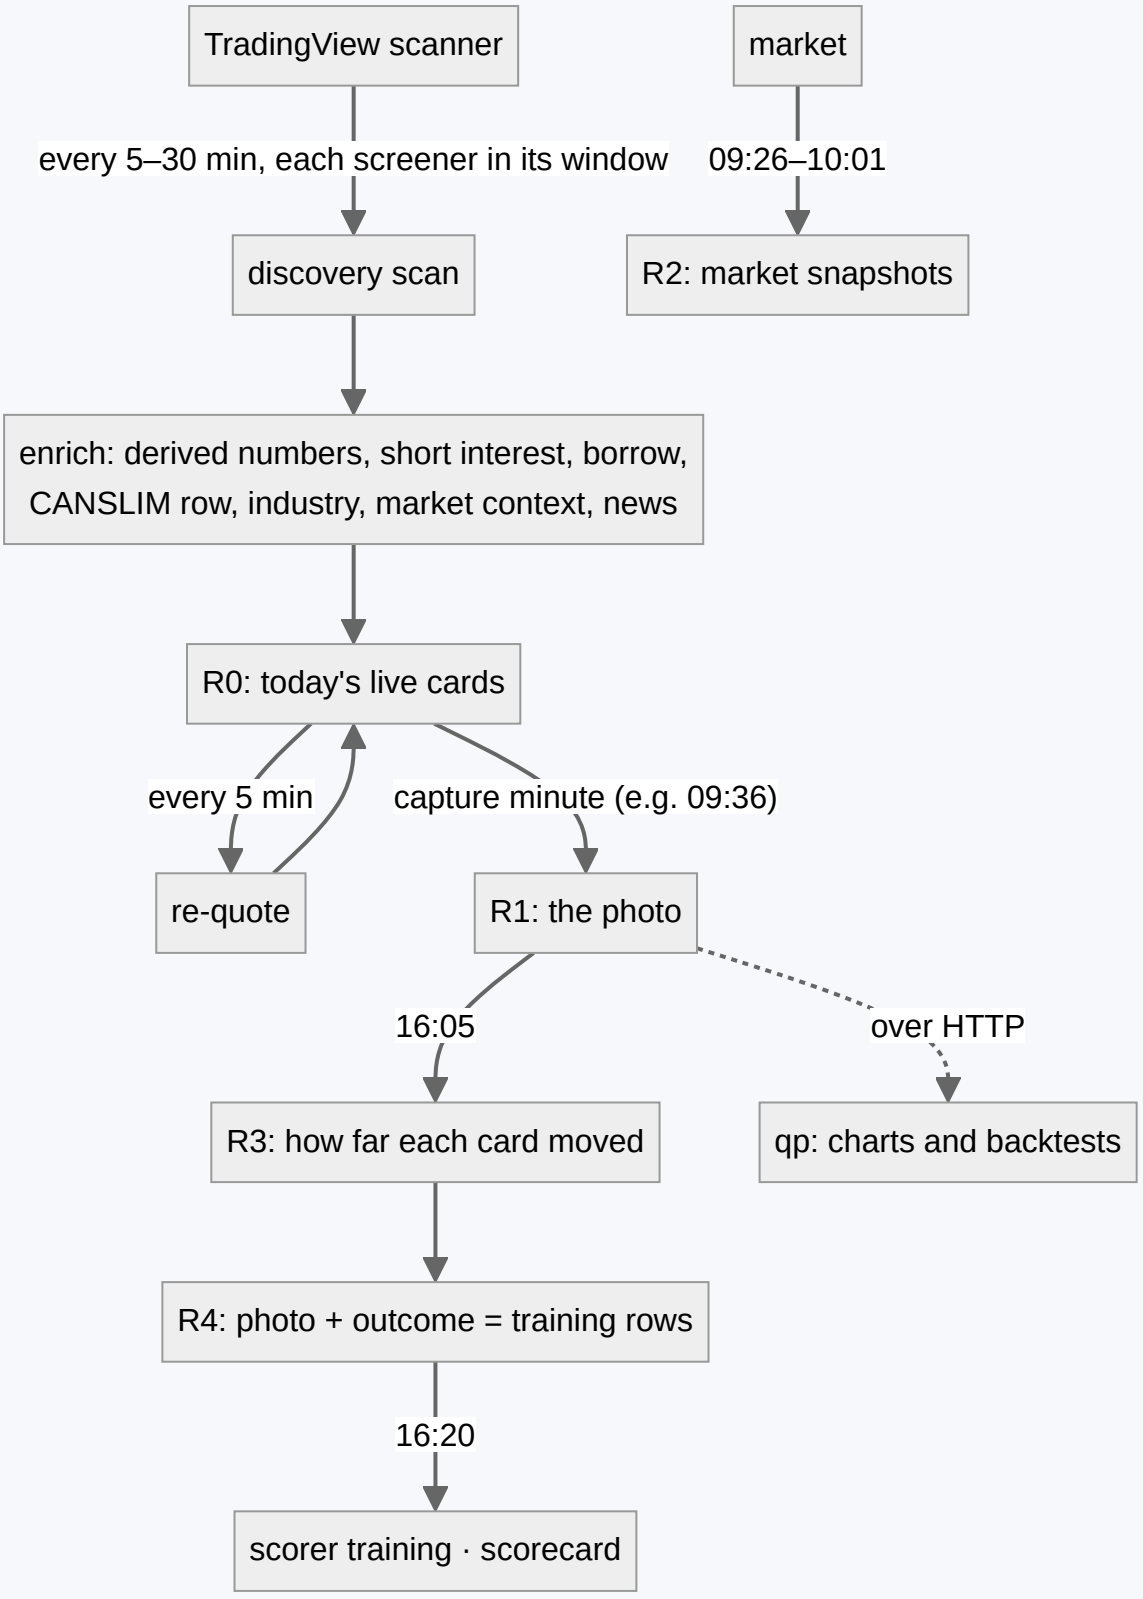

## Rules a rebuild must keep

Each comes from a failure or a decision recorded in these documents.

**The research method**

1. **One photo a day per tool**, at a minute when its screeners can have found something. Only the photo is training data (METHODOLOGY.md, REGISTERS.md).
2. **Outcomes in ATR from fixed entry minutes** (A and B), the same good-move line everywhere (1.3 ATR) (IDEAS.md).
3. **Each tool is its own experiment**: its own screeners, registers, shortlist and model. Shared facts are labels, **never filters** (DATA-PIPELINE.md).
4. **No look-ahead**: every stored value is what was known at that minute.
5. **Judge screeners by the move, not a trade**, with consistency across days deciding, against the tool's own baseline, the benchmark and the mirror (SCORING-TODAY.md, IDEAS.md).

**The data** 6. **Missing is not zero, and not bearish.** A blank says why (CARD-FIELDS.md). 7. **One writer per shared fact**; when two sources exist, both are kept with a stated priority (the F-21 lesson, KNOWN-ISSUES.md). 8. **Check content, not "it answered"** (DATACHECK.md). 9. **The tradability floor is one setting applied to every screener at scan time**, with named exceptions (SCREENER-BUILDER.md).

**The definitions** 10. **A screener's key never changes**; definitions should be **versioned**, so a frozen day records the rules that produced it. 11. **Times are checked against each other when saved** (capture vs windows, the D-S9 case). 12. **No code silently rewrites a definition** (the D-S10 lesson).

**Running it** 13. **Nothing important lives only in memory**: live cards, hot-sector state and job history survive a restart (DATA-MODEL.md). 14. **Every scheduled job has a history and an alert when it fails or does not run** (MONITOR.md). 15. **Stopped tools stay fully readable**, scorecard included (the D-S14 lesson) (TOOL-LIFECYCLE.md).

## What not to copy

- today's **score** and the **scorecard's up-only grading** (SCORING-TODAY.md);
- settings that are accepted but never read, and help text that disagrees with the code (SETTINGS.md);
- the open items in KNOWN-ISSUES.md.

## Not in this folder yet

qp (charts, strategies, backtests, the CANSLIM calculations behind the card’s O’Neil fold), the journal, and the system-wide pages (login, backups, deploy, how the programs connect) are documented in the next phases.