The journal: the entry snapshot and the page

Above: JOURNAL.md §3 (the entry snapshot, the page).

Talks to:

- the front door (`/journal/`);
- the shared record: the facts, the market state and the R1 row known at a trade's entry;
- the research worker, whose O'Neil facts the snapshot reads as of the entry;
- the data sources: 1-minute and daily bars;
- qp: the chart of a trade;
- the journal's own file.

---

1. What it is


What was true at the entry, and the patterns across trades. Once a trade is paired (IMPORT.md), the journal takes an **entry snapshot** — the price structure from bars up to the entry minute, and the facts, the market state and the R1 row **as they were known at the entry** — and measures how far the trade ran for and against the trader (MAE and MFE). The **page** then shows every trade and the patterns across them: by hour, weekday, price, size, side and setup.

What it owns: each trade's entry snapshot, the setups, the day notes, and every number on the page.

What it never does: look at anything known after the entry, or grade a trade for execution.

---

2. The diagram

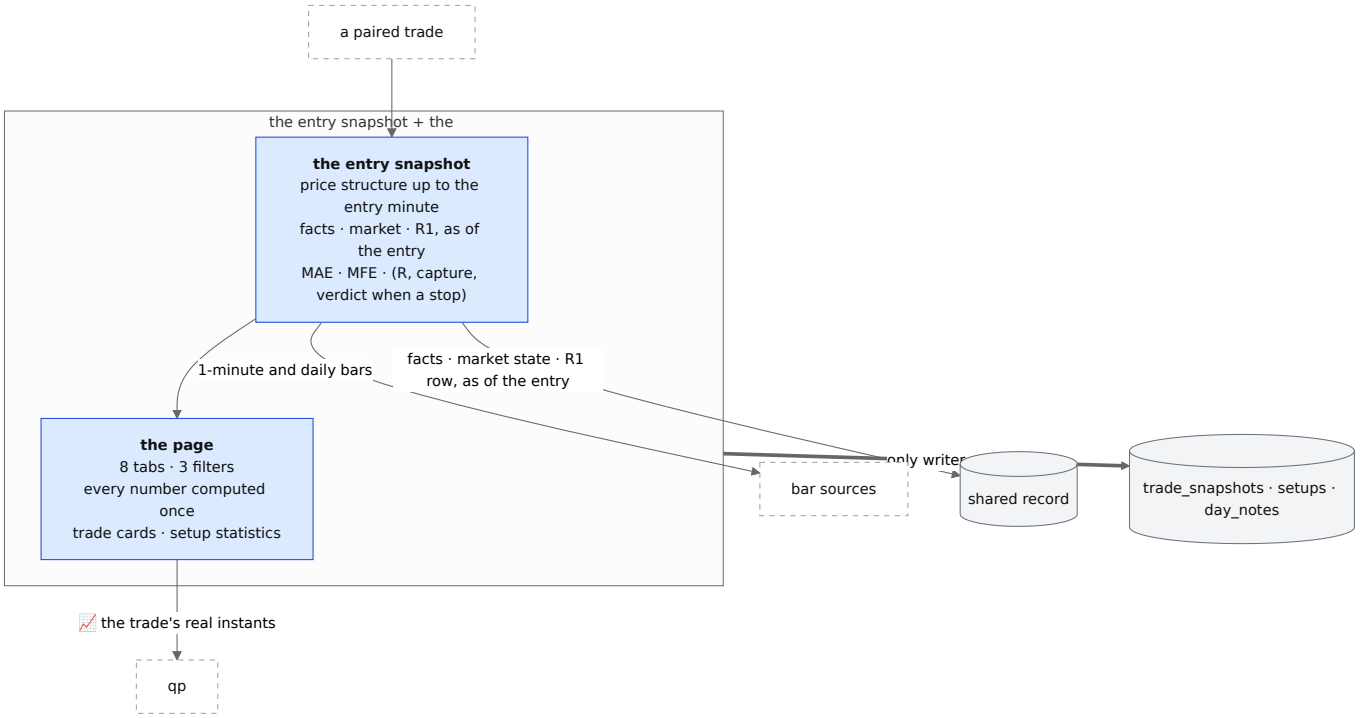

3. Its parts

3.1 The entry snapshot

Computed **as of the entry minute**, never falling back to "the last bar of the day":

- **The price structure** from 1-minute bars up to the entry minute, plus the history the multi-day levels need (fetched, not left blank): VWAP and the EMAs and SMAs at the entry bar, Bollinger bands, the 5-day MA and its slope, 2-day / week / month VWAP and highs/lows, the prior day's high and low, and where price sits against each. Bars are read in New York time, so the window is the real session the year round (D-J8).
- **The facts, the market state and the R1 row as known at the entry**, read from the shared record — the regime, the sector read, the O'Neil letters and the tool's own frozen card for that ticker and day. Not a table the journal never writes (D-J13).
- **MAE and MFE** between the entry and the exit: the worst and best excursion, as a % of the entry price.
- **R, capture and the verdict**, when the trade has a stop: R = P&L per share ÷ |entry − stop|; capture = P&L per share ÷ MFE; the verdict reads from capture. A stop comes in with every trade now (IMPORT.md), so these are no longer always blank (D-J9).

3.2 One condition system over the snapshot

One condition system, not the old two (templates and a check library side by side), and its fields are the ones the snapshot actually stores — so a condition can be judged, where 55 of the old 77 seeded checks could never answer (D-J13). A condition is direction-aware (what is aligned for

a long is reversed for a short), and a missing input reads as **blank**, never as "not aligned" (D-J19).

3.3 Setup statistics

Per setup, over its closed trades with an R: win rate, average win and loss R, expectancy, profit factor, max drawdown, and the conditions that move the result. This replaces the old grading engine, which could never produce a number (it needed an R and no trade had a stop) and which nothing on the page read. It is built only because the page now shows it (D-J14).

3.4 The page

Eight tabs over the trades the three filters (account, setup, source) narrow; **every number is computed in one place**, so the page and the server never disagree (D-J17):

Tab	Shows
Overview	closed P&L, win % and long % rings, insights (the buckets that made or lost the most), six tiles (net P&L, win rate, profit factor, expectancy, payoff, max drawdown), the equity curve, and a strip (SQN, Kelly, recovery, consistency, streaks)
Calendar	a month grid of weekday net P&L and trade counts, with weekly totals; weekend trades are not dropped (D-J20)
Time	net P&L, trades, win rate and $/trade by entry hour, weekday, entry price and position size; and hold time, winners vs losers
Risk	the risk snapshot, the R-multiple distribution, and the P&L distribution
Stats	performance, trade, time, cost and volume groups, and the symbols with the largest net P&L
Setups	one row per setup with at least three closed trades: trades, win rate, $/trade, profit factor, total, average R, a small equity curve (§3.3)
Trades	per day, one card per trade (§3.5); the Alpaca accounts panel sits above the list (IMPORT.md)
Import	the file import and its report (IMPORT.md)

The numbers follow the old desk's definitions: a trade at exactly 0 is neither a win nor a loss (but still a closed trade); profit factor is blank with no losing trade, never ∞; drawdown walks the equity curve in exit order; times are shown in New York whatever the browser.

3.5 A trade card, and the chart

Each card shows the ticker, side, setup and account; net P&L and % move (signed by direction for every source, D-J20); the date, entry, exit, shares, durations, stop and target; and the notes. The **setup, stop, target, fees and notes can be edited on the page**, not only through the API. The 📈 link opens qp's print sheet of that stock and day with the entry and exit drawn — at the trade's **real** instants, so the marks land on the right bar (D-J10).

---

4. Contracts

The code: `journal/server.js`, behind the front door at `/journal/`.

It owns (the journal's file)	Key
`trade_snapshots` (the entry snapshot, one per trade)	trade
`setups`	id
`day_notes`	day

It reads	From
facts, the market state and the R1 row, as of the entry	the shared record
1-minute and daily bars	the bar sources (DATA-SOURCES.md)

Routes, behind `/journal/`	Do
`GET /api/journal/trades` (filters); `GET /api/journal/trades/:id`	trades; one trade with its fills and its snapshot
`PATCH /api/journal/trades/:id`	stop, target, fees, setup, notes, tags
`GET/POST/PATCH /api/journal/setups`	the setups the page edits
`GET /api/journal/stats` (filters)	every number of the page, computed in one place

---

5. When it fails

Event	What happens
the shared record is down	the snapshot waits and says so; trades still import and the page still shows P&L
a bar source returns nothing for the entry day	the snapshot says which values it could not compute; it never falls back to the last bar
a trade has no stop	R, capture, the verdict and the setup statistics for it are blank, and say they need a stop
a condition's input is missing	the condition is blank, never "not aligned"

---

6. Built on

The old desk: legacy/journal/PAGE.md (every tab and formula) and legacy/journal/ANALYSIS.md (the technical snapshot, the two condition systems, the grading engine).

What failed there:

ID	Fault	Prevented by
D-J8	the bar window used a fixed −05:00 offset, so half the year it started an hour late and the snapshot fell back to the last bar	bars read in New York; the entry bar chosen by time
D-J13	RVOL, ATR, pre-market levels and the market context were blank, and the multi-day levels saw the whole day	computed as of the entry; context read from the shared record
D-J14	the grading half had no writer, no screen, and needed an R no trade had	setup statistics on the page, over trades that now carry a stop
D-J17	the server's numbers differed from the page's	every number computed in one place
D-J19	five rules read missing data as "not aligned"	a missing input is blank
D-J10	the 📈 chart marked the trade 4–5 hours early	the trade's real instants
D-J20	weekend trades dropped; a 0 trade broke no streak; a short's % move unsigned	corrected

7. Status

Part	Status
the page and its formulas	**built** (legacy, kept)
real New York instants	**built** (step 4)
the entry snapshot from the shared record; MAE and MFE	**to build**
stops on every trade (from IMPORT.md)	**to build**
one condition system over the snapshot; setup statistics	**to build**
the setup, stop, target, fees and notes editable on the page	**to build**