



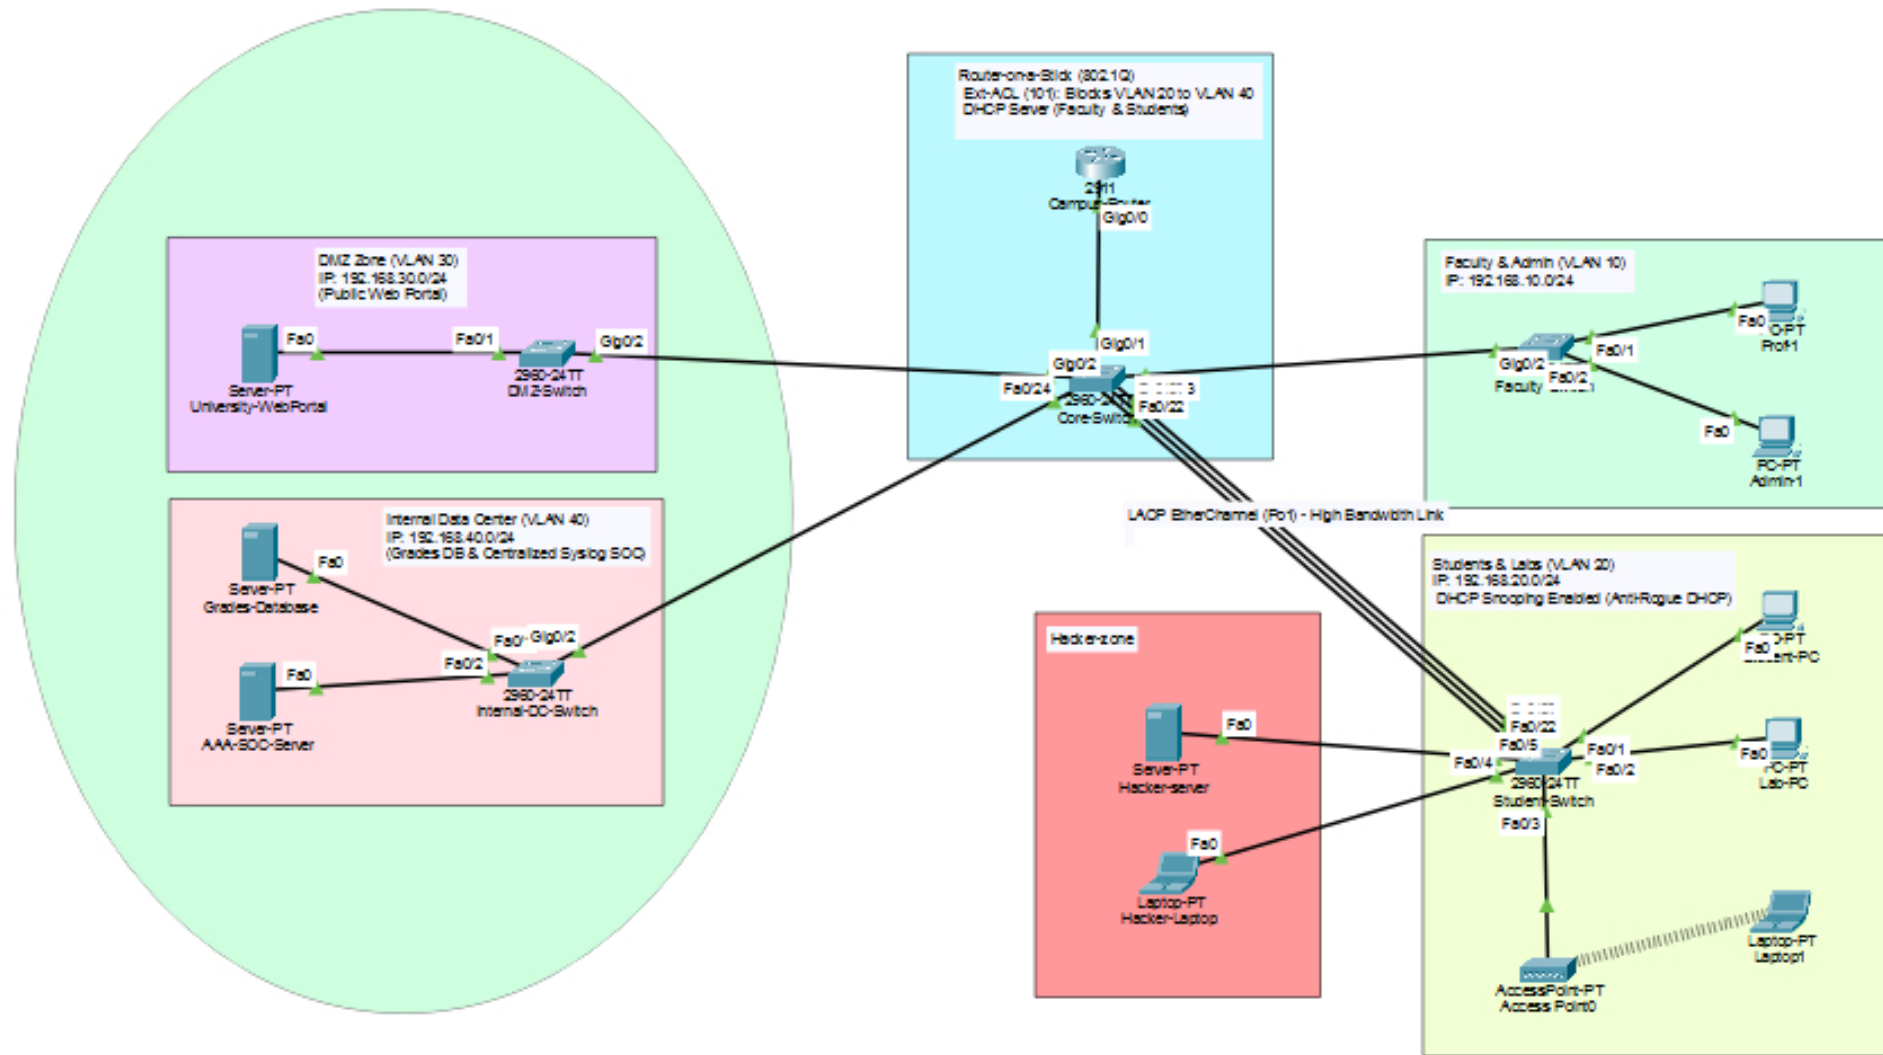


Secure University Campus Network (Three-Tier Architecture)

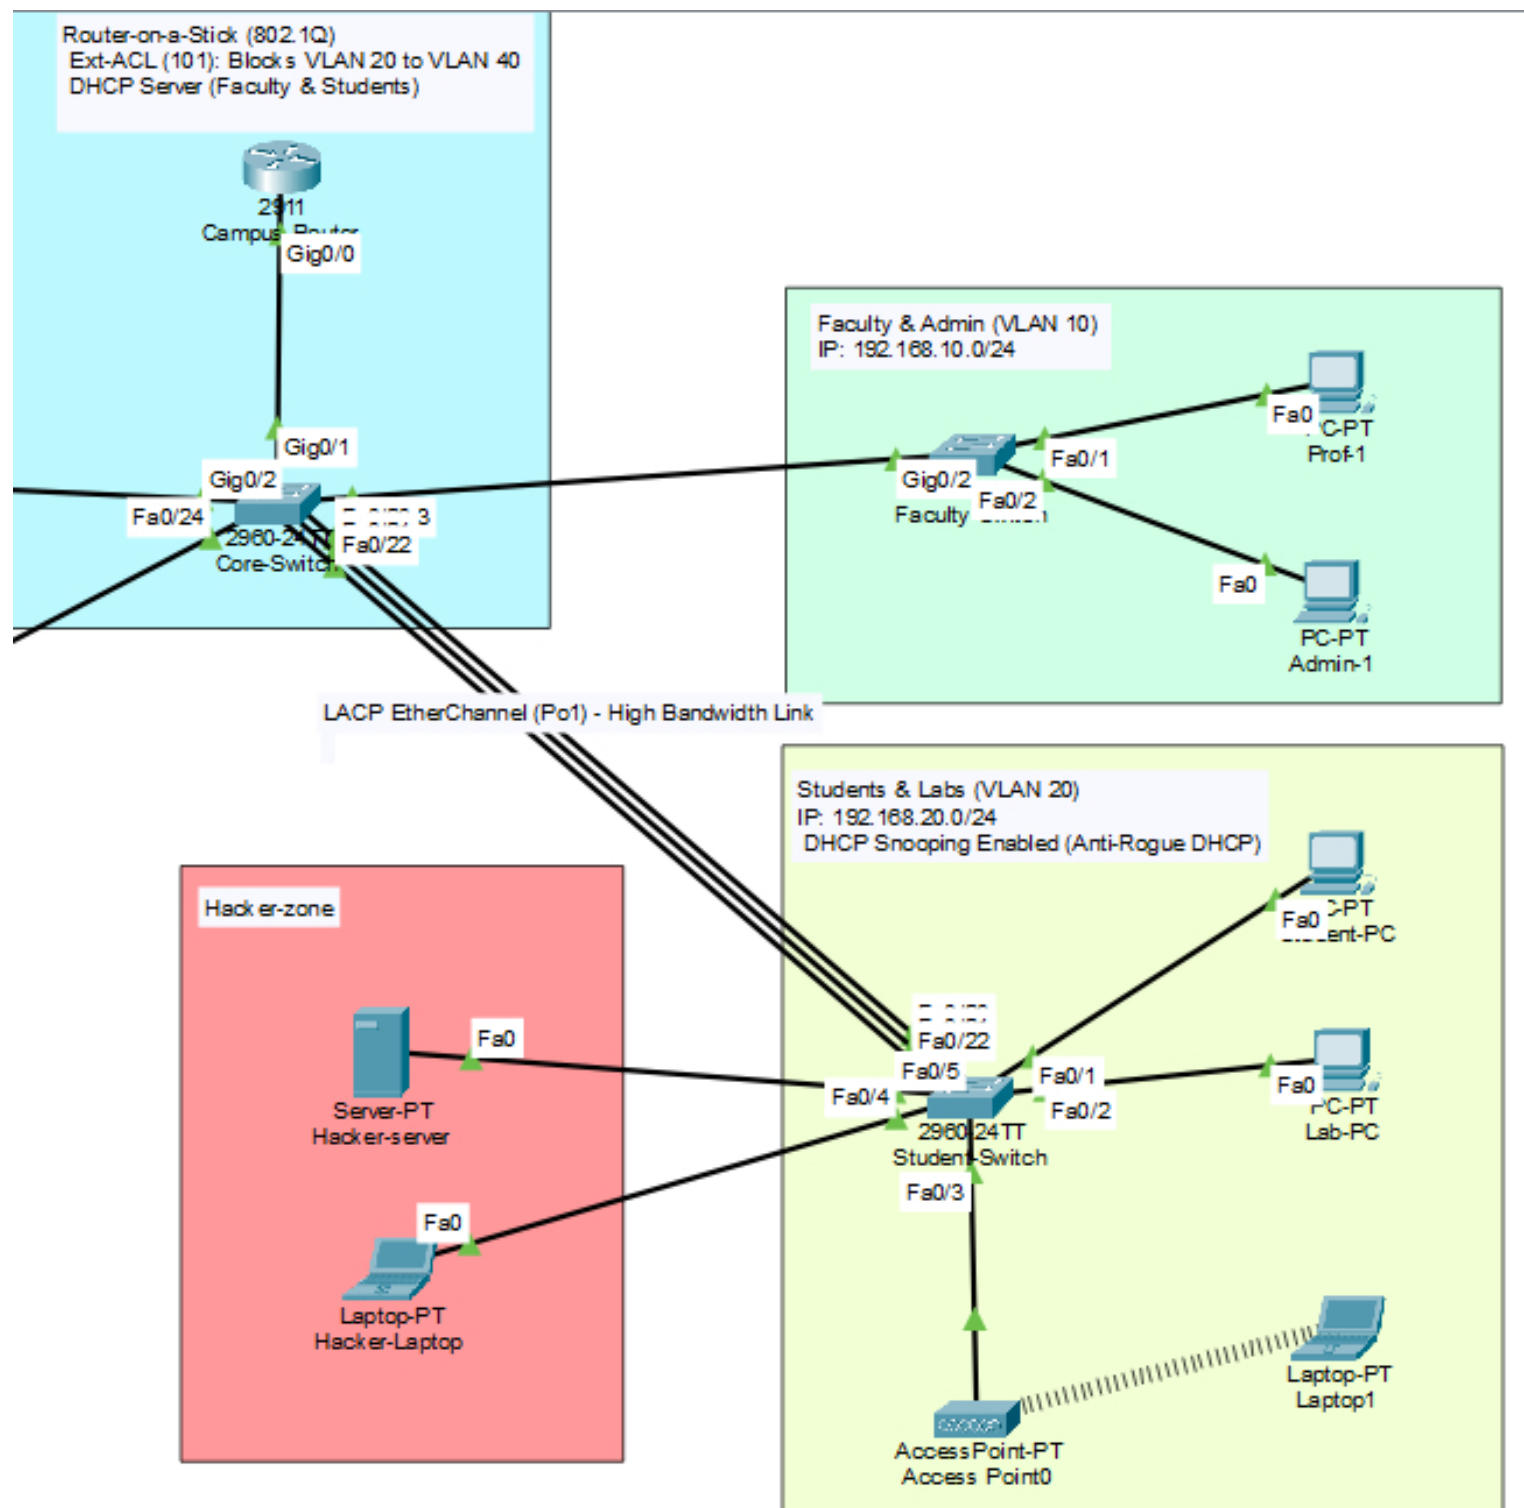

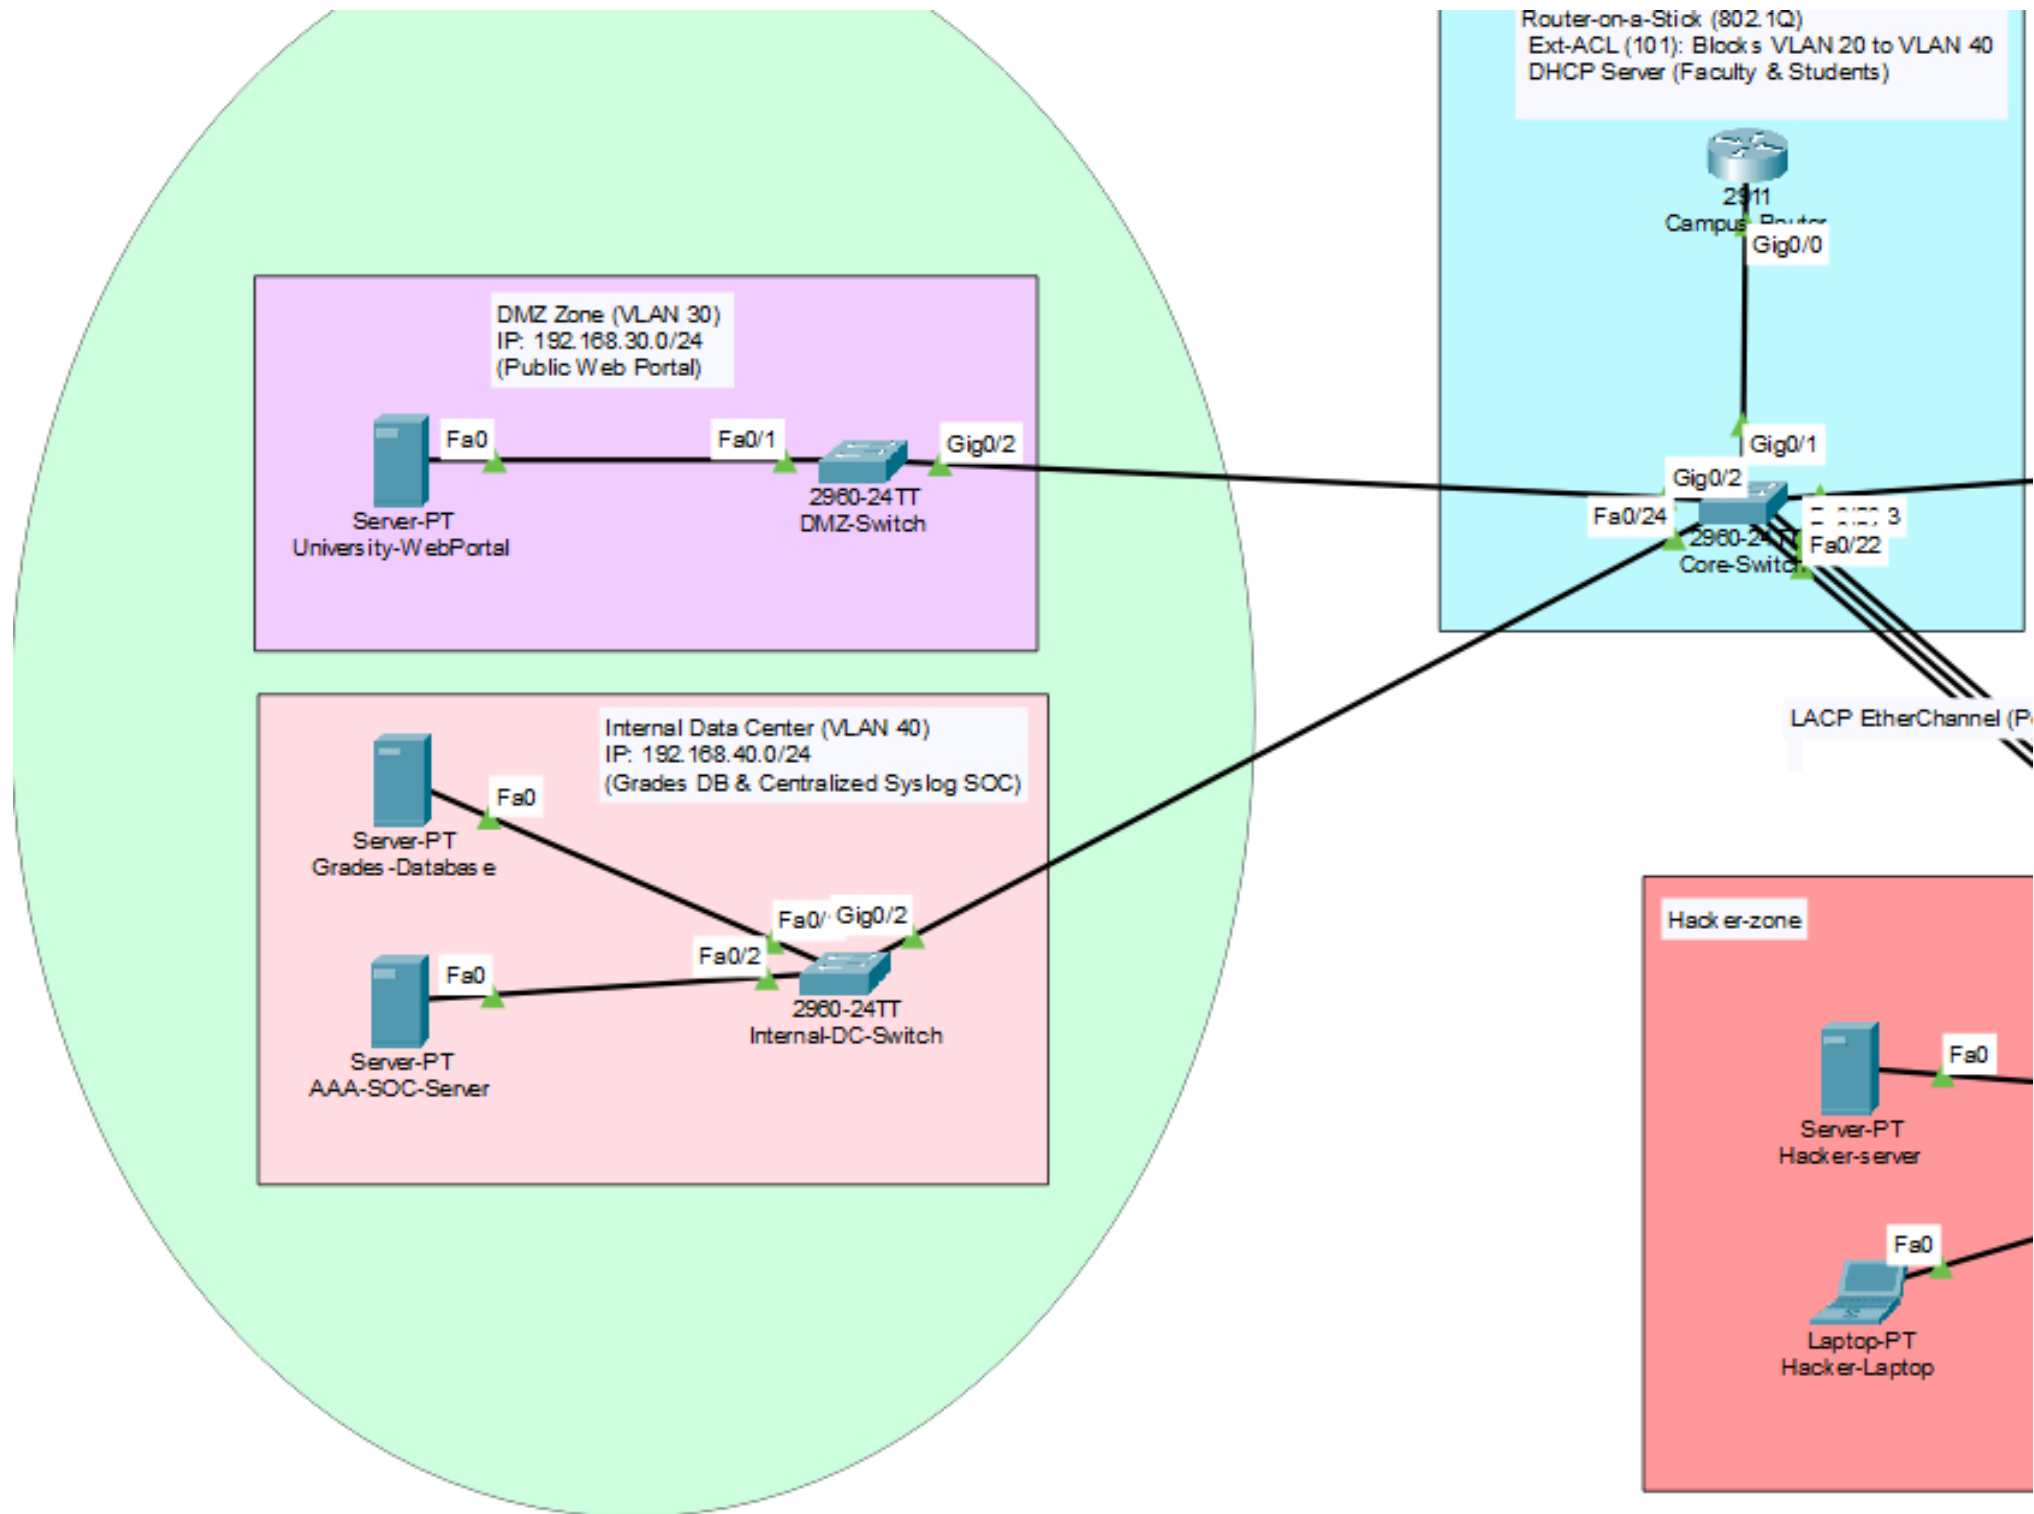

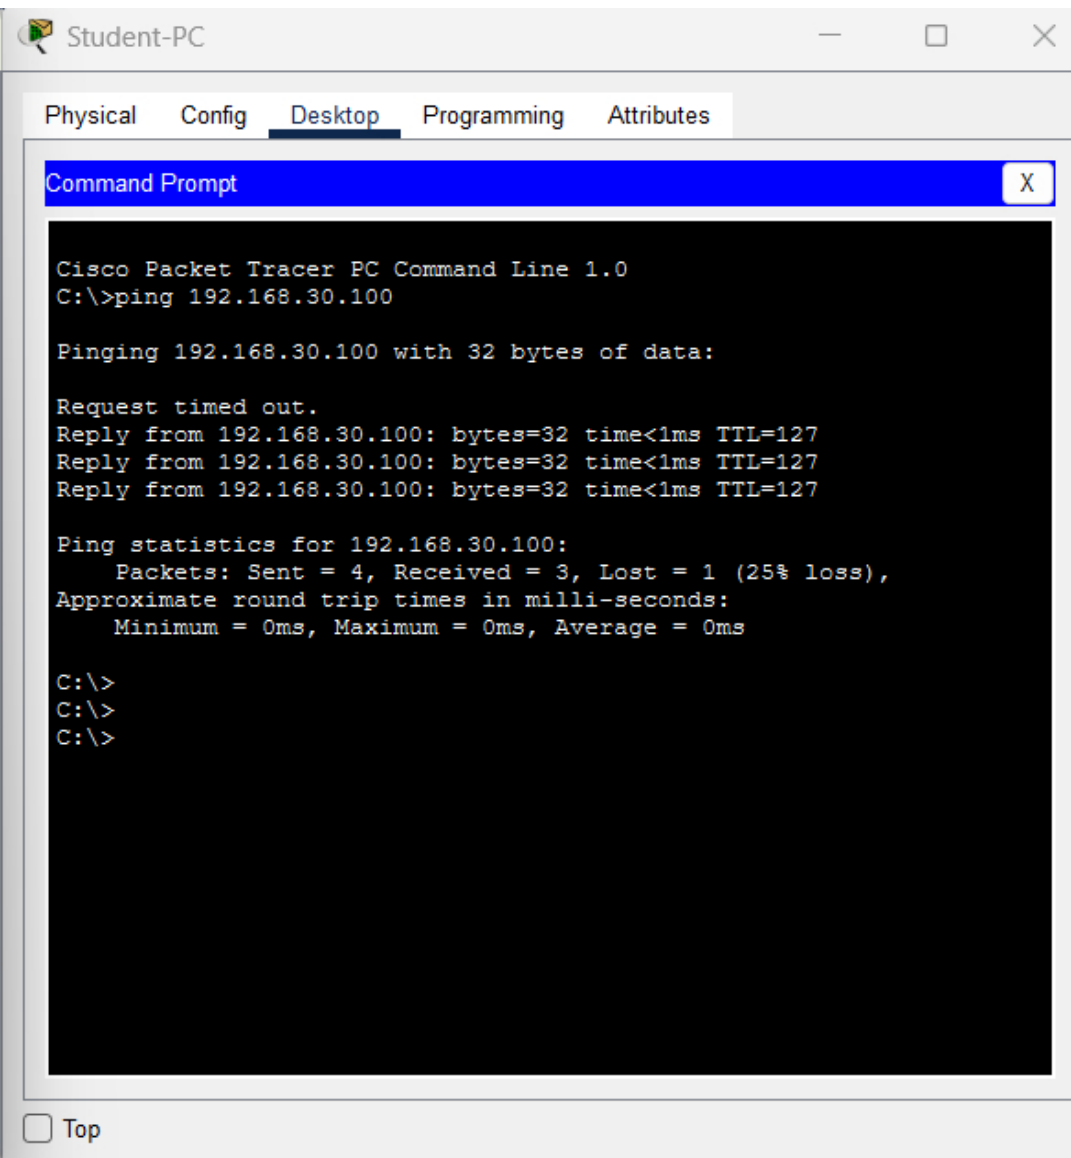

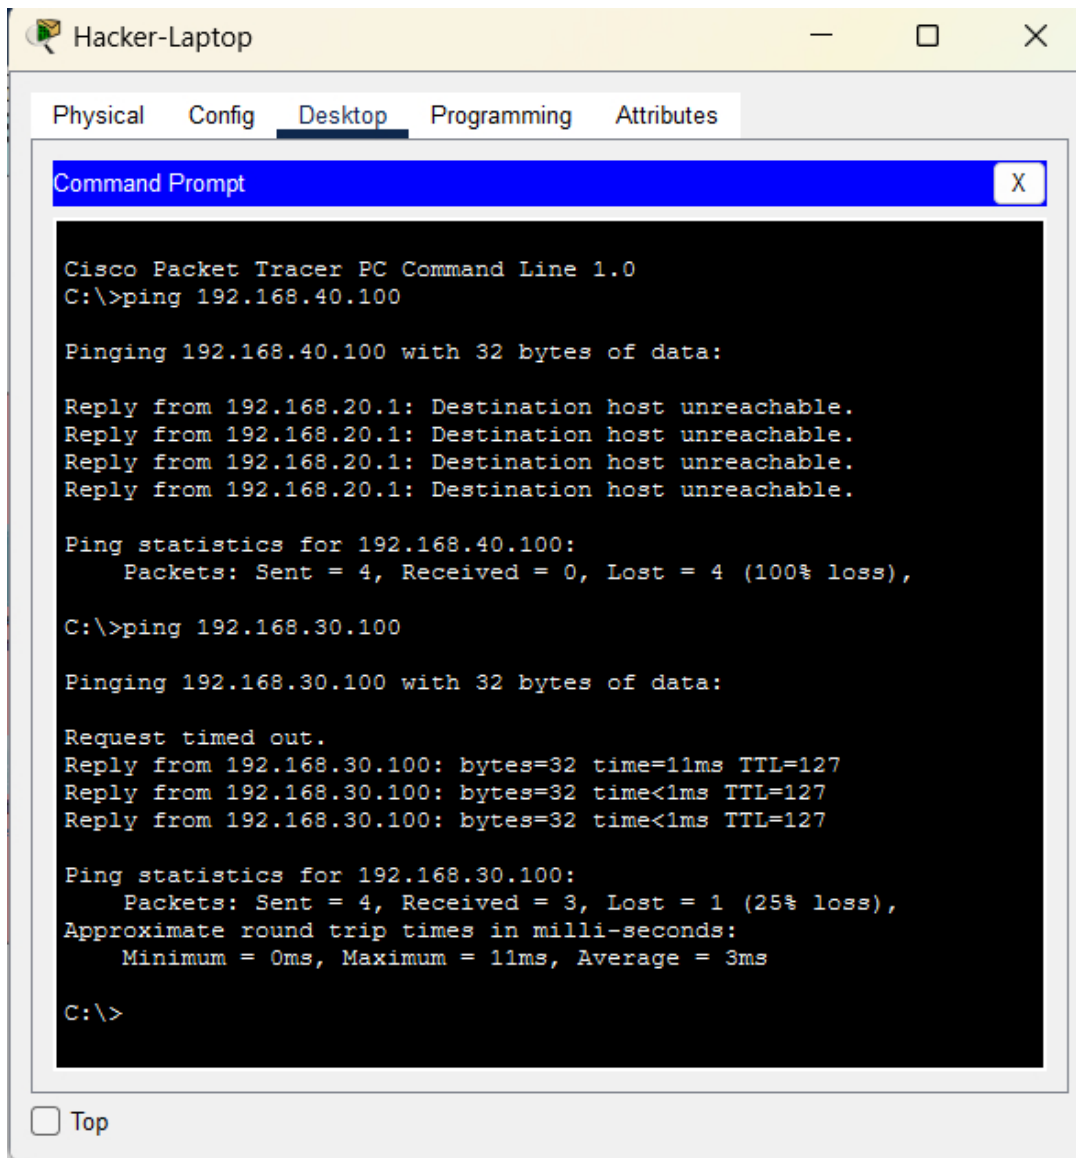

IOS Command Line Interface

```
Core-Switch>ena
Core-Switch#sh
Core-Switch#show eth
Core-Switch#show etherchannel su
Core-Switch#show etherchannel summary
Flags:  D - down          P - in port-channel
        I - stand-alone  s - suspended
        H - Hot-standby (LACP only)
        R - Layer3       S - Layer2
        U - in use       f - failed to allocate aggregator
        u - unsuitable for bundling
        w - waiting to be aggregated
        d - default port

Number of channel-groups in use: 1
Number of aggregators:          1

Group  Port-channel  Protocol    Ports
-----+-----+-----
+-----+-----+-----
1      Po1(SU)        LACP       Fa0/20(P) Fa0/21(P) Fa0/22(P)
Core-Switch#
```

Copy

Paste

The screenshot displays the AAA-SOC-Server web interface. On the left, a sidebar menu lists various services under the "SERVICES" heading: HTTP, DHCP, DHCPv6, TFTP, DNS, SYSLOG (highlighted), AAA, NTP, EMAIL, FTP, IoT, VM Management, Radius EAP, and PRP.

The main area shows the "Syslog" configuration page. The "Service" dropdown is set to "Syslog". A table displays two log entries:

	Time	HostName	Message
1	03.02.1993 04:54:33.094 AM	192.168.40.1	%SYS-5-CONFIG_I: Configured from console by console
2	03.02.1993 04:53:22.523 AM	192.168.40.1	%SYS-5-CONFIG_I: Configured from console by console

An inset window titled "Campus-Router" shows the CLI interface. It contains the following commands and their outputs:

```
Enter configuration commands, one per line. End with CNTL/Z.  
Campus-Router(config)#hostname TEST-ROUTER  
TEST-ROUTER(config)#hostname Campus-Router  
Campus-Router(config)#exit  
Campus-Router#  
*Mar 02, 04:54:33.5454: SYS-5-CONFIG_I: Configured from console by console  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#  
Campus-Router#
```

Buttons for "Copy" and "Paste" are visible below the CLI output. At the bottom right of the main interface, there is a "Clear Log" button.

Student-PC

PhysicalConfigDesktopProgrammingAttributes

IP Configuration

InterfaceFastEthernet0

IP Configuration

☒ DHCP☐ StaticDHCP failed. APIPA is being used.

IPv4 Address169.254.224.227

Subnet Mask255.255.0.0

Default Gateway0.0.0.0

DNS Server0.0.0.0

IPv6 Configuration

☐ Automatic☒ Static

IPv6 Address /

Link Local AddressFE80::260:2FFF:FE23:E0E3

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

AuthenticationMD5

☐ Top