



Final Year Project Report

Presented in partial fulfillment of the requirements for the degree of

**NATIONAL BACHELOR'S DEGREE IN INFORMATION
TECHNOLOGIES**

Specialization: Information Systems Development (DSI)

**Development of Manufacturing Execution System
(MES) application integrated with Dynamics 365
Business Central.**

Company: MAVISION

Developed By:

SLEIMI Mohamed Dhia et BOUZIRI Mustapha

Supervised By:

M. CHAABANI Marwa : ISET Supervisor

M. YOUNSI Mourad: Company Supervisor

Code PFE : DSI-26-R628

Academic Year : 2025/2026

Abstract

Français : Ce projet présente un système d'exécution de la production (MES) intégré nativement à Microsoft Dynamics 365 Business Central, développé lors d'un stage de quatre mois chez Mavision, cabinet de conseil ERP. Il répond à l'absence de visibilité en temps réel sur l'atelier dans les entreprises manufacturières s'appuyant sur un suivi papier. L'architecture repose sur quatre composants: une extension AL exposant des endpoints OData V4 avec authentification par jeton ; un reverse proxy Node.js ; une application Flutter multiplateforme (Android, iOS, Web, bureau) ; et un agent IA Python FastAPI permettant des requêtes en langage naturel. Les opérateurs et superviseurs bénéficient du suivi des machines, du cycle de vie des opérations, de la nomenclature, du scan de codes-barres, du signalement des rebuts et de l'impression d'étiquettes. L'interface supporte le français, l'anglais et l'arabe avec mise en page RTL automatique.

Mots-clés : MES, Système d'Exécution de la Production, Business Central, Flutter, OData V4, Intégration ERP, Industrie 4.0, Suivi de Production, Scrum

English : This project presents a Manufacturing Execution System (MES) natively integrated with Microsoft Dynamics 365 Business Central, developed over a four-month internship at Mavision, an ERP consulting firm. It addresses the absence of real-time shop-floor visibility in manufacturing companies relying on paper-based production tracking. The architecture spans four components: an AL extension inside Business Central exposing OData V4 endpoints with token-based authentication; a Node.js reverse proxy handling BC authentication; a cross-platform Flutter application targeting Android, iOS, Web, and desktop; and a Python FastAPI AI agent enabling natural-language queries over machine states, production orders, and operational data. Operators and Supervisors gain real-time machine monitoring, operation lifecycle control, BOM tracking, barcode scanning, scrap reporting, and label printing. Administrators access a performance dashboard, activity log, and role management. The interface supports English, French, and Arabic with automatic RTL layout. Development followed Scrum across four two-week sprints, with an append-only audit trail guaranteeing tamper-evident shop-floor records.

Keywords: MES, Manufacturing Execution System, Business Central, Flutter, OData V4, ERP Integration, Industry 4.0, Production Tracking, Scrum.

العربية: يقدم هذا المشروع نظام تنفيذ التصنيع (MES) المدمج أصلاً مع 365 Dynamics Microsoft Central، Business والذي طُوّر خلال تدريب مدته أربعة أشهر في شركة Mavision للاستشارات. يعالج النظام غياب الرؤية الفورية لأرضية الإنتاج في المؤسسات الصناعية التي تعتمد على التتبع الورقي. تتألف البنية من أربعة مكونات: امتداد AL يكشف نقاط نهاية OData V4 مع مصادقة قائمة على الرمز المميز؛ وخادم وسيط؛ Node.js وتطبيق Flutter متعدد المنصات يستهدف Android و iOS والويب وسطح المكتب؛ ووكيل ذكاء اصطناعي FastAPI Python يتيح الاستعلام باللغة الطبيعية عن حالات الآلات وأوامر الإنتاج. يحصل المشغلون والمشرفون على مراقبة الآلات وإدارة دورة حياة العمليات وتتبع قوائم المواد ومسح الباركود والإبلاغ عن الخردة وطباعة الملصقات. تدعم الواجهة العربية والفرنسية والإنجليزية مع تخطيط RTL تلقائي. اتّبع التطوير منهجية Scrum عبر أربعة سبرينتات.

الكلمات المفتاحية: نظام تنفيذ التصنيع، Central، Business، Flutter، OData V4، تكامل نظام تخطيط الموارد، الصناعة 0.4، تتبع الإنتاج، Scrum

Dédicaces

[Dédicace de Mohamed Dhia SLEIMI]

[Dédicace de Mustapha BOUZIRI]

Acknowledgements

First and foremost, We would like to thank our academic supervisor, **Ms. Marwa CHAABANI**, for their expert guidance and unwavering commitment. Their in-depth knowledge, availability and unconditional support have been of paramount importance in the completion of this project.

We would also like to express our gratitude to our professional supervisor at **Mavision**, **Mr. Mourad YOUNSI**. Their contribution to this project, both on a technical and organisational level, has been invaluable. Their strategic vision, domain expertise and availability greatly facilitated our progress and allowed us to gain an enriching professional experience.

Contents

Dédicaces	4
Acknowledgements	5
List of Abbreviations	xi
General Introduction	1
1 Global Project Framework	2
Introduction	3
1.1 Presentation of the Host Company	3
1.1.1 Overview of Mavision	3
1.1.2 Areas of Expertise	3
1.2 Project Framework	4
1.3 State of the Art	4
1.3.1 Subject Overview	4
1.3.2 Problem Statement	4
1.3.3 Study of the Existing Situation	5
1.3.4 Critical Analysis of the Existing Situation	5
1.3.5 Proposed Solution	7
1.3.6 Objectives	7
1.3.7 Adopted Methodology	8
Selection of the Agile Methodology	8
Adoption of the Scrum Framework	8
Conclusion	9
2 Requirements Analysis and Specification	10
Introduction	11
2.1 Requirements Analysis	11
2.1.1 Identification of Actors	11
2.1.2 Identification of Requirements	11
Functional Requirements	11
Non-Functional Requirements	13

2.2 Project Management with Scrum	14
2.2.1 Backlog Features	14
Domain 1: Authentication & User Management	14
Domain 2: Machine & Production Management	17
Domain 3: Production Execution & Traceability	20
Domain 4: Administration & Monitoring	23
Domain 5: AI Chat Assistant & Analytical Intelligence	24
2.3 Sprint Plan	26
2.4 Global Application Architecture	27
2.4.1 Physical Architecture	27
2.4.2 Software Architecture	28
AL Back-end (Business Central)	28
Node.js Middleware	29
Python AI Agent	29
Flutter Front-end	29
2.5 Work Environment	30
2.5.1 Software Environment	30
2.5.2 Development Environment	31
Conclusion	31
3 Sprint 1 Authentication & User Management	32
Introduction	33
3.1 Sprint Backlog	33
3.2 Design	38
3.2.1 Use Case Diagram	38
3.2.2 Textual Use Case Description	40
3.2.3 Sequence Diagrams	41
3.2.4 Class Diagram	49
3.3 Implementation	50
3.3.1 Backend Implementation	50
Backend Structure Overview	50
MES User Table Implementation	51
Authentication Token Table	52
MES Settings Table	52
Password Management and Encryption	53
Authentication Logic — Login, Logout, and Change Password	53
Password Expiry Worker	54
3.3.2 REST API and Web Services Implementation	54
OData Functions and Web Service Configuration	54

3.3.3 Frontend Implementation	54
Service Layer (API Communication)	55
State Management Layer using Provider	55
User Interface	56
3.4 Testing and Validation	62
3.4.1 Integration testing	62
Conclusion	62
4 Sprint 2 Machine & Production Management	63
Introduction	64
4.1 Sprint Backlog	64
4.2 Design	67
4.2.1 Use Case Diagram	67
4.2.2 Textual Use Case Description	68
4.2.3 Sequence Diagrams	69
4.2.4 Class Diagram	72
4.3 Implementation	73
4.3.1 Backend Implementation	73
Backend Structure Overview	73
MES Machine Status Table	73
MES Operation State Table	74
Enumerations	75
Machine Actions Business Logic	75
4.3.2 REST API and Web Services Implementation	75
4.3.3 Frontend Implementation	76
Model Layer	76
Service Layer	76
State Management Layer	76
User Interface	76
4.4 Testing and Validation	79
4.4.1 Integrations tests	79
Conclusion	80
5 Sprint 3 Production Execution & Traceability	81
Introduction	82
5.1 Sprint Backlog	82
5.2 Design	88
5.2.1 Use Case Diagram	88
5.2.2 Textual Use Case Description	89
5.2.3 Sequence Diagrams	92

5.2.4 Class Diagram	98
5.3 Implementation	99
5.3.1 Backend Implementation	99
Tables and Entities	99
REST API and Web Services Implementation	101
5.3.2 Frontend Implementation	101
Provider Architecture	101
User Interface	102
5.4 Test and Validation	103
5.4.1 Integration test	103
Conclusion	104
6 Sprint 4 Administration & System Monitoring	105
Introduction	106
6.1 Sprint Backlog	106
6.2 Design	107
6.2.1 Use Case Diagram	107
6.2.2 Textual Use Case Description	108
6.2.3 Sequence Diagrams	109
6.2.4 Class Diagram	110
6.3 Implementation	110
6.3.1 Backend Implementation	110
Dashboard Aggregation	111
Activity Log Aggregation	111
API Endpoints Added in Sprint 4	111
6.3.2 Frontend Implementation	111
Shared HTTP Infrastructure	111
Provider Architecture	111
User Interface	112
6.4 Test and validation	113
6.4.1 Integration test	113
Conclusion	114
7 Sprint 5 AI Assistant & Analytical Intelligence.	115
Introduction	116
7.1 Sprint Backlog	116
7.2 Design	122
7.2.1 Use Case Diagram	122
7.2.2 Textual Use Case Description	122
7.2.3 Sequence Diagrams	124

7.2.4 Class Diagram	125
7.3 Implementation	126
7.3.1 Node.js Middleware	126
Overview	126
AI Proxy Layer	126
Configuration	126
7.3.2 Python AI Agent	126
Intent Classification	127
Tool Catalogue	128
Data Enrichment	129
7.3.3 Flutter Frontend	130
Chat Page and Provider	130
Redirect Actions	130
User Interface	131
7.3.4 Integration Tests	131
Conclusion	133
General Conclusion	134

List of Tables

1.1	Comparison table with Delmia Apriso	6
2.1	List of MES application users	11
2.7	MES project sprint plan	26
2.8	MES project software environment	30
3.1	Story Backlog	33
3.3	MES User (Table 50101) — Field Dictionary	51
3.4	MES Auth Token (Table 50106) — Field Dictionary	52
3.5	MES Settings (Table 50100) — Field Dictionary	53
4.1	Sprint Backlog	64
4.2	Textual Use Case Description — Start Operation	68
4.3	MES Machine Status (Table 50107) — Field Dictionary	73
4.4	MES Operation State (Table 50108) — Field Dictionary	74
5.1	US-3.1 — Declare Production	82
5.2	Textual Use Case Description — Declare Production	90
5.3	Textual Use Case Description — Finish / Cancel / Interrupt Operation	91
5.4	Textual Use Case Description — Scan Component Consumption	91
5.5	MES Operation Execution (Table 50110) — Field Dictionary	99
5.6	MES Operation Progression (Table 50109) — Field Dictionary	100
5.7	MES Operation Scan (Table 50111) — Field Dictionary	100
5.8	New API Endpoints — Sprint 3	101
5.9	Provider Responsibilities — Sprint 3 Additions	102
6.1	Sprint 4 Story Backlog	106
6.2	Textual Use Case Description — View Machine Dashboard	108
6.3	New API Endpoints — Sprint 3	111
6.4	Provider Responsibilities — Sprint 4 Additions	112
7.1	Sprint 5 Story Backlog	117
7.2	Textual Use Case Description — Query via Chat Assistant	123
7.3	Node.js Middleware — Environment Variables	126
7.4	Intent Values and Associated Tool Chains	128

7.5	AI Agent Tool Catalogue	128
7.6	Data Enrichment Applied per Result Key	129

List of Figures

1.1	Mavision Logo [Source: Mavision, https://www.mavision.tn , visited April 2025]	3
1.2	Mavision Headquarters	4
1.3	Logo of the Delmia Apriso solution [Source: Dassault Systèmes, https://www.3ds.com/products/delmia/apriso , visited April 2025]	6
1.4	Adopted Scrum development cycle	8
2.1	MES System Physical Architecture	28
3.1	UML Use Case Diagram — Authentication.	39
3.2	UML Use Case Diagram — Manage Settings.	39
3.3	UML Use Case Diagram — Manage Users.	39
3.4	SD-01: Login.	41
3.5	SD-2FA: Badge Scan.	42
3.6	SD-02: Token Validation.	43
3.7	SD-03: Logout	43
3.8	SD-04: Change Password	44
3.9	SD-05: Admin - Create User.	45
3.10	SD-06: Admin - Set Password.	46
3.11	SD-07: Admin - Change Role / Work Centre.	47
3.12	SD-08: Admin - Toggle Account Active Status.	48
3.13	SD-ADMIN-BADGE: Admin - regenerate 2FA user badge.	49
3.14	UML Class Diagram.	50
3.15	Backend project structure.	50
3.16	Flutter layered architecture.	55
3.17	<i>Paring Page</i> — desktop and mobile views.	56
3.18	<i>Login Page</i> — desktop and mobile views.	57
3.19	<i>Badge Scan Dialog</i> — desktop and mobile views.	57
3.20	<i>MES User List Page</i> .	58
3.21	<i>Assign MES Role Dialog</i> .	58
3.22	<i>Generate Password Dialog</i> .	59
3.23	<i>Password Generated Successfully Dialog</i> .	59
3.24	<i>Change Password Page</i> — desktop and mobile views.	60
3.25	<i>Change Role Dialog</i> .	60

3.26	<i>User Badge Dialog</i>	61
3.27	<i>Settings Page</i>	61
3.28	Postman endpoint test — <code>fetchAllMesUsers</code>	62
4.1	UML Use Case Diagram — Machine & Production Management.	68
4.2	SD-09: Fetch Machines.	70
4.3	SD-10: Get Machine Orders.	71
4.4	SD-23: Fetch Operation progress.	72
4.5	SD-24: Fetch Operation History	72
4.6	UML Class Diagram — Machine & Production Management.	73
4.7	<i>Machine List Page</i> — desktop and mobile views.	77
4.8	<i>Machine Orders Page</i> — desktop and mobile views.	77
4.9	<i>Orders Progression Page</i> — desktop and mobile views.	78
4.10	<i>Machine History Page</i> — desktop and mobile views.	79
4.11	Postman endpoint test — <code>fetchMachines</code>	79
4.12	Postman endpoint test — <code>getMachinesOrders</code>	80
5.1	UML Use Case Diagram — Sprint 3 (manage production)	89
5.2	UML Use Case Diagram — Sprint 3 (control operations)	89
5.3	SD-21: Fetch Bill of Materials.	93
5.4	SD-22: Fetch Production Cycles.	94
5.5	SD-13: Pause Operation.	95
5.6	SD-14: Resume Operation.	96
5.7	SD-15: Finish/Cancel/Interrupt Operation.	97
5.8	SD-18: Fetch Operation Live Data.	98
5.9	UML Class Diagram — Production Execution & Traceability.	99
5.10	<i>Operation Detail Page</i> (Running state) — desktop and mobile views.	102
5.11	<i>Operation Detail Page</i> (Cancelled state) — desktop and mobile views.	103
5.12	Postman endpoint test — <code>fetchBom</code>	104
6.1	UML Use Case Diagram — Administration & UX.	108
6.2	SD-19: Fetch Machine Dashboard.	109
6.3	SD-20: Fetch Activity Log.	110
6.4	UML Class Diagram.	110
6.5	<i>Machine Dashboard Page</i> — desktop and mobile views.	112
6.6	<i>Activity Log Page</i> — desktop and mobile views.	113
6.7	Postman endpoint test — <code>fetchActivityLog</code>	113
6.8	Postman endpoint test — <code>fetchMachineDashboard</code>	114
7.1	UML Use Case Diagram — Sprint 5	122
7.2	SD-31: Intent Classification — LLM with Regex Fallback.	125

7.3 UML Class Diagram — AI Assistant & Analytical Intelligence. 125

7.4 AI Assistant Layer - Physical Architecture. 127

7.5 *AI Chat Panel* — desktop side panel and mobile dialog views. 131

7.6 Postman endpoint test — POST /api/ai/chat. 132

7.7 Postman endpoint test — GET /api/ai/health. 133

List of Abbreviations

Abbreviation	Definition
AL	Application Language (Microsoft Dynamics 365 Business Central)
API	Application Programming Interface
BOM	Bill of Materials
ERP	Enterprise Resource Planning
GUID	Globally Unique Identifier
MES	Manufacturing Execution System
OData	Open Data Protocol
RTL	Right-to-Left
SCRUM	(no acronym — Scrum is a proper noun)
SHA-256	Secure Hash Algorithm 256-bit
UML	Unified Modelling Language

General Introduction

In an industrial context undergoing rapid digital transformation, manufacturing companies face the necessity of optimising their production processes, reducing downtime and ensuring complete traceability of workshop operations. *Manufacturing Execution System* (MES), represent a direct response to these challenges by bridging the gap between decision-making layers *Enterprise Resource Planning* (ERP) and the production floor.

It is within this context that the present end-of-studies project was carried out at **Mavision**. The project consists of the design and development of an integrated MES system, structured around two main components: a business back-end developed in AL language on the Microsoft Dynamics 365 Business Central platform, and a cross-platform mobile/web application developed with the Flutter framework. The system enables machine management, production order tracking, real-time production reporting, as well as user and role-based access management.

This report is structured into several chapters. The first chapter introduces the host organisation and presents the general framework of the project, highlighting the limitations of existing solutions and the relevance of the proposed solution. The second chapter focuses on requirements analysis and specification, as well as the technology choices made. The subsequent chapters trace the various development phases, exploring the conceptual aspects and illustrating the results obtained at the end of each sprint.

Through this approach, we aim to demonstrate how a well-designed digital solution can transform workshop production management by providing visibility, responsiveness and performance, serving both operators and management alike.

Chapter 1

Global Project Framework

Contents

Introduction	3
1.1 Presentation of the Host Company	3
1.1.1 Overview of Mavision	3
1.1.2 Areas of Expertise	3
1.2 Project Framework	4
1.3 State of the Art	4
1.3.1 Subject Overview	4
1.3.2 Problem Statement	4
1.3.3 Study of the Existing Situation	5
1.3.4 Critical Analysis of the Existing Situation	5
1.3.5 Proposed Solution	7
1.3.6 Objectives	7
1.3.7 Adopted Methodology	8
Selection of the Agile Methodology	8
Adoption of the Scrum Framework	8
Conclusion	9

Introduction

This first chapter serves to contextualise our project. It begins with a brief introduction to the host organisation, then describes the objectives to be achieved, provides an in-depth analysis of the existing situation, and finally describes the methodology used to implement this work.

1.1 Presentation of the Host Company

To properly organise this section, we begin with some general details about Mavision before addressing the activities directly relevant to us.

1.1.1 Overview of Mavision

Founded in 2014 and headquartered in Manar II, Tunis, Mavision [1] is a software development company specialising in consulting, auditing and implementing ERP information systems. Mavision supports companies in their IT development projects and helps its clients better organise themselves around their information systems. In addition to its ERP offerings, Mavision develops and integrates reporting solutions to help its clients manage their business activities more effectively. In order to build lasting trust, Mavision places emphasis on its professionalism, commitment and the technical and functional expertise of its team.



Figure 1.1. Mavision Logo [Source: Mavision, <https://www.mavision.tn>, visited April 2025]

1.1.2 Areas of Expertise

Mavision's activities are structured around three main areas:

ERP Integration: Consulting, implementation and integration of ERP solutions, with a strong focus on Microsoft Dynamics 365 Business Central, as well as project and platform management, architecture and custom business software design.

Business Intelligence: Design and deployment of BI solutions enabling clients to gain strategic visibility over their operations through dashboards, reporting tools and data analysis.

Web & Mobile Technology: Development and integration of mobile phone applications and web platforms that complement ERP systems, enabling clients to manage their business activities with greater agility and efficiency.

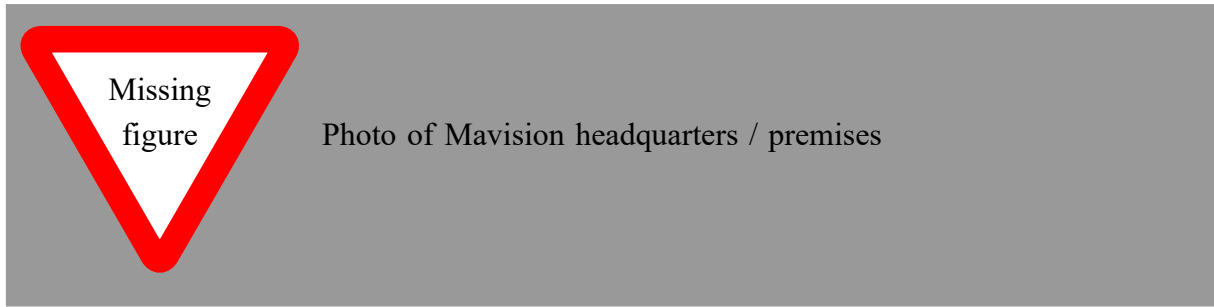


Figure 1.2. Mavision Headquarters

1.2 Project Framework

This project forms part of our end-of-studies internship, an essential step for obtaining the bachelor's degree at the Higher Institute of Technological Studies. This internship, lasting four months, took place from February 2nd to May 30th at Mavision. During this period, we were assigned to the development team.

This team is responsible for designing and maintaining software solutions that meet the company's business needs, leveraging modern technologies such as Microsoft Dynamics 365 Business Central and Flutter, and agile practices. Within this context, we worked on the development of the MES (*Manufacturing Execution System*) project, a mobile and web solution enabling intelligent management of machines and production operations on the workshop floor.

1.3 State of the Art

1.3.1 Subject Overview

With the rise of Industry 4.0 and the widespread adoption of ERP systems in manufacturing companies, the need to connect decision-making levels with floor operations has become critical. A MES (*Manufacturing Execution System*) is an information system that provides this link in real time: it supervises the execution of production orders, monitors machine status, records production declarations and provides operators and supervisors with a consolidated view of the workshop.

In this context, our project reflects a desire to provide Mavision and its industrial clients with a MES solution natively integrated with Microsoft Dynamics 365 Business Central. The primary objective is to allow operators to start and monitor their production operations from an intuitive mobile/web application, while ensuring data consistency with the ERP.

1.3.2 Problem Statement

The problem of optimising production floor operations arises with particular force in manufacturing companies that rely on an ERP system such as Microsoft Dynamics 365 Business Central. Indeed, while Business Central effectively handles production planning and order management

at the decision-making level, no unified, intelligent and dynamic solution exists to bridge the gap between the ERP and the shop floor in real time.

This gap leads to several consequences: inability to track the progress of production orders as they are being executed, manual entry of production declarations through paper routing sheets or spreadsheet files, lack of visibility for supervisors and managers on machine states and operation statuses, and insufficient traceability of actual shop-floor activity. Thus, a central question arises: how can Mavision provide its industrial clients with a solution that optimises the management of production operations, ensuring effective, accurate and real-time synchronisation between the shop floor and the ERP system?

1.3.3 Study of the Existing Situation

Following an in-depth analysis, it is clear that there is a genuine need within manufacturing companies for a centralised solution to efficiently manage production operations directly from the workshop floor.

Currently, production tracking is often carried out manually, via paper route sheets or spreadsheet files, leading to data entry errors, delays in information reporting and the absence of reliable traceability.

Supervisors and production managers have no real-time visibility into the progress of production orders, nor the current status of machines (running, paused, out of order). There is often no tool to automatically correlate production declarations with orders planned in the ERP.

1.3.4 Critical Analysis of the Existing Situation

In the context of this study, we briefly analysed the MES solution proposed by Delmia Apriso, one of the leading enterprise-grade Manufacturing Execution Systems on the market, whose interface is illustrated in the figure below.

Delmia Apriso is a comprehensive cloud-based MES platform developed by Dassault Systemes, designed for large-scale industrial enterprises. It covers the full spectrum of manufacturing operations including production execution, quality management, labour tracking and supply chain integration. While technically mature and feature-rich, it targets large multinational manufacturers with complex and highly customised deployments, resulting in significant licensing, implementation and maintenance costs that place it out of reach for small and medium-sized manufacturers.



Figure 1.3. Logo of the Delmia Apriso solution [Source: Dassault Systèmes, <https://www.3ds.com/products/delmia/apriso>, visited April 2025]

From Mavision’s perspective as a software provider, the goal is not to use an MES solution internally, but to deliver one to its industrial clients. The solution must therefore be cost-effective to sell, straightforward to deploy and maintain at client sites, and natively integrated into Microsoft Dynamics 365 Business Central, which is already Mavision’s core ERP offering. A heavyweight platform such as Delmia Apriso, which requires a separate infrastructure and lengthy implementation cycles, is incompatible with this commercial model. Table 1.1 summarises the key attributes of Delmia Apriso against the specific needs of the project.

Table 1.1. Comparison table with Delmia Apriso

Features	Project needs	Delmia Apriso
Real-time production order tracking	Yes	Yes
Machine status management	Yes	Yes
Production declaration from mobile	Yes	Partial
Native Business Central integration	Yes	No
Cross-platform mobile interface	Yes	Partial
Role management (Admin / Supervisor / Operator)	Yes	Yes
Secure token-based authentication	Yes	Yes
Adaptability to internal needs	High (custom solution)	Low (proprietary platform)
Ease of deployment at client sites	High	Low
Compatible with SME commercial model	Yes	No

1.3.5 Proposed Solution

The diagnosis of the current situation has highlighted several shortcomings and limitations, as detailed in the previous section. To address these, we propose to design and deploy an innovative MES solution natively integrated with Microsoft Dynamics 365 Business Central.

This solution consists of two complementary parts:

- **An AL back-end (Business Central):** developed in AL language, it exposes OData V4 endpoints enabling user management, token-based authentication, machine and operation tracking, as well as production declaration.
- **A Flutter application (front-end):** a cross-platform mobile and web application allowing operators and supervisors to view production orders assigned to their machine, start, pause or complete an operation, declare produced quantities, and visualise progress in real time.
- **A Node.js middleware layer:** a reverse-proxy Express 5.x server handling SSPI/Windows authentication toward Business Central and exposing a unified REST API to both the Flutter client and the Python AI agent.
- **A Python AI agent (FastAPI):** provides the conversational intelligence layer introduced in Sprint 5: intent classification, multi-provider LLM synthesis, fuzzy machine resolution, and contextual redirect actions.

The objective is to optimise every phase of production management by establishing a reliable, traceable and ergonomic digital framework, serving both operators and management.

1.3.6 Objectives

Our MES solution aims to:

- Provide real-time tracking of machine status and production operations directly from the Business Central ERP.
- Allow operators to start, pause and complete operations from an intuitive reactive interfaces.
- Record production declarations (produced quantities, scrap) and synchronise them with production orders in Business Central.
- Manage users by roles (Administrator, Supervisor, Operator) with secure token-based authentication.
- Offer supervisors a consolidated view of production progress across their work centres.

- Reduce manual data entry and the risk of errors associated with paper-based or non-integrated processes.
- Provide an extensible architecture, ready to accommodate new features (alerts, direct machine connection, etc.).

1.3.7 Adopted Methodology

The development method corresponds to an ordered and structured sequence of project phases, for efficient and optimal management.

Selection of the Agile Methodology

Agile is an iterative and collaborative working method that takes into account the initial needs of the client and any changes that may arise. Its central ingredient is customer-centred iterative development, which allows a team to gather client feedback on a regular basis and make the necessary adjustments at the right time.

Thus, the client has a better overview of work progress, leading to regular sessions that guarantee the delivery of a functional application at all times throughout the improvement cycles. Consequently, the underlying key idea is to work faster in order to satisfy a client.

Adoption of the Scrum Framework

We adopted the Scrum framework, an agile approach based on short sprints and regular ceremonies. This choice allowed us to deliver functional increments at the end of each sprint, while maintaining smooth communication with the professional and our academic supervisors.

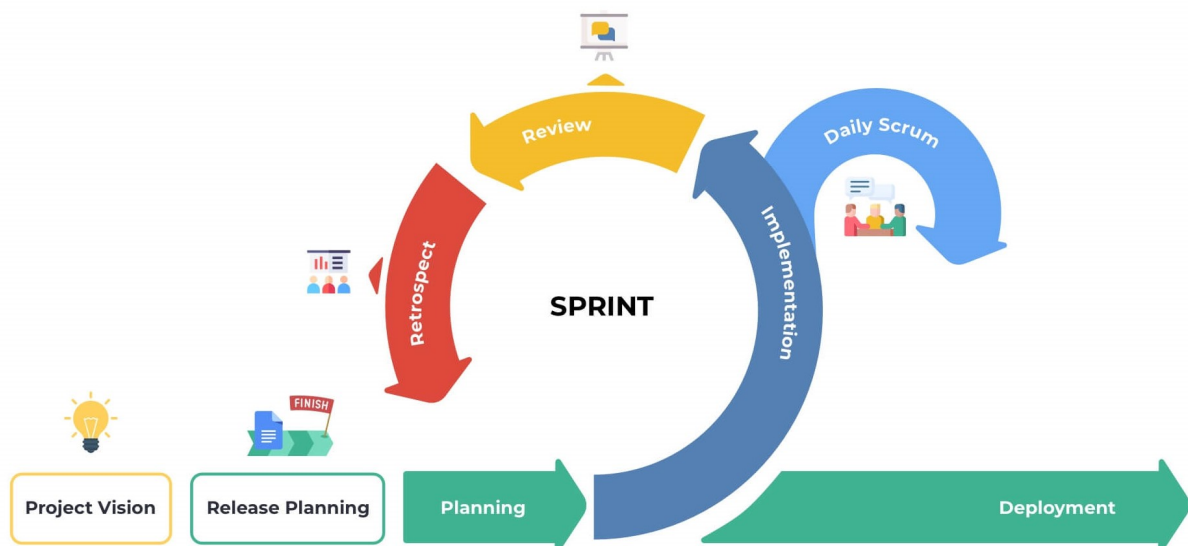


Figure 1.4. Adopted Scrum development cycle

Conclusion

In this chapter, we presented Mavision, the company where the project is being carried out. We then defined the subject context, as well as the objectives of our work and the chosen methodology. In order to ensure the report progresses logically, we will examine the existing solutions used in the company. We will then explain the functional and non-functional requirements of our solution. This will allow us to evaluate existing solutions and identify the weaknesses and strengths for which we should make improvements to our solution. Finally, we will formulate the specific requirements for our solution.

Chapter 2

Requirements Analysis and Specification

Contents

- Introduction 11
- 2.1 Requirements Analysis 11
 - 2.1.1 Identification of Actors 11
 - 2.1.2 Identification of Requirements 11
- Functional Requirements 11
- Non-Functional Requirements 13
- 2.2 Project Management with Scrum 14
 - 2.2.1 Backlog Features 14
- Domain 1: Authentication & User Management 14
- Domain 2: Machine & Production Management 17
- Domain 3: Production Execution & Traceability 20
- Domain 4: Administration & Monitoring 23
- Domain 5: AI Chat Assistant & Analytical Intelligence 24
- 2.3 Sprint Plan 26
- 2.4 Global Application Architecture 27
 - 2.4.1 Physical Architecture 27
 - 2.4.2 Software Architecture 28
- AL Back-end (Business Central) 28
- Node.js Middleware 29
- Python AI Agent 29
- Flutter Front-end 29
- 2.5 Work Environment 30
 - 2.5.1 Software Environment 30
 - 2.5.2 Development Environment 31
- Conclusion 31

Introduction

Requirements analysis and specification is a crucial phase in the information system development process. It consists, first and foremost, of clarifying the functional and non-functional requirements of the system. This step then allows a complete understanding of the subject in order to position oneself clearly, precisely and without ambiguity.

2.1 Requirements Analysis

This step allows us to understand the overall context of our project, that is to say to identify the main features and determine the actors who will interact with the system.

2.1.1 Identification of Actors

Actors are entities external to the system (people, hardware, systems) that are likely to exchange information with it. The following is a list of the actors who will interact with our system:

Table 2.1. List of MES application users

Actor	Description
Administrator	This is the person responsible for the MES platform. They manage all users (supervisors, operators), passwords and account statuses. They have access to all administration application dashboards.
Supervisor	This is an intermediate user. They can monitor the progress of production operations on their work centre, view machine status and track the progress of production orders. Mark operation as finished or cancel/interrupt unneeded operations. View machine dashboards. Have access to all the access of the operators
Operator	This is the end user of the MES application. Assigned to a work centre (<i>Work Center</i>), they can view the production orders assigned to their machine, start, pause or resume an operation, declare produced quantities, declare defective material, and scan components for consumption.

2.1.2 Identification of Requirements

At this stage, we will define the specific requirements of our application, clearly distinguishing functional requirements from non-functional requirements.

Functional Requirements

Each actor of the platform has specific expectations referred to as functional requirements. To define the functional scope, it is necessary that the conceptual solution meets these functional requirements.

- **Authentication:** This feature allows any user to log in to the platform using their Auth ID

and password. Upon first login, the user is prompted to change their temporary password. A secure session token (GUID, 12 h validity) is issued upon each successful login.

- **Two-Factor Authentication (2FA):** When enabled globally by the administrator, users must complete a second authentication step by scanning their personal badge QR code after entering their credentials. Administrators can view, print, and regenerate badge secrets for any user.
- **Application Setup:** On first launch, the user must configure the middleware host URL (entered manually or obtained by scanning a QR code) so that the application connects to the correct server instance. The host is persisted across sessions and can be changed from the login page.
- **User Management:** This feature allows the administrator to:
 - View the complete list of MES users.
 - Create a new user account by linking it to a Business Central employee and assigning them a role and work centre(s) if needed.
 - Generate and assign a temporary password.
 - Activate or deactivate an account (automatic revocation of active tokens).
 - Change a user's role (Operator, Supervisor, Administrator) and work centre assignment.
 - View, print, and regenerate a user's badge QR code for 2FA purposes.
- **Security Policy:** The administrator can configure a password rotation period (in days). A scheduled background job runs every 24 hours and flags users whose password age exceeds the configured period, forcing them to change their password on next login.
- **Machine Management:** This feature allows users to:
 - View the list of machines in a work centre with their current status (Idle, Working).
 - View the production order currently running on each machine.
- **Production Order Management:** This feature allows the Operator and the supervisor to:
 - View production orders (Planned, Firm, Released) assigned to their machine.
 - Filter and sort orders by status or date.
 - View the details of an order (item, quantity, planned dates, operation description).

- **Production Operation Management:** This feature is the core of the system. It allows the operator or Supervisor to:
 - Start an operation (validation of prerequisites: released order, free machine, previous operation completed if applicable).
 - Pause or resume an ongoing operation.
 - Declare produced quantities (validation: quantity > 0, no excess of the ordered quantity).
 - View progress in real time (produced quantity, completion percentage, operation status, scrapped units).
 - View the Bill of Materials for the current operation with component consumption
 - Report scrapped units with a reason code.
 - scan components into the operation to record consumption against the BOM.
- **Progress Dashboard:** Allows the operator and supervisor to view all active operations (Running / Paused) on a given machine, with their respective progress.
- **Password Change:** Allows any logged-in user to change their password by entering their old password and the new one.
- **AI Chat Assistant:** An embedded natural-language assistant allows operators and supervisors to query machine status, production progress, scrap data, BOM, and history without navigating the full interface. The assistant resolves ambiguous machine references, answers fleet-wide questions, surfaces operational anomalies, and provides contextual navigation shortcuts.

Non-Functional Requirements

To define the non-functional scope, it is necessary that the conceptual solution meets these non-functional requirements:

- **Performance:** The platform performs efficiently in terms of handling routine operations (login, order consultation, production declaration).
- **Security:** Implementation of a token-based authentication system (signed GUID, 12 h expiry) and role management (Admin, Supervisor, Operator) to control access to features. Passwords are stored as SHA-256 hashes with a salt. Optional two-factor authentication enforces badge QR verification as a second factor. A configurable password expiry policy forces periodic credential rotation.

- **Maintainability:** The AL back-end code is organised in layers (Tables, Enums, Codeunits, API Pages) and the Flutter code follows a layered architecture (Data, Domain, Presentation) with the Provider pattern, facilitating updates and the addition of new features.
- **Ergonomics:** The user interface is adaptive (mobile, tablet, PC) thanks to responsive layouts dedicated to each form factor, minimising the learning curve for workshop operators.
- **Portability:** The Flutter application is compiled for Android, iOS, Web, Linux, macOS and Windows from a single codebase. The Business Central back-end is deployable both on-premises and in SaaS (cloud) mode.

2.2 Project Management with Scrum

2.2.1 Backlog Features

Domain 1: Authentication & User Management

ID	User Story	Acceptance Criteria	Priority
US-1.1	As an Administrator, I need to assign access to each user so that users only access features appropriate to their role.	• Ability to assign a user as Operator or Supervisor or Administrator. • Unauthorized actions are blocked with clear error messages.	High
US-1.2	As a User (Operator / Supervisor / Administrator), I need to log into the system with my credentials so that I can access features appropriate to my role.	• User can enter username and password. • System validates credentials against the MES. • Session token is created upon successful authentication. • User is redirected to the appropriate dashboard based on role.	High
US-1.3	As an Administrator, I need to search users.	• Ability to filter users based on their role. • Ability to search users based on name or email.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-1.4	As an Administrator, I need to see a list of all MES users with their details so that I can manage accounts.	- The user list displays each account's full name, email, role, and work centre. - Clicking on the action button shows a dropdown menu with available actions(change role, generate password, view badge, and toggle activation). - The list refreshes automatically after a new user is created.	High
US-1.5	As an Administrator, I need to generate and assign a temporary password to a user so that they can log in for the first time.	- Admin can generate a random secure password for any user. - The generated password is sent to the ERP via AdminSetPassword. - The target account is flagged <i>Need To Change Password</i> after the password is set. - Success or failure is reported to the admin with a clear message.	High
US-1.6	As an Administrator, I need to change the role and work-centre assignment of an existing user so that access rights stay current.	- Admin can select a new role for any user. - Work-centre list updates based on the selected role. - All active tokens for the target user are revoked on save. - The user list refreshes after a successful change.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-1.7	As an Administrator, I need to activate or deactivate a user account so that access can be revoked without deleting the account.	• Admin can toggle the active status of any user. • Deactivation immediately revokes all active tokens. • An admin cannot deactivate their own account. • The user row updates its visual status indicator immediately.	High
US-1.8	As a User (Operator / Supervisor / Administrator), I need to complete a badge QR code scan after entering my credentials so that my identity is verified by a second factor.	• <i>2FA</i> prompt appears only when <i>TwoFA Enabled</i> is active in MES Settings. • Camera opens and reads a QR badge code automatically. • Manual entry field available as a fallback. • Session token is persisted only after successful badge verification. • Failed scan shows an error; scanner reactivates. • User can cancel and return to the login page.	High
US-1.9	As an Administrator, I need to view, print, and regenerate a user's badge QR code so that I can distribute it and invalidate a lost or compromised badge.	• Badge QR rendered from the user's <i>Badge Secret</i> via a barcode widget. • Print button generates a PDF with landscape/portrait toggle. • Regenerate action shows a confirmation dialog before replacing the secret. • New QR is displayed immediately after regeneration. • Actions are available only for active users and to the Admin role.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-1.10	As an Administrator, I need to globally enable or disable <i>2FA</i> and configure a password rotation period so that I can control the organisation's authentication security level.	• <i>2FA</i> toggle and password period field available on the <i>Settings</i> page. • Changes take effect on the next login attempt. • Settings are persisted in the MES Settings table in Business Central. • A scheduled job (every 24 h) flags users whose password age exceeds the configured period. • Unsaved changes display a persistent banner with <i>Discard</i> and <i>Save</i> actions.	High
US-1.11	As a first-time user, I need to configure the middleware host URL (or scan a QR code) so that the application connects to the correct server instance.	• <i>Pairing</i> page shown on first launch when no host is saved. • URL can be entered manually or obtained by scanning a QR code. • URL is validated (no spaces, no illegal characters). • Saved host persists across app restarts. • <i>Change Host</i> link on the login page allows re-entering the pairing screen.	High

Domain 2: Machine & Production Management

ID	User Story	Acceptance Criteria	Priority
US-2.1	As an Operator or Supervisor, I need to see the list of machines in my work center with their current status so that I can see which machines are currently active.	- Machine list is scoped to the authenticated user's work centre. - Each card shows machine name, current status (<i>Idle</i>, <i>Working</i>), active production order number, operation No, and the item name. - The list refreshes automatically every 20 seconds.	High
US-2.2	As an Operator or Supervisor, I need to view the production orders assigned to a machine so that I know what work needs to be done.	- Only <i>Planned</i>, <i>Firm Planned</i>, or <i>Released</i> orders are shown. - Each card displays order number, item description, planned quantity, planned start and end dates, operation description, and operation number.	High
US-2.3	As an Operator or Supervisor, I need to start a production operation so that the system records that the order has begun.	- Only <i>operation</i> from <i>Released</i> orders may be started. - An operation cannot be started if it is already running. - A machine cannot run two operations simultaneously. - A new MES Operation State record is created with status. - An operation cannot be started if the previous operation in the same order is not either finished, interrupted after the its start, or running but produced enough for the send ahead quantity. <i>Running</i>.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-2.4	As a Supervisor or Operator, I need to monitor the current status of all active operations on a machine so that I can follow the progress of each order.	- The Operations Progress tab shows all operations whose latest status record is <i>Running</i> or <i>Paused</i>. - Each card shows order number, operation number, current status, operation description, and last updated timestamp. - Data refreshes automatically every 5 seconds.	High
US-2.5	As an Operator or Supervisor, I need a tabbed view for a machine so that I can navigate between pending orders and active operation progress without leaving the machine context.	- Selecting a machine from the list opens a dedicated machine page. - The page provides at least two tabs: <i>Orders</i>, <i>Progress</i>, and <i>History</i>. - The active tab is visually highlighted in the navigation bar.	High
US-2.6	As an Operator or Supervisor, I need to filter and sort production orders so that I can quickly find the most relevant work.	- Orders can be searched by order number, item description, or date. - Orders can be filtered by status (<i>All</i>, <i>Planned</i>, <i>Firm Planned</i>, <i>Released</i>). - Orders can be sorted by planned start date ascending or descending. - On mobile, the status filter is accessible via a compact popup menu.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-2.7	As a Supervisor or Operator, I need to view the history of completed operations for a machine so that I can audit past production.	- The History tab shows all operations with status <i>Finished</i>, <i>Interrupted</i>, or <i>Cancelled</i>. - Each card shows order number, status badge, product name, produced quantity, start time, and end time. - The list supports free-text search and sort by start date. - Tapping a card navigates to the full operation detail page.	High

Domain 3: Production Execution & Traceability

ID	User Story	Acceptance Criteria	Priority
US-3.1	As an Operator or Supervisor, I need to declare the quantity produced in a cycle so that the system records production progress.	- Declared quantity must be positive and not exceed remaining quantity that need to be produced. - Declared quantity must be less than the amount that can be produced with the available components scanned remaining. - Each declaration creates a new progression cycle record. - Produced quantity and progress percentage update immediately.	High
US-3.2	As an Operator or Supervisor, I need to pause and resume an active operation so that interruptions are tracked accurately.	- A Running operation can be paused; a Paused one can be resumed. - A machine cannot resume if another operation is already running.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-3.3	As a Supervisor, I need to finish or cancel an operation so that the machine is released and the order is closed.	• Finishing a complete order (100%) shows a green confirmation dialog. • Cancelling either an incomplete or unstarted order shows a red warning dialog. • If the operation is started then it is marked as interrupted otherwise as cancelled • Closing sets the execution end time and inserts an Idle machine status.	High
US-3.4	As an Operator or Supervisor, I need a dedicated operation detail page with live data in one place.	• Shows status, order number, product, required and produced quantities. • Live data streams without a manual refresh.	High
US-3.5	As an Operator or Supervisor, I need to see all production cycles declared for an operation.	• Cycle table lists operator, quantity, cumulative total, and timestamp. • Records ordered newest-first with pagination. • Refreshes after each new declaration.	High
US-3.6	As an Operator or Supervisor, I need a visual chart of declarations over time to identify performance trends.	• Line chart plots cycle quantity vs. declaration time. • Touch tooltip shows operator, quantity, total production, timestamp. • Auto-scrolls to most recent data point on load and refresh.	Medium

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-3.7	As an Operator or Supervisor, I need to see the Bill of Materials for an operation to know which components are required.	• Components are colour-coded by scanned amount (the needed amount (green) / less then necessary to make a single item (red) otherwise (yellow)). • BOM data refreshes after every consumption event. • can be expanded to a dialog for a better view on larger screens. • search by name and filter by state	High
US-3.8	As an Operator or Supervisor, I need to report scrapped units with a reason code so that waste is accurately tracked.	• Scrap can only be declared when the operation is Running. • A reason code must be selected before submission. • Need to select either input material or output scrap. • the quantity of scrapped units cannot exceed the quantity that can be produced with the available components scanned remaining. • Each declaration records quantity, code, and operator.	High
US-3.9	As a Supervisor, I need to declare production or scrap on behalf of an operator so that output is attributed to the correct person.	• Supervisor role sees an operator selector in the declare dialog. • Selected operator's ID is stored with the declaration record for tracibility. • If no operator is selected, it is declared as if the supervisor made the declaration.	Medium

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-3.10	As an Operator or Supervisor, I need to scan components into an operation so that consumption is recorded against the BOM.	- any scanner connected to the device reads barcodes. - Duplicate scan increments quantity on the existing row. - Confirming scans inserts consumption records and refreshes the BOM. - After confirmation, the inventory in the ERP is updated to reflect the consumed quantity.	High
US-3.11	As an Operator or Supervisor, I need to print a label for a production order so that produced parts are correctly identified.	- Label includes DataMatrix barcode encoding order, machine, item data. - PDF generation supports landscape/portrait toggle. - Print button available only when operation is Finished or progress $\geq$ 100%.	Medium
US-3.12	As an Operator or Supervisor, I need a label printed for each declared unit so that individual pieces carry traceable information.	- One PDF page per declared unit with a label counter. - Same DataMatrix encoding as the production label. - Launched automatically after a successful production declaration.	Medium

Domain 4: Administration & Monitoring

ID	User Story	Acceptance Criteria	Priority
US-4.1	As an Supervisor, I need a performance dashboard for all machines so that I can monitor production health across the facility.	- Dashboard shows uptime %, operation cancelled or finished count, total produced, and scrap per machine. - Configurable time-range (hours back) filter.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-4.2	As an Administrator, I need a filterable activity log of all system actions so that I can audit operator and machine activity.	- Log entries includes all the relevant fields with timestamps. - Filterable by action type and time range.	High
US-4.3	As an Administrator, I need a persistent sidebar navigation so that I can move between admin sections without losing context.	- Sidebar has sections for Users & Roles, Activity Logs, system barcodes and Settings. - Active section is visually highlighted.	High
US-4.4	As any user, I need the application available in English, French, and Arabic so that I can use it in my preferred language.	- Language selector on login screen and in profile page. - All UI strings externalised; no hard-coded text. - Arabic locale activates RTL layout automatically. - Language preference persisted across sessions in the same device.	High
US-4.5	As a first-time user, I need guided coach-mark tutorials so that I can learn the interface without external documentation.	- Tutorials shown exactly once per install per screen. - Coach marks cover: machine list, machine detail tabs, operation detail, and admin dashboard. - Localised skip button text.	Medium

Domain 5: AI Chat Assistant & Analytical Intelligence

ID	User Story	Acceptance Criteria	Priority
US-5.1	As an Operator or Supervisor, I need a natural-language chat assistant so that I can query machine status, production progress, and operational data without navigating the full UI.	• Chat panel opens as a side overlay on wide screens and as a dialog on mobile. • Assistant answers questions about machines, orders, live operations, BOM, history, and scrap. • Responses are scoped to the user's own work centres (access control enforced). • Multi-turn conversation history is maintained within the session. • Conversation can be cleared by the user.	High
US-5.2	As an Operator or Supervisor, I need the assistant to resolve ambiguous machine references (e.g. "Fraiseuse 3") so that I do not need to know exact machine codes.	• Machine names, partial codes, and digit-only references are matched to the correct machine using a five-tier fuzzy resolution strategy. • High-confidence matches ($\geq 85\%$) are resolved silently. • Low-confidence matches present up to 3 candidates for disambiguation. • Machine access control is enforced after resolution.	High
US-5.3	As an Operator or Supervisor, I need the assistant to answer fleet-wide questions (e.g. "which machines are running?") so that I get a consolidated view without visiting each machine individually.	• Queries about all machines trigger a parallel fan-out across work centres. • Results are filtered by running / idle / overdue / scrap status as requested. • Fan-out is capped at 12 machines to control response time. • Fleet summary includes machine count, utilisation percentage, and active orders.	High

Continued on next page

ID	User Story	Acceptance Criteria	Priority
US-5.4	As an Operator or Supervisor, I need the assistant to provide contextual navigation shortcuts so that I can open a machine, operation, or dashboard directly from the chat response.	• Chat responses include up to 4 action buttons when a redirect is relevant. • Supported targets: machine detail, operation detail, machine list, dashboard, and operation history. • Tapping an action navigates to the corresponding screen. • Action buttons appear only on the last assistant message.	Medium
US-5.5	As a Supervisor, I need the assistant to proactively highlight anomalies (overdue orders, scrap spikes, idle operators) so that I can act before problems escalate.	• Scrap rate above 5% is flagged as a warning; above 15% as critical. • Scrap spikes (recent rate $> 2.5 \times$ baseline) are explicitly mentioned. • Overdue orders (past planned end) and at-risk orders (< 4 h remaining) are highlighted. • Paused operations exceeding the configured threshold are surfaced.	High

2.3 Sprint Plan

The project was organised into five two-week sprints, each delivering a functional increment verified by a sprint review with the professional supervisor.

Table 2.7. MES project sprint plan

Sprint	Domain	Scope
Sprint 1	Authentication & User Management	Secure login, 2 factor authentication (2FA), change password, profile page and session token management, role-based access control, administrator user creation, password generation and reset, role and work-centre change, account activation/deactivation, badge management (view, print, regenerate), password expiry policy configuration, export users and first-launch host pairing.

Continued on next page

Sprint	Domain	Scope
Sprint 2	Machine Monitoring & Production Order Management	Real-time machine status tracking, production order list per machine, operation start, tabbed machine view with Orders / Progress / History tabs, order filtering and sorting.
Sprint 3	Production Execution & Traceability	Production cycle declarations, pause/resume/finish/cancel/interrupt operations, operation detail page with live data, production chart, Bill of Materials visibility, component barcode scanning, scrap declaration, supervisor proxy declaration, and label printing.
Sprint 4	Administration and System Monitoring & Configuration	Monitoring dashboard and Administrator activity log, barcode view and printing, user export, multi-language support (EN/FR/AR) and RTL layout, in-app onboarding tutorials.
Sprint 5	AI Assistant & Analytical Intelligence	Natural-language chat assistant, Node.js reverse proxy middleware, Python AI agent with intent classification, multi-provider LLM support, fuzzy machine resolution, composite fan-out queries, data enrichment, anomaly detection (scrap spikes, overdue orders), and contextual redirect actions.

2.4 Global Application Architecture

2.4.1 Physical Architecture

The physical architecture of the MES system rests on three main nodes:

- **Business Central Server (on-premises / SaaS):** hosts the AL extension that exposes OData V4 endpoints and the business REST APIs. In on-premises mode, the server runs on a BC210 instance accessible on port 7048. In SaaS mode, the base URLs follow the schema `api.businesscentral.dynamics.com/v2.0/<tenantId>/<environment>/ODataV4/`.
- **Node.js Middleware:** a reverse-proxy layer running between the Flutter client and Business Central. It handles SSPI/Windows authentication toward BC, exposes a unified REST API consumed by Flutter, and routes AI chat requests to the Python AI agent.
- **Flutter Client (mobile / web / desktop):** application compiled for Android, iOS, Web or

desktop, communicating with the Node.js middleware via HTTP requests. The middleware proxies these to the BC OData V4 endpoints.

- **A Python AI agent (Server):** a module that acts as an interface between the application and the llm model chosen, includes intent classification tool calls.

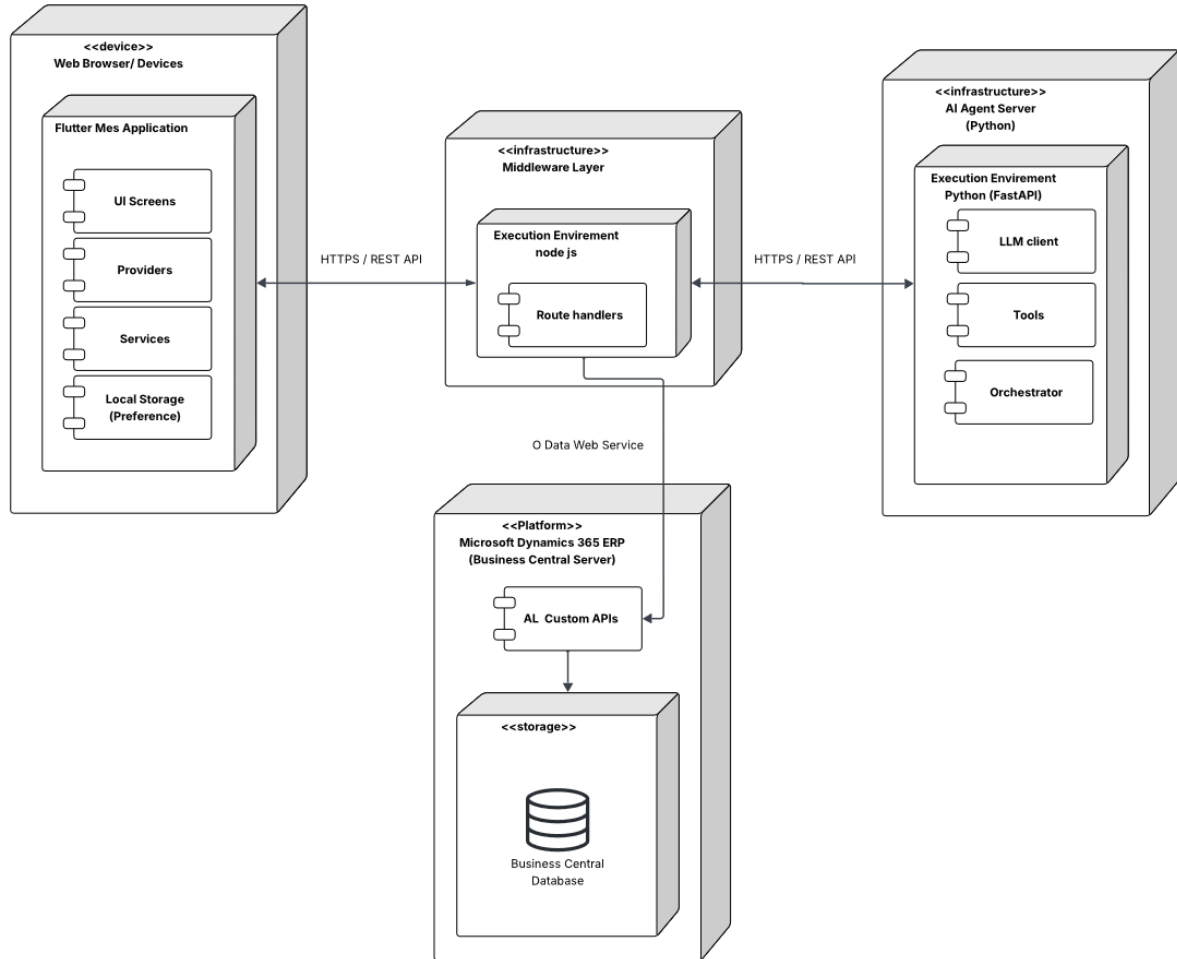


Figure 2.1. MES System Physical Architecture

2.4.2 Software Architecture

The software architecture of the system is organised around four distinct layers.

AL Back-end (Business Central)

The back-end is structured in five layers:

- **Tables (1-Tables):** define the persistent data model; MES User, MES Auth Token, MES Machine Status, MES Operation State, MES Operation Scrap, MES Operation Execution, MES Operation Progression, MES Settings, MES Component Scan, and MES User Execution Interaction.
- **Enums (2-Enum):** define the enumerated types; MES User Role (Operator, Supervisor,

Admin), MES Machine Status (Idle, Working), MES Operation State (Running, Paused, Finished, Cancelled, Interrupted), MES Token State (Revoked, Pending, Active).

- **Codeunits (3-CodeUnit):** contain the business logic; MES Auth Mgt (authentication, tokens), MES Password Mgt (SHA-256 hashing), MES Machine Fetch (read operations), MES Machine Write (state orchestration), MES Machine Insert (table writes), MES Machine Validation (business rule guards), MES Authentication (user authentication), and the *Mes Web Service* (wrappers exposed as web services).
- **API Pages (4-API):** expose data for reading/writing via the BC REST API; employees, work centres.
- **Pages (5-Pages):** administration and debugging interfaces in the BC client (lists, cards, API debug page, etc...).

Node.js Middleware

The Node.js middleware is the network bridge between the Flutter client and Business Central. It handles SSPI/Windows authentication for BC OData V4 requests, exposes a unified REST API to the Flutter application, and routes AI chat requests (POST /api/ai/chat) to the Python AI agent.

Python AI Agent

The Python AI agent (FastAPI) provides the conversational intelligence layer. It classifies user intent, executes tool chains against Business Central via the Node.js middleware, enriches results with data-analysis helpers, and synthesises natural-language replies using a configurable multi-provider LLM client.

Flutter Front-end

The Flutter front-end follows a three-layer architecture:


- **Data:** contains data models (models) and HTTP services (services) that communicate with BC endpoints via the `http` library.
- **Domain:** contains the providers (Provider pattern) that expose the application state to widgets — `AuthProvider`, `MesUserProvider`, `MesMachinesProvider`, `MachineordersProvider`, etc.
- **Presentation:** contains the pages and widgets of the user interface, organised by functional domain (auth, admin, machine) with dedicated responsive layouts (mobile, tablet, PC).

2.5 Work Environment

2.5.1 Software Environment

Table 2.8 summarises the main tools and technologies used in this project.

Table 2.8. MES project software environment

Logo	Tool / Technology	Role in the project
	Microsoft Dynamics 365 Business Central	ERP platform hosting the AL back-end and business data
	AL Language (Application Language)	Development of the BC extension (tables, codeunits, API pages)
	Flutter (Dart)	Development of the cross-platform mobile/web application
	Visual Studio Code	Primary development environment (AL and Flutter)
	Git / GitHub	Version control and collaboration
	Postman	Testing and validation of OData V4 endpoints
	Python (FastAPI)	AI agent layer: intent classification, multi-provider LLM synthesis, fuzzy machine resolution, and analytics enrichment.
	Node.js (Express 5.x)	Reverse-proxy middleware: Windows SSPI authentication toward Business Central, unified REST API for Flutter and Python clients.
	lucid chart	UML and system architecture diagramming

2.5.2 Development Environment

[To be completed: include workstation specifications (OS, RAM, CPU), tool versions (Flutter SDK, Dart SDK, Business Central version, VS Code extensions), and any specific configuration details such as Docker setup or BC on-premises instance parameters.]

Conclusion

In this chapter, we analysed and specified the functional and non-functional requirements of the MES system, identified the actors and their interactions, and presented the overall architecture of the solution. We also described the work environment and the adopted Scrum methodology. The following chapters detail the work carried out sprint by sprint, presenting the conceptual aspects and the results obtained at the end of each iteration.

Chapter 3

Sprint 1 Authentication & User Management

Contents

Introduction	33
3.1 Sprint Backlog	33
3.2 Design	38
3.2.1 Use Case Diagram	38
3.2.2 Textual Use Case Description	40
3.2.3 Sequence Diagrams	41
3.2.4 Class Diagram	49
3.3 Implementation	50
3.3.1 Backend Implementation	50
Backend Structure Overview	50
MES User Table Implementation	51
Authentication Token Table	52
MES Settings Table	52
Password Management and Encryption	53
Authentication Logic — Login, Logout, and Change Password	53
Password Expiry Worker	54
3.3.2 REST API and Web Services Implementation	54
OData Functions and Web Service Configuration	54
3.3.3 Frontend Implementation	54
Service Layer (API Communication)	55
State Management Layer using Provider	55
User Interface	56
3.4 Testing and Validation	62
3.4.1 Integration testing	62
Conclusion	62

Introduction

This sprint focuses on delivering a complete authentication and user management module for the *MES* application. The primary goal is to develop a secure authentication system covering *login*, *logout*, and password management, alongside role-based page access control to ensure each user can only reach features appropriate to their role.

In addition, the Administrator is given the ability to add new MES users, generate temporary secure passwords on their behalf for the first login, change a user's role and work-centre assignment, export users into a file, and activate or deactivate accounts. The sprint also delivers two-factor authentication via badge QR code scanning, administrator badge management (view, print, regenerate), a configurable password expiry policy, and the first-launch host pairing screen that connects the Flutter application to the correct Node.js middleware instance.

3.1 Sprint Backlog

This sprint covers **Domain 1: Authentication & User Management**.

Table 3.1. Story Backlog

ID	User Story	Tasks
US-1.1	As an Administrator, I need to assign a user account for each employee so that users only access features appropriate to their role.	<i>Business Central (AL)</i> • Implement the functions <code>AdminCreateUser()</code> and <code>AdminSetActive()</code> in codeunit MES Unbound Actions. • Expose <code>AdminCreateUser()</code> and <code>AdminSetActive()</code> through codeunit MES Web Service. <i>Flutter</i> • Implement <code>ApiService</code> to consume the new endpoints. • Implement <code>MesUserService</code> to consume <code>fetchMesUsers()</code> and <code>AdminCreateUser()</code> endpoints. • Create provider <code>MesUserProvider</code> to manage its state. • Create widget <code>AddUserDialog</code>. • Implement role-based navigation in <code>_AuthGate</code>.

Continued on next page

ID	User Story	Tasks
US-1.2	As a User (Operator / Supervisor / Administrator), I need to log into and out of the system with my credentials so that I can access features appropriate to my role.	<i>Business Central (AL)</i> • Create the tables MES User and MES AuthToken. • Create enum MES User Role. • Implement functions MakeSalt(), HashPassword(), and VerifyPassword() in codeunit MES Password Mgt. • Implement functions CreateUser(), SetPassword(), ValidateCredentials(), IssueNewToken(), ValidateToken(), TouchToken(), Logout(), ValidateChangePassword(), ValidateAdminToken(), SetActive(), and CleanupExpiredTokens() in codeunit MESAAuthMgt. • Implement functions Login(), Logout(), Me(), and ChangePassword() in codeunit MES Unbound Actions. • Expose Login(), Logout(), Me(), and ChangePassword() in codeunit MES Web Service. <i>Flutter</i> • Implement ApiService to consume the new endpoints. • Create provider AuthProvider to manage its state. • Implement authentication routing in _AuthGate. • Create page LoginPage. • Create a log out button.
US-1.3	As an Administrator, I need to search users.	<i>Flutter</i> • Implement user search in AddUserPage. • Implement role filtering in AddUserPage.

Continued on next page

ID	User Story	Tasks
US-1.4	As an Administrator, I need to see a list of all MES users with their details so that I can manage accounts.	<i>Business Central (AL)</i> • Create the function <code>fetchAllMESUsers</code> in codeunit MES Unbound Actions. • Expose <code>fetchAllMESUsers</code> through codeunit MES Web Service. <i>Flutter</i> • Create model <code>MesUser</code>. • Implement <code>MesUserService</code> to consume the new endpoint. • Implement <code>MesUserProvider</code> to manage its state and its streams. • Implement user list display in <code>AddUserPage</code>.
US-1.5	As an Administrator, I need to generate and assign a temporary password to a user so that they can log in for the first time.	<i>Business Central (AL)</i> • Implement function <code>AdminSetPassword()</code> in codeunit MES Unbound Actions. • Expose <code>AdminSetPassword()</code> through codeunit MES Web Service. <i>Flutter</i> • Create the widgets <code>GeneratePasswordDialog</code> and <code>EmployeeAvatar</code>. • Update <code>ApiService</code> to consume <code>adminSetPassword()</code>. • Update <code>AuthProvider</code> to account for the new functions in the service.
US-1.6	As an Administrator, I need to change the role and work-centre assignment of an existing user so that access rights stay current.	<i>Business Central (AL)</i> • Implement function <code>AdminChangeUserRole()</code> in codeunit MES Unbound Actions. • Expose <code>AdminChangeUserRole()</code> through codeunit MES Web Service. <i>Flutter</i> • Update <code>MesUserService</code> to consume <code>changeUserRole()</code>. • Update <code>MesUserProvider</code> to account for <code>changeUserRole()</code>. • Create widget <code>ChangeRoleDialog</code>.

Continued on next page

ID	User Story	Tasks
US-1.7	As an Administrator, I need to activate or deactivate a user account so that access can be revoked without deleting the account.	<i>Flutter</i> • Update ApiService to account for toggleUserActiveStatus(). • Update AuthProvider to account for toggleUserActiveStatus(). • Integrate activate and deactivate actions in AddUserPage.
US-1.8	As a User (Operator / Supervisor / Administrator), I need to complete a badge QR code scan after entering my credentials so that my identity is verified by a second factor.	<i>Business Central (AL)</i> • Add field Badge Secret (Text[64]) to table MES User. • Implement GenerateBadgeSecret() in MES User.OnInsert. • Implement VerifyBadge(), GetBadgeSecret(), and RegenerateBadgeSecret() in codeunit MESAAuthMgt. • Expose the three procedures through codeunit MES Web Service. • Add field TwoFA Enabled (Boolean) to table MES Settings. • Return twoFAEnabled flag in the Login() response. <i>Flutter</i> • Update AuthProvider.login() to detect twoFAEnabled flag and hold pending session state. • Create page/dialog BadgeScanDialog with live camera feed (mobile_scanner) and manual entry fallback. • Implement verifyBadge(), cancelBadgeScan() in AuthProvider. • Integrate badge verification step into _AuthGate routing logic.

Continued on next page

ID	User Story	Tasks
US-1.9	As an Administrator, I need to view, print, and regenerate a user's badge QR code so that I can distribute it and invalidate a compromised badge.	<i>Flutter</i> • Create dialog <code>UserBadgeDialog</code> rendering badge QR via <code>barcode_widget</code> package. • Implement <code>getBadgeSecret()</code> and <code>regenerateBadge()</code> in <code>AuthProvider</code>. • Implement PDF export in <code>UserBadgeDialog._exportPdf()</code>. • Add <i>View Badge</i> action to <code>UserActionMenu</code> (active users only).
US-1.10	As an Administrator, I need to globally enable or disable 2FA and configure a password rotation period so that I can control the organisation's authentication security level.	<i>Business Central (AL)</i> • Add field <code>PW change period (Duration)</code> to table <code>MES Settings</code>. • Implement <code>GetMESSettings()</code> and <code>UpdateMESSettings()</code> in codeunit <code>MES Settings Functions</code>. • Expose both procedures through codeunit <code>MES Web Service</code>. • Implement codeunit <code>MES Password Expiry Worker</code> (Job Queue, runs every 24 h) that flags users whose password age exceeds the configured period. • Register the worker in <code>MES Setup.RegisterPasswordExpiryWorker()</code>. <i>Flutter</i> • Create model <code>SettingModel</code> with <code>pwChangePeriod</code> and <code>twoFAEnabled</code> fields. • Create <code>SettingService</code> consuming <code>fetchSettings</code> and <code>updateSettings</code> endpoints. • Create <code>MesSettingsProvider</code> managing fetch, dirty-state detection, and save. • Create page <code>MesSettingsPage</code> with toggle and numeric input; animated dirty banner with <i>Discard / Save</i> actions. • Add <i>Settings</i> section to <code>AdminPage</code> sidebar.

Continued on next page

ID	User Story	Tasks
US-1.11	As a first-time user, I need to configure the middleware host URL (or scan a QR code) so that the application connects to the correct server instance.	<i>Flutter</i> • Create page ParingPage shown on first launch when <code>AppConstants.host</code> is empty. • Implement URL validation (no spaces, no backslash, no illegal characters). • Implement QR scanning via <code>QrScannerDialog</code> to populate the host field. • Persist accepted host via <code>AppConstants.changeHost()</code> (<code>SharedPreferences</code>). • Add <i>Change Host</i> link on <code>LoginPage</code> for reconfiguration. • Add <code>AppConstants.loadHost()</code> call to the app initialisation sequence in <code>main()</code>.
US-1.12	As an Administrator, I need to be able to export the list of users so that I can use the info in other applications or processes.	<i>Flutter</i> • implemented export user service so when clicking the export button and excel file is created with all user info • Updated the Add User Page to contain the button export users

3.2 Design

3.2.1 Use Case Diagram

The UML Use Case Diagram (Figure ??) shows the three primary actors (Operator, Supervisor, Administrator) and their interactions with the *MES* authentication and user management system. In addition to the core login, logout, change password, and user creation flows, the diagram includes the *Change Role / Work Centre* and *Activate / Deactivate Account* use cases available exclusively to the Administrator, as well as the *Badge QR Scan* two-factor verification step and the *Paring / Host Configuration* first-launch flow.

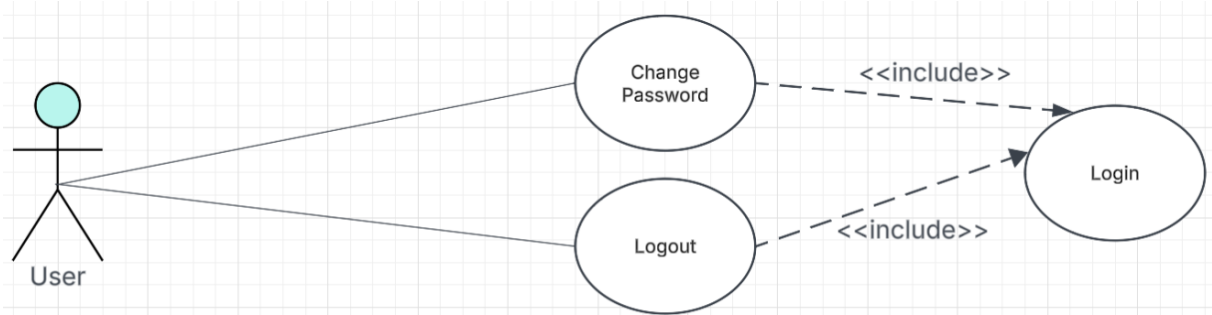


Figure 3.1. UML Use Case Diagram — Authentication.

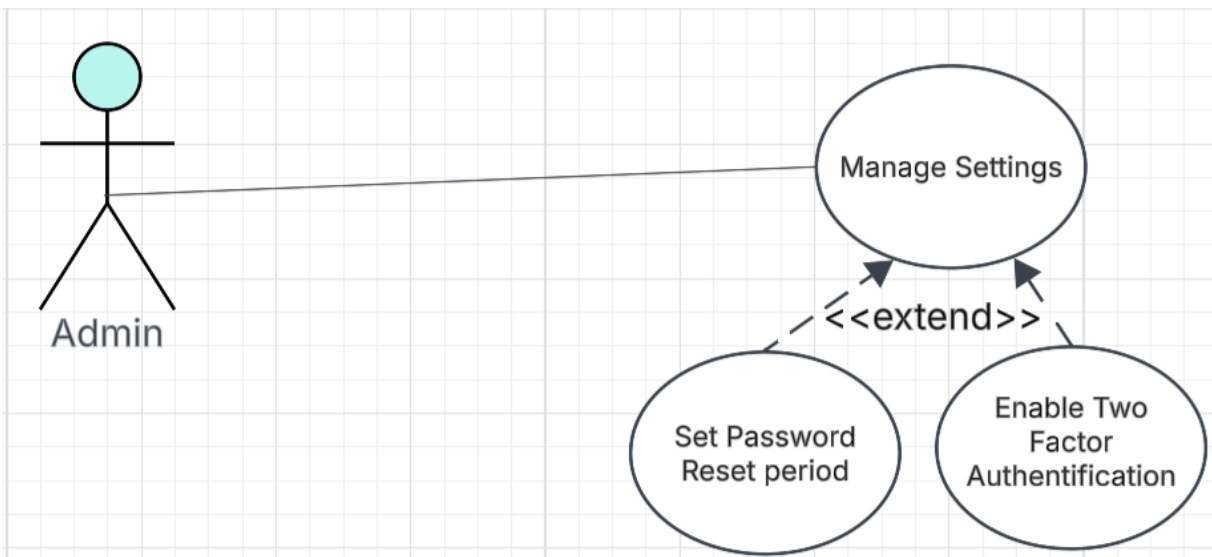


Figure 3.2. UML Use Case Diagram — Manage Settings.

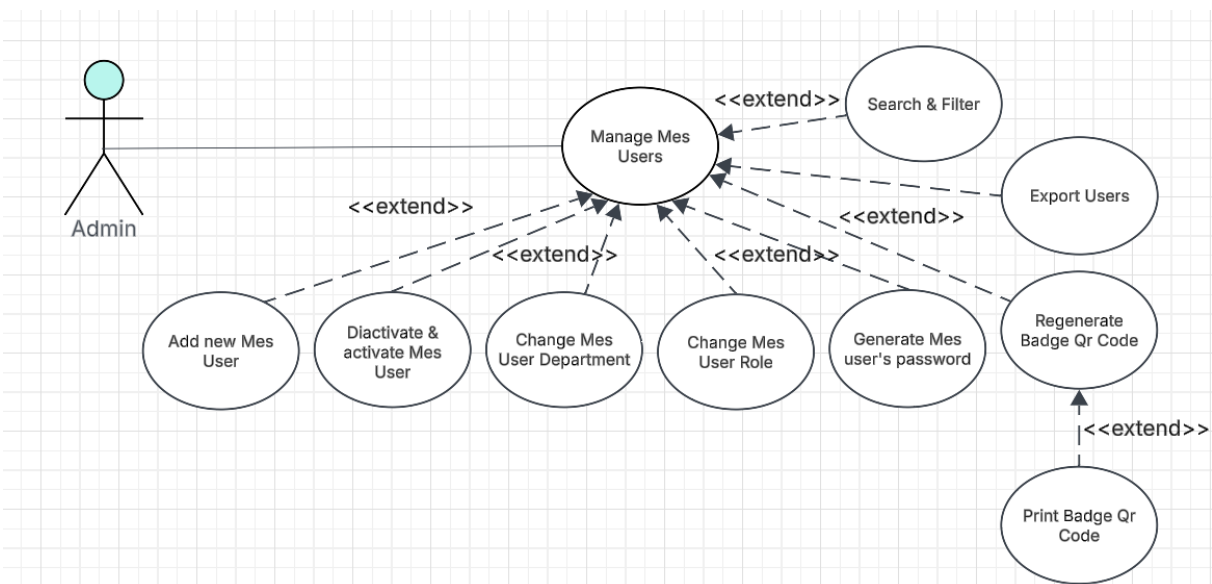


Figure 3.3. UML Use Case Diagram — Manage Users.

3.2.2 Textual Use Case Description

Use Case Name	Login
Primary Actors	Operator, Supervisor, Administrator
Preconditions	• The employee account exists in the ERP system. • The user has an assigned role and department. • The account must have a password. • The user account is active.
Postconditions	• If the credentials are valid, the user is successfully authenticated. • If <i>2FA</i> is enabled, the badge QR scan step is completed before a session token is issued. • A session token is generated and stored securely. • The user is redirected to the appropriate dashboard based on their role (Admin or MES interface). • If the <i>need change password</i> flag is set to true, they are redirected to the <i>Change Password</i> page. • If the credentials are invalid, access is denied and an error message is displayed.
Main Scenario	1. The user launches the application. 2. If no host URL is configured, the system displays the <i>Paring</i> page, the user enters or scans the middleware URL. 3. The system displays the <i>login screen</i>. 4. The user enters <i>Auth ID</i> and <i>password</i>. 5. The system automatically detects the device ID. 6. The user clicks the <i>Login</i> button. 7. The system validates the credentials against the MES database. 8. The system generates a secure session token, If <i>2FA</i> is enabled it is set to state <i>Pending</i> otherwise it is set to state <i>Active</i>. 9. If <i>2FA</i> is enabled, the system opens the <i>Badge Scan</i> dialog, the user scans their badge QR or enters the code manually. 10. The system verifies the badge secret and sets the token state to <i>Active</i>. 11. The system checks the user role. 12. The system redirects the user to the appropriate interface(admin dashboard, or machine list).

3.2.3 Sequence Diagrams

The following sequence diagrams illustrate the communication flow between the Flutter front-end, the Business Central OData layer, and the AL business logic for each authentication flow.

Figure 3.4 depicts the login flow, in which the user submits credentials, the AL layer validates them against the Business Central user store, and the application either returns a structured error or issues a session token (or, when *2FA* is enabled, holds a pending state until the badge scan is verified) and redirects the user to the appropriate page based on their role and password-change flag.

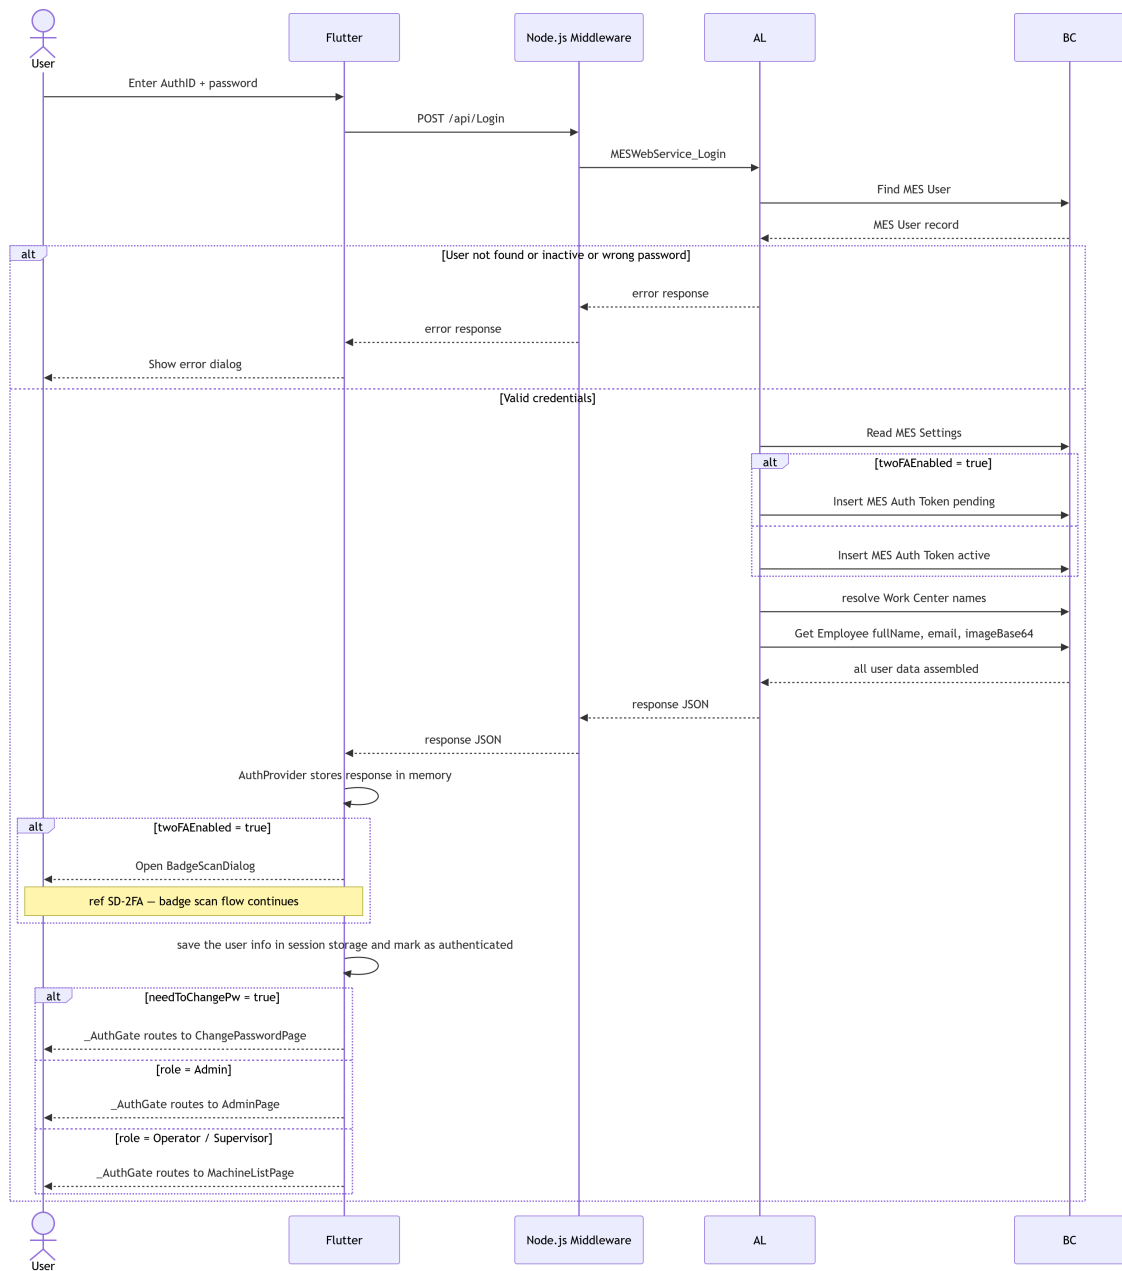


Figure 3.4. SD-01: Login.

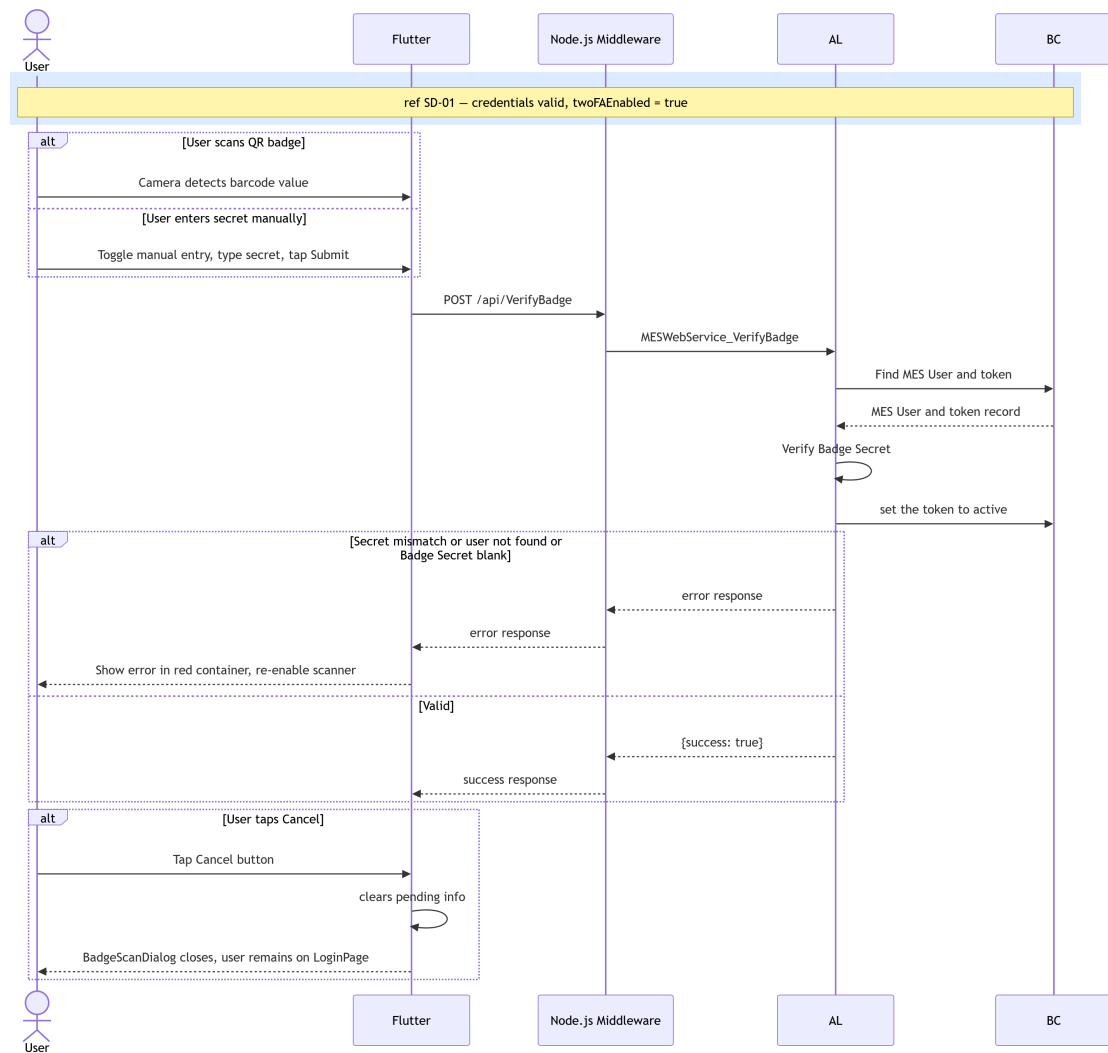


Figure 3.5. SD-2FA: Badge Scan.

Figure 3.6 presents the token validation flow, which is invoked by the AL backend before processing any authenticated request. The backend retrieves the token record from Business Central, verifies its validity and expiry, confirms that the associated user account is still active, and either updates the LastSeenAt timestamp or returns an error that forces the Flutter client to redirect the user to the login page.

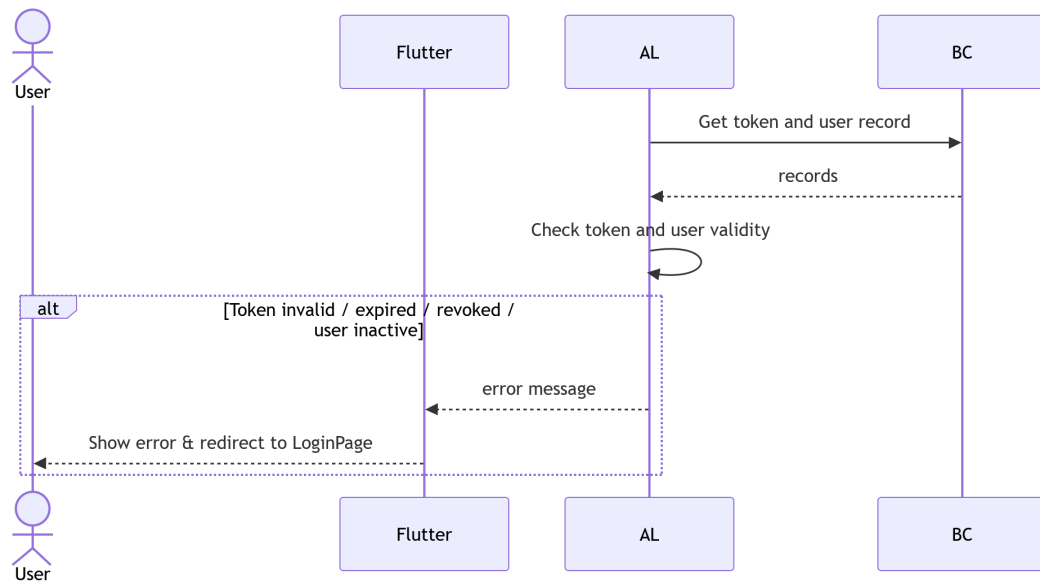


Figure 3.6. SD-02: Token Validation.

Figure 3.7 illustrates the logout flow, in which the Flutter client sends a logout request, the AL layer retrieves and revokes the current session token in Business Central, and the client clears its local AuthProvider state before navigating back to the login page.

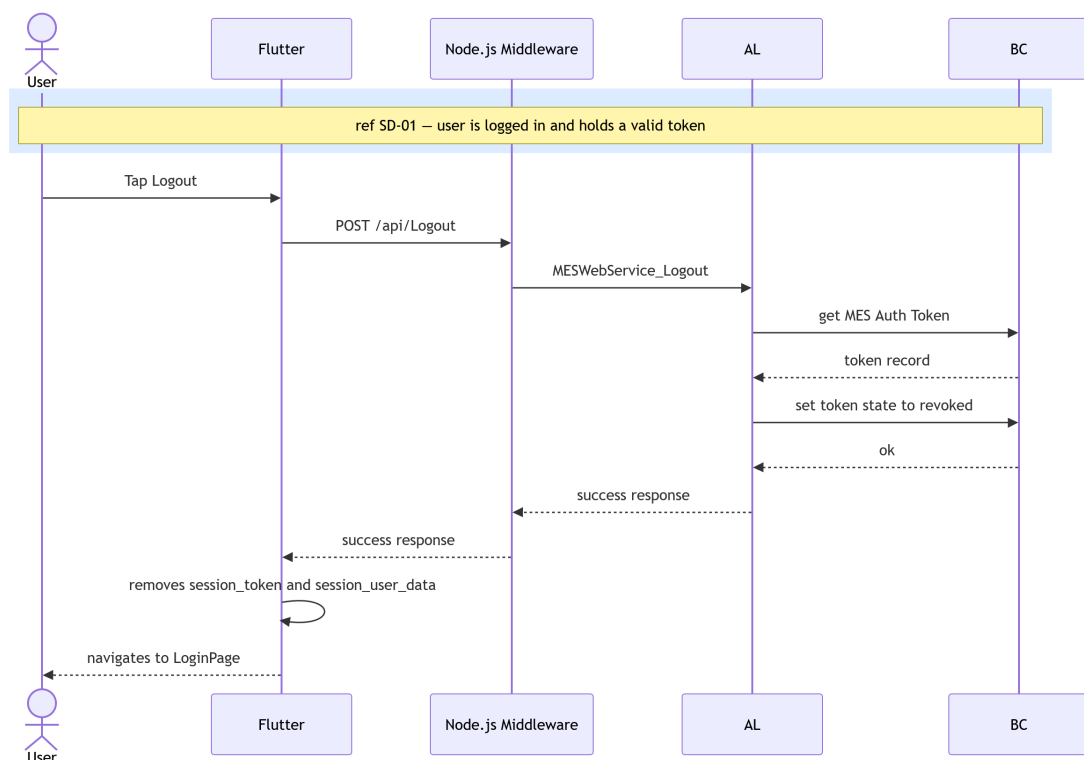


Figure 3.7. SD-03: Logout

Figure 3.8 describes the change-password flow. The Flutter client first validates locally that the two password fields match and satisfy the strength rules, then forwards the request to the AL

layer, which re-validates the token (SD-02), verifies the current password hash, checks the new password strength, and — on success — updates the credential record in Business Central and revokes all existing tokens for the account.

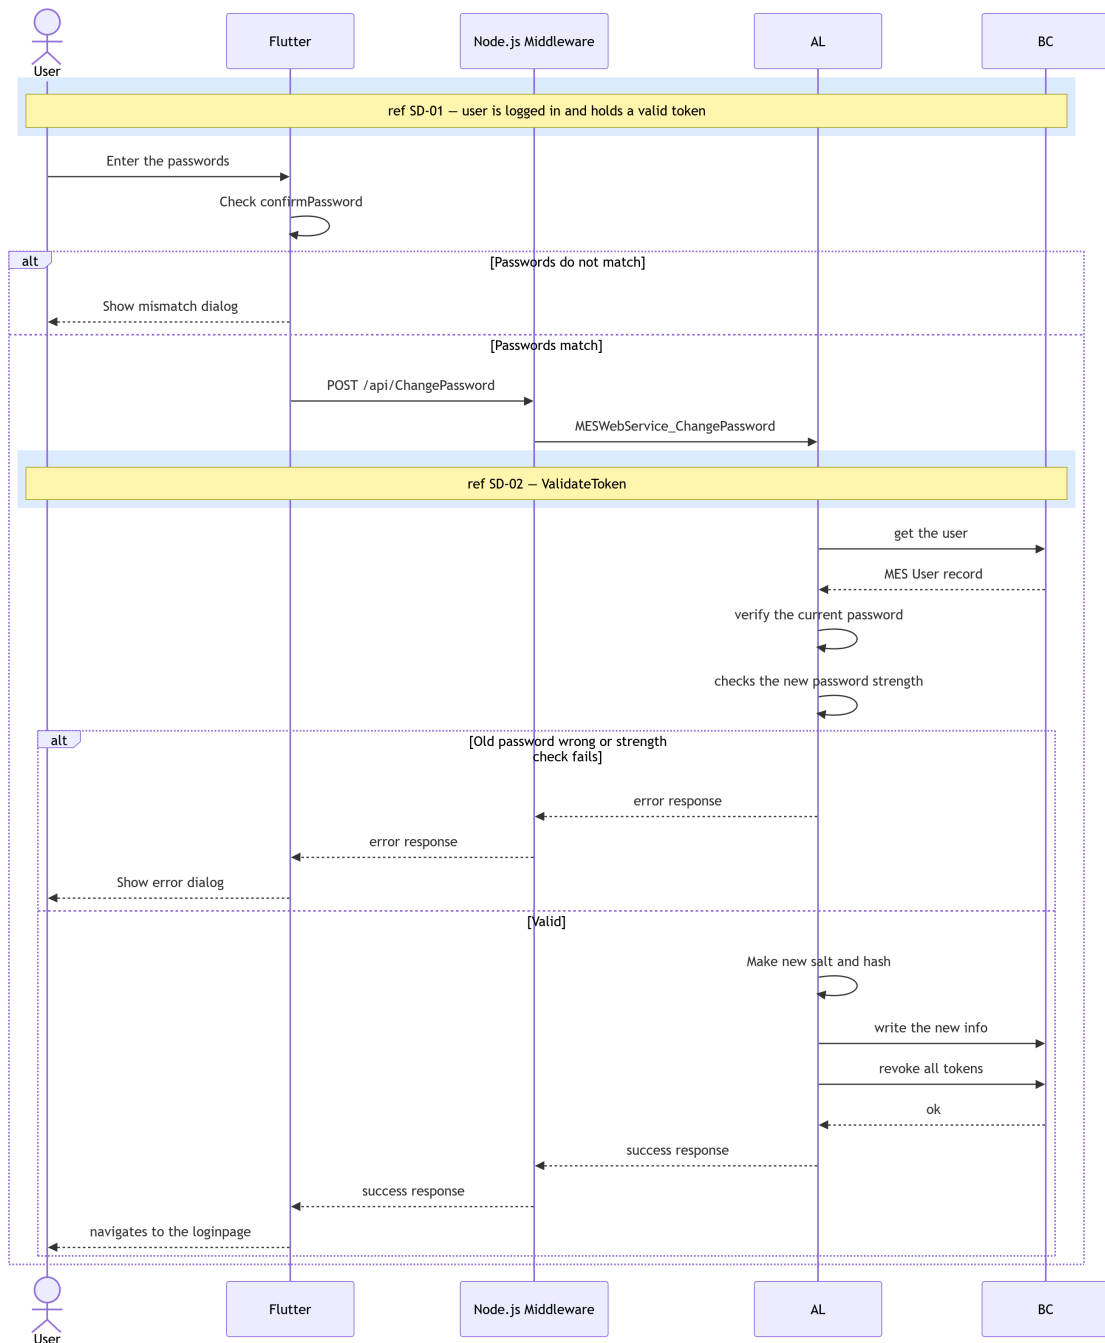


Figure 3.8. SD-04: Change Password

Figures 3.9 through 3.12 cover the four administrator user-management operations. All four follow the same pattern: the Flutter client sends an admin-scoped request, the AL layer validates the token and confirms that the caller holds the Admin role (SD-02), executes the requested Business Central write operations, and triggers a reactive refresh so that the updated user list is reflected immediately in the UI.

Figure 3.9 shows the user creation flow, in which the AL layer inserts a new *MES User* record with *IsActive* and *NeedToChangePw* set to *true*, then iterates over the supplied work-centre list to create the corresponding assignment records.

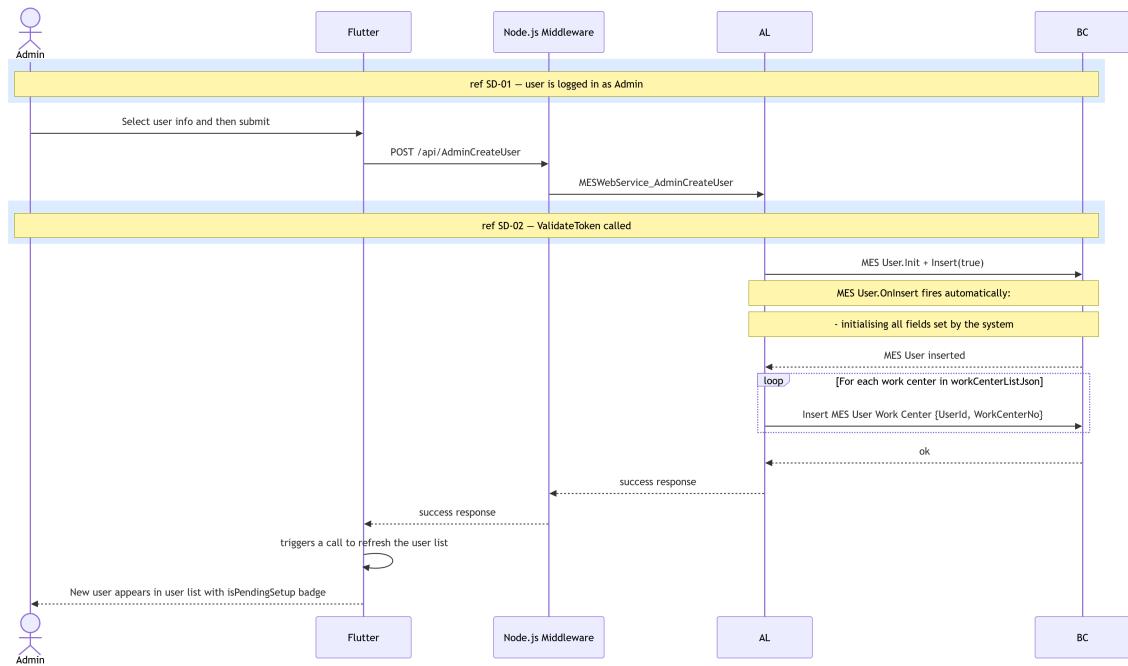
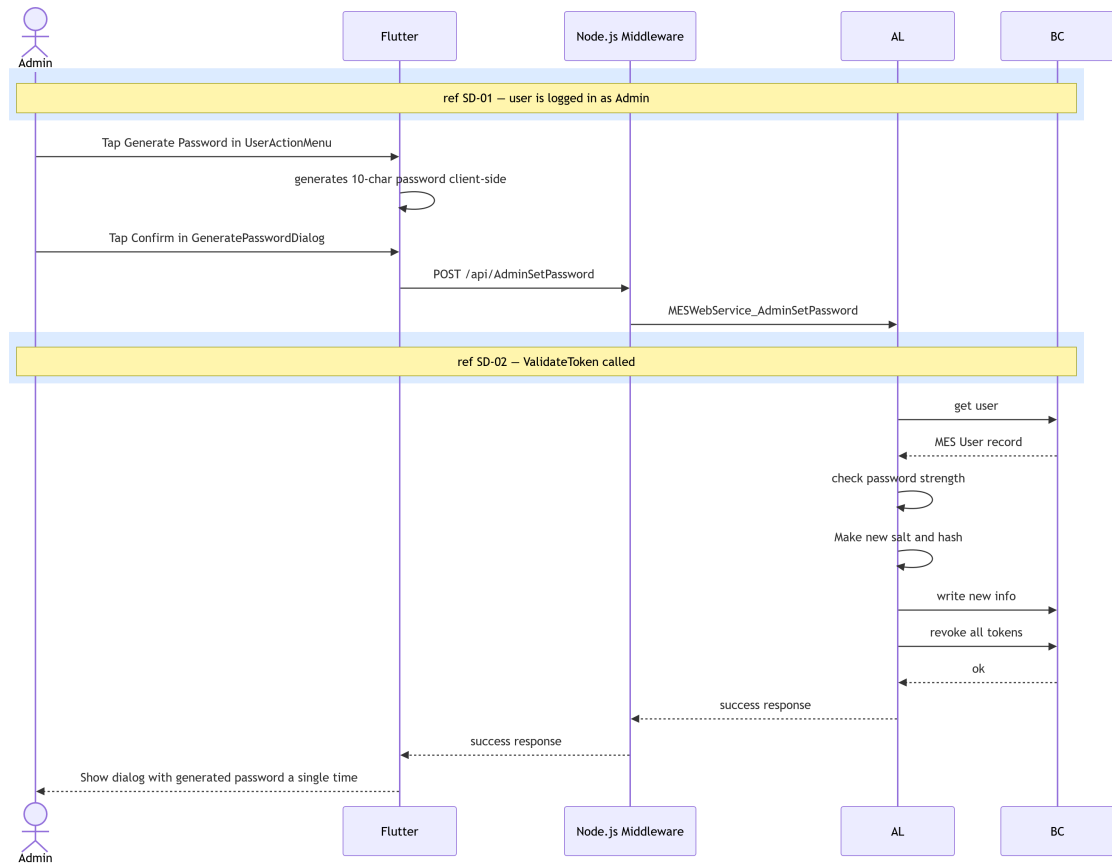


Figure 3.9. SD-05: Admin - Create User.

Figure 3.10 depicts the admin set-password flow. The administrator generates a temporary credential, the AL layer marks the target account as requiring a password change on next login, revokes all active tokens for that account, and returns the new credential to the Flutter client as copyable text.

**Figure 3.10.** SD-06: Admin - Set Password.

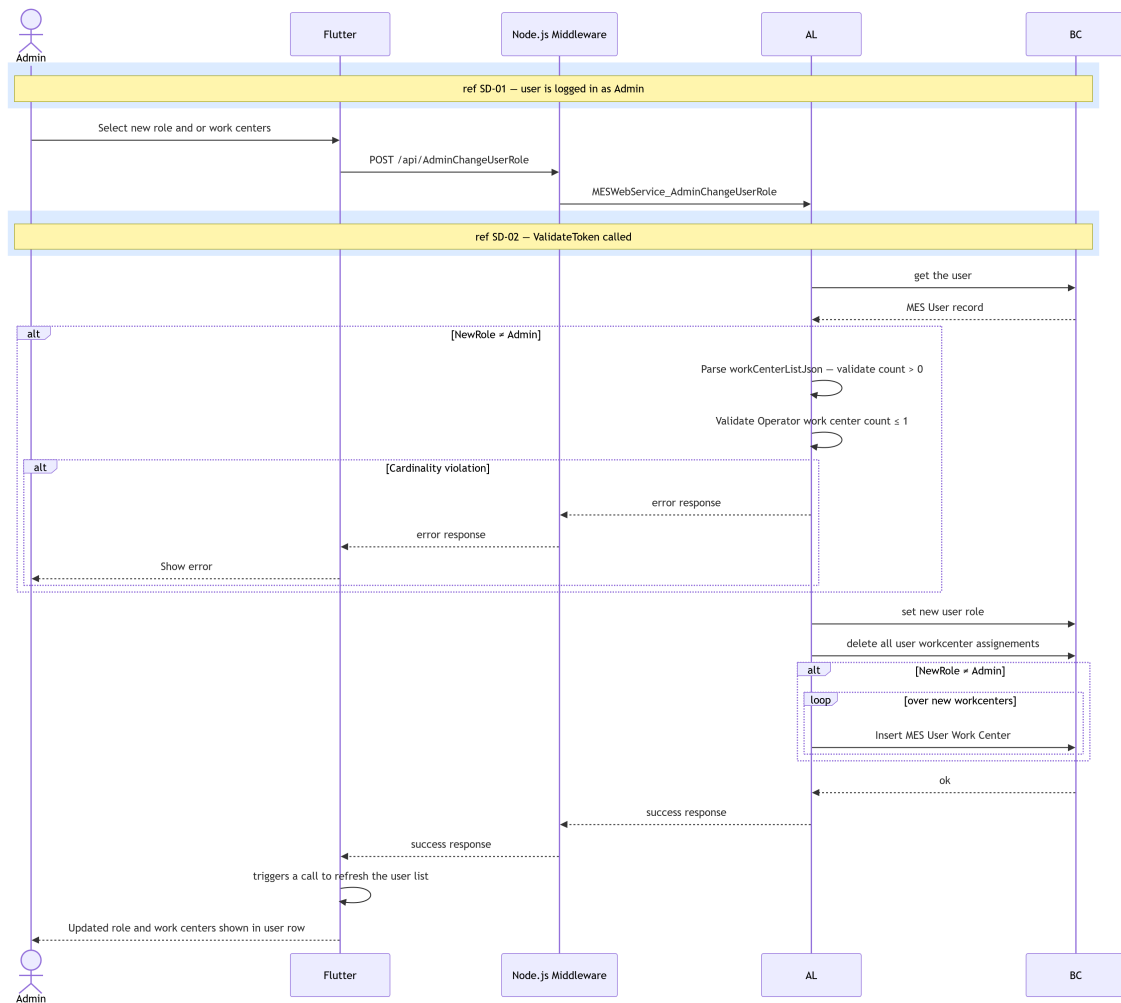


Figure 3.11. SD-07: Admin - Change Role / Work Centre.

Figure 3.12 presents the account activation and deactivation flow. When deactivating an account, the AL layer additionally revokes all active session tokens for that user, ensuring that any currently authenticated sessions are immediately invalidated.

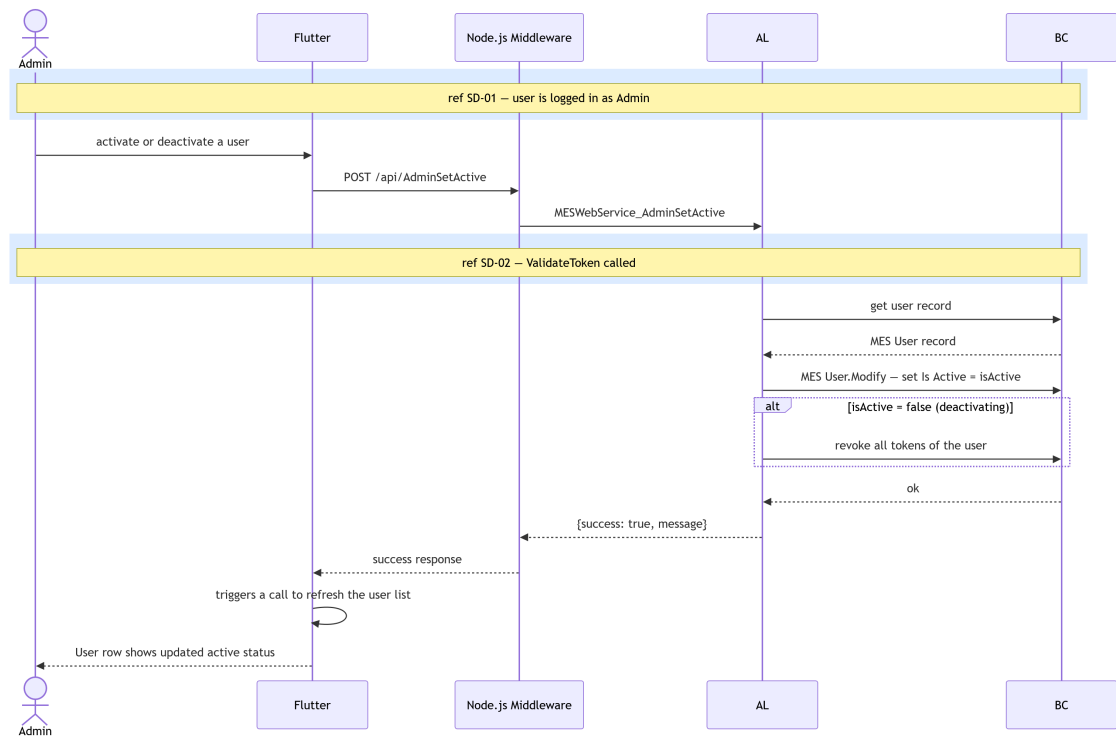


Figure 3.12. SD-08: Admin - Toggle Account Active Status.

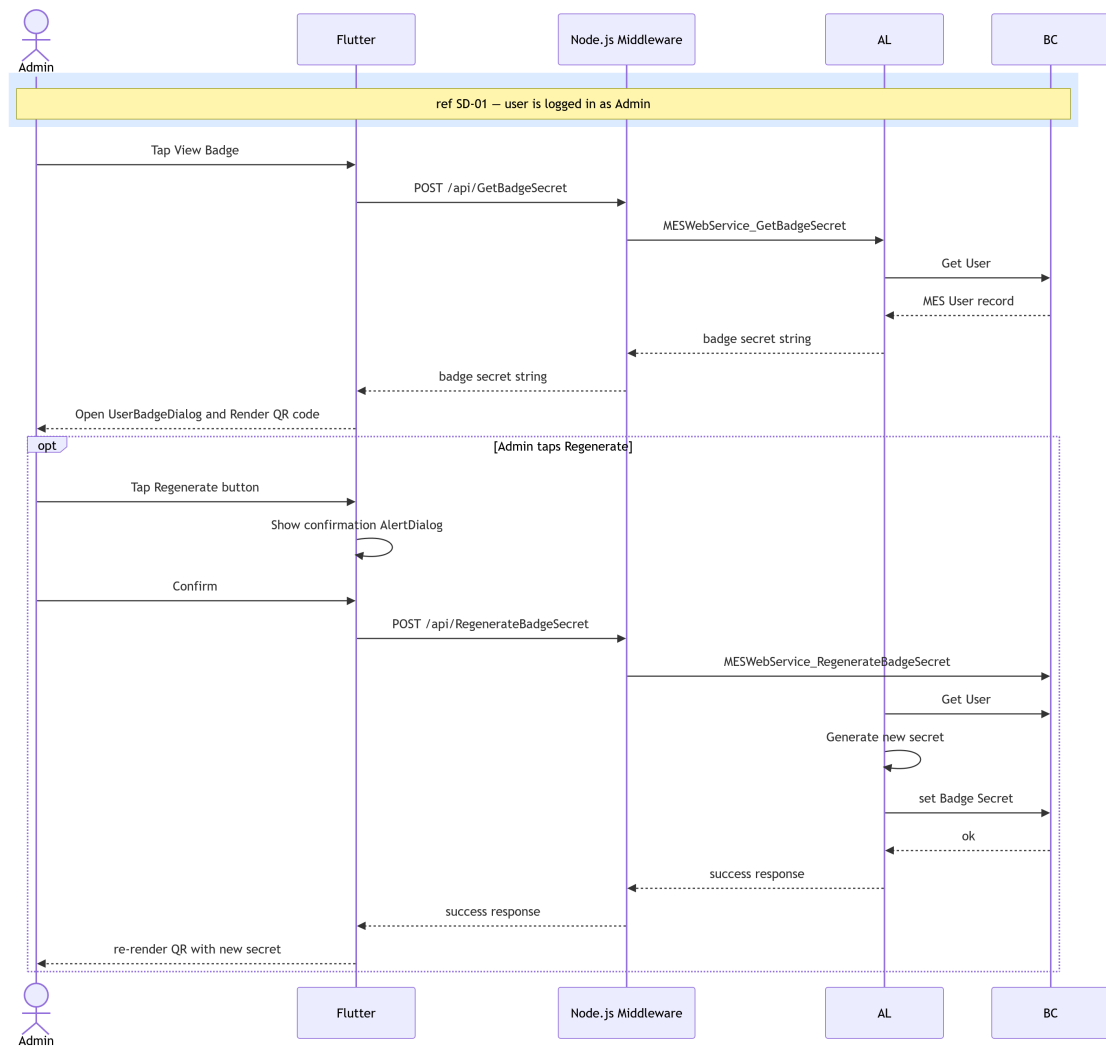


Figure 3.13. SD-ADMIN-BADGE: Admin - regenerate 2FA user badge.

3.2.4 Class Diagram

The UML Class Diagram of the *MES* authentication domain, shown in Figure 3.14, depicts the *MesUser*, *AuthToken*, and *PasswordPolicy* classes with their attributes and associations. The *BadgeSecret* field on *MesUser* and the *MESSettings* singleton are also shown, reflecting the 2FA and password expiry extensions introduced in this sprint.

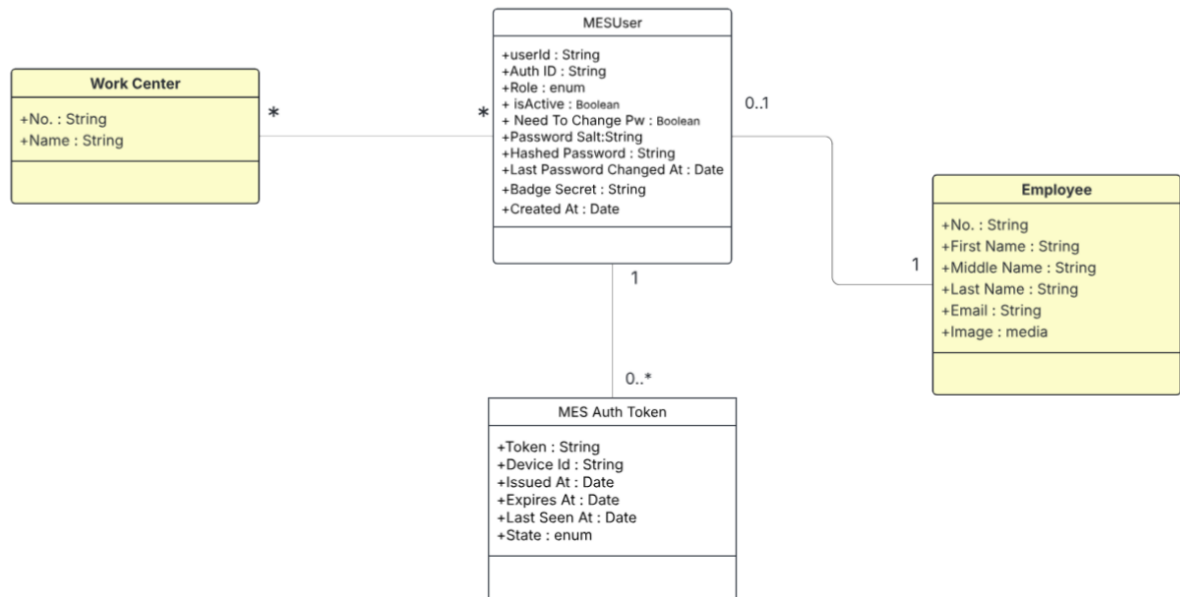


Figure 3.14. UML Class Diagram.

3.3 Implementation

3.3.1 Backend Implementation

Backend Structure Overview

The backend project structure is illustrated in Figure 3.15.



Figure 3.15. Backend project structure.

MES User Table Implementation

The MES User table is implemented to store user information, as described in Table 3.3.

Name	Type	Description
User Id	Code[50]	Primary key. Login identifier used at the MES login prompt (e.g., JD0E, 0P001). If blank on insert, a GUID-derived value is assigned automatically.
Employee ID	Code[50]	Employee. "No. ". Required for every MES account and enforced as unique (one Employee maps to one MES User).
Auth ID	Text[100]	Auto-generated external identifier in the form AUTH-XXXXXXX. Used as the login identifier at the MES login prompt. Uniqueness enforced.
Role	Enum (MES User Role)	Authorization role for the MES application (e.g., Operator / Supervisor / Admin). Used to control permissions and access.
Is Active	Boolean	Account enable/disable flag. If false, authentication is blocked and existing tokens are revoked when deactivated.
Need To Change Pw	Boolean	If true, the user must change their password before using the MES application (set at creation and on forced password resets).
Password Salt	Text[64]	Random hex salt used in password hashing so identical passwords produce different hashes across users.
Hashed Password	Text[128]	Hashed password value (hex string). Passwords are never stored in plaintext; hashing uses the password plus salt.
Created At	DateTime	UTC timestamp set on insert only (audit trail/reporting).
Last Password Changed At	DateTime	Updated whenever the password is modified. Used by the password expiry worker to determine whether a rotation is due.
Badge Secret	Text[64]	SHA-256-derived secret generated on user creation. Used to verify badge QR code scans during the two-factor authentication step.

Table 3.3. MES User (Table 50101) — Field Dictionary

Authentication Token Table

The MES Auth Token table stores session information as described in Table 3.4.

Name	Type	Description
Token	Guid	Primary key. Raw GUID token presented by the client as a Bearer credential. Generated at issue time (never reused). Used for all direct token lookups (validation/logout).
User Id	Code[50]	Foreign key to MES User. "User Id". Identifies the MES user who owns this session/token. Enforces referential integrity via TableRelation.
Device Id	Text[100]	Optional identifier for the device that requested the token (e.g., tablet-floor-02, scanner-01). Stored for traceability/audit only; not used for validation.
Issued At	DateTime	UTC timestamp set when the token is created. Useful for audit trail and token age inspection.
Expires At	DateTime	UTC timestamp after which the token must be rejected even if not revoked. Set to Issued At + TTL. Token validation enforces Expires At > CurrentDateTime().
Last Seen At	DateTime	Updated on every successful token validation. Supports session monitoring (activity/idle detection). Not used for expiry enforcement (use Expires At).
State	Enum (MES Auth Token State)	The state of the authentication token (Pending, Active, Revoked) set to pending when 2FA is on, and revoked when logging out and bulk revocation (password change, account deactivation).

Table 3.4. MES Auth Token (Table 50106) — Field Dictionary

Key points of the token design include a unique *GUID* token, auto-expiry after 12 hours, last activity tracking, and soft revocation.

MES Settings Table

The MES Settings singleton table (Table 50100) stores the two global security parameters configurable from the *Settings* page.

Name	Type	Description
PW change period	Duration	Password rotation interval stored in milliseconds. A value of 0 does not disable the feature; only negative values do.
TwoFA Enabled	Boolean	Global flag. When true, all users must complete a badge QR code scan after entering their credentials.

Table 3.5. MES Settings (Table 50100) — Field Dictionary

Password Management and Encryption

The password management codeunit ensures that plaintext is never persisted. A unique random *salt* (64-character SHA-256 hex string) is generated per user and the password is hashed using single-pass *SHA-256* before storage. Data classification attributes mark sensitive fields as *Customer Content* or *System Metadata*.

Key points include: passwords are never stored in plaintext; a unique salt per user (64 characters) is generated; *SHA-256* hashing is applied; and data is classified as *Customer Content* or *System Metadata*.

Authentication Logic — Login, Logout, and Change Password

Login

The login validates the user credentials against the MES User table. If the credentials are correct and the account is active, and *2FA* is disabled in MES Settings, a token is generated and stored in the MES Auth Token table and set as active. When *2FA* is enabled, a token is generated and stored in the MES Auth Token table and set as pending, the backend returns the *twoFAEnabled* flag and the Flutter client suspends the session until the badge QR code is verified via the *VerifyBadge* endpoint at which point the token is set to active.

Logout

On logout, the user's session authentication token is revoked. The token record matching the supplied session token is located in the MES Auth Token table and its *State* is set to *Revoked*, immediately invalidating the session (soft revocation).

Change Password

Changing password requires a valid authentication token, a correct current password, and a new password that complies with security rules.

Password Expiry Worker

The MES Password Expiry Worker (Codeunit 50129) is a scheduled Business Central Job Queue entry that runs every 24 hours. On each run it reads the PW change period value from MES Settings and computes a cutoff datetime equal to `CurrentDateTime()` minus the period. It then iterates all active MES Users whose Last Password Changed At falls before the cutoff (or is zero, meaning the password has never been changed) and sets their Need To Change Pw flag to true. Affected users are prompted to change their password on their next login.

3.3.2 REST API and Web Services Implementation

To enable communication between Flutter and Microsoft Dynamics Business Central, a set of *RESTful APIs* were implemented using AL.

OData Functions and Web Service Configuration

Exposed these functions in the MES Web Service codeunit (50126). Configured WebServices.xml to publish MES Web Service as an ODataV4 web service under the service name MESWebService.

3.3.3 Frontend Implementation

The frontend of this system was developed using Flutter. The application is structured into four main layers: a *UI Layer* consisting of Screens and Widgets; a *State Management Layer* built on Providers; a *Service Layer* for API communication; and a *Model Layer* for Data Models.

The data flow follows a unidirectional pattern from the *UI Layer* through the *State Management Layer* (Provider pattern) and *Service Layer* to the Business Central REST API backend, as illustrated in Figure 3.16.

Service Layer (API Communication)

The *Service Layer* is responsible for handling all *HTTP* communication between Flutter and the Business Central backend.

Four services were implemented: the `api_service` manages authentication requests such as *login*, *logout*, and *password change*, while the `mes_user_service` handles MES user operations including fetching and creating new users, A dedicated `setting_service` handles fetching and updating the MES global settings, And finally `export user Service` handles the export user list to Excel feature.

`api_service.dart`

The *login* method sends user credentials and device ID to the `/login` endpoint and parses the returned session token, role, *needChangePassword* flag, and *twoFAEnabled* flag. When *2FA* is enabled, the token is held in memory rather than persisted until badge verification succeeds. The *logout* method sends the active session token to the `/logout` endpoint to trigger server-side token revocation.

The *change password* method submits the current password, new password, and session token to the `/changePassword` endpoint. Shared error-handling and response-parsing utilities are used by all methods in the service class to propagate structured exceptions to the *State Management Layer*.

`mes_user_service.dart`

The class declaration and *fetch users* method send a request to the `/mesUsers` endpoint and parses the response into a list of `MesUser` model objects. The *create user* method sends a request to the `/createMesUser` endpoint with the new user's role and employee reference in the request body. The *generate password* method handle the password generation endpoint and map the result into the `GeneratedPassword` model.

State Management Layer using Provider

The *Provider* pattern is implemented to ensure reactive UI updates and centralised data handling. Three providers were implemented: `AuthProvider`, which manages authentication



Figure 3.16. Flutter layered architecture.

state and the 2FA pending flow; `MesUserProvider`, which handles MES user data; and `MesSettingsProvider`, which manages the global settings fetch. Each provider wraps the corresponding service layer calls and exposes reactive state (authenticated user, user list, settings, loading flag, error message) consumed by the *UI Layer* via `context.watch`.

User Interface

The *Pairing Page*, shown in Figure 3.17, is the very first screen presented when the application has no saved host URL. The user enters the middleware URL manually or taps *Scan QR Code* to open the `QrScannerDialog` and populate the field automatically. On submission the URL is validated and persisted via `AppConstants.changeHost()`.

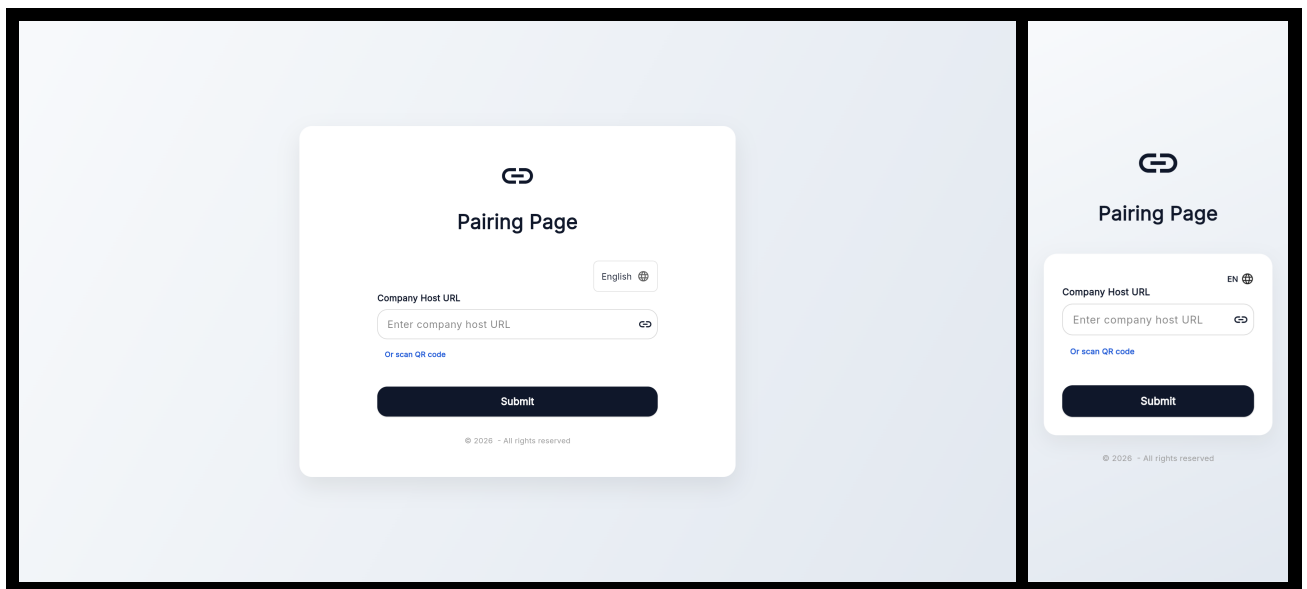


Figure 3.17. *Pairing Page* — desktop and mobile views.

The *Login Page*, shown in Figure 3.18, is the application entry screen presented to all users on launch. It contains *User ID* and *Password* input fields and a *Login* button. Successful authentication redirects the user to the role-appropriate dashboard, or to the *Badge Scan Dialog* if 2FA is enabled.

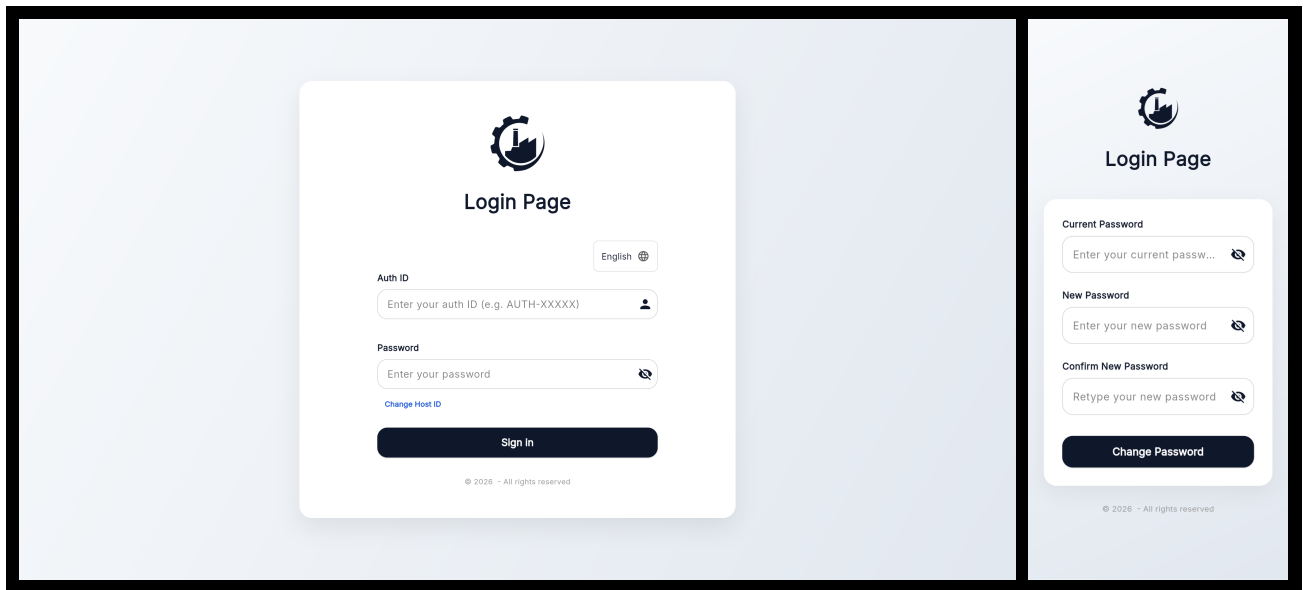


Figure 3.18. *Login Page* — desktop and mobile views.

The *Badge Scan Dialog*, shown in Figure 3.19, is displayed after a successful first-factor login when *2FA* is enabled. A live camera viewport reads the user's badge QR code; a manual entry field is available as a fallback. The dialog displays any verification error and re-enables the scanner on failure. The user can cancel at any time, which clears the pending session state and returns to the login page.

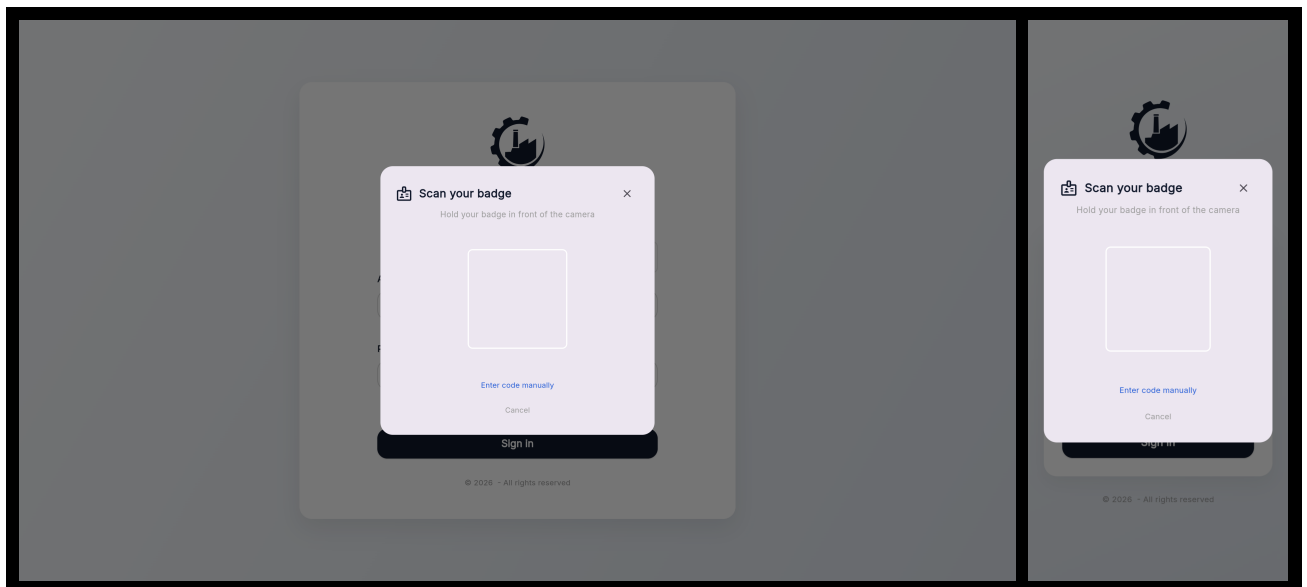


Figure 3.19. *Badge Scan Dialog* — desktop and mobile views.

The *MES User List Page*, shown in Figure 3.20, is the Administrator dashboard screen listing all registered *MES* users with their assigned roles and active status, providing action buttons to assign roles, generate passwords, view or regenerate badges, and activate/deactivate each account.

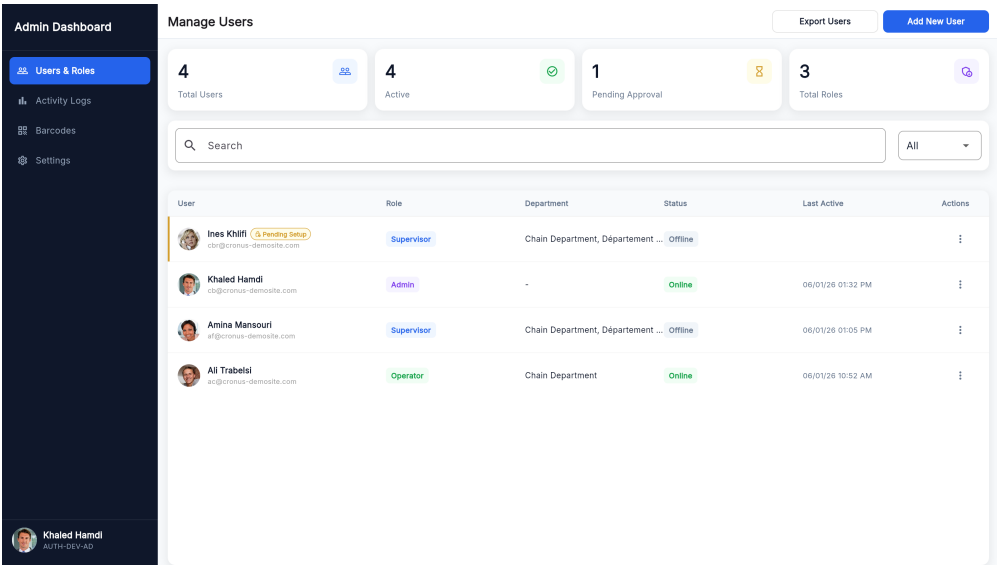


Figure 3.20. MES User List Page.

The *Assign MES Role Dialog*, shown in Figure 3.21, is a modal dialog allowing the Administrator to select a Business Central employee record and assign them an *MES* role (Operator, Supervisor, or Administrator), creating a new *MES* User record via the `/createMesUser` end-point.

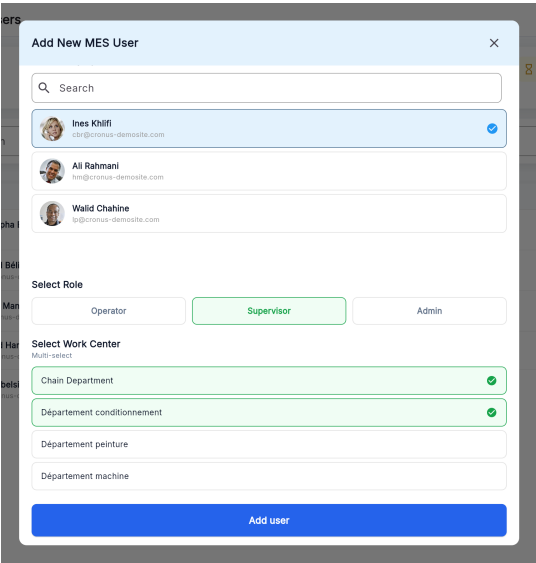


Figure 3.21. Assign MES Role Dialog.

The *Generate Password Dialog*, shown in Figure 3.22, is a modal dialog through which the Administrator triggers server-side secure password generation for a selected *MES* user. The generated password is displayed once and must be communicated to the user out-of-band.

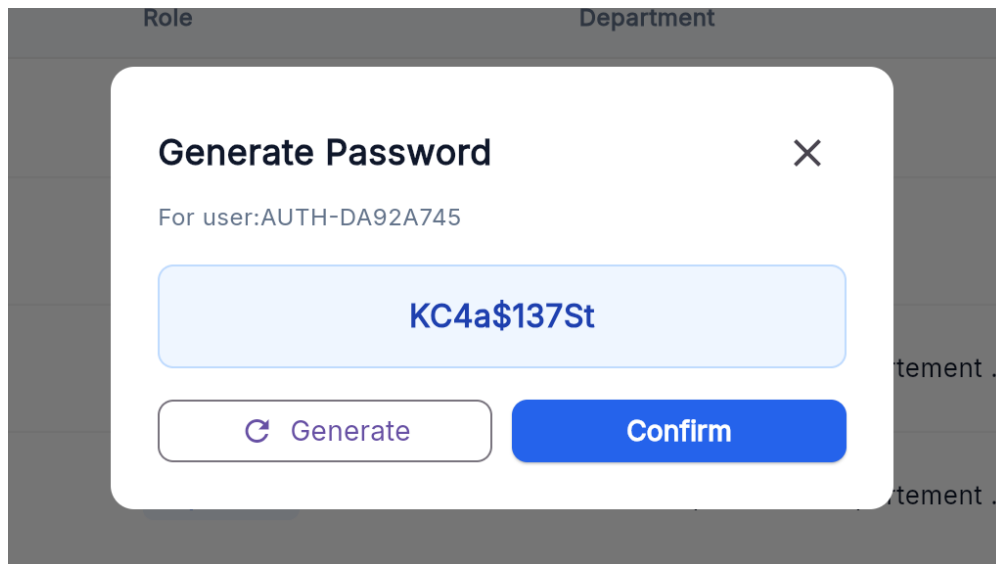


Figure 3.22. *Generate Password Dialog.*

The *Password Generated Successfully Dialog*, shown in Figure 3.23, is a confirmation dialog showing the plaintext password to the Administrator for one-time transmission to the user. The password is not stored in plaintext on the server after this point.

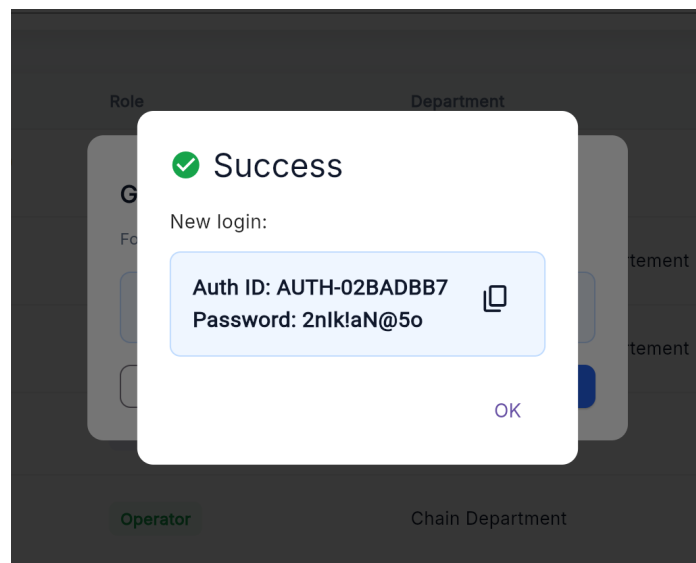


Figure 3.23. *Password Generated Successfully Dialog.*

The *Change Password Page*, shown in Figure 3.24, is presented to users whose *need-ChangePassword* flag is true after login, requiring them to enter their current password and choose a new password before accessing the main application.

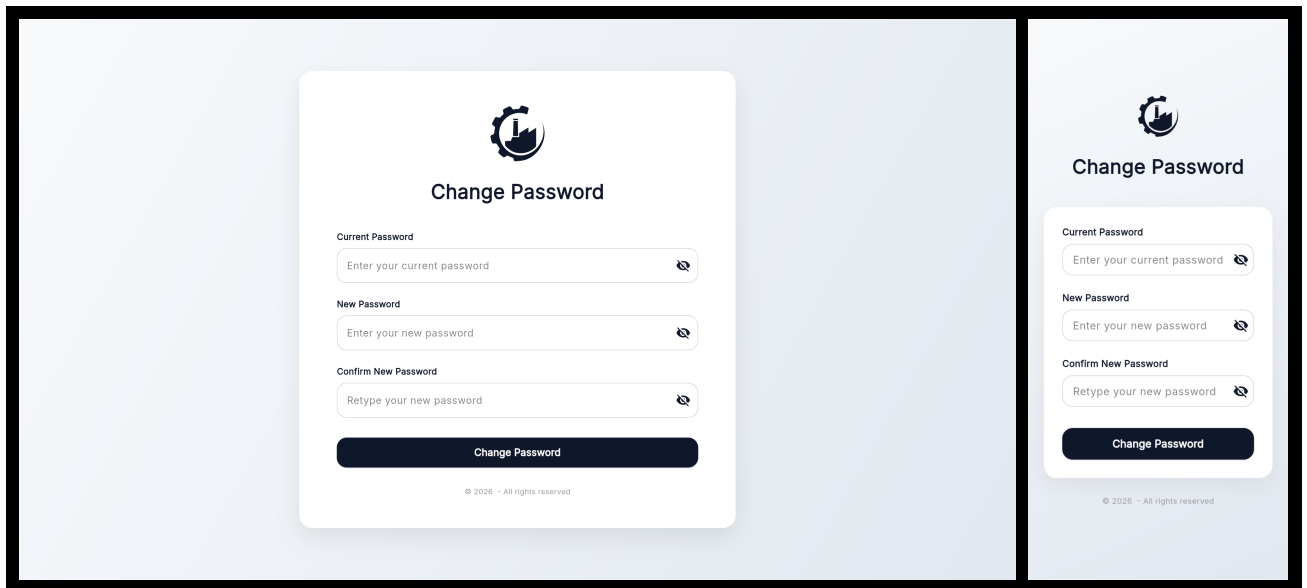


Figure 3.24. *Change Password Page* — desktop and mobile views.

The *Change Role Dialog*, shown in Figure 3.25, is a modal dialog through which the Administrator updates the role and work-centre assignment of an existing *MES* user. The dialog pre-populates the current role and presents a three-button row (Operator / Supervisor / Admin); selecting Admin hides the work-centre list, selecting Operator shows a single-select list, and selecting Supervisor shows a multi-select list. An inline error banner displays any server-side validation failure. Tapping *Save Changes* submits the update and revokes all active tokens for the affected user.

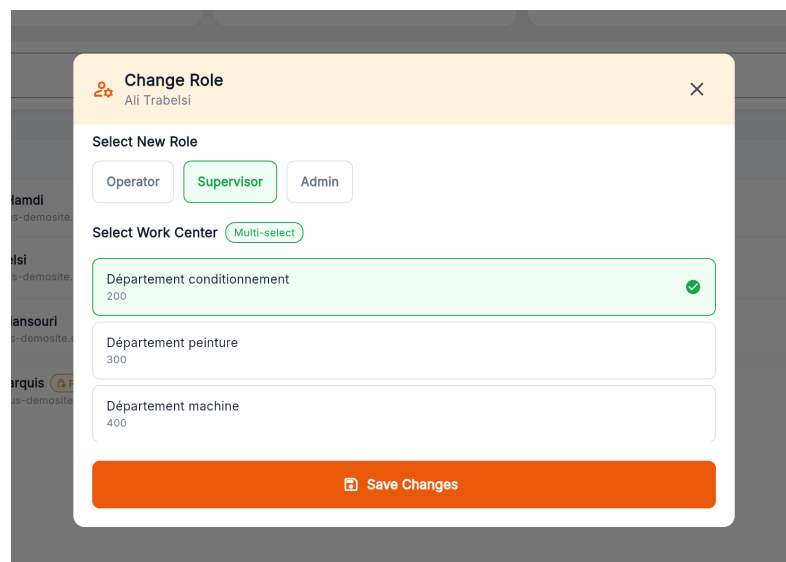


Figure 3.25. *Change Role Dialog*.

The *User Badge Dialog*, shown in Figure 3.26, allows the Administrator to view a user's badge QR code, print it as a PDF, and regenerate the underlying secret after confirmation. It is ac-

cessible via the *View Badge* action in the user row action menu and is available only for active accounts.

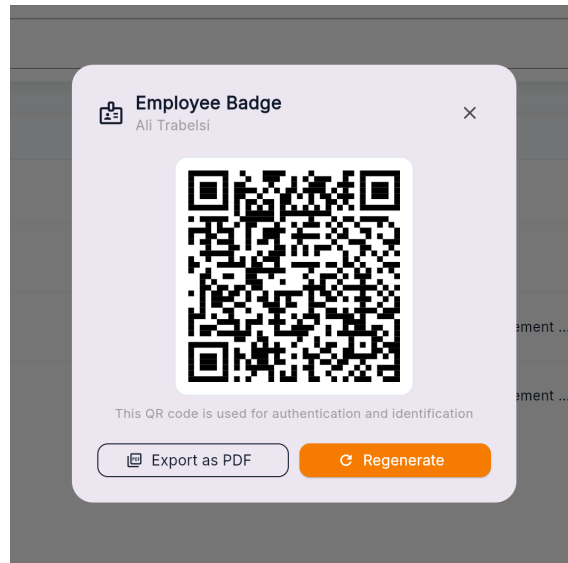


Figure 3.26. *User Badge Dialog.*

The *Settings Page*, shown in Figure 3.27, is accessible from the Administrator sidebar. It exposes two controls: a numeric field for the password rotation period (in days) and a toggle for global 2FA. An animated action banner appears at the bottom of the page whenever the values differ from the last saved state, offering *Discard* and *Save* actions.

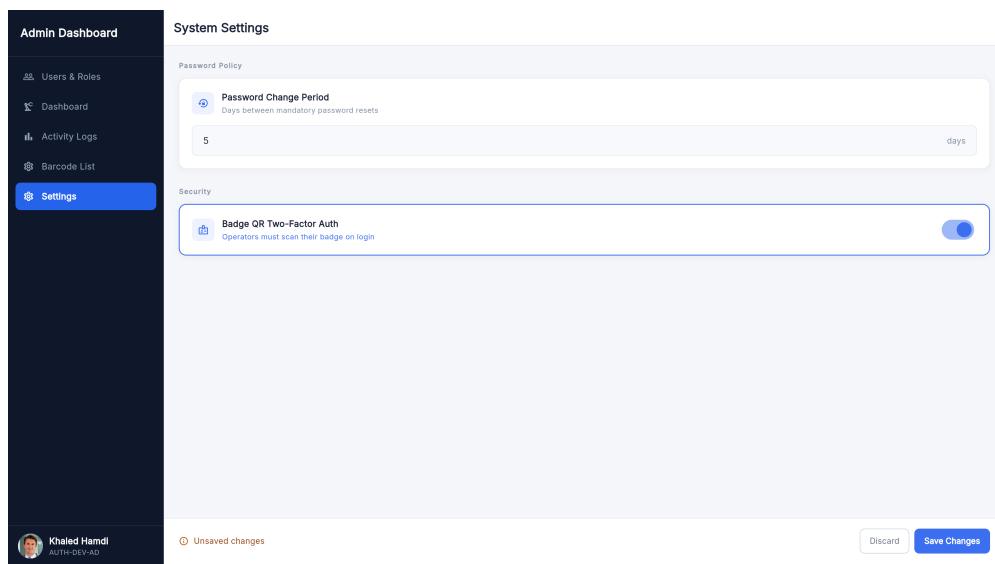


Figure 3.27. *Settings Page.*

3.4 Testing and Validation

3.4.1 Integration testing

For integration testing, we chose Postman, a powerful and user-friendly tool for API evaluation. Figure 3.28 shows a test case for the `/mesUsers` endpoint.

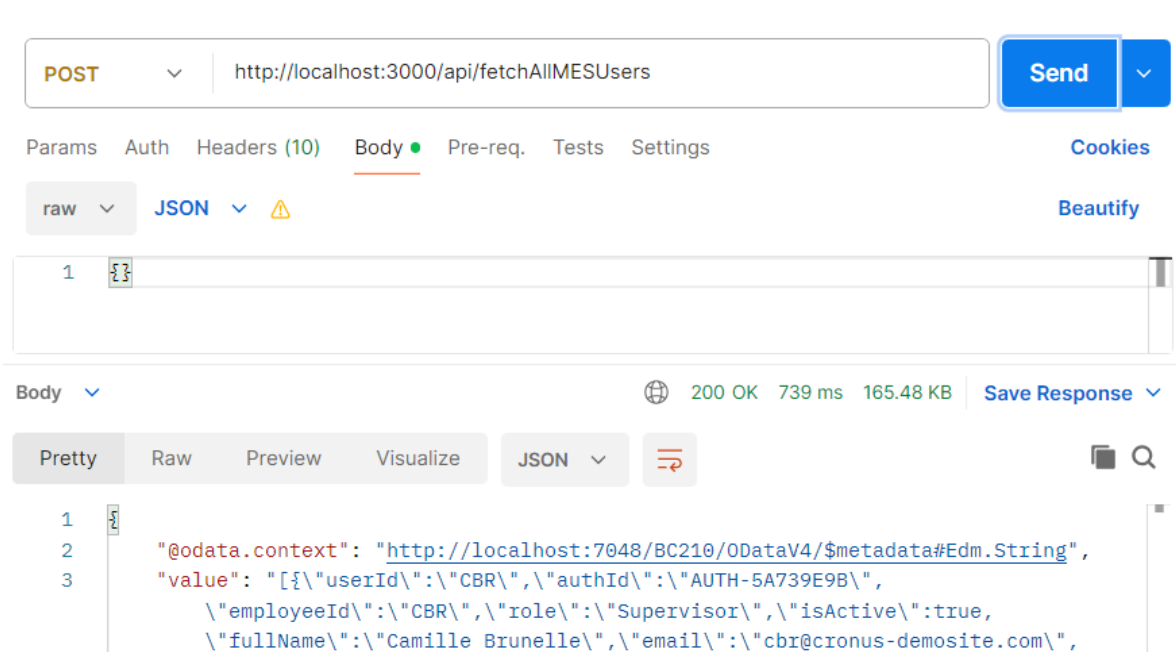


Figure 3.28. Postman endpoint test — `fetchAllMesUsers`.

Conclusion

This sprint successfully delivered a complete authentication and user management foundation for the *MES* application. The backend, built in Microsoft Dynamics Business Central using AL, implements secure credential validation, *SHA-256* password hashing, session token management with automatic expiry, optional two-factor authentication via badge QR code scanning, a configurable password expiry policy enforced by a scheduled background job, and a full set of *RESTful* API endpoints exposed through MES Web Service (codeunit 50126). The Flutter frontend provides a clean, role-aware user experience covering first-launch host pairing, login, badge QR verification, logout, forced password change, administrator-level user creation, badge management (view, print, regenerate), role and work-centre management, account activation control, and security policy configuration.

Chapter 4

Sprint 2 Machine & Production Management

Contents

Introduction	64
4.1 Sprint Backlog	64
4.2 Design	67
4.2.1 Use Case Diagram	67
4.2.2 Textual Use Case Description	68
4.2.3 Sequence Diagrams	69
4.2.4 Class Diagram	72
4.3 Implementation	73
4.3.1 Backend Implementation	73
Backend Structure Overview	73
MES Machine Status Table	73
MES Operation State Table	74
Enumerations	75
Machine Actions Business Logic	75
4.3.2 REST API and Web Services Implementation	75
4.3.3 Frontend Implementation	76
Model Layer	76
Service Layer	76
State Management Layer	76
User Interface	76
4.4 Testing and Validation	79
4.4.1 Integrations tests	79
Conclusion	80

Introduction

This sprint covers **Machine & Production Management** in the *MES* application, giving Operators and Supervisors real-time visibility into machine states and a full audit trail of completed operations.

It addresses three related sub-domains: live machine status tracking from Business Central to the Flutter frontend, production order management with operation lifecycle initiation, and a history view showing all completed, interrupted and cancelled operations per machine.

4.1 Sprint Backlog

This sprint covers **Domain 2: Machine Monitoring, Production Order Management & History**.

Table 4.1. Sprint Backlog

ID	User Story	Tasks
US-2.1	As an Operator or Supervisor, I need to see the list of machines in my work centre with their current status so that I can see which machines are currently active.	<i>Business Central (AL):</i> • Create table MES Machine Status. • Create enum MES Machine Status. • Create function <code>FetchMachines()</code> in codeunit MES Machine Fetch. • Expose <code>FetchMachines()</code> through codeunit MES Web Service. • Create page MES Machine List. <i>Flutter:</i> • Create model <code>MachineModel</code>. • Create service <code>MESMachineListService</code> to consume the <code>FetchMachines()</code> API. • Create provider <code>MesMachinesProvider</code>. • Create page <code>MachineListPage</code>. • Create widget <code>MachineCard</code>. • Implement automatic machine list refresh in <code>MESMachineListService</code>.
US-2.2	As an Operator or Supervisor, I need to view the production orders assigned to a machine so that I know what work needs to be done.	<i>Business Central (AL):</i> • Create function <code>getMachineOrders()</code> in codeunit MES Machine Fetch. • Expose <code>getMachineOrders()</code> in codeunit MES Web Service.

Continued on next page

ID	User Story	Tasks
US-2.3	As an Operator or Supervisor, I need to start a production operation so that the system records that the order has begun.	<i>Flutter:</i> • Create model MachineOrderModel. • Create service ErpMachineOrdersService to consume the getMachineOrders() endpoint. • Create provider MachineOrdersProvider. • Create page MachineOrderPage.
		<i>Business Central (AL):</i> • Create table MES Operation State. • Create enum MES Operation Status. • Create function TryStartOperation() in codeunit MES Machine Validation. • Create function InsertMESOperation() in codeunit MES Machine Insert. • Expose startOperation() through codeunit MES Web Service. • Create page MES Operations. <i>Flutter:</i> • Implement ErpMachineOrdersService that Consumes the startOperation endpoint. • Implement MachineOrdersProvider to manage its state. • Implement start operation action handling in ActionButtons. • Implement automatic navigation to OrdersProgressionPage
US-2.4	As a Supervisor or Operator, I need to view all active operations on a machine so that I can follow the progress of each order.	<i>Business Central (AL):</i> • Create function fetchOperationsStatusAndProgress() in codeunit MES Machine Fetch. • Expose fetchOngoingOperationsState() through codeunit MES Web Service.

Continued on next page

ID	User Story	Tasks
		<i>Flutter:</i> • Update <code>ErpMachineOrdersService</code> to Consume the <code>fetchMachineOperationStatus</code>. • Create model <code>OperationStatusStyle</code>. • Create page <code>OrdersProgressionPage</code>. • Create the widgets <code>OperationCard</code>, <code>OperationStatusBadge</code>, widget <code>OperationInfoGrid</code>, and <code>OperationProgressBar</code>. • Implement automatic refresh for operation status monitoring.
US-2.5	As an Operator or Supervisor, I need a tabbed view for a machine so that I can navigate between pending orders, active operation progress, and the operation history of the machine without leaving the machine context.	<i>Flutter:</i> • Create page <code>MachineMainPage</code>. • Create the widgets <code>TopNavigationBar</code> and <code>NavButton</code>. • Implement tab navigation in <code>MachineMainPage</code>. • Implement navigation from <code>MachineCard</code> to <code>MachineMainPage</code> which displays the selected machine's operations.
US-2.6	As an Operator or Supervisor, I need to filter and sort production orders so that I can quickly find the most relevant work.	<i>Flutter:</i> • Create widget <code>GlobalSearchBar</code>. • Implement order search, filtering, and sorting in <code>MachineOrderPage</code>.

Continued on next page

ID	User Story	Tasks
US-2.7	As a Supervisor or Operator, I need to view the history of completed operations for a machine so that I can audit past production.	<i>Business Central (AL):</i> - Exposed the function <code>fetchOperationsHistory</code> that calls the function <code>fetchOperationsStatusAndProgress</code> in codeunit MES Web Service. <i>Flutter:</i> - Update <code>ErpMachineOrdersService</code> to consume the <code>fetchMachineOperationStatusAndProgress</code> endpoint. - Update <code>MachineordersProvider</code> to manage its state. - Create page <code>MachineHistoryPage</code>. - Create the widgets <code>HistoryCard</code>, <code>HistoryInfoGrid</code>, and <code>HistoryBadgeAndId</code>. - Implement history search and sorting in <code>MachineHistoryPage</code>. - Implement navigation from <code>HistoryCard</code> to <code>OperationDetailPage</code>.

4.2 Design

4.2.1 Use Case Diagram

The UML Use Case Diagram (Figure 4.1) shows the two primary actors (Operator and Supervisor) and their interactions with production order management, and history subsystem. In addition to viewing machines, browsing orders, and managing operation lifecycle transitions, the diagram includes the *View Operation History* use case, which allows both actors to access the finished, interrupted and cancelled operation log for any machine in their work centre.

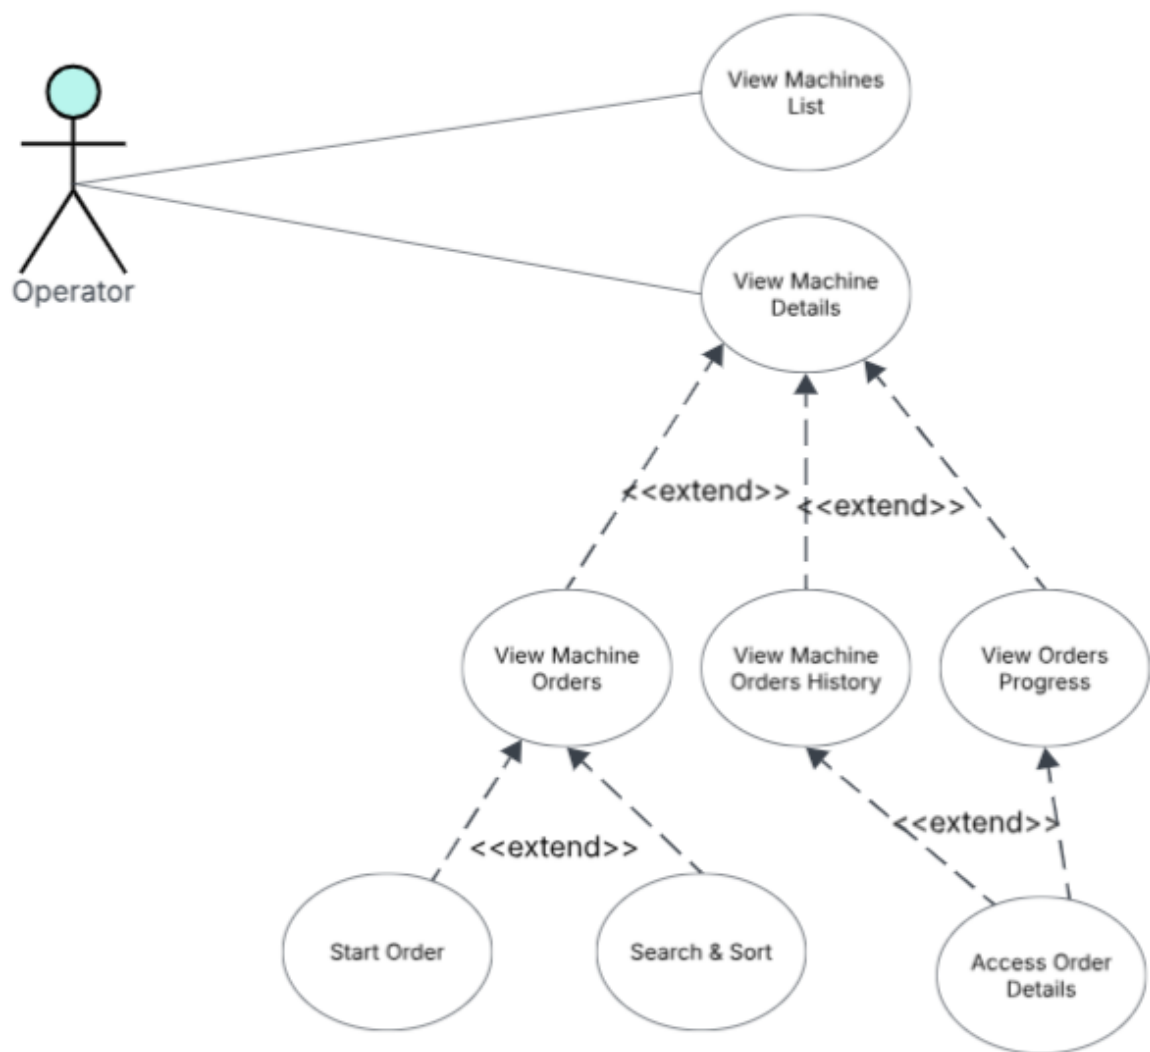


Figure 4.1. UML Use Case Diagram — Machine & Production Management.

4.2.2 Textual Use Case Description

The following table (Table 4.2) provides the detailed textual description of the *Start Operation* use case.

Table 4.2. Textual Use Case Description — Start Operation

Use Case Name	Start Operation
Primary Actor	Operator

Continued on next page

Preconditions

- The Operator is authenticated and has a valid session token.
- The target routing line has status *Released*.
- No other operation is currently *Running* on the same machine.
- The operation has not already been started (no existing *Running* record for this order/operation pair).
- The previous operation in the same production order (if any) is marked as *Finished* or produced enough for the send ahead quantity.

Postconditions

- A new MES *Operation State* record is inserted with status *Running* and the current *UTC* timestamp.
- The *Operations Progress* tab reflects the new running operation within the next polling cycle.
- If any precondition fails, a descriptive error dialog is shown to the operator and no record is inserted.

Main Scenario

1. The Operator navigates to the *Machine List Page* and selects a machine.
2. The system displays the *Machine Orders Page* listing all applicable production orders.
3. The Operator locates a *Released* order and taps *Start Order*.
4. The frontend sends a *POST* request to `MESWebService_startOperation`.
5. The backend validates all preconditions.
6. On success, a MES *Operation State* record is inserted.
7. The frontend navigates to the *Orders Progression Page*.

4.2.3 Sequence Diagrams

The following sequence diagrams illustrate the communication flow between the Flutter frontend, the Business Central OData layer, and the AL business logic for the machine-listing and order-management flows introduced in Sprint 2.

Figure 4.2 depicts the machine-list polling flow. The Flutter client issues a `FetchMachines` request for each work centre resolved from the authenticated user's profile every five seconds. For every machine returned by Business Central, the AL layer fetches the latest *MES Machine Status* row and the work-centre name before assembling the response, which the client uses to rebuild the *MachineCard* grid.

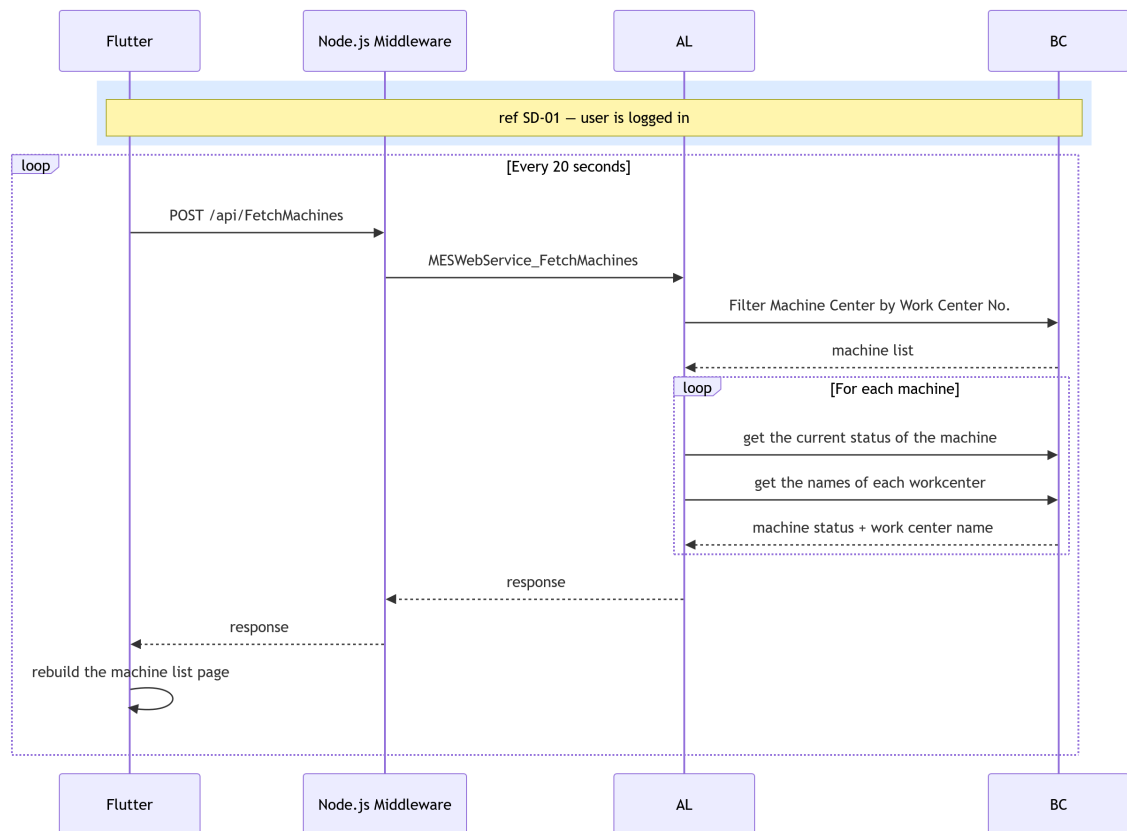


Figure 4.2. SD-09: Fetch Machines.

Figure 4.3 presents the machine-orders retrieval flow, triggered when the user opens the *Orders* tab. The AL layer filters *ProdOrderRoutingLine* records for the selected machine, skips any operation that has already been started, and enriches each remaining routing line with the corresponding *ProdOrderLine* details before returning the list to the Flutter client as a set of *OrderCard* entries.

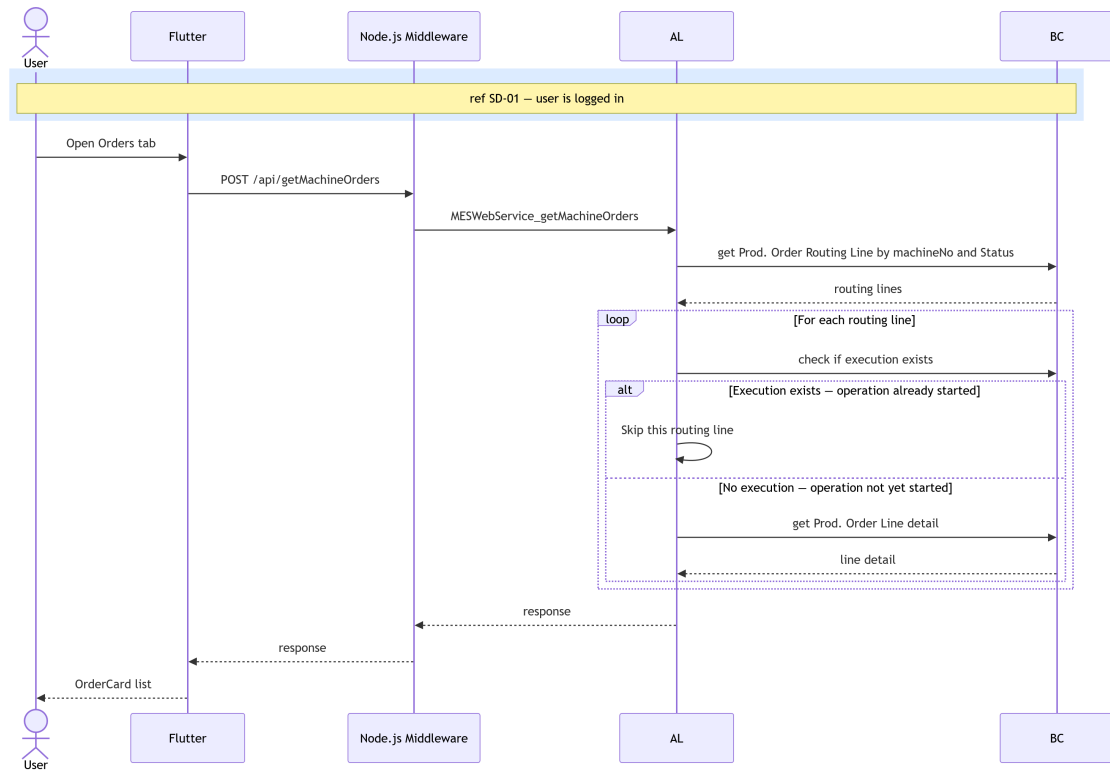


Figure 4.3. SD-10: Get Machine Orders.

Figures 4.4 and 4.5 present the two flows that supply real-time and historical data to the *MachineDetailPage*. Figure 4.4 describes the ongoing-operations state polling flow, in which the AL layer retrieves all active operations for the machine, resolves their current state and cumulative produced quantity from Business Central, and returns the aggregated data to the Flutter client. Figure 4.5 presents the operation history retrieval flow, triggered when the user opens the *MachineDetailPage*, whereby the AL layer queries Business Central for finished and cancelled operations associated with the machine, enriches each record with production quantities and start and end times, and returns the assembled list so the Flutter client can display the operations history.

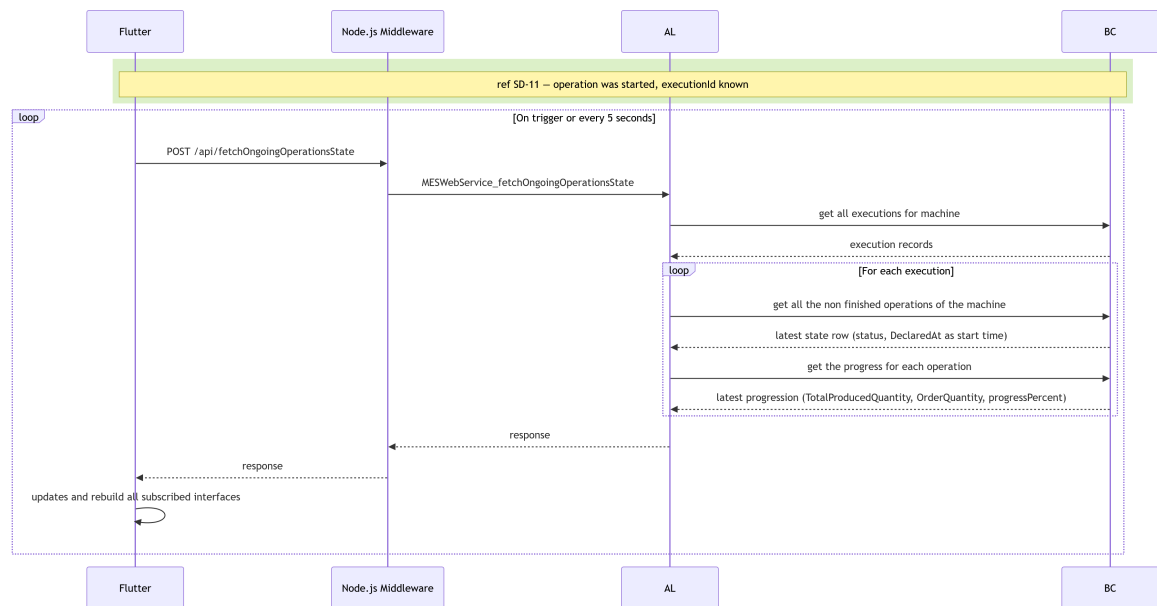


Figure 4.4. SD-23: Fetch Operation progress.

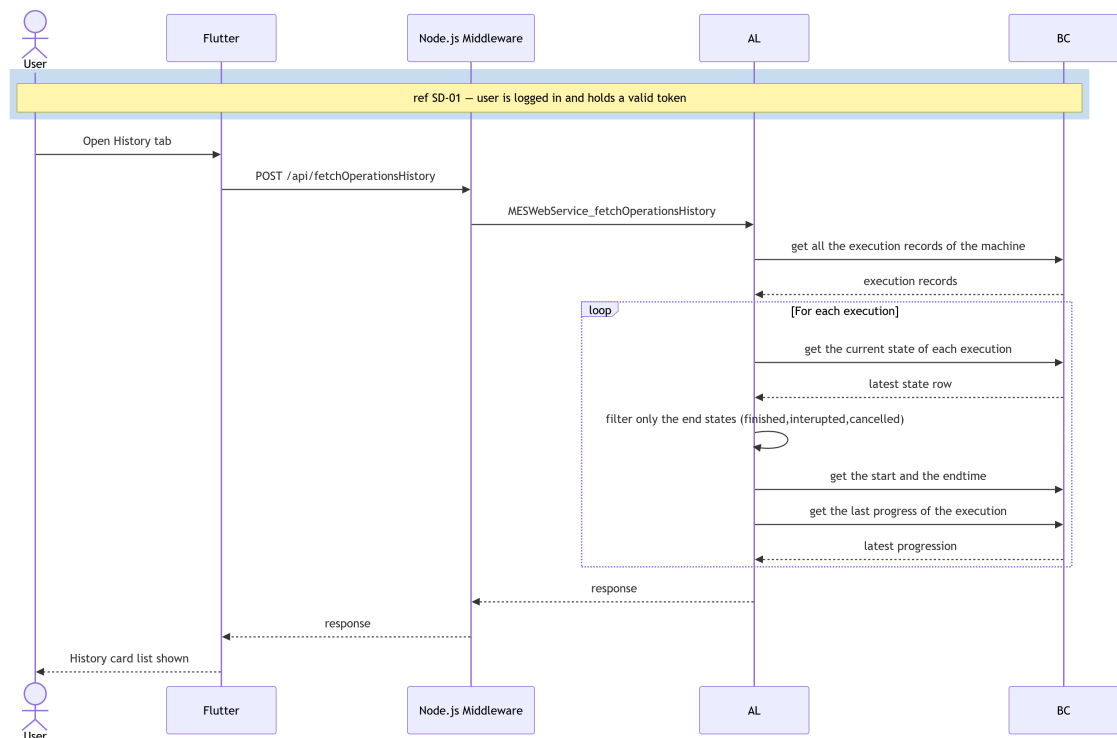


Figure 4.5. SD-24: Fetch Operation History

4.2.4 Class Diagram

The UML Class Diagram (Figure 4.6) of the machine and production management domain shows the MES Machine Status and MES Operation State tables and their relationships with the Business Central standard tables Machine Center and Prod. Order Routing Line.

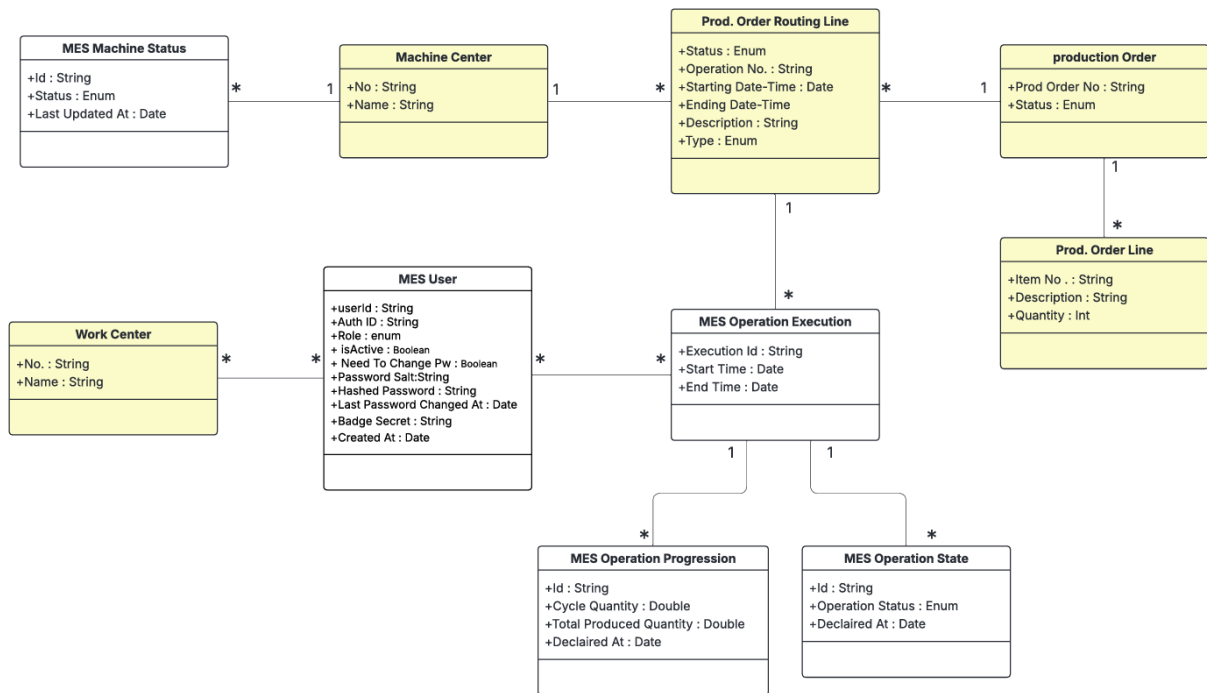


Figure 4.6. UML Class Diagram — Machine & Production Management.

4.3 Implementation

4.3.1 Backend Implementation

Backend Structure Overview

The machines domain follows the same layered structure established in Sprint 1. Two new sub-folders were added under `src/1-Tables/machines/` and `src/2-Enum/machines/`, and a new codeunit was placed under `src/3-CodeUnit/machines/`. The OData web service is published through the existing `WebServices.xml` mechanism under a new service name.

MES Machine Status Table

The MES Machine Status table (50107) stores the full history of machine state changes as an append-only log. Each insert creates a new record; the most recent record per machine represents the current state. Table 4.3 lists the fields and their descriptions.

Table 4.3. MES Machine Status (Table 50107) — Field Dictionary

Name	Type	Description
Id	Code[50]	Primary key. GUID-derived value assigned automatically on insert if blank.
Machine No.	Code[20]	Foreign key to Machine Center."No.". Identifies the machine this status record belongs to.

Continued on next page

Name	Type	Description
Status	Enum (MES Machine Status)	Current machine state: <i>Idle</i> or <i>Working</i> .
Current Prod. Order No.	Code[20]	Foreign key to Prod. Order Routing Line."Prod. Order No.". Records which production order the machine is currently executing, if any.
Updated At	DateTime	UTC timestamp set automatically on insert. Used to find the most recent status record for a given machine.

MES Operation State Table

The MES Operation Status table (50108) implements the same append-only pattern for operation lifecycle events. Every state transition (start, pause, resume, finish) inserts a new record; queries always sort by Last Updated At descending to obtain the current state. Table 4.4 provides the full field dictionary.

Table 4.4. MES Operation State (Table 50108) — Field Dictionary

Name	Type	Description
Id	Code[50]	Primary key. GUID-derived identifier assigned automatically on insert.
Execution Id	Code[50]	Foreign key to MESOperationExecution.
Operator Id	Code[50]	Foreign key to MES User."User Id". The operator who triggered the state transition.
Operation Status	Enum (MES Operation Status)	Lifecycle state at the time of this record: <i>Running</i> , <i>Paused</i> , <i>Finished</i> , <i>Cancelled</i> , or <i>Interrupted</i> .
Declared At	DateTime	UTC timestamp set automatically on insert. Together with the execution index, this field is used to retrieve the current status via descending sort.

Key points:

- Both tables use an append-only design: no Modify is called on existing records.
- The *secondary index* ExecutionTimeline("Execution Id", "Declared At") on MES Operation State supports efficient retrieval of the latest event per group.

Enumerations

Two enumerations support the domain. MES Machine Status defines two values: *Idle* and *Working*. MES Operation Status defines five values: *Running*, *Paused*, *Finished*, *Cancelled*, and *Interrupted*. Both enumerations are declared `Extensible = true` to allow future additions without modifying the base objects.

Machine Actions Business Logic

Machine and operation business logic is encapsulated across three codeunits: MES Machine Fetch for read operations and MES Machine Write and MES Machine Insert for write operations. Their public procedures are exposed by the OData web service layer.

FetchMachines. Accepts an array of work centres and returns their machines enriched with each machine's current status and active production order, defaulting to *Idle* when no status history exists.

getMachineOrders. Accepts a machine number and returns only the production routing lines that are eligible for assignment, those in a *Planned*, *Firm Planned*, or *Released* state, of type *Machine Center*, and not yet linked to an execution record. Each result is joined with its parent order line for item description and quantity.

startOperation. Accepts an order, token, operation, and machine number. Before inserting a new *Running* execution record, the procedure enforces three guards: the routing line must be *Released*, no running record may already exist for that operation, the state of the previous operation in that order allows it and the machine must be free. Any guard failure is returned as a structured *JSON* error.

fetchOngoingOperationsState. Returns the active operations for a machine, those whose most recent status entry is *Running* or *Paused*, deduplicated to one entry per (order, operation) pair.

4.3.2 REST API and Web Services Implementation

Communication between Flutter and Business Central for the machines domain uses the same *OData V4 Unbound Actions* through the middleware proxy. The procedures are exposed through the existing MESWebService registered in `WebServices.xml`. After deployment, the four procedures are reachable at the following endpoints:

- POST .../ODataV4/MESWebService_FetchMachines
- POST .../ODataV4/MESWebService_getMachineOrders
- POST .../ODataV4/MESWebService_startOperation
- POST .../ODataV4/MESWebService_fetchOngoingOperationsState

All endpoints follow the same *JSON* request/response convention used by the authentication

layer: the request body carries named parameters as top-level *JSON* fields, and the response wraps the AL return value inside a "value" field which the Flutter service layer double-decodes.

4.3.3 Frontend Implementation

The machines domain retains the same four-layer call stack introduced in Sprint 1 (*Model* → *Service* → *Provider* → *UI*).

Model Layer

Two models were introduced. `MachineModel` (`mes_machine_model.dart`) holds the info displayed in the machine cards in `machineList` page, populated from the `FetchMachines` response. `MachineOrderModel` (`erp_order_model.dart`) holds the full set of production order fields returned by `getMachineOrders`.

Service Layer

Two service classes handle all network communication for the machines domain. `MESMachineListService` (`mes_MachineList.dart`) exposes `fetchMachines` for retrieving and deserialising the machine list for a given work centre, and `streamMachines` for polling that endpoint every 20 seconds, emitting an empty list on error to keep the `StreamBuilder` stable. `ErpMachineOrdersService` (`erp_order_service.dart`) covers the order and operation lifecycle through three methods: fetching the order list, triggering and validating a start-operation request, and retrieving active operation records. A companion `streamMachines` generator applies the same polling pattern at a 5-second interval for the operations progress view.

State Management Layer

Two providers were introduced. `MesMachinesProvider` wraps the `MESMachineListService` stream and exposes it directly to the UI, no `ChangeNotifier` is needed since the stream itself carries all state. `MachineOrdersProvider` follows the standard `ChangeNotifier` pattern and manages both machine order retrieval and order start logic, exposing the operation status polling stream to the UI layer.

User Interface

The *Machine List Page* is the entry point for operators after login. It displays a live-updating grid (tablet/desktop) or list (mobile) of machine cards scoped to the authenticated work centre, refreshing every 20 seconds. Each card shows the machine name, its current status with a colour-coded badge, and the active production order number. The layout adapts across breakpoints. As illustrated in Figure 4.7, the interface is consistent across both desktop and mobile platforms.

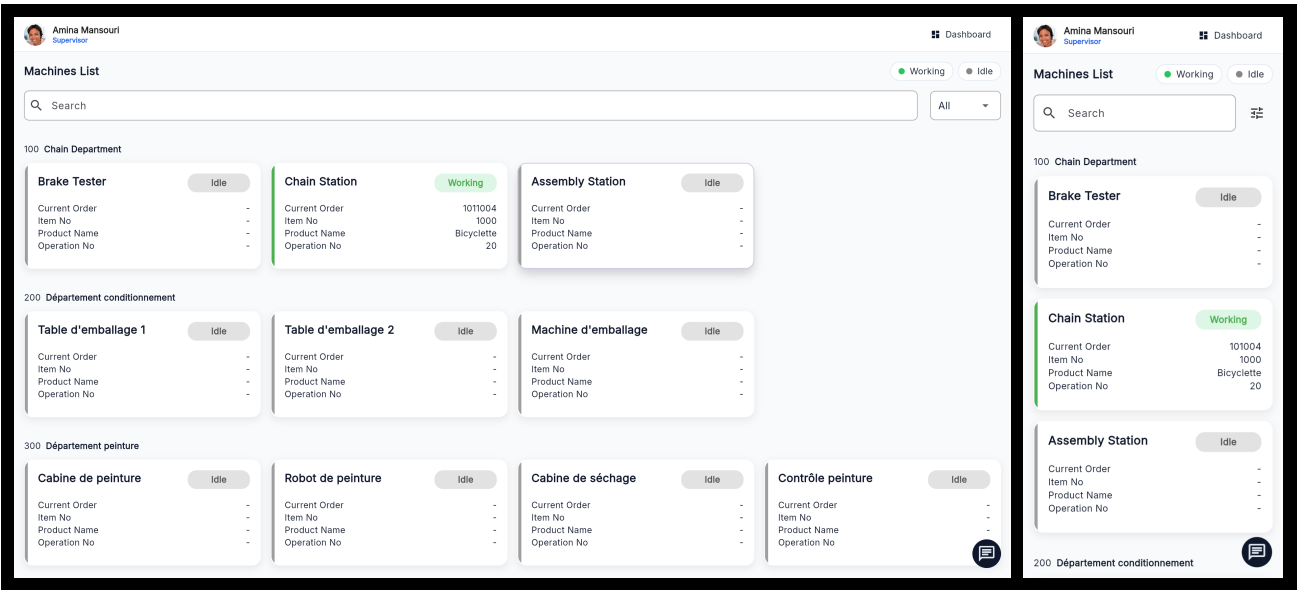


Figure 4.7. Machine List Page — desktop and mobile views.

The user interface for the machines domain is split across two top-level pages accessible via a shared *Top Navigation Bar* with tabs for *Orders*, *Progress*, and *History*.

The *Machine Orders Page* displays the production routing lines assigned to the selected machine. A *Global Search Bar* allows filtering by free text (order number, item description, or date), by status, and sorting by planned start date. Order cards use a responsive layout that switches between a stacked *narrow layout* and a side-by-side *wide layout*. Only *Released* orders display an active *Start Order* button; *Planned* and *Firm Planned* orders show it disabled. Figure 4.8 illustrates both the desktop and mobile views.

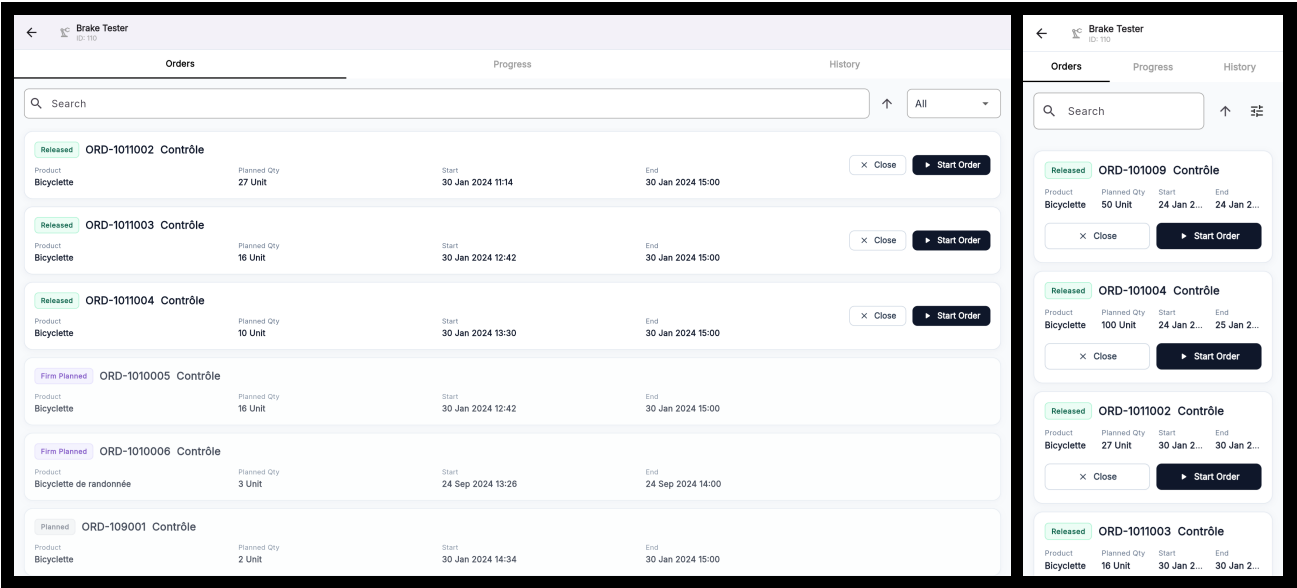


Figure 4.8. Machine Orders Page — desktop and mobile views.

The *Orders Progression Page* displays the currently active operations on a machine, polling every 5 seconds. Each operation card shows a colour-coded status badge (green for *Running*, amber for *Paused*), the order and operation identifiers, the last updated timestamp, and a progress bar. The card layout also switches between narrow and wide variants. *Pause* and *Resume* action buttons adapt their colour and label to the current operation status, as shown in Figure 4.9.

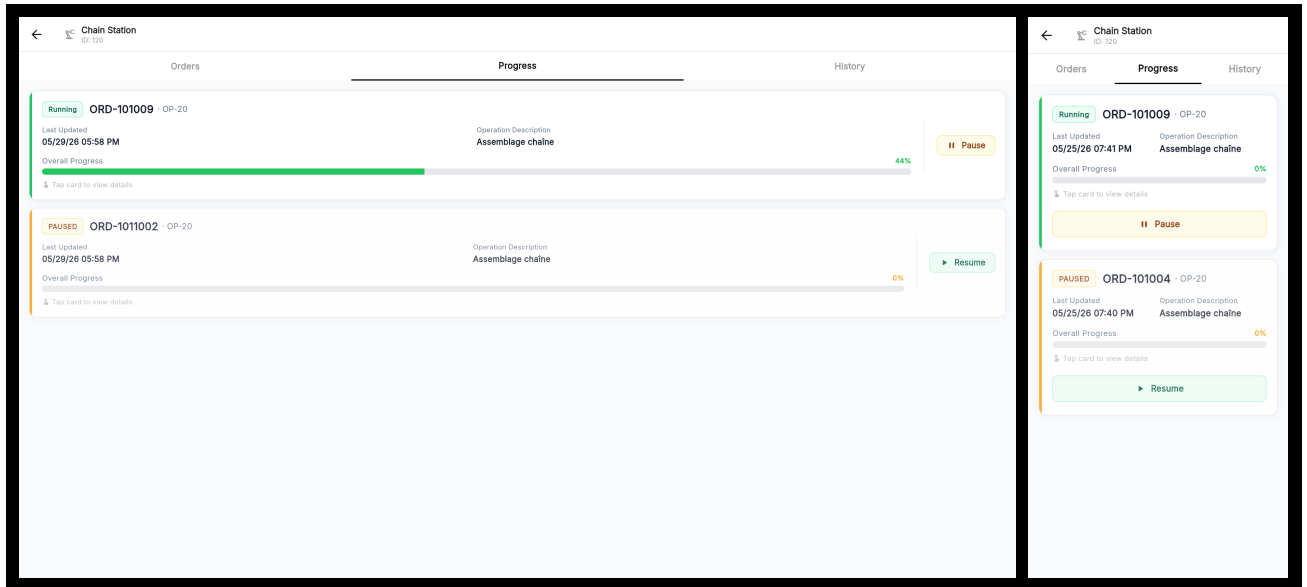


Figure 4.9. *Orders Progression Page* — desktop and mobile views.

The *Machine History Page* (Figure 4.10) displays completed operations assigned to the selected machine, limited to *Finished*, *Interrupted*, and *Cancelled* statuses. It shares the same layout and filtering behaviour as the *Machine Orders Page*, including free-text search, status filtering, and sort controls — but omits the *Start Order* button. Tapping an operation card navigates to its *Operation Detail Page* for review. The *Machine History Page* is accessible via the *History* tab in the *TopNavigationBar*. Figure 4.10 shows the desktop and mobile views.

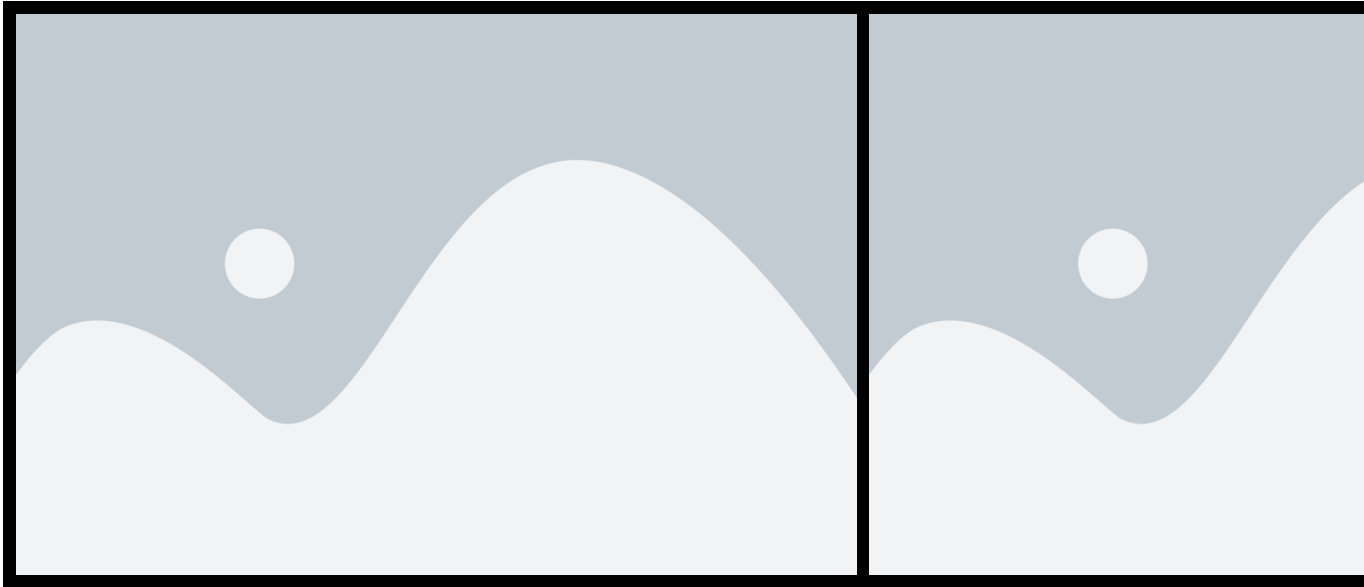


Figure 4.10. *Machine History Page* — desktop and mobile views.

4.4 Testing and Validation

4.4.1 Integrations tests

For integration testing, we chose Postman, a powerful and user-friendly tool for API evaluation. Figure 4.11 shows a test case for the `/fetchmachines` endpoint.

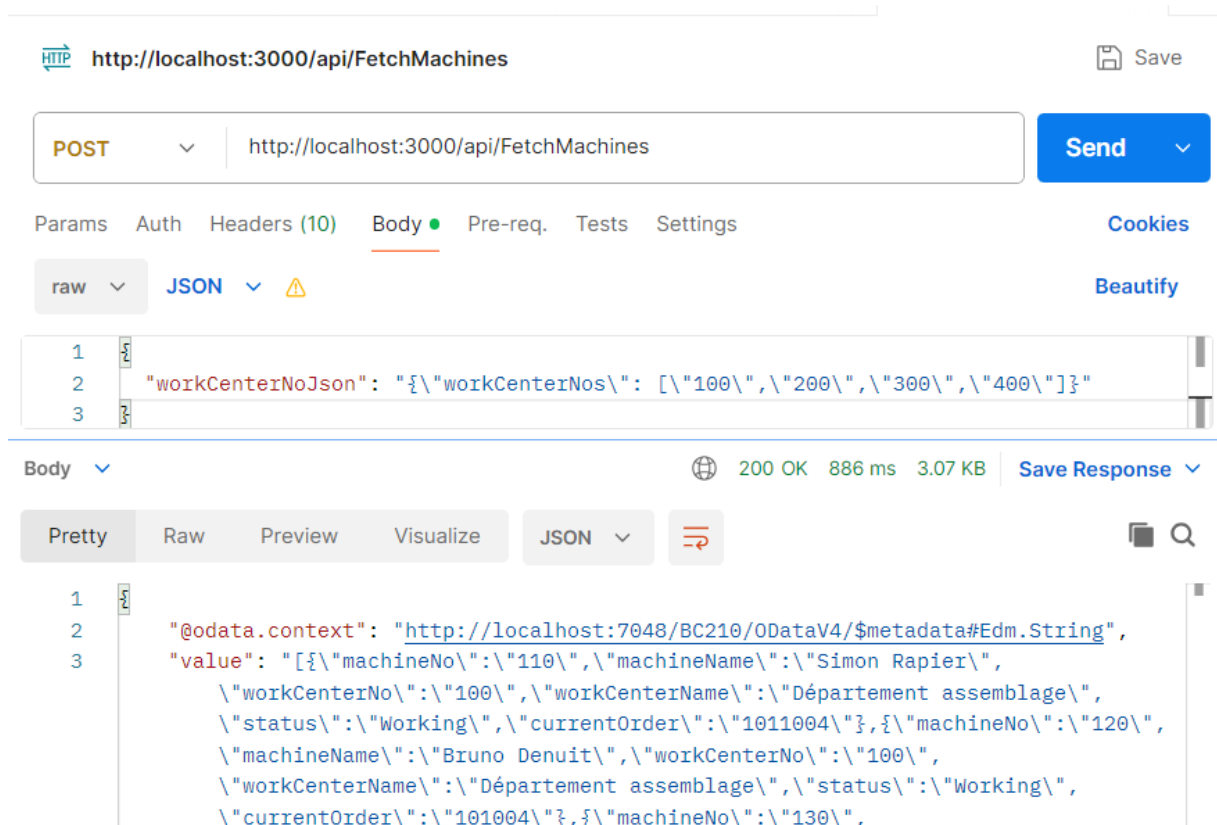


Figure 4.11. Postman endpoint test — `fetchMachines`.

Figure 4.12 shows a test case for the `/getMachinesOrders` endpoint.

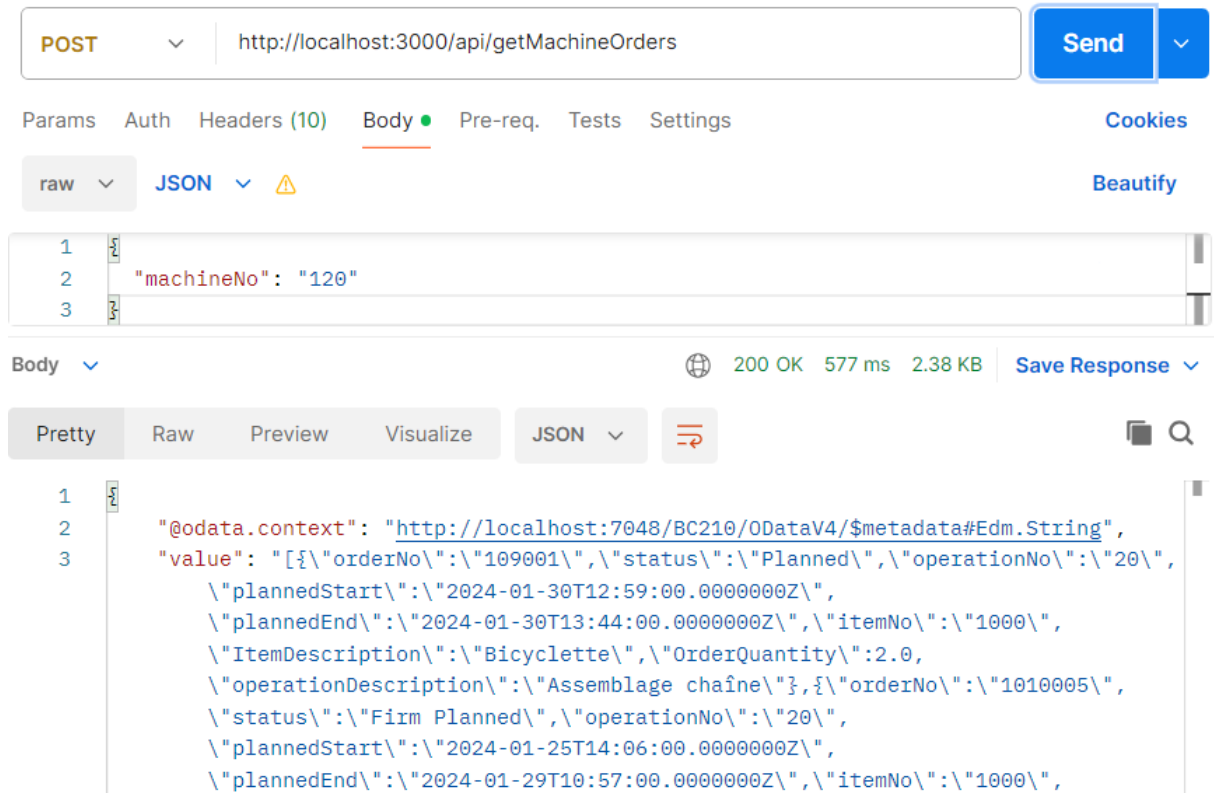


Figure 4.12. Postman endpoint test — `getMachinesOrders`.

Conclusion

This sprint successfully delivered the machine monitoring and production order management foundation of the *MES* application. On the backend, two new append-only tables (*MES Machine Status* and *MES Operation State*) and dedicated codeunits (*MES Machine Fetch* and *MES Machine Write*) were implemented in Business Central AL, exposing four *OData V4* endpoints that cover the full machine and operation lifecycle. The append-only design ensures a complete, tamper-evident audit trail of every state transition without requiring any record modification.

Chapter 5

Sprint 3 Production Execution & Traceability

Contents

Introduction	82
5.1 Sprint Backlog	82
5.2 Design	88
5.2.1 Use Case Diagram	88
5.2.2 Textual Use Case Description	89
5.2.3 Sequence Diagrams	92
5.2.4 Class Diagram	98
5.3 Implementation	99
5.3.1 Backend Implementation	99
Tables and Entities	99
REST API and Web Services Implementation	101
5.3.2 Frontend Implementation	101
Provider Architecture	101
User Interface	102
5.4 Test and Validation	103
5.4.1 Integration test	103
Conclusion	104

Introduction

This sprint report covers **Domain 3: Production Execution & Traceability**. Building upon the authentication and machine monitoring infrastructure established in the previous sprints, this sprint delivers the core production execution features; declaring production output, pausing and resuming operations, finishing, Interrupting or cancelling orders, tracking production declarations over time, monitoring Bill of Materials consumption, component barcode scanning, scrap declaration, supervisor proxy declaration, and label printing. The result is a fully operational shop-floor execution loop from order assignment through to order closure, material traceability, and printed part identification.

5.1 Sprint Backlog

This sprint covers **Domain 3: Production Execution & Traceability**.

Table 5.1. US-3.1 — Declare Production

ID	User Story	Tasks
US-3.1	As an Operator or Supervisor, I need to declare the produced quantity in a cycle so that the system records my production progress.	<i>Business Central (AL):</i> • Create table MES Operation Progression. • Create the functions: – TryDeclareProduction() in codeunit MESMachineValidation. – InsertNewProgressionCycle() in codeunit MESMachineInsert. – declareProduction() in codeunit MESMachineWrite. • Expose declareProduction() through the codeunit MES Web Service. • Create page MES Operation Progression list page. <i>Flutter:</i> • Updated ErpMachineOrdersService to consume the declareProduction API and MachineordersProvider to manage it. <i>Flutter(continuation):</i> • Create widget DeclareProductionDialog. • Add the Declare Production action in ActionButtonsContainer.

Continued on next page

ID	User Story	Tasks
US-3.2	As an Operator or Supervisor, I need to pause and resume an active operation so that production interruptions are tracked accurately.	<i>Business Central (AL):</i> • Create the functions: – TryPauseOperation() and TryResumeOperation() in codeunit MESMachineValidation. – ExecuteOperationTransition(), pauseOperation(), and resumeOperation() in codeunit MES-MachineWrite. • Expose pauseOperation() and resumeOperation() through codeunit MES Web Service. <i>Flutter:</i> • Implement ErpMachineOrdersService to consume the new endpoints • Implement MachineordersProvider to manage its state. • Create widget OperationActionButtons. • Implement pause/resume operation toggle handling in OrdersProgressionPage.

Continued on next page

ID	User Story	Tasks
US-3.3	As a Supervisor, I need to finish, interrupt or cancel a production operation so that the machine is released and the order is closed in the system.	<i>Business Central (AL):</i> • Create the functions: – TryCloseOperation() in codeunit MESMachineValidation. – InsertOperationStatus(), SetErpOrderToFinish(), InsertStartMESMachineStatus() and InsertIdleMachineStatus() in codeunit MESMachineInsert. – finishOperation() and cancelOperation() in codeunit MESMachineWrite. – ExecuteCancelUnstartedOperation() in codeunit MESMachineWrite. • Expose finishOperation() and cancelOperation() in codeunit MES Web Service. <i>Flutter:</i> • Update ErpMachineOrdersService to consume the new endpoints. • Update MachineOrdersProvider to manage its state. • Update ActionButtonsContainer to handle Finish/Interrupt operation flow.
US-3.4	As an Operator or Supervisor, I need a dedicated detail page for an operation so that I can see all real-time information in one place.	<i>Business Central (AL):</i> • Create table MES Operation Execution. • Create function InsertMESOperationExecution() in codeunit MESMachineInsert. • Create function fetchOperationLiveData() in codeunit MESMachineFetch. • Expose fetchOperationLiveData() through codeunit MES Web Service. • Create page MES Operation Execution.

Continued on next page

ID	User Story	Tasks
		<i>Flutter:</i> • Create model <code>OperationStatusAndProgress-Model</code>. • Update <code>ErpMachineOrdersService</code> to consume the new endpoints. • Update <code>MachineOrdersProvider</code> to manage its state. • Create page <code>OperationDetailPage</code>. • Create widget <code>OperationAppBar</code>. • Create widget <code>CurrentOrderInfoContainer</code>.
US-3.5	As an Operator or Supervisor, I need to see all production cycles declared for an operation so that I can review each declaration's quantity, operator, and timestamp.	<i>Business Central (AL):</i> • Create function <code>fetchProductionCycles()</code> in codeunit <code>MESMachineFetch</code>. • Expose <code>fetchProductionCycles()</code> through codeunit <code>MES Web Service</code>. <i>Flutter:</i> • Create model <code>ProductionCycleModel</code>. • Update <code>ErpMachineOrdersService</code> to consume the new endpoints. • Update <code>MachineOrdersProvider</code> to manage its state. • Create widget <code>ProductionCycle</code>.
US-3.6	As an Operator or Supervisor, I need to see a visual chart of production declarations over time so that I can identify trends and performance patterns.	<i>Flutter:</i> • Create widget <code>ProductionChart</code>. • create a function to ensure that the chart is always centered • implemented a scrollable view into the chart
US-3.7	As an Operator or Supervisor, I need to see the Bill of Materials for a production operation so that I know which components are required, how much has already been consumed, and the amount available in the inventory.	<i>Business Central (AL):</i> • Create function <code>fetchBom()</code> in codeunit <code>MESMachineFetch</code>. • Expose <code>fetchBom()</code> through codeunit <code>MES Web Service</code>.

Continued on next page

ID	User Story	Tasks
US-3.8	As an Operator or Supervisor, I need to report scrapped units with a reason code so that waste is accurately tracked.	<i>Flutter:</i> • Create MesComponentConsumptionService to consume the fetchBom() API. • Create MesComponentConsumptionProvider to manage BOM stream and refresh state. • Create widget RequiredComponent. • Implement BOM streaming and refresh flow in MesComponentConsumptionService and MesComponentConsumptionProvider. • Implement component status display and operation-based filtering in RequiredComponent widget.
		<i>Business Central (AL):</i> • Create table MES Operation Scrap. • Create function declareScrap() in codeunit MES Machine Write. • Expose declareScrap() through codeunit MES Web Service. • Create MES Scrap Code API to fetch scrap codes from the standard Business Central Scrap Code. <i>Flutter:</i> • Create model MesScrapCode. • Create MesScrapService to consume the scrap code fetch and declareScrap() APIs. • Create MesScrapProvider to manage scrap code and scrap declaration state. • Create dialog DeclareScrapDialog.
US-3.9	As a Supervisor, I need to declare production on behalf of an operator so that output is attributed to the correct person.	<i>Business Central (AL):</i> • Add field Declared By to the tables MES Operation Progression and MES Operation Scan.

Continued on next page

ID	User Story	Tasks
US-3.10	As an Operator or Supervisor, I need to scan components into an operation so that consumption is recorded against the BOM.	<i>Flutter:</i> • Create widget OperatorSelector. • Update DeclareProductionDialog to support supervisor declaration on behalf of an operator. • Connect OperatorSelector to MesUserProvider and pass onBehalfOfUserId to MachineOrdersProvider.declareProduction().
		<i>Business Central (AL):</i> • Create table MES Component Scan. • Create the function insertScans() in codeunit MES Machine Write. • Create the functions resolveBarcode() in codeunit MES Machine Fetch. • Expose the three function through codeunit MES Web Service. • Create page MES Component Consumption. <i>Flutter:</i> • Create model ItemBarcodeModel. • Create MesBarcodeService to consume the endpoints insertScans(), and resolveBarcode(). • Create MesBarcodeProvider to manage barcode state and API calls. • Create widget ScannerWidget. • Update widget RequiredComponent to integrate item scanning, search, filtering, and BOM refresh after scan submission. • Implement ondevice camera scanning via mobile_scanner in ScannerWidget

Continued on next page

ID	User Story	Tasks
US-3.11	As an Operator or Supervisor, I need to print a label for the finished production operations (100% progress) so that produced parts are correctly identified.	<i>Flutter:</i> • Create page <code>PrintLabelPage</code>. • Update <code>ActionButtonsContainer</code> to integrate the <i>Print Label</i> action. • Implement label generation, preview, print flow, and orientation toggle in <code>PrintLabelPage</code>.
US-3.12	As an Operator or Supervisor, I need a label printed for each declared unit so that individual pieces carry traceable information.	<i>Flutter:</i> • Create page <code>DeclarationLabelPage</code>. • Implement declaration label generation, preview, orientation toggle, and per-unit PDF export in <code>DeclarationLabelPage</code>.

5.2 Design

5.2.1 Use Case Diagram

This sprint adds production execution actors and interactions centred on the Operator and Supervisor roles. The primary use cases are: Declare Production, Pause Operation, Resume Operation, Finish Operation, Interrupt Operation, Cancel Operation, View BOM Components, View Operation Detail, View declaration History.

The Supervisor role is a superset of Operator: both roles can declare production, pause, resume, and view detail; only the Supervisor may close (Finish, Interrupt or Cancel) a production order in the intended business flow, although the current implementation enforces this at the UI layer through the `canCloseProductionOrder` flag rather than at the API level. The resulting use case diagram is shown in Figures 5.1 and 5.2.

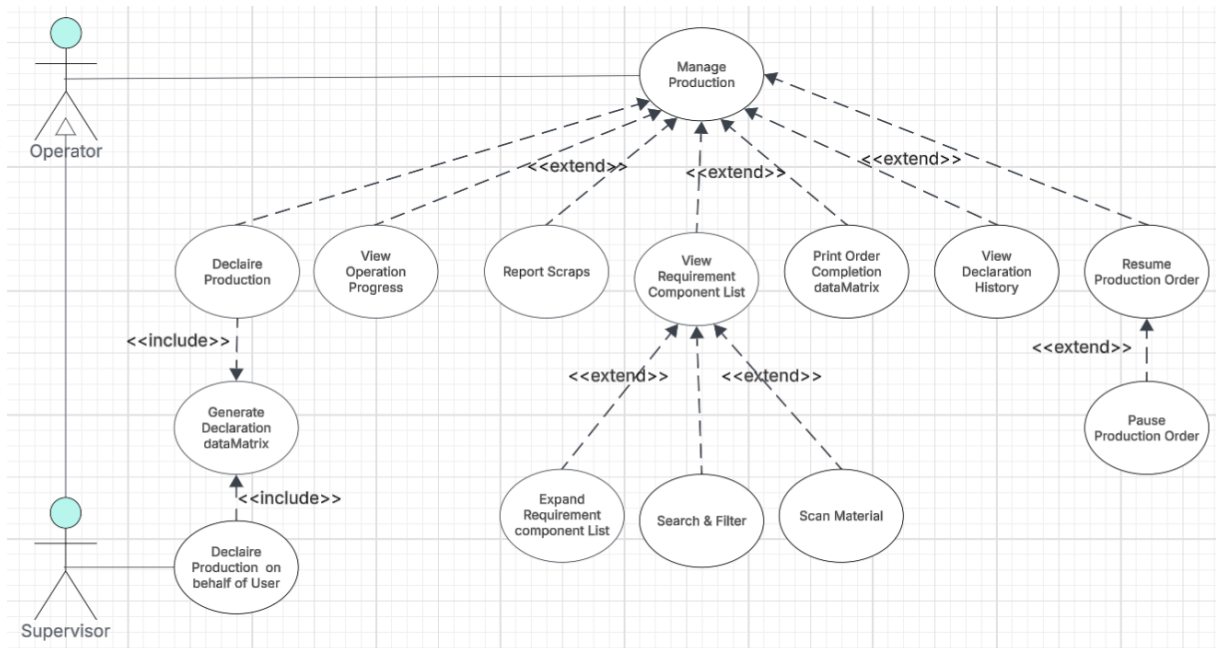


Figure 5.1. UML Use Case Diagram — Sprint 3 (manage production)

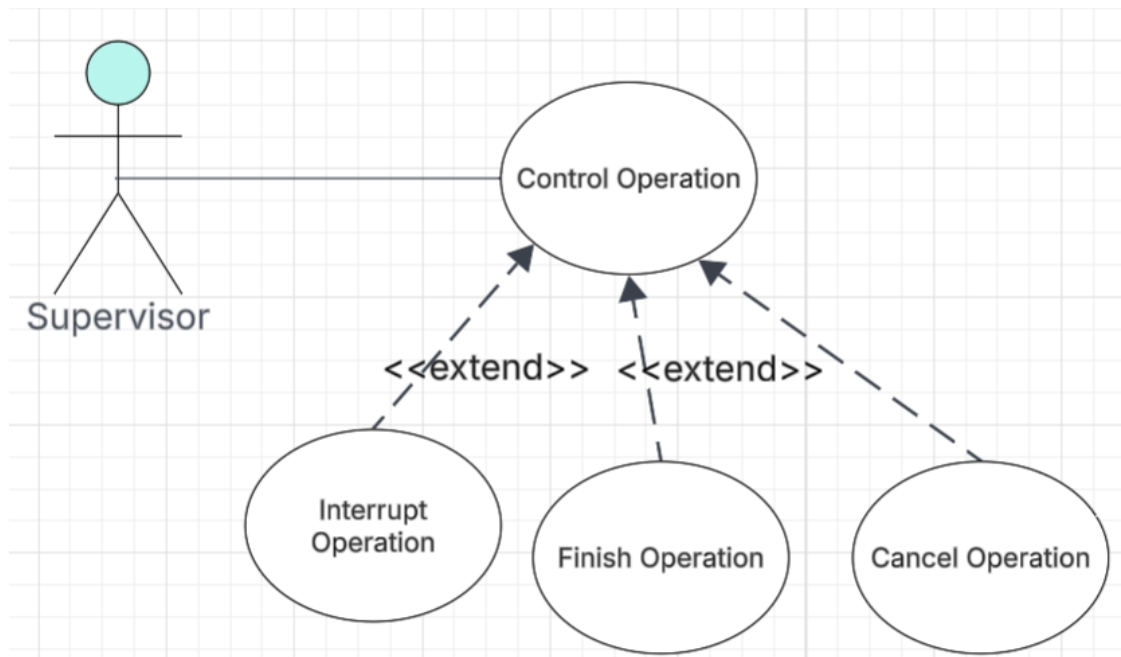


Figure 5.2. UML Use Case Diagram — Sprint 3 (control operations)

5.2.2 Textual Use Case Description

Table 5.2. Textual Use Case Description — Declare Production

Use Case Name	Declare Production
Primary Actor	Operator / Supervisor
Preconditions	• The user is authenticated and navigated to an Operation Detail page. • The operation status is <i>Running</i>. • The produced quantity is below the order quantity.
Postconditions	• A new MES Operation Progression record is inserted. • The production chart and cycle table update via the refresh stream or trigger. • The progress percentage and produced quantity in the info container update.
Main Scenario	1. The user taps <i>Declare Production</i> in the Quick Actions panel. 2. The DeclareProductionDialog opens showing the remaining quantity. 3. The user (if Supervisor) optionally selects an operator from the dropdown to declare on behalf of. 4. The user enters a positive integer not exceeding the remaining quantity. 5. The user taps <i>Submit</i>. 6. The ERP validates the quantity and inserts the progression record. 7. The user is redirected to the declaration lable print page 8. The refresh stream triggers a live data update.
Alternative Flow	• <i>Step 3, invalid quantity</i>: client-side validation shows an inline error; submission is blocked. • <i>Step 6, ERP error</i>: the server error message is displayed in the dialog; the record is not inserted.

Table 5.3. Textual Use Case Description — Finish / Cancel / Interrupt Operation

Use Case Name	Finish / Cancel / Interrupt Operation
Primary Actor	Supervisor
Preconditions	• The user is authenticated with an active session as a Supervisor. • The operation is in <i>Running</i>, <i>Paused</i>, or <i>Released and unstarted</i> state.
Postconditions	• A <i>Finished</i>, <i>Interrupted</i>, or <i>Cancelled</i> status record is inserted. • The execution end time is stamped. • An Idle machine status record is inserted if the operation was started.
Main Scenario	1. The user clicks in the (Interrupt, Finish, Cancel) button based on the operation state. 2. A confirmation dialog is displayed; the user confirms. 3. The system POSTs to /MESWebService_finishOperation or cancelOperation. 4. The ERP validates, inserts the status record, stamps the end time, and inserts an Idle machine status.

Table 5.4. Textual Use Case Description — Scan Component Consumption

Use Case Name	Scan Component Consumption
Primary Actor	Operator / Supervisor
Preconditions	• The user is authenticated and holds a valid session token. • The operation has been started. • The user is on the Operation Detail page with the ScannerWidget open.
Postconditions	• One MES Operation Scan record is inserted per scanned item line. • One Item Journal Line (consumption) is posted to BC inventory per scanned item line. • The Required Component widget refreshes to reflect the updated consumed quantities.

Continued on next page

Main Scenario

1. The user taps *Scan Item* and points the camera or scanner at a component barcode.
2. Flutter POSTs to `/api/resolveBarcode`; the middleware forwards the call to `MESWebService_resolveBarcode` in AL.
3. AL resolves the item: if the barcode carries an Item Number: prefix, AL parses the item number directly and retrieves the item record from BC; otherwise AL resolves the identifier via the Item Identifier table.
4. AL fetches the unit-of-measure conversion factor via `Item Unit of Measure.Get` and returns `itemNo`, `itemDescription`, `unitOfMeasure`, and `quantityPerUnitOfMeasure` to Flutter.
5. Flutter validates the response and adds the item to the local scanned-items list (or increments its quantity if already present); the item appears in the scan list.
6. The user repeats steps 1–5 for each additional component, then taps *Confirm Scans*.
7. Flutter POSTs the full scan list to `/api/insertScans`; the middleware forwards to `MESWebService_insertScans` in AL.
8. AL for each scan inserts an MES Operation Scan record and an Item Journal Line.
9. AL posts all journal lines to BC inventory in a single batch; BC confirms success.
10. Flutter pops the `ScannerWidget` and triggers a data refresh; the Required Component widget displays the updated consumed quantities.

Alternative Flow

- *Step 3, unresolvable barcode*: AL returns an error; Flutter displays an inline error message and does not add the item to the scan list.
- *Step 5, client validation failure*: Flutter blocks the addition and shows an inline error (e.g. zero or negative quantity).
- *Step 9, BC posting error*: AL returns the server error to Flutter; no consumption or journal records are committed, and the dialog remains open with the error displayed.

5.2.3 Sequence Diagrams

The following sequence diagrams illustrate the communication flow between the Flutter frontend, the Business Central OData layer, and the AL business logic for the production and

operation-lifecycle flows introduced in Sprint 3.

Figures 5.3 and 5.4 present the two supplementary data-retrieval flows that run concurrently alongside the main operation detail view. Both are polling streams that re-emit on demand or when a state-change trigger is received from the Flutter client.

Figure 5.3 describes the bill-of-materials retrieval flow. The AL layer resolves the routing link code from the active *ProdOrderRoutingLine*, filters the production order components by that link, aggregates the quantity already scanned per item, and resolves per-unit quantities from the *ItemUnitOfMeasure* table before returning the assembled BOM rows to the Flutter client.

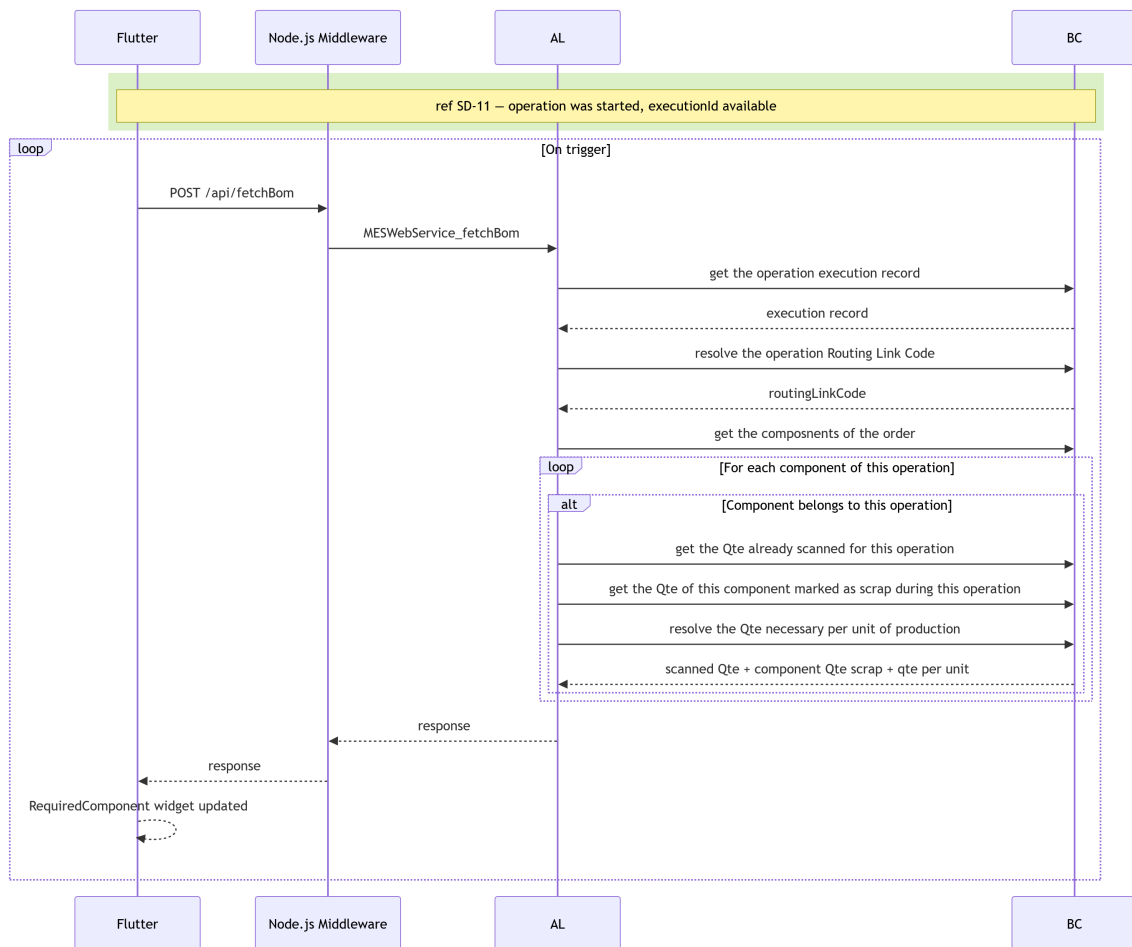


Figure 5.3. SD-21: Fetch Bill of Materials.

Figure 5.4 illustrates the production-cycle retrieval flow. The AL layer fetches the full progression history for the operation, enriches each entry with the name of the user who declared it, and returns the assembled cycle list to the Flutter client.

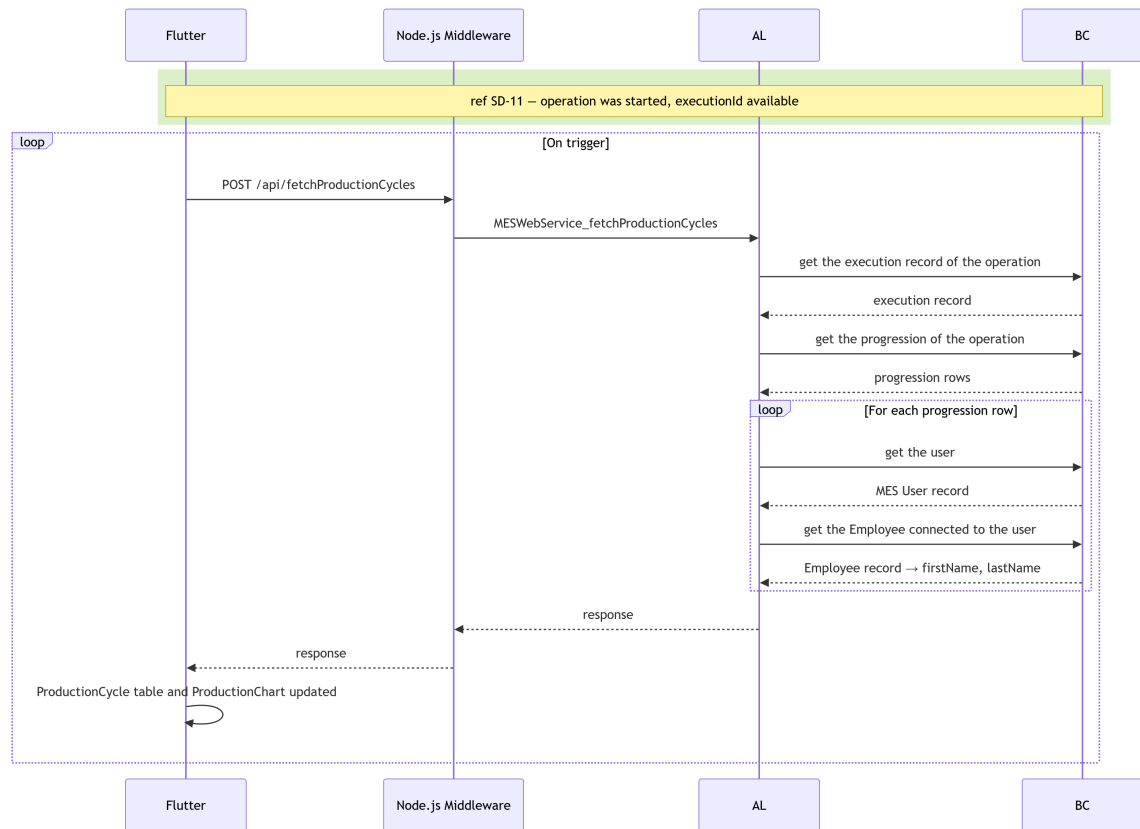


Figure 5.4. SD-22: Fetch Production Cycles.

Figures 5.5 through 5.6 illustrate the operation: pause, resume. Figure 5.5 describes the pause flow. The AL layer confirms that the operation is currently in the *Running* state before inserting a *Paused MES Operation State* record and setting the machine status back to *Idle*.

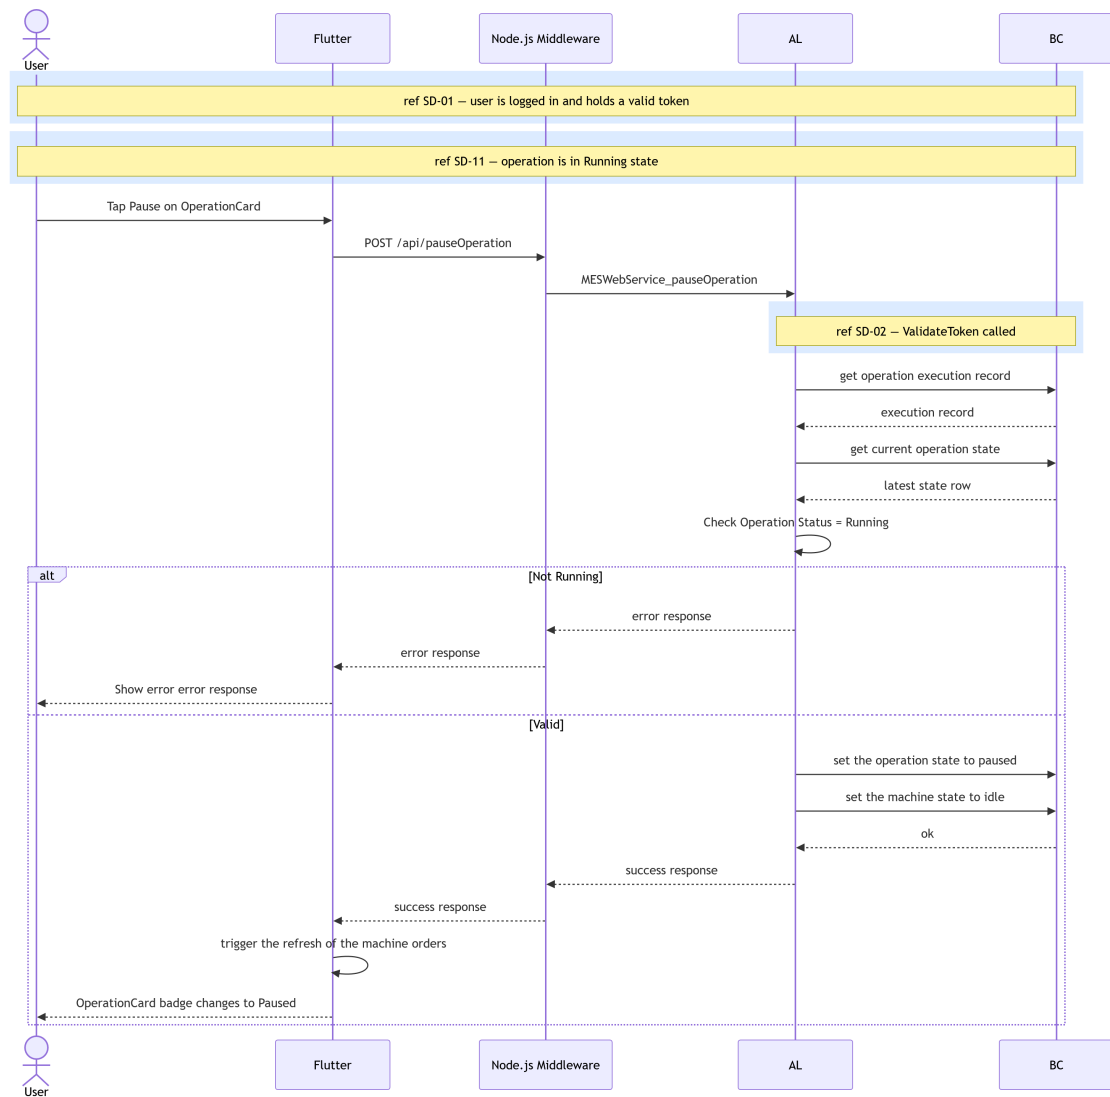


Figure 5.5. SD-13: Pause Operation.

Figure 5.6 presents the resume flow. In addition to confirming that the operation is in the *Paused* state, the AL layer verifies that no other operation is currently running on the same machine before inserting a *Running* state record and marking the machine as *Working*.

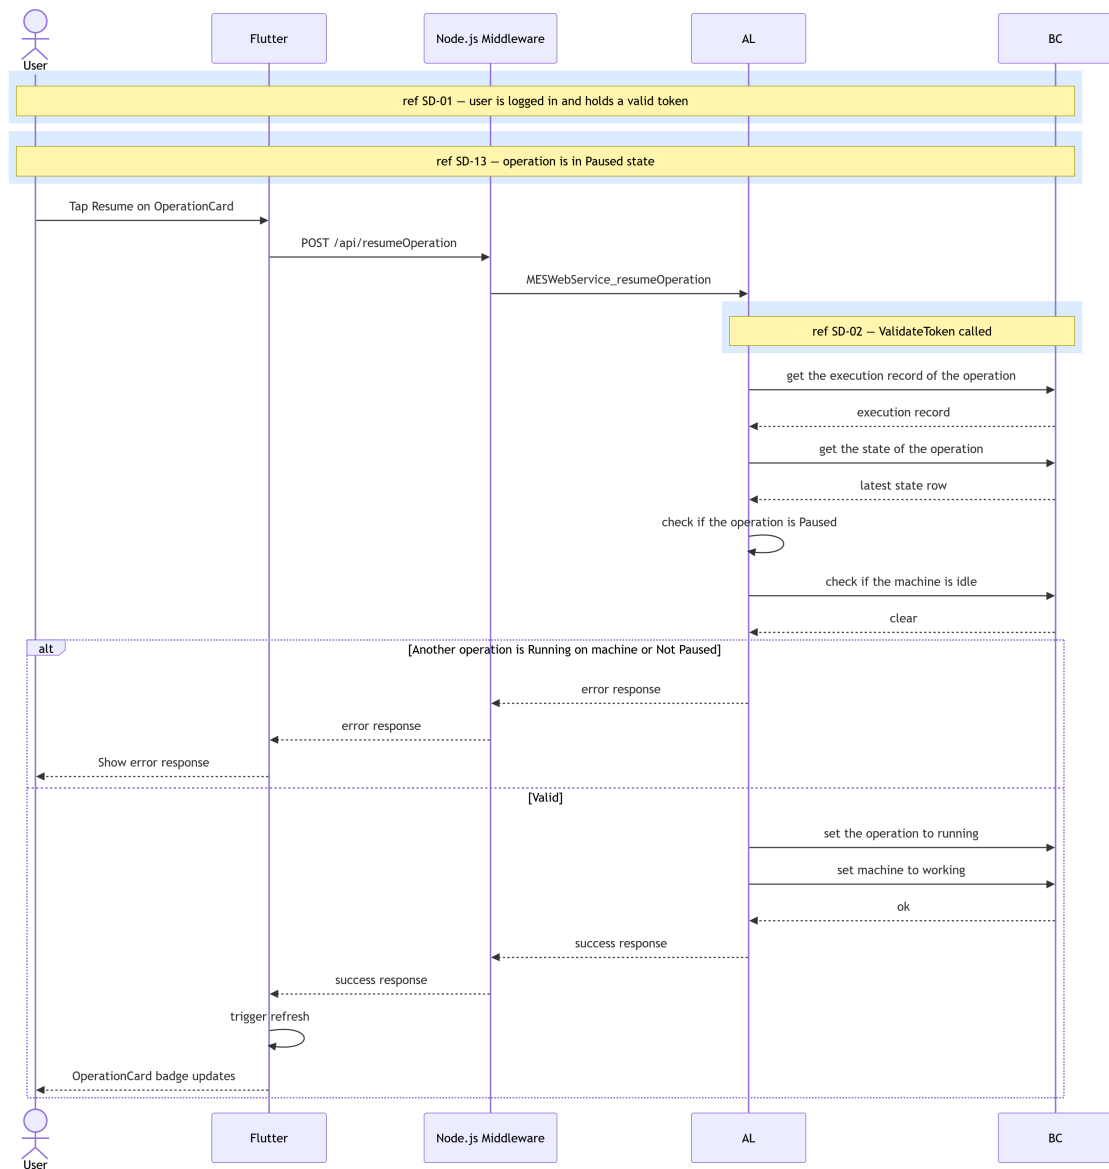


Figure 5.6. SD-14: Resume Operation.

Figure 5.7 covers the finish and cancel flows, which share a single endpoint family. The AL layer rejects the request if the operation is already in a terminal state; otherwise it inserts the appropriate closed-state record, stamps the execution end time, and resets the machine status to *Idle*. The closed operation then appears in the history view rather than the active operations list.

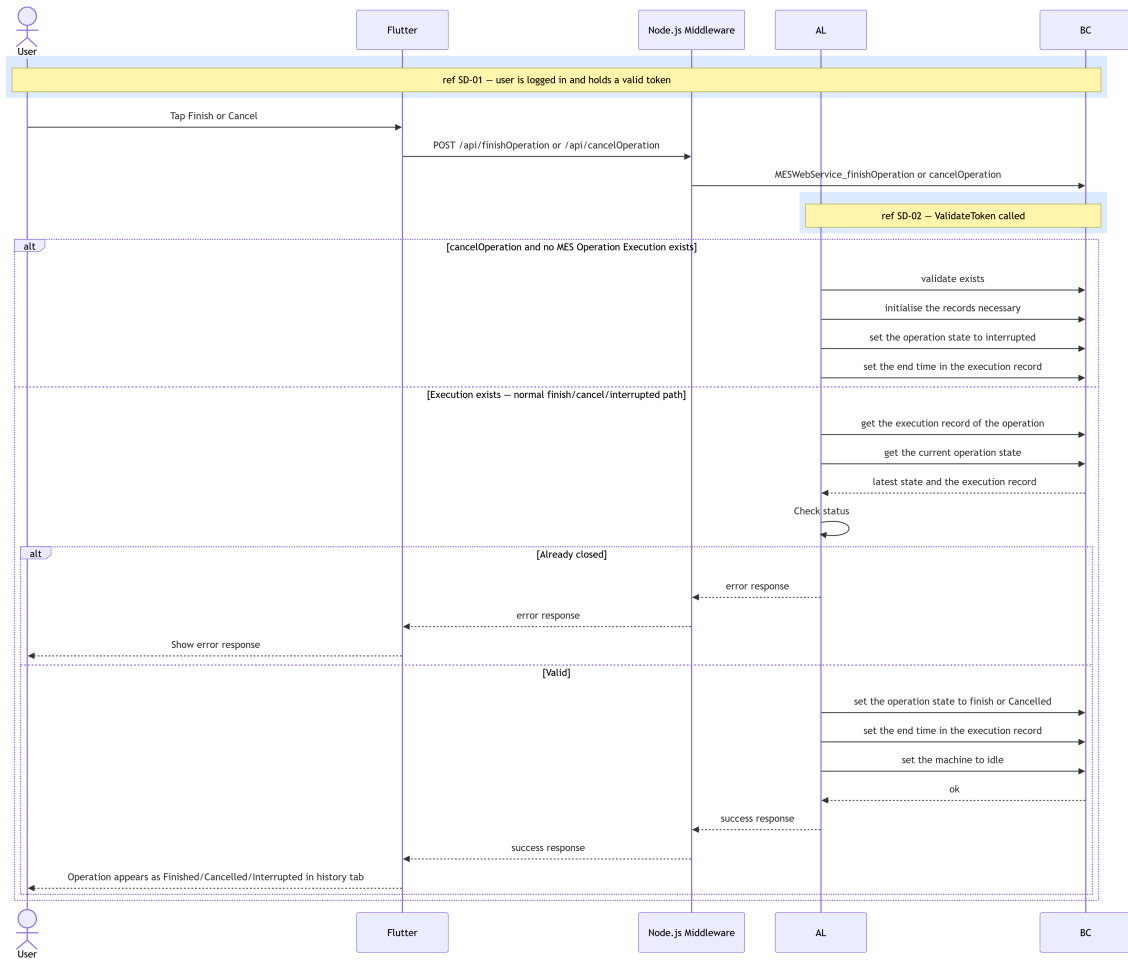


Figure 5.7. SD-15: Finish/Cancel/Interrupt Operation.

Figure 5.8 presents the live operation data retrieval sequence. When the user navigates to the *OperationDetailPage*, three StreamBuilder instances mount simultaneously: one polling the current operation status and quantities from Business Central (SD-18), one consuming the production-cycle stream (SD-22), and one consuming the BOM stream (SD-21). The Flutter client merges all three data sources and renders the full detail view. If the operation is finished, cancelled, or not yet started, the live-data stream returns an empty response and the client falls back to the history view.

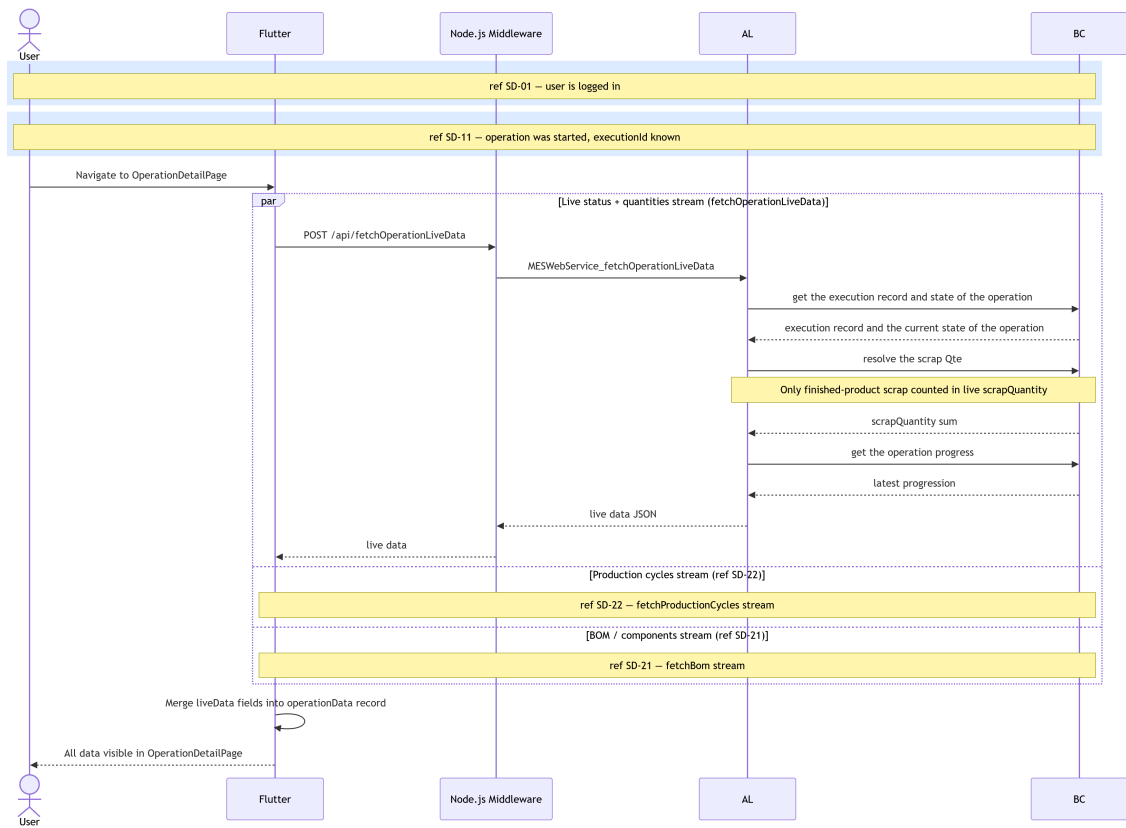


Figure 5.8. SD-18: Fetch Operation Live Data.

5.2.4 Class Diagram

The UML Class Diagram (Figure 5.9) extends the Sprint 2 domain model with three new tables. MES Operation Execution (50110) is the central anchor record linking a machine, production order, and operation to its full lifecycle; it holds item description, order quantity, and start/end timestamps. MES Operation Progression (50109) is an append-only table of production cycle declarations, each referencing an execution and accumulating TotalProducedQuantity from the previous cycle. MES Component Consumption (50111) records scrap and barcode scan events, also referencing an execution. Both progression and consumption records are child tables of the execution record, forming a hub-and-spoke traceability model.

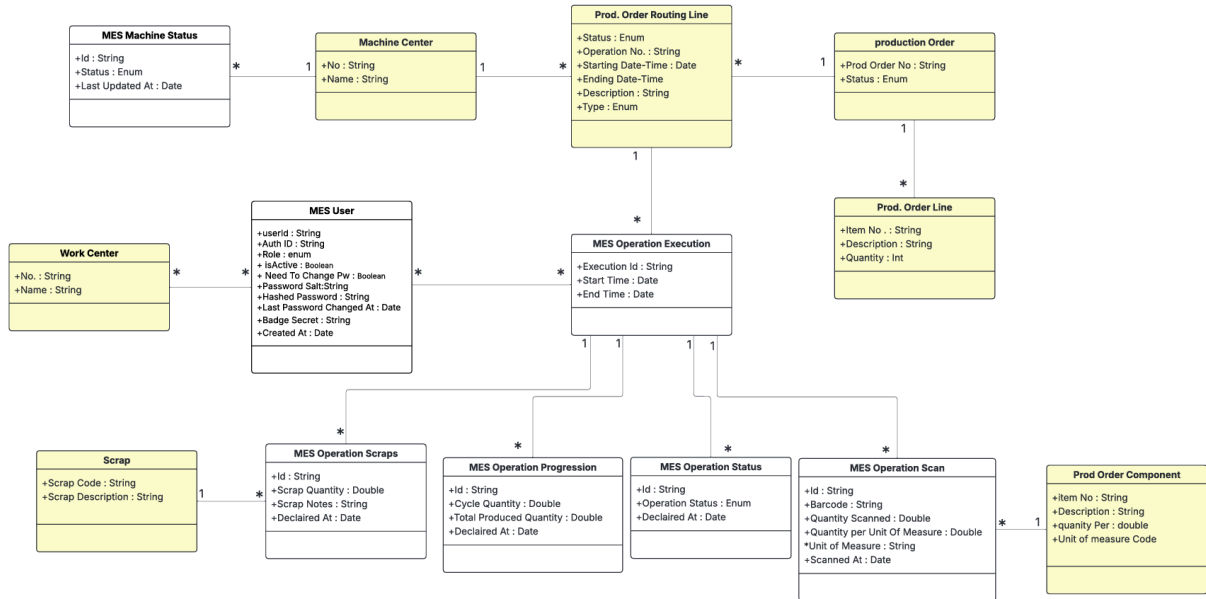


Figure 5.9. UML Class Diagram — Production Execution & Traceability.

5.3 Implementation

5.3.1 Backend Implementation

Tables and Entities

Table 5.5. MES Operation Execution (Table 50110) — Field Dictionary

Name	Type	Description
Execution Id	Code[50]	GUID-based primary key; auto-generated on insert.
Machine No	Code[20]	References Machine Center (no referential constraint enforced in the current implementation).
Prod Order No	Code[20]	Foreign key to Prod. Order Routing Line.
Operation No	Code[10]	Operation identifier from the routing line.
Item No	Code[20]	Copied from Prod. Order Line on execution creation.
Item Description	Text[100]	Copied from Prod. Order Line for denormalized display.
Order Quantity	Decimal	Copied from Prod. Order Line; used for progress calculation.
Start Time	DateTime	Set by OnInsert trigger to CurrentDateTime().
End Time	DateTime	Stamped when status transitions to Finished or Cancelled.

Table 5.6. MES Operation Progression (Table 50109) — Field Dictionary

Name	Type	Description
Id	Code[50]	GUID-based primary key; auto-generated on insert.
Execution Id	Code[50]	Foreign key to MES Operation Execution.
Cycle Quantity	Decimal	Units declared in this single production cycle.
Total Produced Quantity	Decimal	Running total: previous total + Cycle Quantity.
Operator Id	Code[50]	BC session UserId of the user who produced the unites during this cycle.
Declared At	DateTime	Set by OnInsert trigger to CurrentDateTime().
Declared By	Code[50]	BC session UserId of the user who declared the production cycle

Table 5.7. MES Operation Scan (Table 50111) — Field Dictionary

Name	Type	Description
Id	Code[50]	GUID-based primary key; auto-generated on insert.
Execution Id	Code[50]	Foreign key to MES Operation Execution.
Prod Order No	Code[50]	Foreign key to Prod. Order Component.
Item No	Code[50]	Item identifier of the consumed component.
Barcode	Text[500]	Barcode scanned to register the component.
Unit of Measure	Code[50]	Unit of measure code from the component definition.
Quantity Scanned	Decimal	Raw quantity read from the barcode scan.
Quantity per Unit of Measure	Decimal	Unit-of-measure conversion factor; the effective consumed quantity equals Quantity Scanned multiplied by this value.
Operator Id	Code[50]	BC session UserId of the operator who scanned.
Scanned At	DateTime	Set by OnInsert trigger to CurrentDateTime().
Declared By	Code[50]	BC session UserId of the user who declared the production cycle

REST API and Web Services Implementation

All endpoints are exposed as ODataV4 unbound actions through MES Web Service (codeunit 50126) and are served by the middleware at:

`middlewareHostURL/api/<endpointName>`

Each request is forwarded to the AL layer as an ODataV4 action call of the form:

`POST <baseUrl>/ODataV4/MESWebService_<ProcedureName>?company=<companyId>`

Table 5.8 lists all endpoints introduced in this sprint.

Table 5.8. New API Endpoints — Sprint 3

Endpoint	Endpoint
startOperation	fetchOperationsStatusAndProgress
declareProduction	fetchOperationLiveData
pauseOperation	fetchProductionCycles
resumeOperation	fetchBom
finishOperation	
cancelOperation	

5.3.2 Frontend Implementation

This sprint introduces a reactive pattern: a shared `StreamController<void>.broadcast()` in `MachineOrdersProvider` and `MesComponentConsumptionProvider`. When any write action (declare, pause, resume, finish, cancel) succeeds, `triggerRefresh()` adds an event to the controller. All live data streams (`fetchOperationLiveDataStream`, `streamProductionCycles`, `streamBom`) are implemented as `async*` generators that yield on both the initial fetch and on each event from the shared broadcast stream, enabling coordinated, push-driven UI updates without polling.

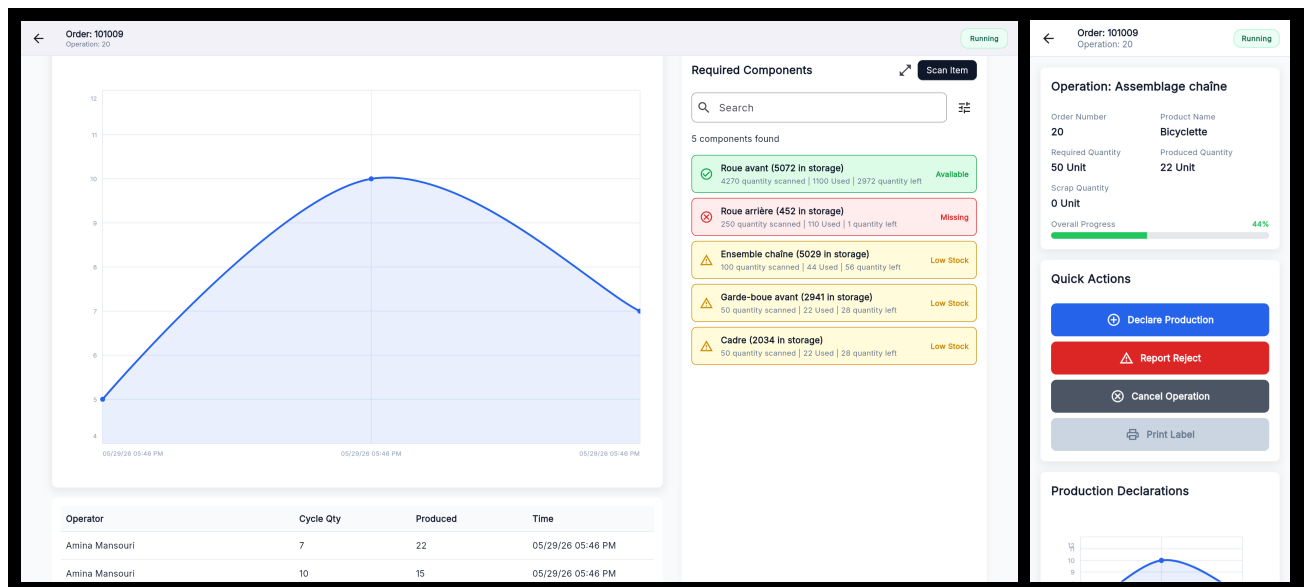
Provider Architecture

Table 5.9. Provider Responsibilities — Sprint 3 Additions

Provider	Responsibility
MachineOrdersProvider	Owns write operations (start, declare, pause, resume, finish, cancel) and their refresh controller; exposes all live data streams.
MesComponentConsumptionProvider	Exposes <code>getBomStream()</code> combining service fetch with an independent refresh controller.
AuthProvider	Adds <code>changePassword()</code> and <code>adminSetPassword()</code> ; manages <code>needsPasswordChange</code> flag in the in-memory session.

User Interface

Figures 5.10 through 5.11 illustrate the *Operation Detail Page* across its five possible states: Running, Paused, Finished, Interrupted, and Cancelled. Each view adapts its action buttons and status badge to the current state, while the production chart, cycle table, and BOM list remain consistently visible. On desktop, the page uses a two-column layout with order information and production data on the left, and the *Quick Actions* panel on the right; on mobile, these sections stack vertically. Action button availability is state-dependent: *Declare Production* and *Declare Scrap* are disabled in the Paused, Finished, and Cancelled states; the close button triggers a *Finish Production Order* or *Interrupt Production Order* action depending on whether the progress has reached 100%; and *Print Label* is enabled only once the operation is finished.

**Figure 5.10.** Operation Detail Page (Running state) — desktop and mobile views.

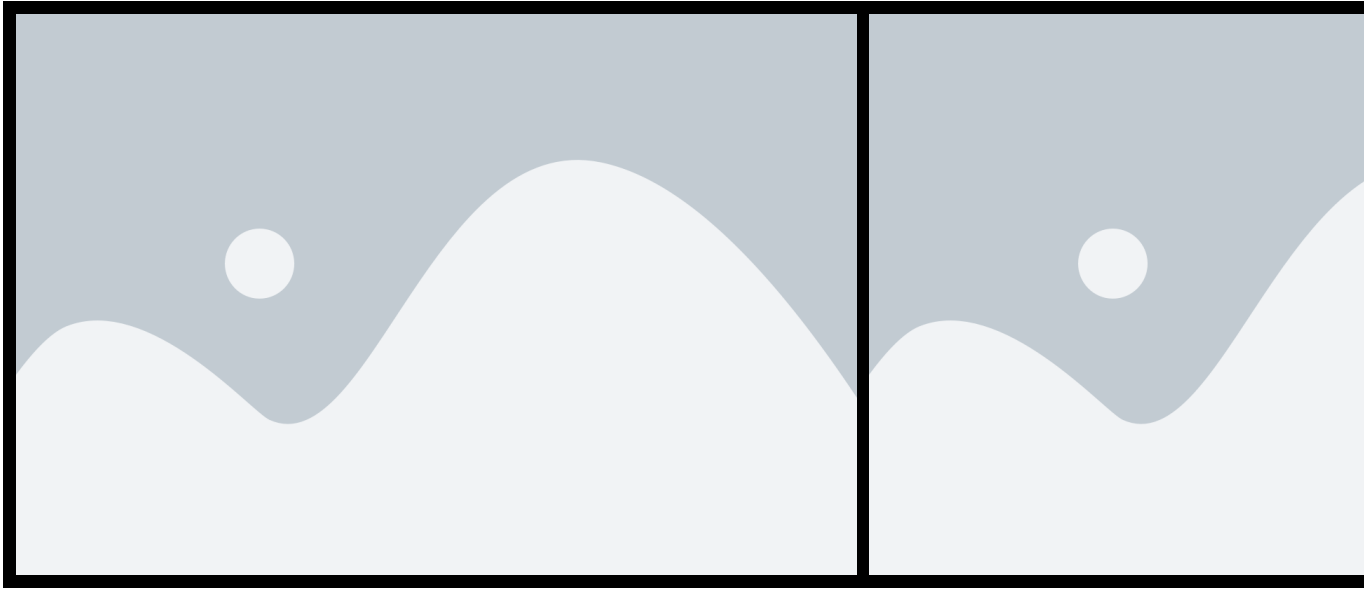


Figure 5.11. *Operation Detail Page* (Cancelled state) — desktop and mobile views.

5.4 Test and Validation

5.4.1 Integration test

For integration testing, we chose Postman, a powerful and user-friendly tool for API evaluation. Figure 5.12 shows a test case for the `/fetchBom` endpoint.

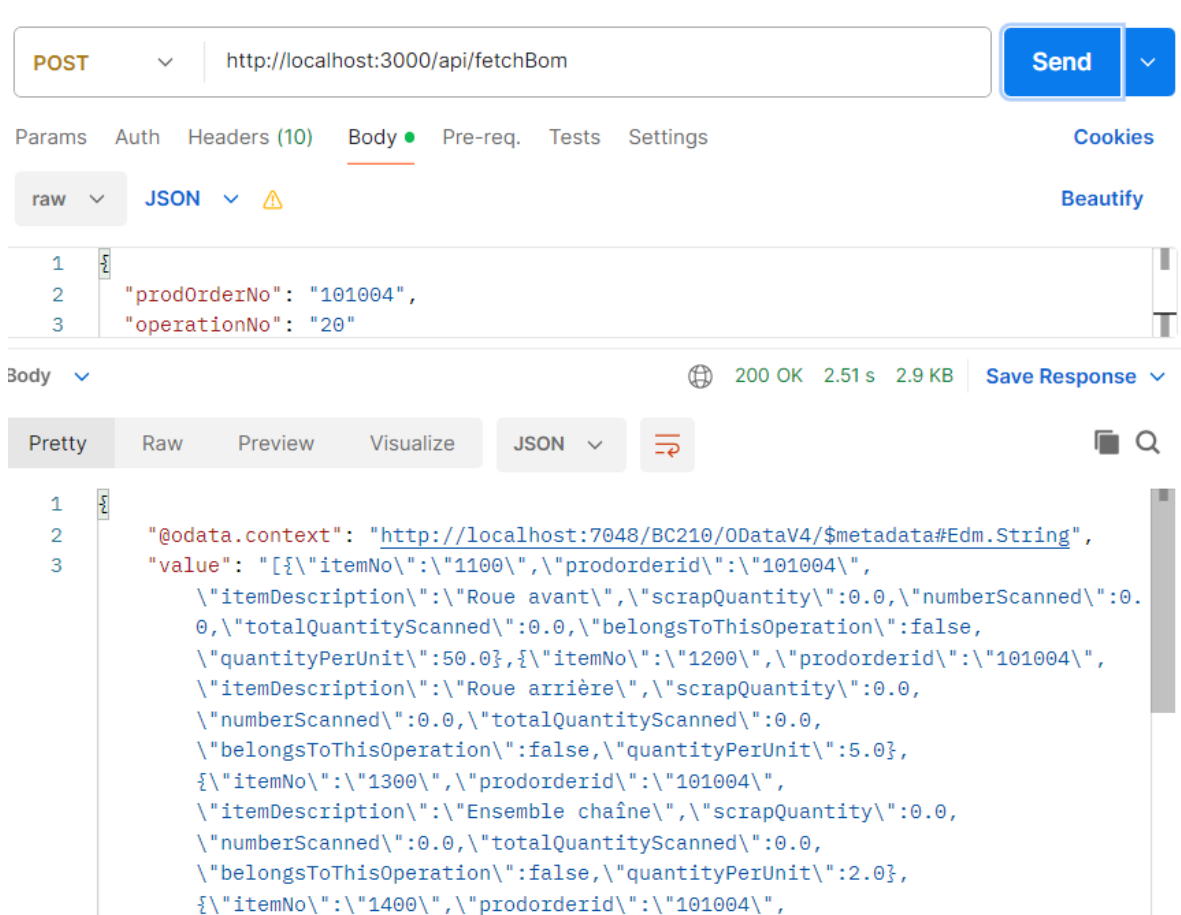


Figure 5.12. Postman endpoint test — fetchBom.

Conclusion

This sprint delivered the complete shop-floor execution loop for the MES system. Operators can now start, pause, resume, interrupt and close production operations, declare production output cycle by cycle, track cumulative progress through real-time charts and paginated tables, inspect the Bill of Materials, scan physical components via barcodes, declare scrapped units with reason codes, and print traceable labels for both production orders and individual declared units. Supervisors gain the ability to declare production on behalf of a specific operator, with a full attribution audit trail. The reactive stream architecture ensures that all UI panels update in concert after every write action, providing a consistent and accurate view of the production floor without manual refreshes.

Chapter 6

Sprint 4 Administration & System Monitoring

Contents

Introduction	106
6.1 Sprint Backlog	106
6.2 Design	107
6.2.1 Use Case Diagram	107
6.2.2 Textual Use Case Description	108
6.2.3 Sequence Diagrams	109
6.2.4 Class Diagram	110
6.3 Implementation	110
6.3.1 Backend Implementation	110
Dashboard Aggregation	111
Activity Log Aggregation	111
API Endpoints Added in Sprint 4	111
6.3.2 Frontend Implementation	111
Shared HTTP Infrastructure	111
Provider Architecture	111
User Interface	112
6.4 Test and validation	113
6.4.1 Integration test	113
Conclusion	114

Introduction

This sprint delivers the administration layer, multi-language support, and in-app onboarding tutorials that complete the *MES* solution. Administrators receives access to an activity log, and a user role management interface. Quality-of-life features include full internationalisation with English, French, and Arabic support, automatic right-to-left layout for Arabic, and guided coach-mark tutorials shown once in the main screens on first use. This sprint also delivers machine performance dashboard for the Supervisor. No new Business Central tables are introduced in this sprint; all data is derived by querying and aggregating the tables created in Sprints 1 through 3.

6.1 Sprint Backlog

This sprint covers **Domain 4: Administration & Monitoring**

Table 6.1. Sprint 4 Story Backlog

ID	User Story	Tasks
US-4.1	As an Supervisor, I need a performance dashboard for all machines so that I can monitor production health across the facility.	<i>Business Central (AL):</i> • Create function <code>fetchMachineDashboard()</code> in codeunit MES Machine Fetch. • Expose the function through the codeunit MES Web Service. <i>Flutter:</i> • Create model <code>MachineDashboardModel</code>. • Create <code>LogService</code> to consume the <code>fetchMachineDashboard</code> API and <code>Log-Provider</code> to manage its state. • Create page <code>MachineDashboardPage</code>. • Implement machine dashboard search and time-range filtering in <code>MachineDashboardPage</code>.
US-4.2	As an Administrator, I need a filterable, paginated log of all system actions so that I can audit operator and machine activity.	<i>Business Central (AL):</i> • Create function <code>fetchActivityLog()</code> in codeunit MES Machine Fetch. • Add the wrapper of the function to MES Web Service.

Continued on next page

ID	User Story	Tasks
		<i>Flutter:</i> • Create model ActivityLogModel. • Create LogService to consume the fetchActivityLog() API and LogProvider to manage its state. • Create page ActivityLogPage. • Implement activity log search, type filtering, time-range filtering, and pagination in ActivityLogPage.
US-4.3	As any user, I need the application available in English, French, and Arabic so that I can use it in my preferred language.	<i>Flutter:</i> • Integrate the easy_localization package. • Create translation JSON files for en, fr, and ar. • Create widget LanguageSelector. • Implement language selection in ProfilePage. • Add the EasyLocalization wrapper in main(). • Implement right-to-left layout support through MaterialApp.
US-4.4	As a first-time user, I need guided coach-mark tutorials so that I can learn the interface without external documentation.	<i>Flutter:</i> • Integrate the tutorial_coach_mark package. • Implement tutorial persistence using SharedPreferences. • Create MachineListTutorial, MachineDetailTabsTutorial, OperationDetailTutorial, and AdminDashboardTutorial. • Implement tutorial target styling and localisation.

6.2 Design

6.2.1 Use Case Diagram

The UML Use Case Diagram (Figure 6.1) covers the actors and interactions introduced in this sprint. The Administrator gains the interaction *View Activity Log*. The Supervisor gains the interaction *View Machine Dashboard*. All three actors (Operator, Supervisor, Administrator) share the *Select Language* and *View Tutorial* use cases, which are cross-cutting accessibility features available on every screen.

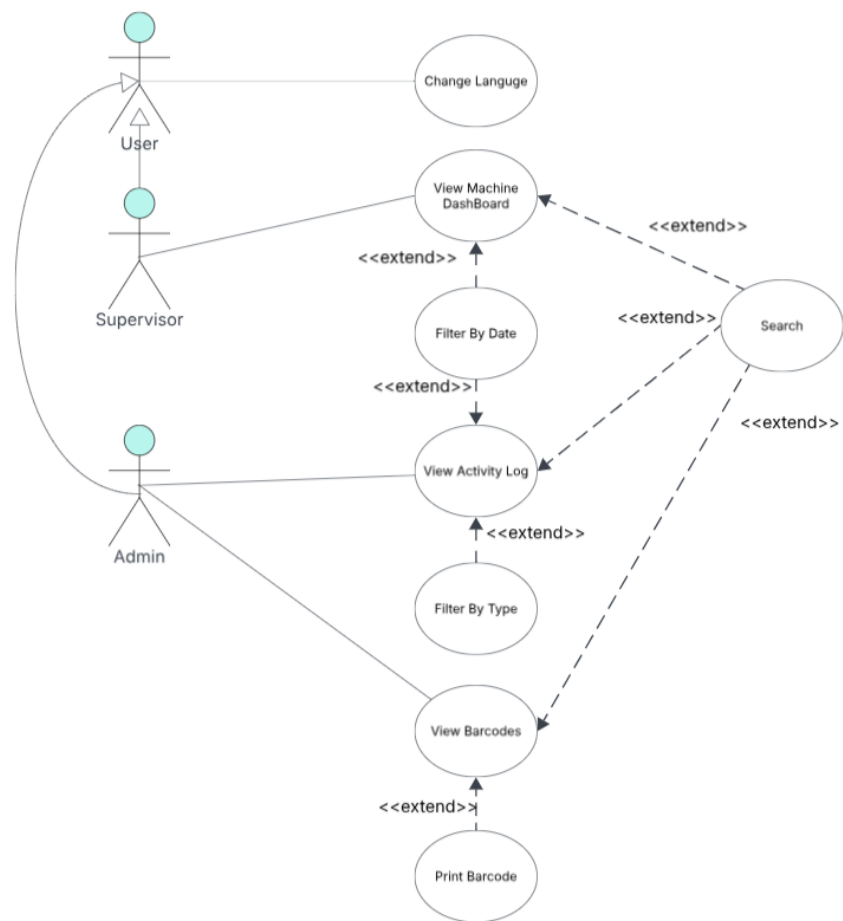


Figure 6.1. UML Use Case Diagram — Administration & UX.

6.2.2 Textual Use Case Description

The following table (Table 6.2) provides the detailed textual description of the *View Machine Dashboard* use case, which represents the most significant new administrator workflow in this sprint.

Table 6.2. Textual Use Case Description — View Machine Dashboard

Use Case Name	View Machine Dashboard
Primary Actor	Supervisor
Preconditions	• The user is authenticated with the <i>Supervisor</i> role.
Postconditions	• A grid of machine cards is displayed, each showing uptime, production totals, and scrap for the selected time window. • Changing the time-range selector refreshes all card metrics.

Continued on next page

Main Scenario

1. The Supervisor logs in and is routed to machineList.
2. The Supervisor selects *Machine Dashboard* in the topBar.
3. The system POSTs to /MESWebService_fetchMachineDashboard with the default hoursBack = 24.
4. The backend aggregates execution and progression records and returns per-machine metrics.
5. The Supervisor changes the time range to 48 h via the AppBar dropdown; the page re-fetches and updates.

6.2.3 Sequence Diagrams

The following sequence diagrams illustrate the communication flow between the Flutter frontend, the Business Central OData layer, and the AL business logic for the administrator analytics flows introduced in Sprint 4.

Figure 6.2 depicts the machine dashboard retrieval flow. The AL layer iterates over all *Machine Center* records and, for each machine, computes the total operation count, cancelled/Interrupted operations, total production and scrap quantities, and uptime percentage from the corresponding Business Central records before assembling the per-machine KPI rows returned to the Flutter client.

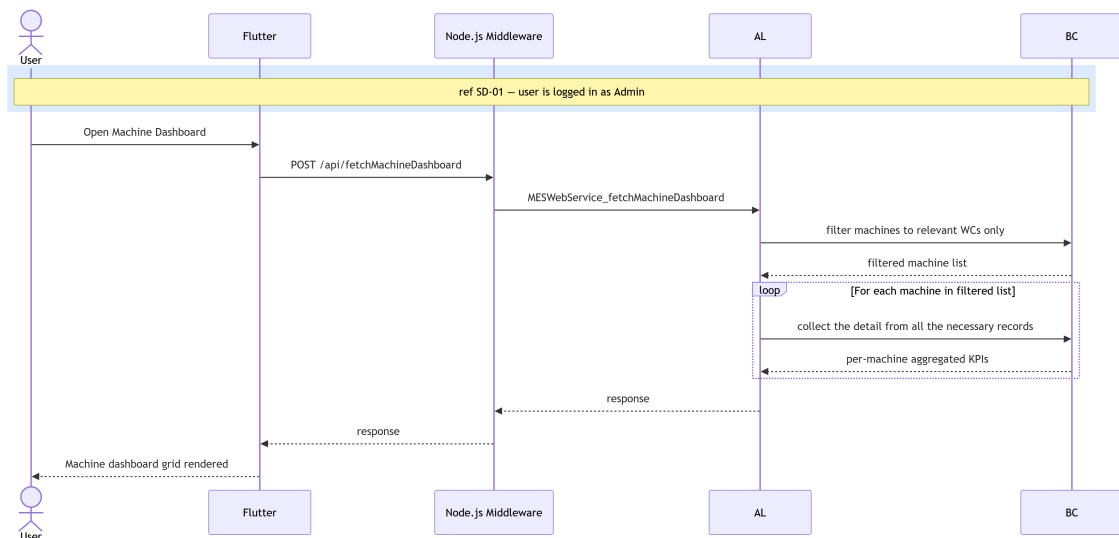


Figure 6.2. SD-19: Fetch Machine Dashboard.

Figure 6.3 presents the activity log retrieval flow. The AL layer queries four event tables in parallel; *MES Operation State*, *MES Operation Progression*, *MES Operation Scrap*, and *MES Component Consumption*, filtering each by the requested time window. For every event row it joins the associated *MES User* and *MES Operation Execution* records to enrich the entry with

operator identity and execution context. The resulting flat event list is returned to the Flutter client, which renders it as a chronological activity table.

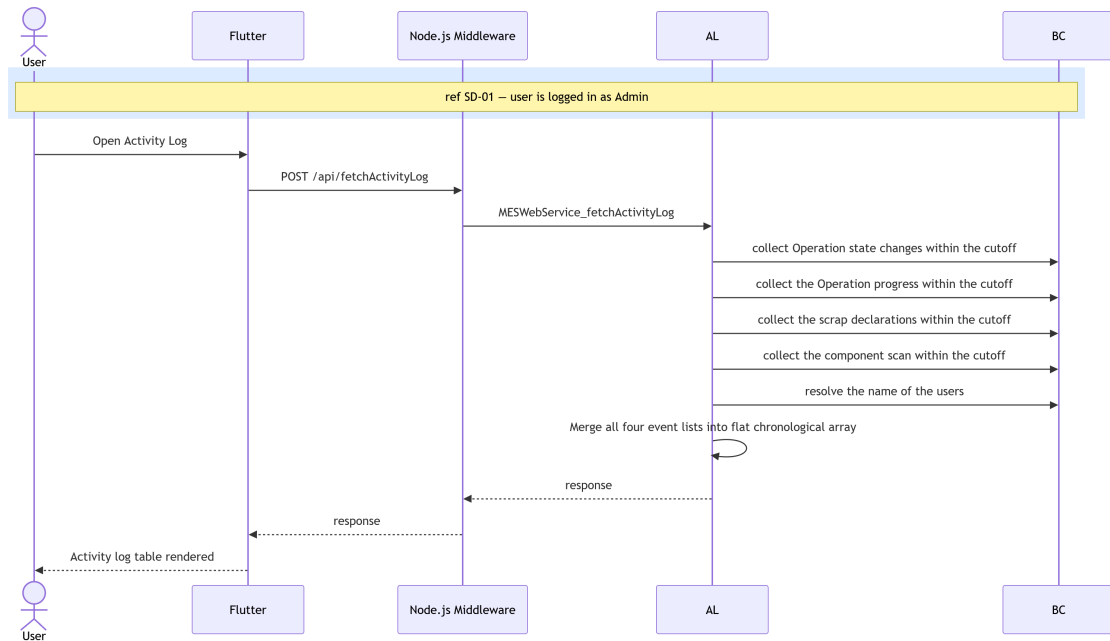


Figure 6.3. SD-20: Fetch Activity Log.

6.2.4 Class Diagram

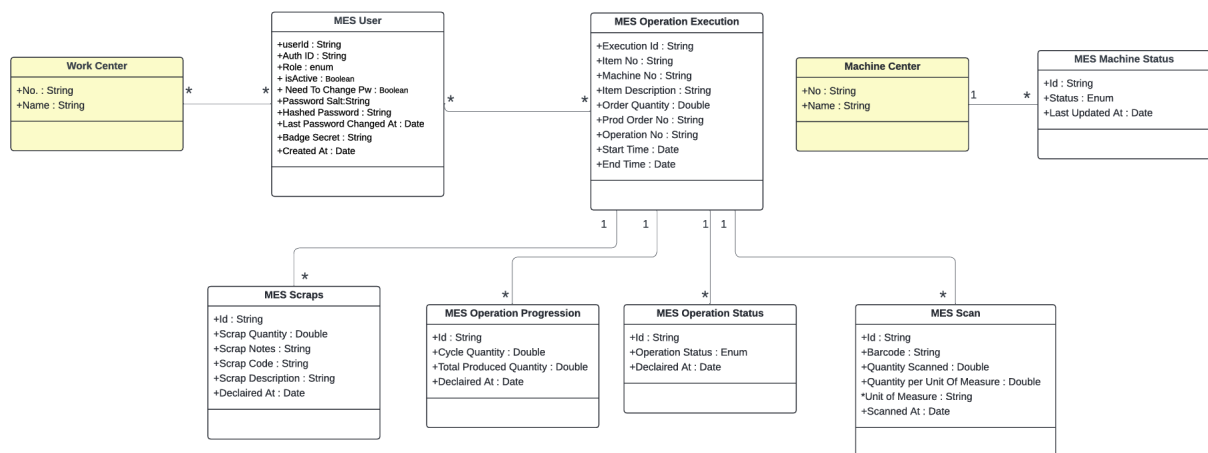


Figure 6.4. UML Class Diagram.

6.3 Implementation

6.3.1 Backend Implementation

No new Business Central tables are introduced in this sprint. All backend work consists of new query and aggregation procedures added to MES Web Service (codeunit 50126), reading from tables defined in Sprints 1 through 3.

Dashboard Aggregation

`fetchMachineDashboard()` accepts a `hoursBack` window and an optional `workCenterNoJson` filter. For each Machine Center it aggregates the matched MES Operation Execution records, summing Cycle Quantity from linked MES Operation Progression entries to obtain total produced and scrap counts, and computing uptime as $\text{runningMinutes} / (\text{hoursBack} \times 60) \times 100$, capped at 100.

Activity Log Aggregation

`fetchActivityLog()` queries four tables within the `hoursBack` window — MES Operation State, MES Operation Progression, MES Operation Scrap, and MES Component Consumption — resolves operator names via the Employee table, and merges the results into a single descending-timestamp JSON array.

API Endpoints Added in Sprint 4

All endpoints are exposed as ODataV4 unbound actions through MES Web Service (codeunit 50126) and are served by the middleware at:

`middlewareHostURL/api/<endpointName>`

Each request is forwarded to the AL layer as an ODataV4 action call of the form:

POST `<baseUrl>/ODataV4/MESWebService_<ProcedureName>?company=<companyId>`

Table 6.3. New API Endpoints — Sprint 3

Endpoint	Endpoint
<code>fetchMachineDashboard</code>	<code>fetchActivityLog</code>

6.3.2 Frontend Implementation

Shared HTTP Infrastructure


All sprint services (including retroactively migrated ones) share a `HttpClient` and `HttpResponseParser` layer, replacing the inline `http.post` calls from Sprint 1. `HttpClient.post()` is a centralised wrapper that injects JSON headers and encodes the request body. `HttpResponseParser` exposes four static helpers: `parseList()` and `parseObject()` decode OData list and single-object responses respectively; `parseWriteResult()` decodes write responses and surfaces backend errors; `_assertSuccess()` validates HTTP status codes and throws a structured exception on non-2xx responses.

Provider Architecture

Table 6.4. Provider Responsibilities — Sprint 4 Additions

Provider	Responsibility
LogProvider	Owns dashboard and activity log fetch calls; exposes <code>selectedHours</code> , <code>hourOptions</code> , and <code>setHours()</code> shared between the two admin pages.
MesBarcodeProvider	Exposes <code>fetchAllBarcodes()</code> ; resolves the session token automatically from <code>AuthProvider</code> .

User Interface

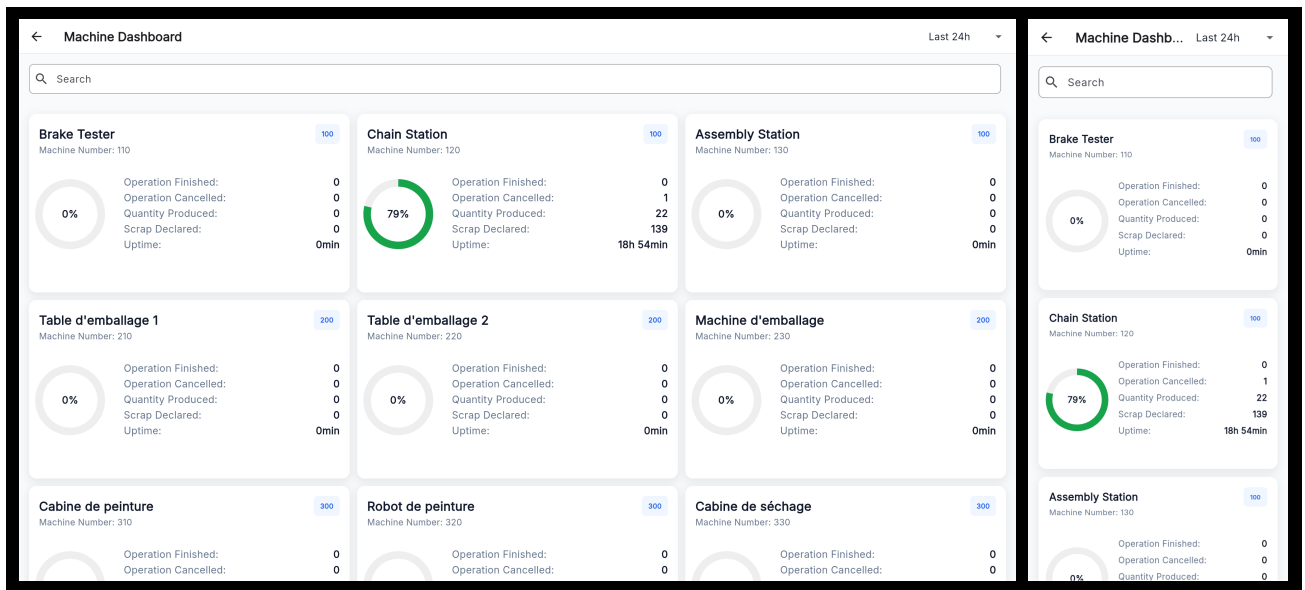**Figure 6.5.** *Machine Dashboard Page* — desktop and mobile views.

Figures 6.5 and 6.6 illustrate the two pages. The *Machine Dashboard Page* renders one card per machine with a circular uptime indicator and four metric rows (finished operations, Cancelled and Interrupted operations, produced, scrap, uptime), and an AppBar time-range dropdown that re-fetches on change. The *Activity Log Page* presents a paginated, newest-first event list where each row shows a type icon, operator, machine, and expandable action text; AppBar dropdowns filter by type and time range.

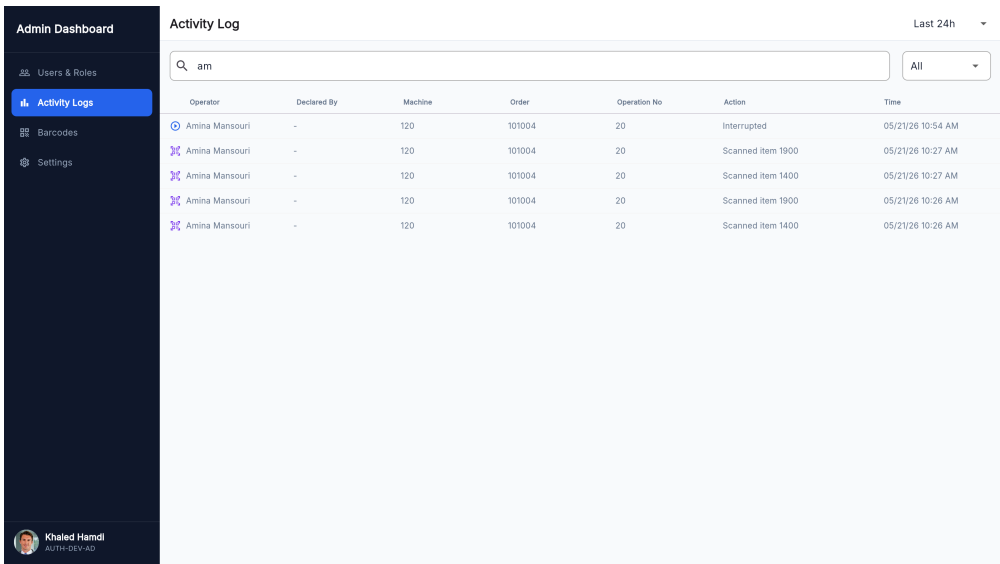


Figure 6.6. Activity Log Page — desktop and mobile views.

6.4 Test and validation

6.4.1 Integration test

For integration testing, we chose Postman, a powerful and user-friendly tool for API evaluation. Figure 6.7 shows a test case for the /activityLog endpoint.

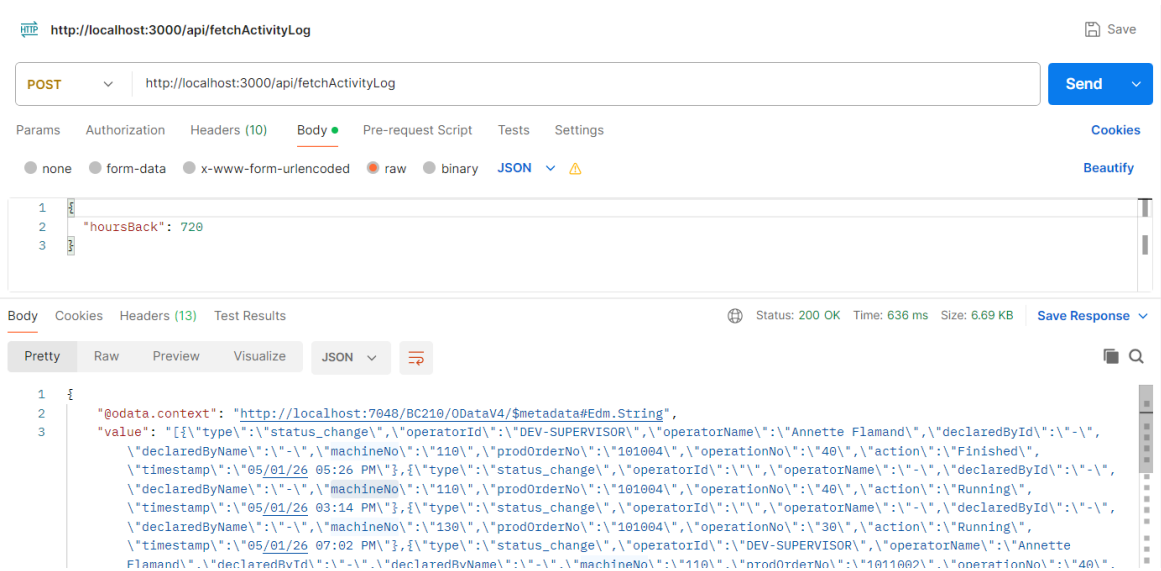


Figure 6.7. Postman endpoint test — fetchActivityLog.

Figure 6.8 shows a test case for the /MachineDashboard endpoint.

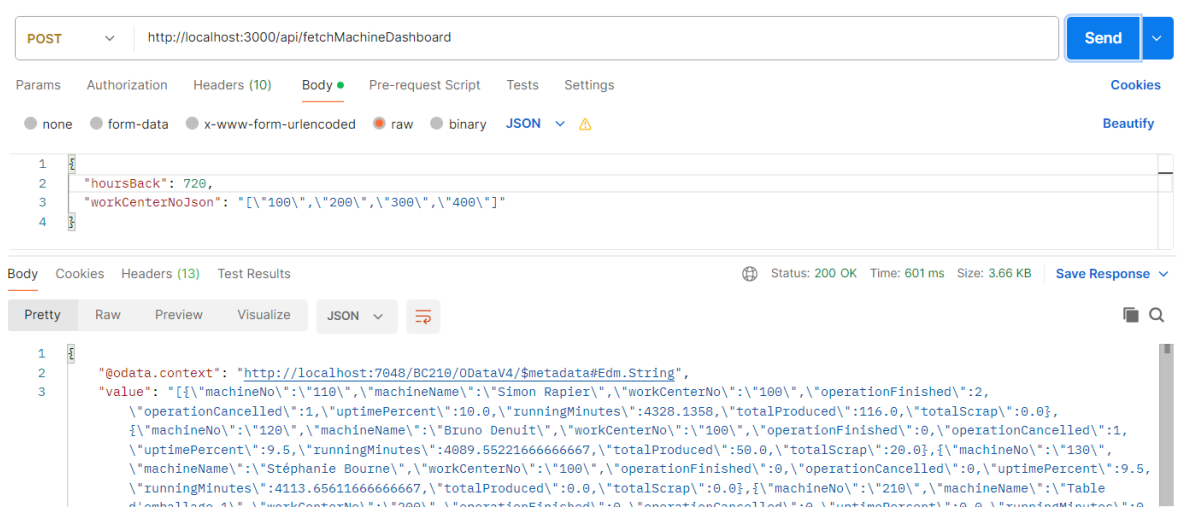


Figure 6.8. Postman endpoint test — `fetchMachineDashboard`.

Conclusion

This sprint completed the *MES* solution by delivering the administration layer and cross-cutting quality-of-life features. Administrators can now monitor the production health of the entire facility through a configurable machine performance dashboard, audit all operator and machine actions through a paginated activity log, and manage users from a persistent navigation shell without losing context between sections. All users benefit from full internationalisation covering English, French, and Arabic with automatic right-to-left layout, and from guided coach-mark tutorials that ease onboarding for first-time users.

Chapter 7

Sprint 5 AI Assistant & Analytical Intelligence.

Contents

- Introduction 116
- 7.1 Sprint Backlog 116
- 7.2 Design 122
 - 7.2.1 Use Case Diagram 122
 - 7.2.2 Textual Use Case Description 122
 - 7.2.3 Sequence Diagrams 124
 - 7.2.4 Class Diagram 125
- 7.3 Implementation 126
 - 7.3.1 Node.js Middleware 126
- Overview 126
- AI Proxy Layer 126
- Configuration 126
 - 7.3.2 Python AI Agent 126
- Intent Classification 127
- Tool Catalogue 128
- Data Enrichment 129
 - 7.3.3 Flutter Frontend 130
- Chat Page and Provider 130
- Redirect Actions 130
- User Interface 131
 - 7.3.4 Integration Tests 131
- Conclusion 133

Introduction

This sprint delivers the conversational intelligence layer of the *MES* solution. Building upon the production execution and administration infrastructure established in the previous sprints, this sprint introduces an embedded natural-language chat assistant that allows operators and supervisors to query machine status, production progress, scrap data, Bill of Materials, and operation history without navigating the full interface. The assistant resolves ambiguous machine references, answers fleet-wide questions through parallel fan-out queries, proactively surfaces operational anomalies, and provides contextual navigation shortcuts directly within the chat reply.

The implementation spans three new components: a Node.js reverse-proxy middleware layer that handles *SSPI/Windows* authentication toward Business Central and routes AI chat traffic to a dedicated Python agent; the Python FastAPI AI agent itself, which classifies user intent, executes tool chains against the existing BC web services, enriches results with pure-Python analytics, and synthesises natural-language replies using a configurable multi-provider *LLM* client; and the Flutter chat UI, integrated directly into the machine list page as a side panel or dialog.

7.1 Sprint Backlog

This sprint covers **Domain 5: *AI Chat Assistant & Analytical Intelligence***.

Table 7.1. Sprint 5 Story Backlog

ID	User Story	Tasks
US-5.1	As an Operator or Supervisor, I need a natural-language chat assistant so that I can query machine status, production progress, and operational data without navigating the full UI.	<i>Node.js Middleware</i> • Implement Express application (<code>index.js</code>) with global middleware stack (JSON body parser, CORS, request logger). • Implement <code>src/config.js</code> loading all environment variables and computing BC URL constants (<code>odataBase</code>, <code>webServiceBase</code>, <code>companyParam</code>). • Implement <code>src/proxy.js</code>: <code>buildTargetUrl()</code>, <code>buildPsScript()</code>, <code>runPowerShell()</code>, and <code>forwardRequest()</code> to proxy Flutter requests to BC via PowerShell <i>SSPI</i>. • Register all 44 AL web service endpoints in the <code>webServiceEndpoints</code> set. • Implement <code>src/cors.js</code> CORS options.

Continued on next page

ID	User Story	Tasks
		<i>Python AI Agent</i> • Implement FastAPI application (<code>main.py</code>) with <code>/health</code> and <code>POST /chat</code> endpoints and lifespan context manager. • Implement <code>agent/models.py</code>: <code>ChatRequest</code>, <code>ChatResponse</code>, <code>UserContext</code>, <code>ConversationTurn</code>, <code>ToolResult</code>, <code>RedirectAction</code>, <code>ActionType</code>. • Implement <code>agent/config.py</code> with all environment variable constants (LLM provider, model, timeouts, middleware URL). • Implement <code>agent/llm_client.py</code>: <code>LLMClient</code> abstraction and <code>build_llm_client()</code> factory supporting Ollama, OpenAI, HuggingFace, OpenAI-compatible, and Anthropic providers. • Implement <code>tools/mes_tools.py</code>: all 17 BC web service tool classes, <code>TOOL_MAP</code> registry, <code>MACHINE_SCOPED_TOOLS</code> set, <code>_post()</code> HTTP helper, and <code>_extract_value()</code> response normaliser. <i>Flutter</i> • Create model <code>AiChatResponse</code>, <code>ConversationTurn</code>, and <code>AiRedirectAction</code>. • Create <code>AiChatService</code> consuming <code>POST /api/ai/chat</code>. • Create <code>AiChatProvider</code> managing conversation history, loading state, and last response. • Create page <code>AiChatPage</code> rendering as side overlay (width ≥ 600 dp) or dialog (mobile). • Integrate chat FAB and overlay toggle in <code>Machinelistpage</code>.

Continued on next page

ID	User Story	Tasks
US-5.2	As an Operator or Supervisor, I need the assistant to resolve ambiguous machine references so that I do not need to know exact machine codes.	<i>Python AI Agent</i> • Implement <code>agent/resolver.py</code>: <code>MachineEntry</code>, <code>ResolveResult</code>, <code>build_machine_index()</code>, and <code>resolve_machine()</code> with five-tier cascade (exact ID, normalised exact, digit suffix, token overlap, edit distance). • Implement text normalisation helpers <code>_norm()</code>, <code>_digits_only()</code>, <code>_tokenise()</code>, <code>_edit_distance()</code>, <code>_token_overlap()</code>. • Implement <code>format_candidates_for_llm()</code> disambiguation message builder. • Implement <code>_substitute_machine_no()</code> in <code>agent/orchestrator.py</code> to replace <code>__RESOLVE__</code> slot placeholders after resolution. • Integrate resolution into <code>Orchestrator.run()</code> when <code>chain.unresolved_machine_ref</code> is set.
US-5.3	As an Operator or Supervisor, I need the assistant to answer fleet-wide questions so that I get a consolidated view without visiting each machine individually.	<i>Python AI Agent</i> • Implement <code>agent/composite.py</code>: <code>is_composite()</code> detection, <code>CompositeResult</code> dataclass, <code>run_composite()</code> with status filters (running/idle/overdue/scrap), fan-out capped at 12 machines in batches of 4. • Implement <code>build_composite_context()</code> context builder. • Integrate composite path in <code>Orchestrator.run()</code> and <code>Orchestrator._run_composite()</code>. • Add <code>is_composite</code> flag detection to both LLM and regex classifiers.

Continued on next page

ID	User Story	Tasks
US-5.4	As an Operator or Supervisor, I need the assistant to provide contextual navigation shortcuts so that I can open a machine, operation, or dashboard directly from the chat response.	<i>Python AI Agent</i> • Define <code>ActionType</code> enum and <code>RedirectAction</code> schema in <code>agent/models.py</code>. • Implement <code>Orchestrator._parse_actions()</code> to extract actions JSON block from LLM reply (up to 4 actions). • Document supported action types and payload shapes in <code>prompts/system_prompts.py</code> (<code>SYNTHESIS_USER_TEMPLATE</code>). <i>Flutter</i> • Implement <code>AiChatPage._handleAction()</code> routing: <code>redirect_machine</code> → <code>MachineMainPage</code>, <code>redirect_machine_list</code> → <code>popUntil</code>, <code>redirect_operation</code> → <code>OperationDetailPage</code>. • Render action buttons only on the last assistant message.

Continued on next page

ID	User Story	Tasks
US-5.5	As a Supervisor, I need the assistant to proactively highlight anomalies so that I can act before problems escalate.	<i>Python AI Agent</i> • Implement <code>agent/data_analysis.py</code>: <code>enrich_deadlines()</code> (hours until deadline, overdue flag, risk level), <code>analyse_scrap()</code> (scrap rate, severity, spike detection at $2.5 \times$ baseline), <code>analyse_velocity()</code> (units per hour, projected end, velocity status), <code>summarise_machines()</code>, and <code>summarise_dashboard()</code>. • Integrate enrichment into <code>Orchestrator._enrich()</code> for all result key types (machines, orders, live_data, cycles, activity, dashboard, history, bom, etc.). • Implement <code>agent/intent.py</code> deterministic regex classifier: <code>Intent</code> enum, <code>ToolStep</code>, <code>ToolChain</code> dataclasses, extraction helpers (<code>_extract_machine_no</code>, <code>_extract_order_no</code>, <code>_extract_hours</code>), and <code>classify()</code> priority chain. • Implement <code>agent/llm_intent.py</code>: <code>LLMIntentIdentifier</code> with <code>_llm_classify()</code>, validation helpers, <code>_plan_to_tool_chain()</code>, and <code>ThinkingBlock</code> reasoning trace. • Implement <code>agent/orchestrator.py</code>: full 7-stage pipeline (<code>run()</code>, <code>_execute_step()</code>, <code>_fetch_all_machines()</code>, <code>_enrich()</code>, <code>_build_context()</code>, <code>_synthesise()</code>, <code>_parse_actions()</code>). • Implement <code>prompts/system_prompts.py</code>: <code>SYNTHESIS_SYSTEM</code> and <code>SYNTHESIS_USER_TEMPLATE</code> with anomaly alert rules and action block instructions. • Wire all 17 tools to the <code>fetchSupervisorOverview</code> and <code>fetchDelayReport</code> BC endpoints used in anomaly detection.

7.2 Design

7.2.1 Use Case Diagram

The UML Use Case Diagram (Figure 7.1) shows the two primary actors (Operator and Supervisor) and their interactions with the AI chat assistant. The Supervisor role has access to anomaly-oriented queries (overdue orders, scrap spikes, idle operators) in addition to the machine and operation queries shared with Operator. Both roles benefit from the fuzzy machine resolution and redirect action use cases.



Figure 7.1. UML Use Case Diagram — Sprint 5

7.2.2 Textual Use Case Description

The following table (Table 7.2) provides the detailed textual description of the *Query via Chat Assistant* use case, which represents the central interaction delivered in this sprint.

Table 7.2. Textual Use Case Description — Query via Chat Assistant

Use Case Name	Query via Chat Assistant
Primary Actors	Operator, Supervisor
Preconditions	• The user is authenticated and holds a valid session token. • The Node.js middleware and Python AI agent are running and reachable. • At least one work centre is assigned to the authenticated user.
Postconditions	• A natural-language answer is displayed in the chat panel. • Up to 4 contextual navigation action buttons may appear below the reply. • The conversation turn is appended to the session history for multi-turn context.
Main Scenario	1. The user opens the chat panel from the <i>Machine List Page</i>. 2. The user types a question in natural language (e.g., “What is MC-001 producing?”). 3. The Flutter client sends a POST <code>/api/ai/chat</code> request to the Node.js middleware with the message, user context, and conversation history. 4. The middleware forwards the request to the Python AI agent. 5. The AI agent classifies intent via the <i>LLM</i> classifier (with regex fallback) and builds a <i>ToolChain</i>. 6. If the machine reference is ambiguous, the agent resolves it using the five-tier fuzzy resolver. 7. The agent executes each <i>ToolStep</i> in sequence, calling the corresponding BC web service via the Node.js middleware. 8. The agent enriches the raw results with pure-Python analytics (deadline enrichment, scrap analysis, velocity computation). 9. The agent synthesises a natural-language answer via a second <i>LLM</i> call using the enriched context block. 10. Any contextual redirect actions are extracted from the reply and returned as structured <i>RedirectAction</i> objects. 11. The Flutter client displays the answer and optional action buttons.

Continued on next page

Alternative Flows

- *Ambiguous machine name*: the agent returns a disambiguation message listing up to 3 candidates; the user clarifies in the next turn.
 - *Fleet-wide query*: the agent triggers the composite fan-out path, querying up to 12 machines in parallel batches of 4.
 - *LLM classifier failure*: the deterministic regex classifier is used as a fallback; the *ThinkingBlock* records `fallback_used = true`.
 - *General question*: no tool calls are made; the *LLM* answers from general manufacturing knowledge.
-

7.2.3 Sequence Diagrams

The following sequence diagram illustrate the communication flow between the Flutter frontend, the Node.js middleware, the Python AI agent, and the Business Central OData layer.

Figure 7.2 illustrates the two-tier intent classification flow, showing the LLM-based primary classifier, the JSON plan validation step, and the fallback path to the regex classifier. The *ThinkingBlock* capturing the classification trace is also shown.

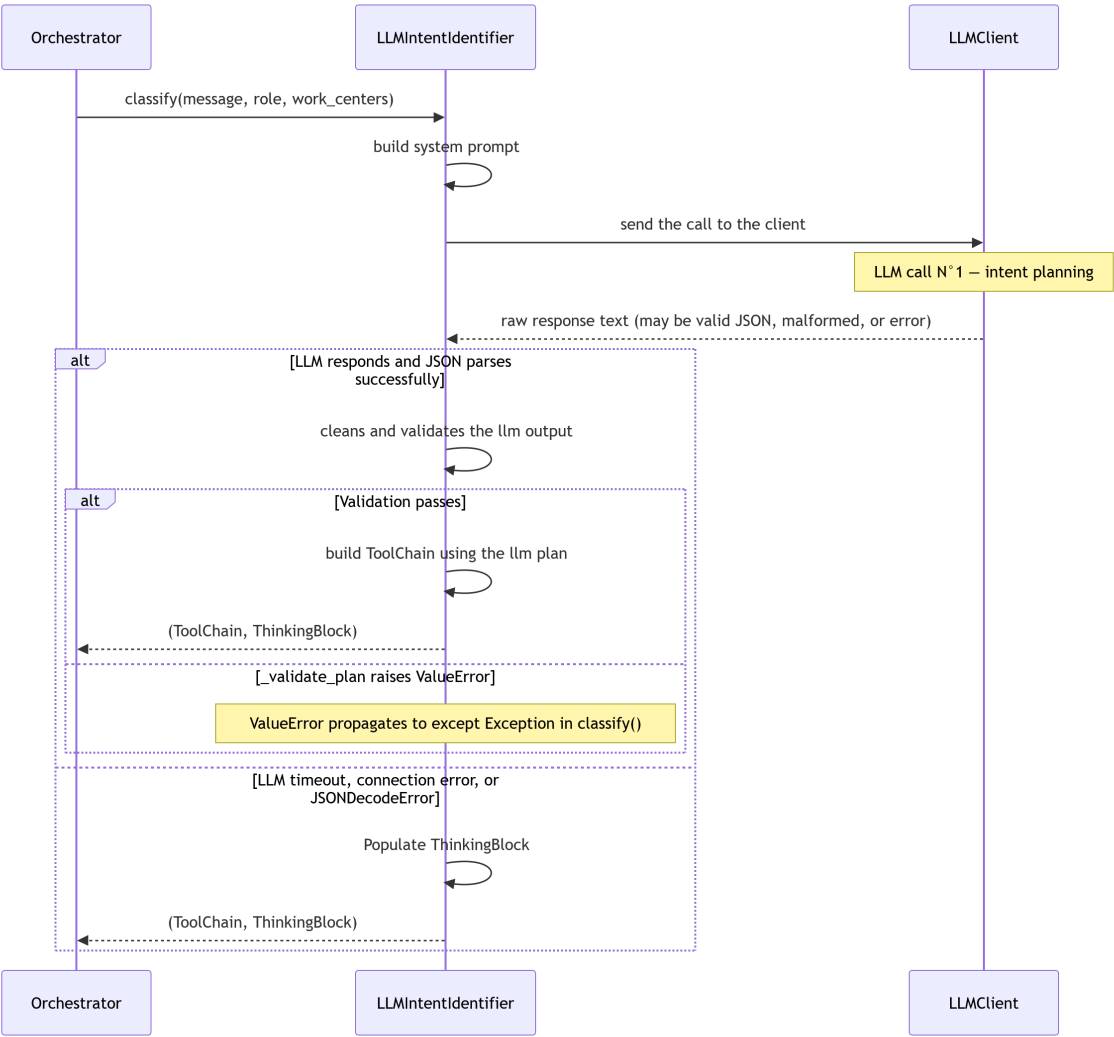


Figure 7.2. SD-31: Intent Classification — LLM with Regex Fallback.

7.2.4 Class Diagram

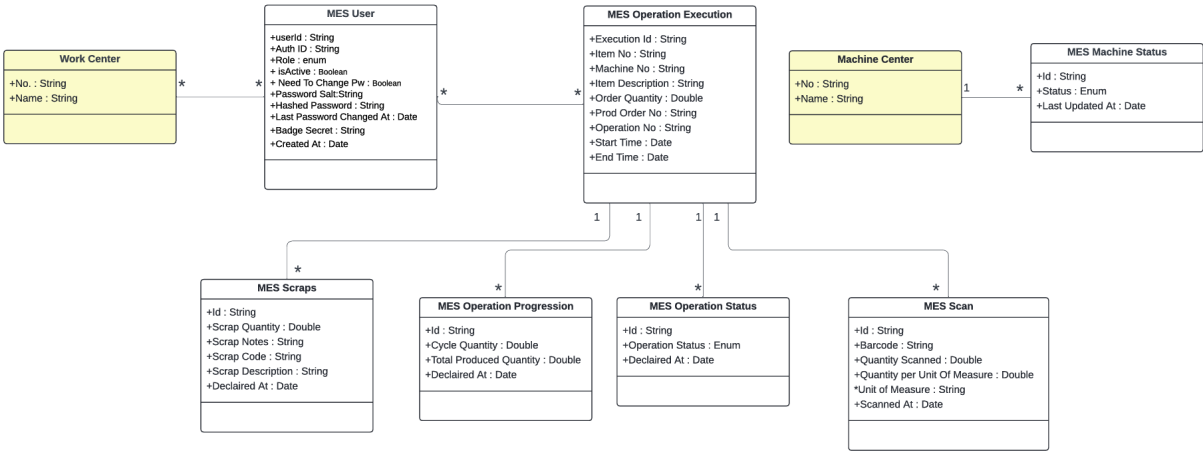


Figure 7.3. UML Class Diagram — AI Assistant & Analytical Intelligence.

7.3 Implementation

7.3.1 Node.js Middleware

Overview

The Node.js middleware (`node-middleware/`) is an Express 5 application that acts as the single network bridge between the Flutter client and Business Central.

The middleware exposes two distinct route families: `/api/<endpoint>` (proxied to BC) and `/api/ai/*` (forwarded to the Python agent).

AI Proxy Layer

The `src/aiProxy.js` Express Router, mounted at `/api/ai`, forwards `POST /chat` requests to the Python agent at `AI_AGENT_URL/chat` using the native `fetch` API. It validates that both `message` and `user_context` are present before forwarding, enforces a `AI_TIMEOUT_MS` abort timeout, and passes the Python agent's response through unchanged. A `GET /api/ai/health` endpoint aggregates the Node process uptime with the Python agent's own health status for monitoring purposes.

Configuration

Table 7.3 lists the environment variables consumed by the middleware.

Table 7.3. Node.js Middleware — Environment Variables

Variable	Default	Description
BC_HOST	—	Base URL of the BC server (no trailing slash)
BC_INSTANCE	—	BC server instance name
BC_COMPANY	—	Company GUID
PROXY_PORT	3000	Listening port
ALLOWED_ORIGINS	""	Comma-separated CORS origins
BC_TIMEOUT_MS	30 000	BC request timeout in milliseconds
AI_AGENT_URL	port 3000	Python agent base URL
AI_TIMEOUT_MS	60 000	AI request abort timeout in milliseconds

7.3.2 Python AI Agent

The agent makes exactly two *LLM* calls per user message . **Call 1 — Intent classification.** The `LLMIntentIdentifier` sends the user message, role, and work centres to the LLM with a structured system prompt listing all 17 available tools and their required arguments. The LLM

responds with a JSON plan containing the intent label, a list of ToolStep objects (each with a tool name, arguments — which may be slot references to previous steps — and a result key), and a reasoning string. The plan is validated against the tool catalogue before being converted to a ToolChain dataclass. If the LLM call fails for any reason, the deterministic regex classifier in `agent/intent.py` is used as a fallback. The entire classification reasoning is stored in a `ThinkingBlock` and returned in `ChatResponse.thinking` for debugging; it is never shown to the user.

Call 2 — Synthesis. After all tool steps have been executed and their results enriched, the `Orchestrator._synthesise()` method builds a context block containing the enriched data in markdown format (truncated at `LLM_MAX_CONTEXT_CHARS` characters) and calls the LLM with the `SYNTHESIS_SYSTEM` and `SYNTHESIS_USER_TEMPLATE` prompts. The system prompt instructs the model to answer only from the pre-fetched data, to highlight anomalies prominently, to respond in the same language as the user, and to optionally append a actions JSON block containing up to 4 `RedirectAction` objects.

Intent Classification

LLM classifier. The `LLMIntentIdentifier` constructs a system prompt containing the full `TOOL_CATALOGUE` and the list of valid intent labels. The user message is injected via `_IDENTIFIER_USER_TEMPLATE` along with the user's role and work centres. The raw LLM response is stripped of JSON fences, parsed, validated against `_VALID_TOOLS` and `_INTENT_MAP`, and converted to a `ToolChain` via `_plan_to_tool_chain()`.

Figure 7.4 shows the file architecture of the AI assistant layer.

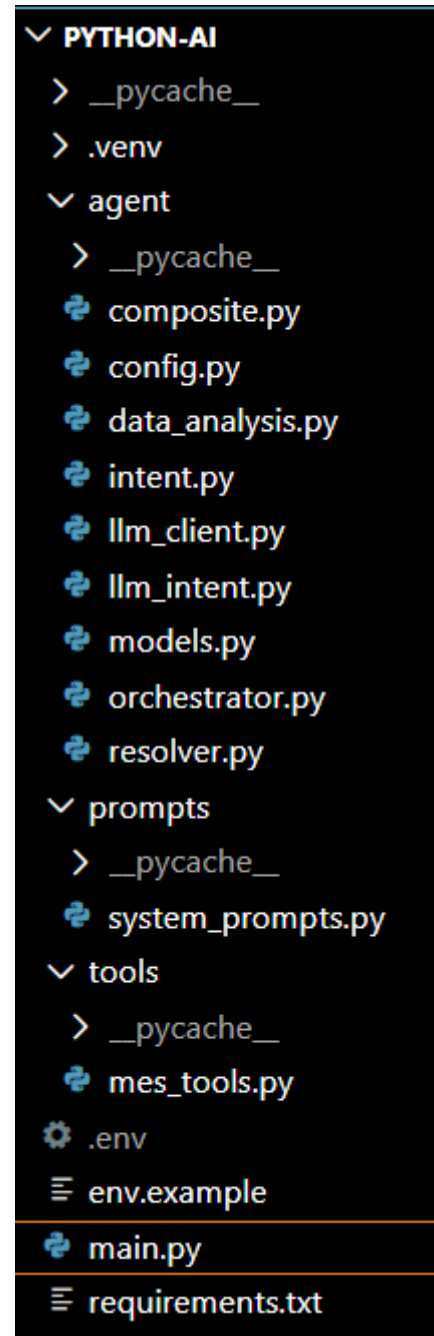


Figure 7.4. AI Assistant Layer - Physical Architecture.

Table 7.4. Intent Values and Associated Tool Chains

Intent	Primary Tool(s)	Trigger Keywords
machine_status	get_ongoing_operations	machine, mc-N, status
machine_orders	get_machine_orders	order, queue, po-N
machine_live	get_ongoing_operations + get_operation_live_data	live, real-time, progress
machine_history	get_operations_history	history, finished, past
machine_dashboard	get_ongoing_operations + get_machine_dashboard	dashboard, kpi, uptime
department_overview	list_machines (fan-out)	department, all machines
activity_log	get_activity_log	activity, log, happened
scrap_analysis	get_activity_log	scrap, reject, defect
operation_bom	get_bom	bom, component, material
production_cycles	get_production_cycles	cycle, declaration, shift
operation_live	get_operation_live_data	live + order number
general	(none)	No tool trigger matched

Tool Catalogue

The 17 Business Central web service wrappers in `tools/mes_tools.py` correspond directly to the OData functions exposed by MES Web Service (Codeunit 50126). Table 7.5 lists all tools, their AL endpoint mappings, and access scope.

Table 7.5. AI Agent Tool Catalogue

Tool name	AL Endpoint	Scope
list_machines	FetchMachines	Work-centre scoped
get_machine_orders	getMachineOrders	Machine scoped
get_ongoing_operations	fetchOngoingOperationsState	Machine scoped
get_operation_live_data	fetchOperationLiveData	Machine scoped
get_production_cycles	fetchProductionCycles	Machine scoped
get_operations_history	fetchOperationsHistory	Machine scoped

Continued on next page

Tool name	AL Endpoint	Scope
get_activity_log	fetchActivityLog	Work-centre scoped
get_machine_dashboard	fetchMachineDashboard	Work-centre scoped
get_production_orders	fetchProductionOrders	Machine scoped
get_work_center_summary	fetchWorkCenterSummary	Work-centre scoped
get_operator_summary	fetchOperatorSummary	Work-centre scoped
get_my_data	fetchMyData	User scoped
get_scrap_summary	fetchScrapSummary	Machine scoped
get_bom	fetchBom	Machine scoped
get_delay_report	fetchDelayReport	Work-centre scoped
get_consumption_summary	fetchConsumptionSummary	Machine scoped
get_supervisor_overview	fetchSupervisorOverview	Work-centre scoped

Machine-scoped tools are subject to access control: the orchestrator verifies that the resolved machineNo is present in the allowed_machines map (populated by list_machines calls for the authenticated user's work centres) before executing the step.

Data Enrichment

The `Orchestrator._enrich()` method runs pure-Python analytics over the raw tool results before they are passed to the synthesis LLM. Table 7.6 summarises the enrichment applied to each result key.

Table 7.6. Data Enrichment Applied per Result Key

Result key	Enrichment
machines	<code>summarise_machines()</code> — utilisation percentage, working/idle counts, interpretation string
orders	<code>enrich_deadlines()</code> — hours until deadline, overdue flag, risk level (<i>at_risk</i> threshold: < 4 h)
live_data	<code>analyse_scrap()</code> + <code>analyse_velocity()</code> — scrap severity, spike detection, units per hour, projected end
cycles	<code>analyse_scrap()</code> — scrap trend from cycle history

Continued on next page

Result key	Enrichment
activity	<code>analyse_scrap(activity=data)</code> — recent scrap event count
dashboard	<code>summarise_dashboard()</code> — fleet totals, overall scrap severity
bom	Missing components list (items with zero scanned quantity)

Scrap spike detection. The `analyse_scrap()` function computes the scrap rate for the most recent quarter of declared cycles and compares it to the rate for the earlier three-quarters. If the recent rate exceeds the baseline by a factor of 2.5 or is above the critical threshold of 15%, a spike is flagged and explicitly mentioned in the synthesis prompt.

Velocity projection. The `analyse_velocity()` function derives the actual production rate (units per hour) from the last 6 declared cycles and compares it to the required rate (remaining quantity divided by time until the planned end). The result is one of *ahead*, *on_pace*, or *behind*, along with a projected completion timestamp.

7.3.3 Flutter Frontend

Chat Page and Provider

The `AiChatPage` widget adapts its rendering to the available screen width: on screens wider than 600 dp it is displayed as a `Positioned` overlay panel (400 dp wide, full height) anchored to the right side of the `MachineListPage`; on mobile it opens as a `Dialog`. The chat input field and conversation history list are shared between both modes.

The `AiChatProvider` maintains the in-session conversation history as a `List<ConversationTurn>`. On each `sendMessage()` call it appends the user turn, calls `AiChatService.sendMessage()` with the history (excluding the most recently appended turn, which the server receives as the primary message), appends the assistant reply, and stores the last `AiChatResponse` for action button rendering.

Redirect Actions

After each assistant reply, the `AiChatPage` inspects `lastResponse.actions`. If non-empty and the message is the last in the conversation, up to 4 `ElevatedButton` widgets are rendered below the reply bubble. The `_handleAction()` method routes each action type:

- `redirect_machine` → `Navigator.push` to `MachineMainPage` with the payload `machineNo`.
- `redirect_operation` → `Navigator.push` to `OperationDetailPage` with `machineNo`, `prodOrderNo`, and `operationNo`.
- `redirect_machine_list` → `Navigator.popUntil` to the root route (machine list).
- `redirect_machine_dashboard` → `Navigator.push` to the admin machine dashboard.

- `redirect_history` → `Navigator.push` to `MachineHistoryPage` with `machineNo`.

User Interface

The *AI Chat Panel*, shown in Figure 7.5, is accessible from the *Machine List Page* via a floating action button. On wide screens it opens as a non-modal side panel; on mobile it opens as a full-screen dialog. The panel displays the conversation history, a text input field at the bottom, and optional action buttons below the last assistant message. A *Clear* button resets the conversation history.

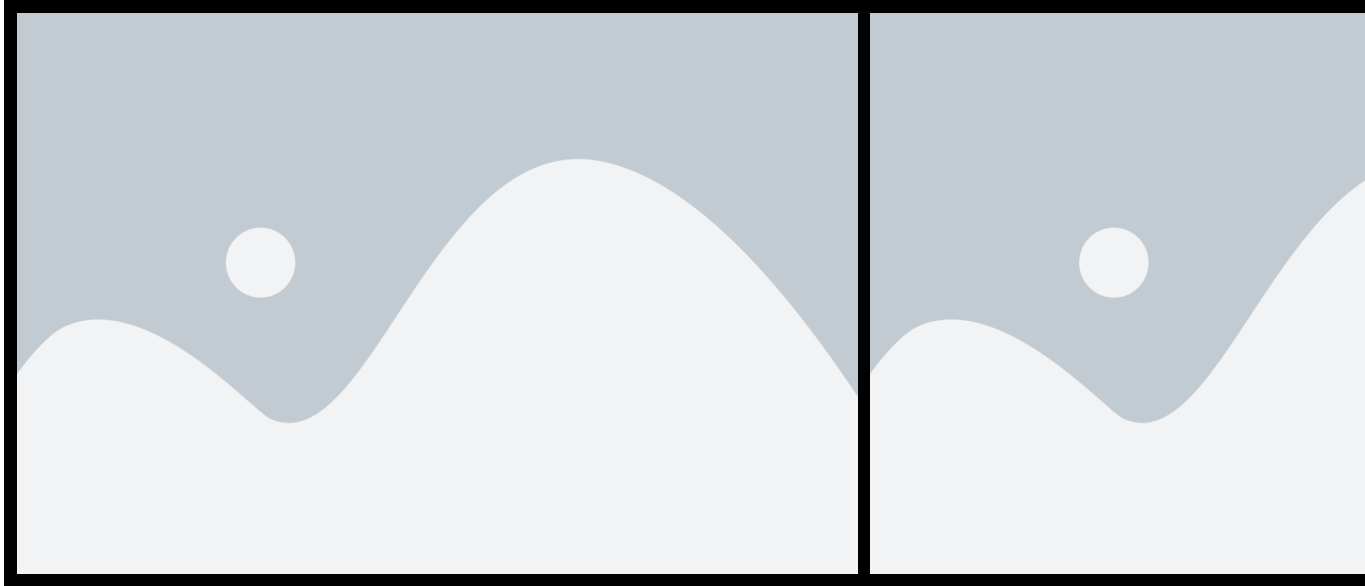


Figure 7.5. *AI Chat Panel* — desktop side panel and mobile dialog views.

7.3.4 Integration Tests

For integration testing we used Postman for the Node.js middleware endpoints and the FastAPI built-in `/docs` interface for the Python agent.

Figure 7.6 shows a test of the `POST /api/ai/chat` endpoint with a single-machine live data query. The response contains the synthesised text, the thinking block with the classified intent and tool steps, and one `redirect_machine` action.



Figure 7.6. Postman endpoint test — POST `/api/ai/chat`.

Figure 7.7 shows a test of the GET `/api/ai/health` endpoint confirming that both the Node.js proxy and the Python agent are reachable.



Figure 7.7. Postman endpoint test — GET /api/ai/health.

Conclusion

This sprint delivered the conversational intelligence layer of the *MES* solution.

The AI agent implements a two-*LLM*-call pipeline: a first call classifies user intent and produces an executable `ToolChain` plan, and a second call synthesises the final natural-language reply from the enriched tool results. Pure-Python analytics (deadline enrichment, scrap spike detection, velocity projection) pre-compute key facts so the synthesis *LLM* receives answers rather than raw numbers.

Operators and supervisors can now ask questions in natural language, receive machine and production data scoped strictly to their work centres, navigate directly to relevant screens via action buttons embedded in the reply, and obtain proactive alerts for overdue orders, scrap anomalies, and paused operations — all without leaving the chat interface.

General Conclusion

This report has presented the full lifecycle of the MES (*Manufacturing Execution System*) project developed at **Mavision** over the course of five sprints. Starting from a blank slate, the team designed and implemented a complete shop-floor execution system natively integrated with Microsoft Dynamics 365 Business Central. Sprint 1 established the security and identity foundation: a token-based authentication system, role-based access control, and a full administrator interface for user and account management. Sprint 2 delivered real-time machine monitoring, production order management, and a complete operation history trail. Sprint 3 completed the production execution loop with cycle declarations, pause, resume, and close flows, Bill of Materials visibility, component scanning, scrap tracking, and label printing. Sprint 4 added the administration layer with a machine performance dashboard, a paginated activity log, multi-language support covering English, French, and Arabic, and in-app onboarding tutorials. Sprint 5 delivered the AI intelligence layer: a natural-language chat assistant embedded in the Flutter frontend, a Node.js reverse-proxy middleware bridging the Flutter application to both Business Central and a Python AI agent, and the agent itself, providing intent classification, multi-provider LLM synthesis, fuzzy machine resolution, composite fan-out queries, and contextual redirect actions. Across all five sprints, the append-only data model ensures a tamper-evident audit trail from every machine state change through to every production cycle declaration. The reactive stream architecture in the Flutter frontend provides operators and supervisors with a consistent, real-time view of the production floor without manual refreshes. The project demonstrates that a tightly integrated MES solution can be built on top of Microsoft Dynamics 365 Business Central using OData V4 unbound actions, with a Node.js middleware layer handling Windows authentication and AI routing. The extensible layered architecture positions the system for future enhancements such as statistical reporting, alert management, and additional language support.

Bibliography

- [1] Mavision, *Official Website*, <https://www.mavision.tn>, visited April 2025.