



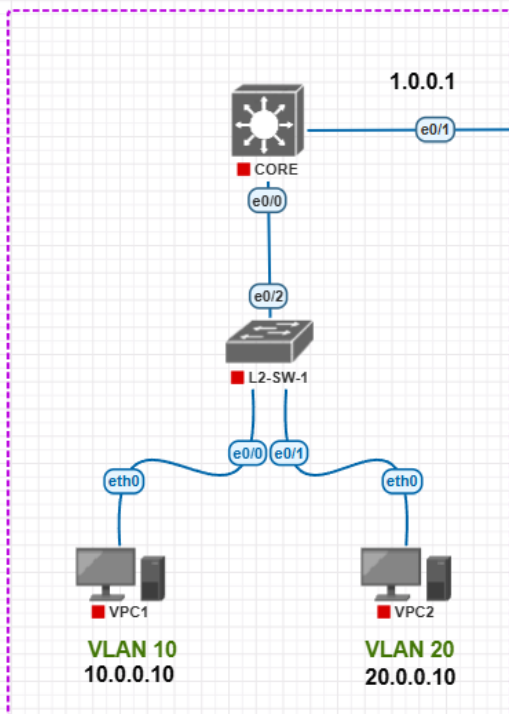

SWITCH VIRTUAL INTERFACE

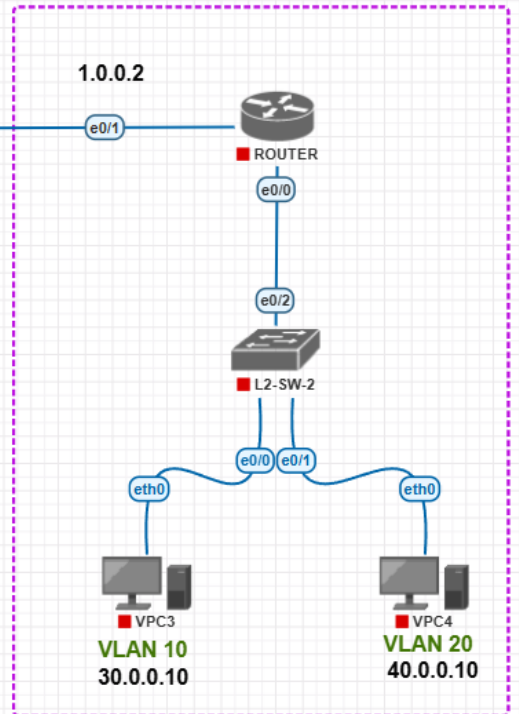

ROUTER ON-A-STICK

```
L2-SW-1
L2-SW-1(config)#vlan 10
L2-SW-1(config-vlan)#name HR
L2-SW-1(config-vlan)#exit
L2-SW-1(config)#
L2-SW-1(config)#vlan 20
L2-SW-1(config-vlan)#name SALES
L2-SW-1(config-vlan)#exit
L2-SW-1(config)#
L2-SW-1(config)#int e0/0
L2-SW-1(config-if)#switchport access vlan 10
L2-SW-1(config-if)#ex
L2-SW-1(config)#
L2-SW-1(config)#int e0/1
L2-SW-1(config-if)#switchport access vlan 20
L2-SW-1(config-if)#ex
L2-SW-1(config)#
L2-SW-1(config)#int e0/2
L2-SW-1(config-if)#switchport trunk
*Sep 19 01:08:12.721: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
L2-SW-1(config-if)#switchport trunk encapsulation dot1q
L2-SW-1(config-if)#switchport mode trunk
L2-SW-1(config-if)#exit
L2-SW-1(config)#
```

```
CORE
CORE#conf t
Enter configuration commands, one per line. End with CNTL/Z.
CORE(config)#vlan 10
CORE(config-vlan)#ex
CORE(config)#
*Sep 19 01:09:15.906: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
CORE(config)#vlan 20
CORE(config-vlan)#ex
CORE(config)#
CORE(config)#int e0/2
CORE(config-if)#switchport trunk encapsulation dot1q
CORE(config-if)#switchport mode trunk
CORE(config-if)#ex
CORE(config)#
CORE(config)#interface vlan 10
CORE(config-if)#ip add
*Sep 19 01:10:01.802: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan10, changed state to down
CORE(config-if)#ip add 10.0.0.1 255.0.0.0
CORE(config-if)#no sh
CORE(config-if)#ex
CORE(config)#
CORE(config)#
*Sep 19 01:11:21.133: %LINK-3-UPDOWN: Interface Vlan10, changed state to up
*Sep 19 01:11:22.133: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan10, changed state to up
CORE(config)#interface vlan 20
CORE(config-if)#ip a
*Sep 19 01:11:29.714: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan20, changed state to down
CORE(config-if)#ip add 20.0.0.1 255.0.0.0
CORE(config-if)#no sh
CORE(config-if)#ex
CORE(config)#
CORE(config)#
*Sep 19 01:11:57.643: %LINK-3-UPDOWN: Interface Vlan20, changed state to up
*Sep 19 01:11:58.643: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan20, changed state to up
CORE(config)#
```



VPC1



```
VPCS is free software, distributed under the terms of the "BSD" licence.  
Source code and license can be found at vpcs.sf.net.  
For more information, please visit wiki.freecode.com.cn.  
Modified version for EVE-NG.
```

```
Press '?' to get help.
```

```
Executing the startup file
```

```
VPC1> ip 10.0.0.10/8 10.0.0.1  
Checking for duplicate address...  
VPC1 : 10.0.0.10 255.0.0.0 gateway 10.0.0.1
```

```
VPC1> ping 20.0.0.10
```

```
20.0.0.10 icmp_seq=1 timeout  
84 bytes from 20.0.0.10 icmp_seq=2 ttl=63 time=1.904 ms  
84 bytes from 20.0.0.10 icmp_seq=3 ttl=63 time=2.096 ms  
84 bytes from 20.0.0.10 icmp_seq=4 ttl=63 time=1.924 ms  
84 bytes from 20.0.0.10 icmp_seq=5 ttl=63 time=1.857 ms
```



VPC2



```
VPCS is free software, distributed under the terms of the "BSD" licence.  
Source code and license can be found at vpcs.sf.net.  
For more information, please visit wiki.freecode.com.cn.  
Modified version for EVE-NG.
```

```
Press '?' to get help.
```

```
Executing the startup file
```

```
VPC2> ip 20.0.0.10/8 20.0.0.1  
Checking for duplicate address...  
VPC2 : 20.0.0.10 255.0.0.0 gateway 20.0.0.1
```

```
VPC2> ping 10.0.0.10
```

```
84 bytes from 10.0.0.10 icmp_seq=1 ttl=63 time=2.227 ms  
84 bytes from 10.0.0.10 icmp_seq=2 ttl=63 time=2.052 ms  
84 bytes from 10.0.0.10 icmp_seq=3 ttl=63 time=1.847 ms  
84 bytes from 10.0.0.10 icmp_seq=4 ttl=63 time=1.969 ms  
84 bytes from 10.0.0.10 icmp_seq=5 ttl=63 time=1.883 ms
```

```
L2-SW-2
L2-SW-2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
L2-SW-2(config)#vlan 10
L2-SW-2(config-vlan)#name HR
L2-SW-2(config-vlan)#ex
L2-SW-2(config)#
L2-SW-2(config)#vlan 20
L2-SW-2(config-vlan)#name SALES
L2-SW-2(config-vlan)#ex
L2-SW-2(config)#
L2-SW-2(config)#int e0/0
L2-SW-2(config-if)#switchport access vlan 10
L2-SW-2(config-if)#ex
L2-SW-2(config)#
L2-SW-2(config)#int e0/1
L2-SW-2(config-if)#switchport access vlan 20
L2-SW-2(config-if)#ex
L2-SW-2(config)#
L2-SW-2(config)#int e0/2
L2-SW-2(config-if)#switchport trunk encapsulation dot1q
L2-SW-2(config-if)#switchport mode trunk
L2-SW-2(config-if)#
*Sep 19 01:17:18.847: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
L2-SW-2(config-if)#ex
L2-SW-2(config)#
L2-SW-2(config)#
*Sep 19 01:17:21.851: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to up
L2-SW-2(config)#
```

```
ROUTER
ROUTER(config)#int e0/0
ROUTER(config-if)#no sh
ROUTER(config-if)#ex
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#int e0/0.1
ROUTER(config-subif)#encapsulation dot1q 10
ROUTER(config-subif)#ip add 30.0.0.1 255.0.0.0
ROUTER(config-subif)#no sh
ROUTER(config-subif)#ex
ROUTER(config)#
ROUTER(config)#int e0/0.2
ROUTER(config-subif)#encapsulation dot1q 20
ROUTER(config-subif)#ip add 40.0.0.1 255.0.0.0
ROUTER(config-subif)#no sh
ROUTER(config-subif)#ex
ROUTER(config)#
```

VPC3

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

VPC3> ip 30.0.0.10/8 30.0.0.1
Checking for duplicate address...
VPC3 : 30.0.0.10 255.0.0.0 gateway 30.0.0.1

VPC3> ping 40.0.0.10

84 bytes from 40.0.0.10 icmp_seq=1 ttl=63 time=2.713 ms
84 bytes from 40.0.0.10 icmp_seq=2 ttl=63 time=1.022 ms
84 bytes from 40.0.0.10 icmp_seq=3 ttl=63 time=1.148 ms
84 bytes from 40.0.0.10 icmp_seq=4 ttl=63 time=1.363 ms
84 bytes from 40.0.0.10 icmp_seq=5 ttl=63 time=1.200 ms

VPC3>

VPC4

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

VPC4> ip 40.0.0.10/8 40.0.0.1
Checking for duplicate address...
VPC4 : 40.0.0.10 255.0.0.0 gateway 40.0.0.1

VPC4> ping 30.0.0.10

84 bytes from 30.0.0.10 icmp_seq=1 ttl=63 time=1.605 ms
84 bytes from 30.0.0.10 icmp_seq=2 ttl=63 time=1.635 ms
84 bytes from 30.0.0.10 icmp_seq=3 ttl=63 time=1.204 ms
84 bytes from 30.0.0.10 icmp_seq=4 ttl=63 time=1.412 ms
84 bytes from 30.0.0.10 icmp_seq=5 ttl=63 time=1.559 ms

```
CORE
CORE(config-if)#
CORE(config-if)#int e0/1
CORE(config-if)#no switchport
CORE(config-if)#ip add 1
*Sep 19 02:08:00.926: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Sep 19 02:08:01.926: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/1, changed state to up
CORE(config-if)#ip add 1.0.0.1 255.255.255.252
CORE(config-if)#no sh
CORE(config-if)#ex
CORE(config)#
CORE(config)#
CORE(config)#ip route 30.0.0.0 255.0.0.0 1.0.0.2
CORE(config)#ip route 40.0.0.0 255.0.0.0
*Sep 19 02:08:37.393: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
CORE(config)#ip route 40.0.0.0 255.0.0.0 1.0.0
% Incomplete command.
CORE(config)#ip route 40.0.0.0 255.0.0.0 1.0.0.2
CORE(config)#
```

```
ROUTER
ROUTER(config)#int e0/1
ROUTER(config-if)#ip add 1.0.0.2 255.255.255.252
ROUTER(config-if)#no sh
ROUTER(config-if)#exit
ROUTER(config)#
ROUTER(config)#ip route 10.0.0.0 255.0.0.0 1.0.0.1
ROUTER(config)#ip route 20.0.0.0 255.0.0.0 1.0.0.1
ROUTER(config)#
```

```
ROUTER
ROUTER(config)#exit
ROUTER#ping
*Sep 19 02:12:37.688: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#ping 1.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 1.0.0.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
ROUTER#
```

 VPC1

—

□

×

```
VPC1> ip 10.0.0.10/24 10.0.0.1
Checking for duplicate address...
VPC1 : 10.0.0.10 255.255.255.0 gateway 10.0.0.1

VPC1> ping 30.0.0.10

84 bytes from 30.0.0.10 icmp_seq=1 ttl=62 time=3.940 ms
84 bytes from 30.0.0.10 icmp_seq=2 ttl=62 time=2.954 ms
84 bytes from 30.0.0.10 icmp_seq=3 ttl=62 time=2.996 ms
84 bytes from 30.0.0.10 icmp_seq=4 ttl=62 time=2.773 ms
84 bytes from 30.0.0.10 icmp_seq=5 ttl=62 time=2.418 ms

VPC1> ping 40.0.0.10

84 bytes from 40.0.0.10 icmp_seq=1 ttl=62 time=3.056 ms
84 bytes from 40.0.0.10 icmp_seq=2 ttl=62 time=3.339 ms
84 bytes from 40.0.0.10 icmp_seq=3 ttl=62 time=2.430 ms
84 bytes from 40.0.0.10 icmp_seq=4 ttl=62 time=1.899 ms
84 bytes from 40.0.0.10 icmp_seq=5 ttl=62 time=1.954 ms

VPC1> █
```