```html
<!-- <!doctype html>
<html lang="en">
  <head>
     Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <!-- Bootstrap CSS -->
    <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTwFspd3yD65VohhpuuCOmLASjC"
crossorigin="anonymous">

    <title>Login</title>
    <style>



form{
        border: 1px solid black;
        border-radius: 5px;
        box-shadow: 5px 8px rgba(171, 192, 171, 0.678);
        width: 400px;
        margin:30px 450px;
        padding: 20px;
}
form label{ display: block;

}

div>a{
  margin: 100px;
}
</style>




  </head>
  <body>

    <div><a href="./webpages.html"> Home</a></div>

    <form>
```

```html
      <h3 style="text-align: center;">Login</h3>

        <div class="mb-3">
          <label for="username" class="form-label">Username:</label>
          <input type="text" class="form-control" placeholder="Enter username">
        </div>
        <div class="mb-3">
          <label for="exampleInputPassword1" class="form-label">Password:</label>
          <input type="password" class="form-control" id="exampleInputPassword1">
        </div>


        <button type="submit" class="btn btn-primary">Login</button>

        <h6>Not a user?<a href="./random.html">Registration</a></h6>
      </form>




    <!-- Optional JavaScript; choose one of the two! -->

    <!-- Option 1: Bootstrap Bundle with Popper -->
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js
" integrity="sha384-
MrcW6ZMFYlzcLA8Nl+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>

    <!-- Option 2: Separate Popper and Bootstrap JS -->
    <!--
    <script
src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js"
integrity="sha384-
IQsoLXl5PILFhosVNubq5LC7Qb9DXgDA9i+tQ8Zj3iwWAwPtgFTxbJ8NT4GN1R8p"
crossorigin="anonymous"></script>
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js"
integrity="sha384-
cVKIPhGWiC2Al4u+LWgxfKTRIcfu0JTxR+EQDz/bgldoEyl4H0zUF0QKbrJ0EcQF"
crossorigin="anonymous"></script>
    -->
```

```
    </body>
</html>
```

Home

### Login

Username:

Enter username

Password:

Login

Not a user?Registration

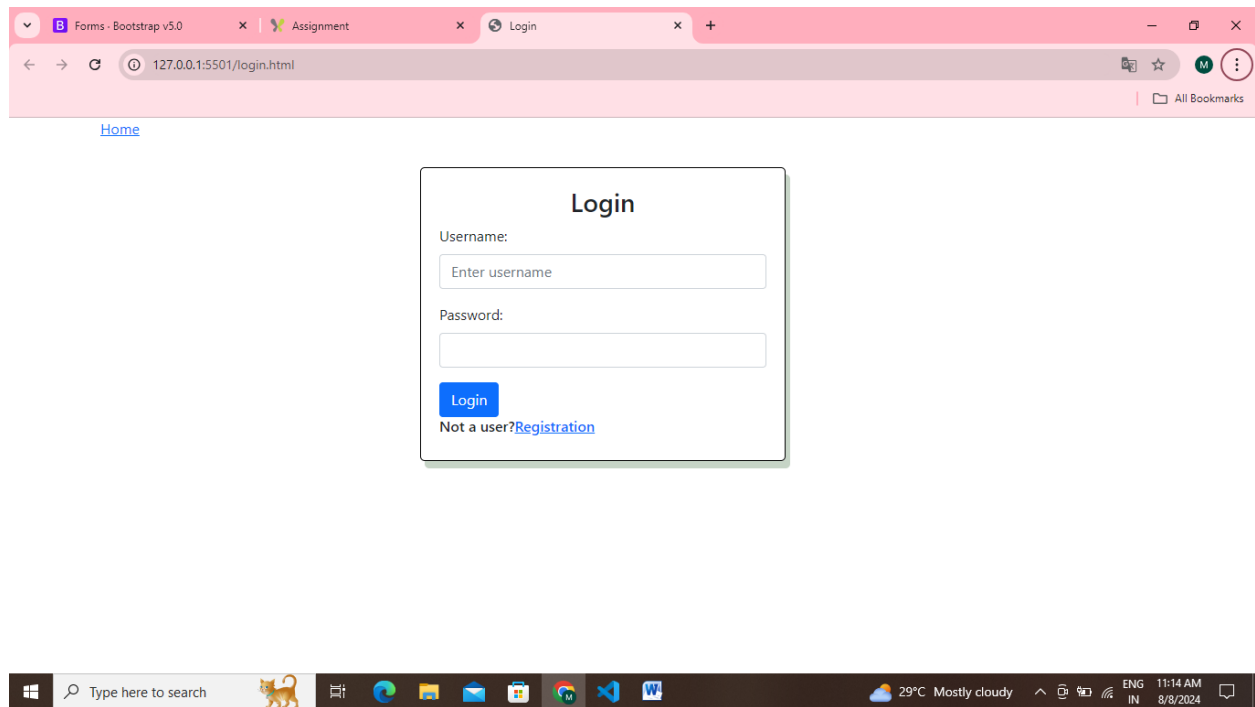```
<!doctype html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <!-- Bootstrap CSS -->
    <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTwFspd3yD65VohhpuuCOmLASjC"
crossorigin="anonymous">

    <title>Registration!</title>
    <style>form{
        border: 1px solid black;
```

```
        border-radius: 5px;
        box-shadow: 5px 8px rgba(171, 192, 171, 0.678);
        width: 400px;
        margin:30px 450px;
        padding: 20px;


    }
    div>a{
        margin: 100px;
    }
    </style>

  </head>
  <body>


<div>
    <a href="./webpages.html">home</a>
    <form>
        <h3 style="text-align: center;">Registration</h3>

        <div class="mb-3">
          <label for="username" class="form-label">Username:</label>
          <input type="text" class="form-control" placeholder="Enter username">
        </div>
        <div class="mb-3">
          <label for="email" class="form-label">Email ID:</label>
          <input type="email" class="form-control" id="email"
placeholder="Enter a valid Email">
        </div>
        <div class="mb-3">
          <label for="exampleInputPassword1" class="form-
label">Password</label>
          <input type="password" class="form-control"
id="exampleInputPassword1">
        </div>
        <div class="mb-3">
          <label for="exampleInputPassword1" class="form-label">Confirm
Password:</label>
          <input type="password" class="form-control"
id="exampleInputPassword1">
        </div>
        <button type="submit" class="btn btn-primary">Registration</button>

        <h6>Already User?<a href="./login.html">Registration</a></h6>
```

```html
        </form>
</div>




    <!-- Optional JavaScript; choose one of the two! -->

    <!-- Option 1: Bootstrap Bundle with Popper -->
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js
" integrity="sha384-
MrcW6ZMFYlzcLA8Nl+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>

    <!-- Option 2: Separate Popper and Bootstrap JS -->
    <!--
    <script
src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js"
integrity="sha384-
IQsoLXl5PILFhosVNubq5LC7Qb9DXgDA9i+tQ8Zj3iwWAwPtgFTxbJ8NT4GN1R8p"
crossorigin="anonymous"></script>
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js"
integrity="sha384-
cVKIPhGWiC2Al4u+LWgxfKTRIcfu0JTxR+EQDz/bgldoEyl4H0zUF0QKbrJ0EcQF"
crossorigin="anonymous"></script>
    -->
  </body>
</html>
```

home

# Registration

Username:

Enter username

Email ID:

Enter a valid Email

Password

Confirm Password:

Registration

**Already User?**Registration