

About the Tutorial

HTML stands for Hyper Text Markup Language, which is the most widely used language on Web to develop web pages.

HTML was created by Berners-Lee in late 1991 but "HTML 2.0" was the first standard HTML specification which was published in 1995. HTML 4.01 was a major version of HTML and it was published in late 1999. Though HTML 4.01 version is widely used but currently we are having HTML-5 version which is an extension to HTML 4.01, and this version was published in 2012.

Audience

This tutorial is designed for the aspiring Web Designers and Developers with a need to understand the HTML in enough detail along with its simple overview, and practical examples. This tutorial will give you enough ingredients to start with HTML from where you can take yourself at higher level of expertise.

Prerequisites

Before proceeding with this tutorial you should have a basic working knowledge with Windows or Linux operating system, additionally you must be familiar with:

- Experience with any text editor like notepad, notepad++, or Edit plus etc.
- How to create directories and files on your computer.
- How to navigate through different directories.
- How to type content in a file and save them on a computer.
- Understanding about images in different formats like JPEG, PNG format.

Copyright & Disclaimer

© Copyright 2015 by Tutorials Point (I) Pvt. Ltd.

All the content and graphics published in this e-book are the property of Tutorials Point (I) Pvt. Ltd. The user of this e-book is prohibited to reuse, retain, copy, distribute or republish any contents or a part of contents of this e-book in any manner without written consent of the publisher.

We strive to update the contents of our website and tutorials as timely and as precisely as possible, however, the contents may contain inaccuracies or errors. Tutorials Point (I) Pvt. Ltd. provides no guarantee regarding the accuracy, timeliness or completeness of our website or its contents including this tutorial. If you discover any errors on our website or in this tutorial, please notify us at contact@tutorialspoint.com

Table of Contents

About the Tutorial	i
Audience.....	i
Prerequisites	i
Copyright & Disclaimer	i
Table of Contents	ii
1. HTML – OVERVIEW	1
Basic HTML Document	1
HTML Tags	2
HTML Document Structure	3
The <!DOCTYPE> Declaration	3
2. HTML – BASIC TAGS	4
Heading Tags	4
Paragraph Tag.....	5
Line Break Tag	5
Centering Content	6
Horizontal Lines	6
Preserve Formatting	7
Nonbreaking Spaces	8
3. HTML – ELEMENTS	9
HTML Tag vs. Element.....	9
Nested HTML Elements	9
4. HTML – ATTRIBUTES	11
Core Attributes	12
Internationalization Attributes	13
The xml:lang Attribute	15

	HTML
5. HTML – FORMATTING.....	17
Bold Text	17
<i>Italic Text</i>	17
Underlined Text	18
Strike Text	18
Monospaced Font	19
Superscript Text.....	19
Subscript Text	20
Inserted Text.....	20
Deleted Text	21
Larger Text	21
Smaller Text	22
Grouping Content.....	22
6. HTML – PHRASE TAGS.....	24
Emphasized Text	24
Marked Text	24
Strong Text	25
Text Abbreviation	25
Acronym Element.....	26
Text Direction	26
Special Terms.....	27
Quoting Text	27
Short Quotations	28
Text Citations.....	28
Computer Code	29
Keyboard Text	29
Programming Variables.....	30
Program Output.....	30
Address Text	31

	HTML
7. HTML – META TAGS	32
Adding Meta Tags to Your Documents.....	32
Specifying Keywords.....	32
Document Description	33
Document Revision Date	33
Document Refreshing	34
Page Redirection	35
Setting Cookies	35
Setting Author Name.....	36
Specify Character Set.....	36
8. HTML – COMMENTS.....	38
Valid vs Invalid Comments.....	38
Multiline Comments	39
Conditional Comments	40
Using Comment Tag	40
Commenting Script Code.....	41
Commenting Style Sheets.....	41
9. HTML – IMAGES.....	43
Insert Image	43
Set Image Location	44
Set Image Width/Height	44
Set Image Border.....	45
Set Image Alignment.....	46
Free Web Graphics	46
10. HTML – TABLES.....	47
Table Heading.....	48
Cellpadding and Cellspacing Attributes	49
Colspan and Rowspan Attributes	50
Tables Backgrounds.....	50

	HTML
Table Height and Width.....	52
Table Caption.....	53
Table Header, Body, and Footer.....	54
Nested Tables.....	55
11. HTML – LISTS.....	57
HTML Unordered Lists.....	57
The type Attribute.....	58
HTML Ordered Lists.....	60
The type Attribute.....	60
The start Attribute.....	64
HTML Definition Lists.....	64
12. HTML – TEXT LINKS.....	66
Linking Documents.....	66
The target Attribute.....	66
Use of Base Path.....	67
Linking to a Page Section.....	68
Setting Link Colors.....	69
Download Links.....	69
File Download Dialog Box.....	70
13. HTML – IMAGE LINKS.....	71
Mouse-Sensitive Images.....	71
Server-Side Image Maps.....	72
Client-Side Image Maps.....	73
Coordinate System.....	74
14. HTML – EMAIL LINKS.....	75
HTML Email Tag.....	75
Default Settings.....	75
	v
15. HTML – FRAMES.....	76

	HTML
Disadvantages of Frames	76
Creating Frames	76
The <frameset> Tag Attributes.....	78
The <frame> Tag Attributes.....	79
Browser Support for Frames	80
Frame's name and target attributes	80
16. HTML – IFRAMES.....	83
The <iframe> Tag Attributes	84
17. HTML – BLOCKS	85
Block Elements	85
Inline Elements	85
Grouping HTML Elements	85
The <div> tag	85
The tag	87
18. HTML – BACKGROUNDS	88
Html Background with Colors.....	88
Html Background with Images	89
Patterned & Transparent Backgrounds.....	90
19. HTML – COLORS	92
HTML Color Coding Methods.....	92
HTML Colors -Color Names.....	92
W3C Standard 16 Colors.....	93
HTML Colors -Hex Codes	93
HTML Colors -RGB Values	95
Browser Safe Colors.....	96
20. HTML – FONTS.....	99
Set Font Size.....	99
Relative Font Size.....	100

	HTML
Setting Font Face	101
Specify alternate font faces	101
Setting Font Color	102
The <basefont> Element:.....	102
Example of the <basefont> Element	103
21. HTML – FORMS.....	104
Form Attributes	104
HTML Form Controls	105
Text Input Controls.....	105
Single-line text input controls	105
Attributes	106
Password Input controls	106
Attributes	107
Multiple-Line Text Input Controls	107
Attributes	108
Checkbox Control	109
Attributes	109
Radio Button Control	110
Select Box Control.....	111
Attributes	111
File Upload Box	112
Button Controls	113
Hidden Form Controls	114
22. HTML – EMBED MULTIMEDIA	115
The <embed> Tag Attributes	116
Supported Video Types	116
Background Audio.....	117
HTML Object tag	118
23. HTML – MARQUEES	120

The <marquee> Tag Attributes.....	120
24. HTML – HEADER.....	123
The HTML <title> Tag	123
The HTML <meta> Tag	124
The HTML <base> Tag	125
The HTML <link> Tag	125
The HTML <style> Tag	126
The HTML <script> Tag	127
25. HTML – STYLE SHEET	128
External Style Sheet	129
Internal Style Sheet	130
Inline Style Sheet.....	131
26. HTML JAVASCRIPT	133
External JavaScript.....	133
Internal Script	134
Event Handlers	135
Hide Scripts from Older Browsers.....	135
The <noscript> Element.....	136
Default Scripting Language	136
27. HTML – LAYOUTS	138
HTML Layout - Using Tables	138
Multiple Columns Layout - Using Tables	139
HTML Layouts - Using DIV, SPAN.....	141
28. HTML – TAG REFERENCE.....	143
HTML <comment> and <!--.....--> Tag.....	150
Browser Support	151
HTML <doctype> Tag.....	151
HTML <a> Tag	153

	HTML
Global Attributes	153
Specific Attributes	153
Event Attributes	155
HTML <abbr> Tag.....	156
HTML <acronym> Tag.....	157
HTML <address> Tag.....	158
HTML <applet> Tag	159
HTML <area> Tag	161
HTML <article> Tag	164
Global Attributes	165
Event Attributes	165
Browser Support	165
HTML <aside> Tag	165
Description	165
HTML <audio> Tag.....	166
HTML Tag	167
HTML <base> Tag	168
HTML <basefont> Tag	169
HTML <bdo> Tag.....	171
HTML <bdi> Tag	172
HTML <bgsound> Tag	173
HTML <big> Tag	174
HTML blink Tag	175
HTML <blockquote> Tag	176
HTML <body> Tag.....	177
HTML Tag.....	178
HTML Button Tag.....	179
HTML <canvas> Tag	181
HTML <caption> Tag.....	182
HTML <center> Tag.....	184

HTML <cite> Tag	184
HTML <code> Tag	185
HTML <col> Tag	186
HTML colgroup Tag	188
HTML <comment> and <!--.....--> Tag	190
HTML <datalist> Tag	191
HTML <dd> Tag	192
HTML Tag	193
HTML <dfn> Tag	194
HTML <dialog> tag	195
HTML <dir> Tag	196
HTML div Tag	198
HTML <dl> Tag	199
HTML <dt> Tag	201
HTML Tag	202
HTML <embed> Tag	203
HTML <fieldset> Tag	204
HTML Figcaption Tag	206
HTML Figure Tag	207
HTML Tag	208
HTML Footer Tag	209
HTML <form> Tag	210
HTML <frame> Tag	212
HTML <frameset> Tag	214
HTML <h1> to <h6> Tag	216
HTML <head> Tag	217
HTML Header Tag	218
HTML <hr> Tag	219
HTML <html> Tag	220
HTML <i> Tag	221

	HTML
HTML <iframe> Tag	222
HTML <ilayer> Tag	224
HTML Tag	227
HTML <input> Tag.....	229
HTML <ins> Tag	233
HTML <isindex> tag.....	235
HTML <kbd> Tag	236
HTML keygen Tag	236
HTML <label> Tag	238
HTML <layer> Tag	239
HTML <legend> Tag.....	242
HTML Tag	243
HTML <link> Tag	245
HTML Main Tag	248
HTML <map> Tag	249
HTML Mark Tag	250
HTML <marquee> Tag	251
HTML <menu> Tag.....	253
HTML <menuitem> tag.....	254
HTML <meta> tag.....	256
HTML <meter> Tag	257
HTML <multicol> tag	259
HTML <nav> Tag	260
HTML <nobr> Tag	261
HTML <noembed> Tag.....	262
HTML <noframes> Tag	263
HTML <noscript> Tag	264
HTML <object> Tag	265
HTML Tag	267
HTML <optgroup> Tag.....	269

	HTML
HTML <option> Tag.....	270
HTML <output> Tag.....	272
HTML <p> Tag	273
HTML <param> Tag.....	274
HTML <plaintext> Tag	276
HTML <pre> Tag.....	276
HTML Progress Tag	278
HTML <q> Tag	279
HTML Rp Tag.....	280
HTML Rt Tag.....	281
HTML Ruby Tag.....	282
HTML <strike> Tag.....	283
HTML Phrase Elements	284
HTML <script> Tag.....	286
HTML Section Tag.....	288
HTML <select> Tag	289
HTML <spacer> Tag.....	291
HTML <small> Tag	292
HTML <source> tag	293
HTML Tag	294
HTML <strike> Tag.....	295
HTML tag.....	296
HTML <style> tag.....	297
HTML <sub> Tag	298
HTML Summary Tag	299
HTML <sup> Tag	300
HTML <table> Tag.....	301
HTML <tbody> Tag.....	303
HTML <td> Tag	306
HTML textarea Tag	309

	HTML
HTML <tfoot> Tag	311
HTML <th> Tag	314
HTML <thead> Tag	316
HTML <time> tag.....	319
HTML <title> Tag	320
HTML <tr> Tag.....	321
HTML <track> tag	323
HTML <tt> Tag	324
HTML <u> Tag	325
HTML Tag	326
HTML <var> Tag	328
HTML <video> Tag	328
HTML <wbr> Tag.....	330
HTML <xmp> Tag	331
29. HTML – ATTRIBUTE REFERENCE	333
Global Attributes	333
Language Attributes	334
30. HTML EVENTS REFERENCE	335
Window Events Attributes	335
Form Events	336
Keyboard Events	337
Mouse Events	337
Media Events	338
31. HTML – FONTS REFERENCE.....	341
Fonts for Microsoft Systems.....	342
Fonts for Macintosh Systems	343
Fonts for Unix Systems	344
HTML ASCII Codes	xi 344

	HTML
7-BIT Printable ASCII Characters.....	344
7-BIT ASCII Device Control Characters.....	348
32. ASCII TABLE LOOKUP.....	351
7 Bit ASCII Codes.....	351
Extended ASCII Codes	356
33. HTML – COLOR NAMES.....	363
34. HTML – ENTITIES	370
Other Entities Supported by HTML Browsers	375
35. MIME MEDIA TYPES.....	377
36. HTML – URL ENCODING.....	393
ASCII Control Characters Encoding.....	394
Non-ASCII control characters encoding	395
Reserved Characters Encoding.....	402
Unsafe Characters Encoding.....	403
37. LANGUAGE ISO CODES.....	405
Language Codes: ISO 639, Microsoft.....	405
Language Codes: ISO 639, Macintosh	412
38. HTML – CHARACTER ENCODINGS.....	420
39. HTML – DEPRECATED TAGS	422
HTML Deprecated Attributes	422

1. HTML – OVERVIEW

HTML stands for **H**ypertext **M**arkup **L**anguage, and it is the most widely used language to write Web Pages.

- **Hypertext** refers to the way in which Web pages (HTML documents) are linked together. Thus, the link available on a webpage is called Hypertext.
- As its name suggests, HTML is a **Markup Language** which means you use HTML to simply "mark-up" a text document with tags that tell a Web browser how to structure it to display.

Originally, HTML was developed with the intent of defining the structure of documents like headings, paragraphs, lists, and so forth to facilitate the sharing of scientific information between researchers.


Now, HTML is being widely used to format web pages with the help of different tags available in HTML language.

Basic HTML Document

In its simplest form, following is an example of an HTML document:

```
<!DOCTYPE html>
<html>
<head>
<title>This is document title</title>
</head>
<body>
<h1>This is a heading</h1>
<p>Document content goes here.....</p>
</body>
</html>
```

Either you can use **Try it** option available at the top right corner of the code box to check the result of this HTML code, or let's save it in an HTML file **test.htm** using your favorite text editor. Finally open it using a web browser like Internet Explorer or Google Chrome, or Firefox etc. It must show the following output:

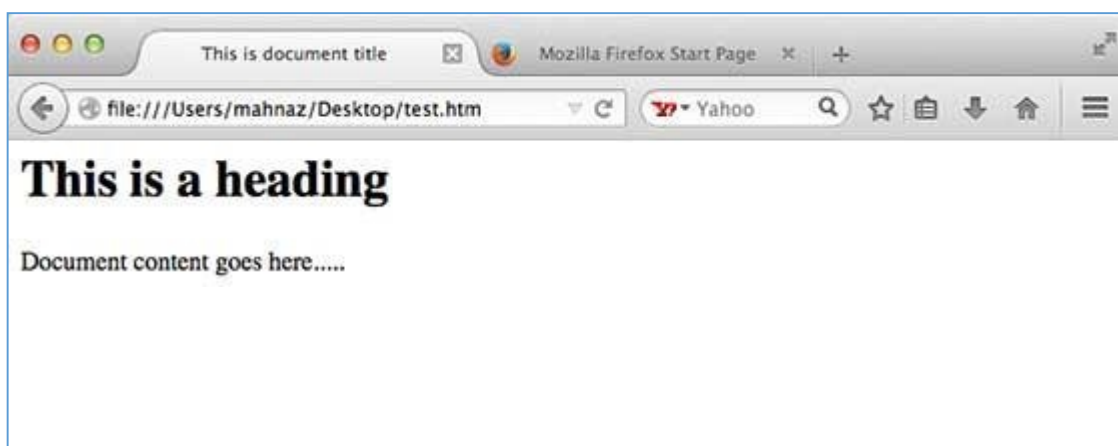

HTML Tags

As told earlier, HTML is a markup language and makes use of various tags to format the content. These tags are enclosed within angle braces **<Tag Name>**. Except few tags, most of the tags have their corresponding closing tags. For example, **<html>** has its closing tag **</html>** and **<body>** tag has its closing tag **</body>** tag etc.

Above example of HTML document uses the following tags:

Tag	Description
<!DOCTYPE...>	This tag defines the document type and HTML version.
<html>	This tag encloses the complete HTML document and mainly comprises of document header which is represented by <head>...</head> and document body which is represented by <body>...</body> tags.
<head>	This tag represents the document's header which can keep other HTML tags like <title>, <link> etc.
<title>	The <title> tag is used inside the <head> tag to mention the document title.
<body>	This tag represents the document's body which keeps other HTML tags like <h1>, <div>, <p> etc.
<h1>	This tag represents the heading.

<p>	This tag represents a paragraph.
-----	----------------------------------

To learn HTML, you will need to study various tags and understand how they behave, while formatting a textual document. Learning HTML is simple as users have to learn the usage of different tags in order to format the text or images to make a beautiful webpage.

World Wide Web Consortium (W3C) recommends to use lowercase tags starting from HTML 4.

HTML Document Structure

A typical HTML document will have the following structure:

```
Document declaration tag
<html>
  <head>
    Document header related tags
  </head>

  <body>
    Document body related tags
  </body>
</html>
```

We will study all the header and body tags in subsequent chapters, but for now let's see what is document declaration tag.

The<!DOCTYPE> Declaration

The <!DOCTYPE> declaration tag is used by the web browser to understand the version of the HTML used in the document. Current version of HTML is 5 and it makes use of the following declaration:

```
<!DOCTYPE html>
```

There are many other declaration types which can be used in HTML document depending on what version of HTML is being used. We will see more details on this while discussing <!DOCTYPE...> tag along with other HTML tags.

2. HTML – BASIC TAGS

Heading Tags

Any document starts with a heading. You can use different sizes for your headings. HTML also has six levels of headings, which use the elements **<h1>**, **<h2>**, **<h3>**, **<h4>**, **<h5>**, and **<h6>**. While displaying any heading, browser adds one line before and one line after that heading.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Heading Example</title>
</head>
<body>
<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<h3>This is heading 3</h3>
<h4>This is heading 4</h4>
<h5>This is heading 5</h5>
<h6>This is heading 6</h6>
</body>
</html>
```

This will produce the following result:

This is heading 1

This is heading 2

This is heading 3

This is heading 4

This is heading 5

This is heading 6

Paragraph Tag

The **<p>** tag offers a way to structure your text into different paragraphs. Each paragraph of text should go in between an opening **<p>** and a closing **</p>** tag as shown below in the example:

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Paragraph Example</title>
</head>
<body>
<p>Here is a first paragraph of text.</p>
<p>Here is a second paragraph of text.</p>
<p>Here is a third paragraph of text.</p>
</body>
</html>
```

This will produce the following result:

Here is a first paragraph of text.
Here is a second paragraph of text.
Here is a third paragraph of text.

Line Break Tag

Whenever you use the **
** element, anything following it starts from the next line. This tag is an example of an **empty** element, where you do not need opening and closing tags, as there is nothing to go in between them.

The **
** tag has a space between the characters **br** and the forward slash. If you omit this space, older browsers will have trouble rendering the line break, while if you miss the forward slash character and just use **
** it is not valid in XHTML.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Line Break Example</title>
</head>
<body>
<p>Hello<br />
You delivered your assignment on time.<br />
Thanks<br />
Mahnaz</p>
</body>
</html>
```

This will produce the following result:

```
Hello
You delivered your assignment on time.
Thanks
Mahnaz
```

Centering Content

You can use **<center>** tag to put any content in the center of the page or any table cell.

Example

```
<!DOCTYPE html>
<html>
<head>
```

```

<title>Centring Content Example</title>
</head>
<body>
<p>This text is not in the center.</p>
<center>
<p>This text is in the center.</p>
</center>
</body>
</html>

```

This will produce the following result:

This text is not in the center.

This text is in the center.

Horizontal Lines

Horizontal lines are used to visually break-up sections of a document. The **<hr>** tag creates a line from the current position in the document to the right margin and breaks the line accordingly.

For example, you may want to give a line between two paragraphs as in the given example below:

Example

```

<!DOCTYPE html>
<html>
<head>
<title>Horizontal Line Example</title>
</head>
<body>
<p>This is paragraph one and should be on top</p>
<hr />
<p>This is paragraph two and should be at bottom</p>
</body>
</html>

```

This will produce the following result:

This is paragraph one and should be on top

This is paragraph two and should be at bottom

Again **<hr />** tag is an example of the **empty** element, where you do not need opening and closing tags, as there is nothing to go in between them.

The **<hr />** element has a space between the characters **hr** and the forward slash. If you omit this space, older browsers will have trouble rendering the horizontal line, while if you miss the forward slash character and just use **<hr>** it is not valid in XHTML

Preserve Formatting

Sometimes, you want your text to follow the exact format of how it is written in the HTML document. In these cases, you can use the preformatted tag **<pre>**.

Any text between the opening **<pre>** tag and the closing **</pre>** tag will preserve the formatting of the source document.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Preserve Formatting Example</title>
</head>
<body>
<pre>
function testFunction( strText ){
    alert (strText)
}
</pre>
</body>
</html>
```

This will produce the following result:

```
function testFunction( strText ){
```

```
    alert (strText)
}
```

Try using the same code without keeping it inside **<pre>...</pre>** tags

Nonbreaking Spaces

Suppose you want to use the phrase "12 Angry Men." Here, you would not want a browser to split the "12, Angry" and "Men" across two lines:

An example of this technique appears in the movie "12 Angry Men."

In cases, where you do not want the client browser to break text, you should use a nonbreaking space entity ** **; instead of a normal space. For example, when coding the "12 Angry Men" in a paragraph, you should use something similar to the following code:

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Nonbreaking Spaces Example</title>
</head>
<body>
<p>An example of this technique appears in the movie "12 Angry Men."</p>
</body>
</html>
```


3. HTML – ELEMENTS

An **HTML element** is defined by a starting tag. If the element contains other content, it ends with a closing tag, where the element name is preceded by a forward slash as shown below with few tags:

Start Tag	Content	End Tag
<p>	This is paragraph content.	</p>
<h1>	This is heading content.	</h1>
<div>	This is division content.	</div>

So here **<p>....</p>** is an HTML element, **<h1>...</h1>** is another HTML element. There are some HTML elements which don't need to be closed, such as **<img.../>**, **<hr />** and **
** elements. These are known as **void elements**.

HTML documents consists of a tree of these elements and they specify how HTML documents should be built, and what kind of content should be placed in what part of an HTML document.

HTML Tag vs. Element

An HTML element is defined by a *starting tag*. If the element contains other content, it ends with a *closing tag*.

For example, **<p>** is starting tag of a paragraph and **</p>** is closing tag of the same paragraph but **<p>This is paragraph</p>** is a paragraph element.

Nested HTML Elements

It is very much allowed to keep one HTML element inside another HTML element:

Example

```
<!DOCTYPE html>
<html>
```

```
<head>
```

```
<title>Nested Elements Example</title>
</head>
<body>
<h1>This is <i>italic</i> heading</h1>
<p>This is <u>underlined</u> paragraph</p>
</body>
</html>
```

This will display the following result:

This is *italic* heading
This is underlined paragraph

4. HTML –ATTRIBUTES

We have seen few HTML tags and their usage like heading tags **<h1>**, **<h2>**, paragraph tag **<p>** and other tags. We used them so far in their simplest form, but most of the HTML tags can also have attributes, which are extra bits of information.

An attribute is used to define the characteristics of an HTML element and is placed inside the element's opening tag. All attributes are made up of two parts: a **name** and a **value**:

- The **name** is the property you want to set. For example, the paragraph **<p>** element in the example carries an attribute whose name is **align**, which you can use to indicate the alignment of paragraph on the page.
-
- The **value** is what you want the value of the property to be set and always put within quotations. The below example shows three possible values of align attribute: **left**, **center** and **right**.

Attribute names and attribute values are case-insensitive. However, the World Wide Web Consortium (W3C) recommends lowercase attributes/attribute values in their HTML 4 recommendation.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Align Attribute Example</title>
</head>
<body>
<p align="left">This is left aligned</p>
<p align="center">This is center aligned</p>
<p align="right">This is right aligned</p>
</body>
</html>
```

This will display the following result:

This is left aligned

This is center aligned

This is right aligned

Core Attributes

The four core attributes that can be used on the majority of HTML elements (although not all) are:

- Id
- Title
- Class
- Style

The Id Attribute

The **id** attribute of an HTML tag can be used to uniquely identify any element within an HTML page. There are two primary reasons that you might want to use an id attribute on an element:

- If an element carries an id attribute as a unique identifier, it is possible to identify just that element and its content.
- If you have two elements of the same name within a Web page (or style sheet), you can use the id attribute to distinguish between elements that have the same name.

We will discuss style sheet in separate tutorial. For now, let's use the id attribute to distinguish between two paragraph elements as shown below.

Example

```
<p id="html">This para explains what is HTML</p>
<p id="css">This para explains what is Cascading Style Sheet</p>
```

The title Attribute

The **title** attribute gives a suggested title for the element. The syntax for the **title** attribute is similar as explained for **id** attribute:

The behavior of this attribute will depend upon the element that carries it, although it is often displayed as a tooltip when cursor comes over the element or while the element is loading.

Example

```
<!DOCTYPE html>
<html>
<head>
```

```
<title>The title Attribute Example</title>
</head>
<body>
<h3 title="Hello HTML!">Titled Heading Tag Example</h3>
</body>
</html>
```

This will produce the following result:

Titled Heading Tag Example

Now try to bring your cursor over "Titled Heading Tag Example" and you will see that whatever title you used in your code is coming out as a tooltip of the cursor.

The class Attribute

The **class** attribute is used to associate an element with a style sheet, and specifies the class of element. You will learn more about the use of the class attribute when you will learn Cascading Style Sheet (CSS). So for now you can avoid it.

The value of the attribute may also be a space-separated list of class names. For example:

```
class="className1 className2 className3"
```

The style Attribute

The style attribute allows you to specify Cascading Style Sheet (CSS) rules within the element.

```
<!DOCTYPE html>
<html>
<head>
<title>The style Attribute</title>
</head>
<body>
<p style="font-family:arial; color:#FF0000;">Some text...</p>
</body>
</html>
```

This will produce the following result:

Some text...

At this point of time, we are not learning CSS, so just let's proceed without bothering much about CSS. Here, you need to understand what are HTML attributes and how they can be used while formatting content.

Internationalization Attributes

There are three internationalization attributes, which are available for most (although not all) XHTML elements.

- dir
- lang
- xml:lang

The dir Attribute

The **dir** attribute allows you to indicate to the browser about the direction in which the text should flow. The dir attribute can take one of two values, as you can see in the table that follows:

Value	Meaning
ltr	Left to right (the default value)
rtl	Right to left (for languages such as Hebrew or Arabic that are read right to left)

Example

```
<!DOCTYPE html>
<html dir="rtl">
<head>
<title>Display Directions</title>
</head>
<body>
This is how IE 5 renders right-to-left directed text.
</body>
</html>
```

This will produce the following result:

This is how IE 5 renders right-to-left directed text.

When *dir* attribute is used within the `<html>` tag, it determines how text will be presented within the entire document. When used within another tag, it controls the text's direction for just the content of that tag.

The lang Attribute

The **lang** attribute allows you to indicate the main language used in a document, but this attribute was kept in HTML only for backwards compatibility with earlier versions of HTML. This attribute has been replaced by the **xml:lang** attribute in new XHTML documents.

The values of the *lang* attribute are ISO-639 standard two-character language codes. Check [HTML Language Codes: ISO 639](#) for a complete list of language codes.

Example

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>English Language Page</title>
</head>
<body>
This page is using English Language
</body>
</html>
```

The xml:lang Attribute

The *xml:lang* attribute is the XHTML replacement for the *lang* attribute. The value of the *xml:lang* attribute should be an ISO-639 country code as mentioned in previous section.

Generic Attributes

Here's a table of some other attributes that are readily usable with many of the HTML tags.

Attribute	Options	Function
align	right, left, center	Horizontally aligns tags

valign	top, middle, bottom	Vertically aligns tags within an HTML element.
bgcolor	numeric, hexadecimal, RGB values	Places a background color behind an element
background	URL	Places a background image behind an element
id	User Defined	Names an element for use with Cascading Style Sheets.
class	User Defined	Classifies an element for use with Cascading Style Sheets.
width	Numeric Value	Specifies the width of tables, images, or table cells.
height	Numeric Value	Specifies the height of tables, images, or table cells.
title	User Defined	"Pop-up" title of the elements.

We will see related examples as we will proceed to study other HTML tags. For a complete list of HTML Tags and related attributes please check reference to [HTML Tags List](#).

5. HTML – FORMATTING

If you use a word processor, you must be familiar with the ability to make text bold, italicized, or underlined; these are just three of the ten options available to indicate how text can appear in HTML and XHTML.

Bold Text

Anything that appears within `...` element, is displayed in bold as shown below:

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Bold Text Example</title>
</head>
<body>
<p>The following word uses a <b>bold</b> typeface.</p>
</body>
</html>
```

This will produce the following result:

The fo**ll**owing word uses a **bo**ld**** ty**pe**face.

Italic Text

Anything that appears within `<i>...</i>` element is displayed in italicized as shown below:

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Italic Text Example</title>
</head>
```

```
<body>
<p>The following word uses a <i>italicized</i> typeface.</p>
</body>
</html>
```

This will produce the following result:

The **f**ollowing word uses an *italicized* typeface.

Underlined Text

Anything that appears within `<u>...</u>` element, is displayed with underline as shown below:

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Underlined Text Example</title>
</head>
<body>
<p>The following word uses a <u>underlined</u> typeface.</p>
</body>
</html>
```

This will produce the following result:

The following word uses an underlined typeface.

Strike Text

Anything that appears within `<strike>...</strike>` element is displayed with strikethrough, which is a thin line through the text as shown below:

Example

```
<!DOCTYPE html>
<html>
<head>
```

```
<title>Strike Text Example</title>
</head>
<body>
<p>The following word uses a <strike>strikethrough</strike> typeface.</p>
</body>
</html>
```

This will produce the following result:

The following word uses a ~~strikethrough~~ typeface.

Monospaced Font

The content of a **<tt>...</tt>** element is written in monospaced font. Most of the fonts are known as variable-width fonts because different letters are of different widths (for example, the letter 'm' is wider than the letter 'i'). In a monospaced font, however, each letter has the same width.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Monospaced Font Example</title>
</head>
<body>
<p>The following word uses a <tt>monospaced</tt> typeface.</p>
</body>
</html>
```

This will produce the following result:

The following word uses a monospaced typeface.

Superscript Text

The content of a **^{...}** element is written in superscript; the font size used is the same size as the characters surrounding it but is displayed half a character's height above the other characters.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Superscript Text Example</title>
</head>
<body>
<p>The following word uses a <sup>superscript</sup> typeface.</p>
</body>
</html>
```

This will produce the following result:

The following word uses a ^{superscript} typeface.

Subscript Text

The content of a **_{...}** element is written in subscript; the font size used is the same as the characters surrounding it, but is displayed half a character's height beneath the other characters.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Subscript Text Example</title>
</head>
<body>
<p>The following word uses a <sub>subscript</sub> typeface.</p>
</body>
</html>
```

This will produce the following result:

The following word uses a _{subscript} typeface.

Inserted Text

Anything that appears within `<ins>...</ins>` element is displayed as inserted text.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Inserted Text Example</title>
</head>
<body>
<p>I want to drink <del>cola</del> <ins>wine</ins></p>
</body>
</html>
```

This will produce the following result:

I want to drink ~~cola~~ wine

Deleted Text

Anything that appears within `...` element, is displayed as deleted text.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Deleted Text Example</title>
</head>
<body>
<p>I want to drink <del>cola</del> <ins>wine</ins></p>
</body>
</html>
```

This will produce the following result:

I want to drink ~~cola~~ wine

Larger Text

The content of the **<big>...</big>** element is displayed one font size larger than the rest of the text surrounding it as shown below:

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Larger Text Example</title>
</head>
<body>
<p>The following word uses a <big>big</big> typeface.</p>
</body>
</html>
```

This will produce the following result:

The following word uses a **big** typeface.

Smaller Text

The content of the **<small>...</small>** element is displayed one font size smaller than the rest of the text surrounding it as shown below:

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Smaller Text Example</title>
</head>
<body>
<p>The following word uses a <small>small</small> typeface.</p>
</body>
```

```
</html>
```

This will produce the following result:

The **f**ollowing word uses a sma**ll** type**f**ace.

Grouping Content

The **<div>** and **** elements allow you to group together several elements to create sections or subsections of a page.

For example, you might want to put all of the footnotes on a page within a **<div>** element to indicate that all of the elements within that **<div>** element relate to the footnotes. You might then attach a style to this **<div>** element so that they appear using a special set of style rules.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Div Tag Example</title>
</head>
<body>
<div id="menu" align="middle" >
<a href="/index.htm">HOME</a> |
<a href="/about/contact_us.htm">CONTACT</a> |
<a href="/about/index.htm">ABOUT</a>
</div>

<div id="content" align="left" bgcolor="white">
<h5>Content Articles</h5>
<p>Actual content goes here.....</p>
</div>
</body>
</html>
```

This will produce the following result:

[HOME](#) | [CONTACT](#) | [ABOUT](#)

CONTENT ARTICLES

Actual content goes here.....

The `` element, on the other hand, can be used to group inline elements only. So, if you have a part of a sentence or paragraph which you want to group together, you could use the `` element as follows

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Span Tag Example</title>
</head>
<body>
<p>This is the example of <span style="color:green">span tag</span> and the <span
style="color:red">div tag</span> alongwith CSS</p>
</body>
</html>
```

This will produce the following result:

This is the example of span tag and the div tag along with CSS

These tags are commonly used with CSS to allow you to attach a style to a section of a page.

6. HTML – PHRASE TAGS

The phrase tags have been designed for specific purposes, though they are displayed in a similar way as other basic tags like ****, **<i>**, **<pre>**, and **<tt>**, you have seen in previous chapter. This chapter will take you through all the important phrase tags, so let's start seeing them one by one.

Emphasized Text

Anything that appears within **...** element is displayed as emphasized text.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Emphasized Text Example</title>
</head>
<body>
<p>The following word uses a <em>emphasized</em> typeface.</p>
</body>
</html>
```

This will produce the following result:

The following word uses an *emphasized* typeface.

Marked Text

Anything that appears with-in **<mark>...</mark>** element, is displayed as marked with yellow ink.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Marked Text Example</title>
```

```

</head>
<body>
<p>The following word has been <mark>marked</mark> with yellow</p>
</body>
</html>

```

This will produce the following result:

The following word has been marked with yellow.

Strong Text

Anything that appears within **...** element is displayed as important text.

Example

```

<!DOCTYPE html>
<html>
<head>
<title>Strong Text Example</title>
</head>
<body>
<p>The following word uses a <strong>strong</strong> typeface.</p>
</body>
</html>

```

This will produce the following result:

The following word uses a **strong** typeface.

Text Abbreviation

You can abbreviate a text by putting it inside opening **<abbr>** and closing **</abbr>** tags. If present, the title attribute must contain this full description and nothing else.

Example

```

<!DOCTYPE html>
<html>
<head>

```

```

<title>Text Abbreviation</title>
</head>
<body>
<p>My best friend's name is <abbr title="Abhishek">Abhy</abbr>.</p>
</body>
</html>

```

This will produce the following result:

My best friend's name is Abhy.

Acronym Element

The **<acronym>** element allows you to indicate that the text between **<acronym>** and **</acronym>** tags is an acronym.

At present, the major browsers do not change the appearance of the content of the **<acronym>** element.

Example

```

<!DOCTYPE html>
<html>
<head>
<title>Acronym Example</title>
</head>
<body>
<p>This chapter covers marking up text in <acronym>XHTML</acronym>.</p>
</body>
</html>

```

This will produce the following result:

This chapter covers marking up text in XHTML.

Text Direction

The **<bdo>...</bdo>** element stands for Bi-Directional Override and it is used to override the current text direction.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Text Direction Example</title>
</head>
<body>
<p>This text will go left to right.</p>
<p><bdo dir="rtl">This text will go right to left.</bdo></p>
</body>
</html>
```

This will produce the following result:

This text will go left to right.

This text will go right to left.

Special Terms

The **<dfn>...</dfn>** element (or HTML Definition Element) allows you to specify that you are introducing a special term. It's usage is similar to italic words in the midst of a paragraph.

Typically, you would use the **<dfn>** element the first time you introduce a key term. Most recent browsers render the content of a **<dfn>** element in an italic font.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Special Terms Example</title>
</head>
<body>
<p>The following word is a <dfn>special</dfn> term.</p>
</body>
</html>
```

This will produce the following result:

The following word is a *special* term.

Quoting Text

When you want to quote a passage from another source, you should put it in between **<blockquote>...</blockquote>** tags.

Text inside a `<blockquote>` element is usually indented from the left and right edges of the surrounding text, and sometimes uses an italicized font.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Blockquote Example</title>
</head>
<body>
<p>The following description of XHTML is taken from the W3C Web site:</p>

<blockquote>XHTML 1.0 is the W3C's first Recommendation for XHTML, following on
from earlier work on HTML 4.01, HTML 4.0, HTML 3.2 and HTML 2.0.</blockquote>
</body>
</html>
```

This will produce the following result:

The following description of XHTML is taken from the W3C Web site:

```
XHTML 1.0 is the W3C's first Recommendation for XHTML, following on from earlier
work on HTML 4.01, HTML 4.0, HTML 3.2 and HTML 2.0.
```

Short Quotations

The **<q>...</q>** element is used when you want to add a double quote within a sentence.

Example

```
<!DOCTYPE html>
<html>
<head>
```

```
<title>Double Quote Example</title>
</head>
<body>
<p>Amit is in Spain, <q>I think I am wrong</q>.</p>
</body>
</html>
```

This will produce the following result:

Amit is in Spain, I think I am wrong.

Text Citations

If you are quoting a text, you can indicate the source placing it between an opening **<cite>** tag and closing **</cite>** tag

As you would expect in a print publication, the content of the `<cite>` element is rendered in italicized text by default.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Citations Example</title>
</head>
<body>
<p>This HTML tutorial is derived from <cite>W3 Standard for HTML</cite>.</p>
</body>
</html>
```

This will produce the following result:

This HTML tutorial is derived from *W3 Standard for HTML*.

Computer Code

Any programming code to appear on a Web page should be placed inside **<code>...</code>** tags. Usually the content of the `<code>` element is presented in a monospaced font, just like the code in most programming books.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Computer Code Example</title>
</head>
<body>
<p>Regular text. <code>This is code.</code> Regular text.</p>
</body>
</html>
```

This will produce the following result:

Regular text. `This is code.` Regular text.

Keyboard Text

When you are talking about computers, if you want to tell a reader to enter some text, you can use the **<kbd>...</kbd>** element to indicate what should be typed in, as in this example.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Keyboard Text Example</title>
</head>
<body>
<p>Regular text. <kbd>This is inside kbd element</kbd> Regular text.</p>
</body>
</html>
```

This will produce the following result:

Regular text. `This is inside kbd element` Regular text.

Programming Variables

This element is usually used in conjunction with the **<pre>** and **<code>** elements to indicate that the content of that element is a variable.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Variable Text Example</title>
</head>
<body>
<p><code>document.write("<var>user-name</var>")</code></p>
</body>
</html>
```

This will produce the following result:

```
document.write("user-name")
```

Program Output

The **<samp>...</samp>** element indicates sample output from a program, and script etc. Again, it is mainly used when documenting programming or coding concepts.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Program Output Example</title>
</head>
<body>
<p>Result produced by the program is <samp>Hello World!</samp></p>
</body>
</html>
```

This will produce the following result:

Result produced by the program is Hello World!

Address Text

The `<address>...</address>` element is used to contain any address.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Address Example</title>
</head>
<body>
<address>388A, Road No 22, Jubilee Hills - Hyderabad</address>
</body>
</html>
```

This will produce the following result:

388A, Road No 22, Jubilee Hills - Hyderabad

7. HTML – META TAGS

HTML lets you specify metadata - additional important information about a document in a variety of ways. The META elements can be used to include name/value pairs describing properties of the HTML document, such as author, expiry date, a list of keywords, document author etc.

The **<meta>** tag is used to provide such additional information. This tag is an empty element and so does not have a closing tag but it carries information within its attributes.

You can include one or more meta tags in your document based on what information you want to keep in your document but in general, meta tags do not impact physical appearance of the document so from appearance point of view, it does not matter if you include them or not.

Adding Meta Tags to Your Documents

You can add metadata to your web pages by placing **<meta>** tags inside the header of the document which is represented by **<head>** and **</head>** tags. A meta tag can have following attributes in addition to core attributes:

Attribute	Description
Name	Name for the property. Can be anything. Examples include, keywords, description, author, revised, generator etc.
content	Specifies the property's value.
scheme	Specifies a scheme to interpret the property's value (as declared in the content attribute).
http-equiv	Used for http response message headers. For example, http-equiv can be used to refresh the page or to set a cookie. Values include content-type, expires, refresh and set-cookie.

Specifying Keywords

You can use **<meta>** tag to specify important keywords related to the document and later these keywords are used by the search engines while indexing your webpage for searching purpose.

Example

Following is an example, where we are adding HTML, Meta Tags, Metadata as important keywords about the document.

```
<!DOCTYPE html>
<html>
<head>
<title>Meta Tags Example</title>
<meta name="keywords" content="HTML, Meta Tags, Metadata" />
</head>
<body>
<p>Hello HTML5!</p>
</body>
</html>
```

This will produce the following result:

```
Hello HTML5!
```

Document Description

You can use <meta> tag to give a short description about the document. This again can be used by various search engines while indexing your webpage for searching purpose.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Meta Tags Example</title>
<meta name="keywords" content="HTML, Meta Tags, Metadata" />
<meta name="description" content="Learning about Meta Tags." />
</head>
<body>
<p>Hello HTML5!</p>
</body>
</html>
```

Document RevisionDate

You can use <meta> tag to give information about when last time the document was updated. This information can be used by various web browsers while refreshing your webpage.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Meta Tags Example</title>
<meta name="keywords" content="HTML, Meta Tags, Metadata" />
<meta name="description" content="Learning about Meta Tags." />
<meta name="revised" content="Tutorialspoint, 3/7/2014" />
</head>
<body>
<p>Hello HTML5!</p>
</body>
</html>
```

Document Refreshing

A <meta> tag can be used to specify a duration after which your web page will keep refreshing automatically.

Example

If you want your page keep refreshing after every 5 seconds then use the following syntax.

```
<!DOCTYPE html>
<html>
<head>
<title>Meta Tags Example</title>
<meta name="keywords" content="HTML, Meta Tags, Metadata" />
<meta name="description" content="Learning about Meta Tags." />
<meta name="revised" content="Tutorialspoint, 3/7/2014" />
<meta http-equiv="refresh" content="5" />
```

```
</head>
<body>
<p>Hello HTML5!</p>
</body>
</html>
```

Page Redirection

You can use <meta> tag to redirect your page to any other webpage. You can also specify a duration if you want to redirect the page after a certain number of seconds.

Example

Following is an example of redirecting current page to another page after 5 seconds. If you want to redirect page immediately then do not specify *content* attribute.

```
<!DOCTYPE html>
<html>
<head>
<title>Meta Tags Example</title>
<meta name="keywords" content="HTML, Meta Tags, Metadata" />
<meta name="description" content="Learning about Meta Tags." />
<meta name="revised" content="Tutorialspoint, 3/7/2014" />
<meta http-equiv="refresh" content="5; url=http://www.tutorialspoint.com" />
</head>
<body>
<p>Hello HTML5!</p>
</body>
</html>
```

Setting Cookies

Cookies are data, stored in small text files on your computer and it is exchanged between web browser and web server to keep track of various information based on your web application need.

You can use <meta> tag to store cookies on client side and later this information can be used by the Web Server to track a site visitor.

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Meta Tags Example</title>
<meta name="keywords" content="HTML, Meta Tags, Metadata" />
<meta name="description" content="Learning about Meta Tags." />
<meta name="revised" content="Tutorialspoint, 3/7/2014" />
```

Following is an example of redirecting current page to another page after 5 seconds. If you want to redirect page immediately then do not specify *content* attribute.

