Chemistry-Aware Machine Translation Evaluation with Domain Terminology Verification

BASF AI

November 4, 2026

Abstract

Chemical translation evaluation must distinguish general quality from retention of technical terminology. We describe a segment-level methodology combining Google Patents Chemical abstract pairs with an article-focused JRC-Acquis legal comparison corpus. The pipeline constructs source snapshots, extracts reference-side terminology using complementary linguistic and learned approaches, attaches external evidence, and selects exact reference spans through domain-specific large language model curation. The proposed generation protocol distinguishes a source-only baseline from an explicitly reference-derived, oracle terminology condition. Evaluation combines corpus lexical overlap, segment-level learned similarity, and strict and variant-aware term coverage. Intermediate artifacts and provenance support auditable comparisons. We report descriptive results from ten current model runs across chemical patents, legal articles, and legal definitions. Mixed rankings conceal family-level differences, and few-shot effects vary by model and dataset. These aggregate results do not establish a causal benefit of oracle terminology or chemically validated annotations.

1 Introduction

Chemical translation requires preserving distinctions in names, materials, processes, formulas, and quantities. General MT metrics assess overlap or learned similarity [1, 2, 3, 4]; these differ from checking whether a specific technical term is retained correctly. We investigate how reference-side terminology annotations complement conventional evaluation, and how providing such terminology affects a controlled translation comparison.

The primary domain is chemistry patent abstracts. JRC-Acquis legal articles offer a distinct, terminology-sensitive comparison domain, not additional chemical training data. The evaluation unit is a bounded segment, potentially containing several sentences, rather than a complete patent or long legal document. The intended scale is a few hundred tokens; actual corpus lengths are reported instead of assuming a shared 256-token mean.

The contributions are multilingual benchmark construction, provenance-preserving terminology extraction and curation, and an evaluation protocol separating general quality from term retention. These preserve the chemistry-aware evaluation objective. The infrastructure is implemented, but the full translation comparison remains planned; no model ranking or superiority claim is made.

2 Related Work

Large language models (LLMs) have been investigated as translation systems through studies of translation quality, prompting, and adaptation. Hendy et al. compare GPT models with research and commercial systems, reporting competitive high-resource performance but limitations for low-resource languages in their evaluation [5]. Vilar et al. demonstrate the importance of demonstration quality for prompted translation [6], while Moslem et al. investigate adaptation

using in-domain examples and terminology [7]. These studies motivate assessing translation capability under explicitly defined conditioning rather than assuming uniform performance across languages and domains.

Translation benchmarks operationalize these comparisons. FLORES-101 provides professionally translated, fully aligned multilingual references for many-to-many evaluation [8]. WMT25 compares submitted systems, LLMs, and online providers using challenging test material, multiple domains, and document context [9]. Its professional evaluation covers 15 of the 30 offered language pairs using Error Span Annotation or Multidimensional Quality Metrics (MQM). This work underscores the importance of test difficulty, language coverage, and evaluation context; our segment-level benchmark does not replicate its document-level protocol.

Model comparison requires complementary quality measures. BLEU measures reference n-gram overlap [1], SacreBLEU standardizes its reporting [2], and chrF++ combines character and word overlap [10]. COMET learns quality prediction from human judgments [3], whereas BERTScore compares contextual token representations [4]. Expert MQM evaluation demonstrates the importance of annotator expertise and document context [11]. Terminology accuracy supplies an additional dimension, as reflected in dedicated WMT evaluation [12]; variation-aware analysis further distinguishes legitimate alternatives from undesirable inconsistency [13]. Reference-term retention, however, is narrower than bilingual terminology accuracy: span presence does not establish contextual correctness, and reference mismatch need not indicate mistranslation.

Terminology extraction supports the annotations needed for these diagnostics. Chun et al. use syntactically retrieved demonstrations to improve LLM term-boundary prediction on specialized benchmarks [14]. Such work motivates evaluating extraction quality independently: verifying occurrence in a reference does not establish annotation completeness or expert validity.

In chemistry, related tasks must be distinguished from prose translation. STOUT studies molecular representation-to-name conversion with structure-oriented checks [15], while CHEMD-NER evaluates chemical mention recognition against expert annotations [16]; neither benchmarks multilingual chemical prose translation. For legal comparison, JRC-Acquis [17], distributed through OPUS [18], provides parallel text. LegISTyr distinguishes terminology insertion from contextual choice and fluency [19], and an EEA terminology suite reports performance that need not follow general MT rankings [20]. Our study centers on multilingual chemical-patent translation capability, using legal text as a comparison domain and terminology metrics as complementary diagnostics. Reference-derived terminology hints constitute a separate oracle-assisted condition, not evidence of source-only capability.

3 Data and Methodology

3.1 Evaluation Data and Preparation

Google Patents Chemical. The source is the BASF-AI within-document abstract-pairs dataset, documented locally as within-publication abstract pairs from the CLIR Google Patents Chemical corpus [21]. The exporter normalizes whitespace, rejects empty text, retains accepted upstream judge verdicts labelled *exact* or *high*, and selects in deterministic dataset order. These are alignment-screening labels, not human chemical validation. The snapshot contains 2,750 pairs in 11 stored directions, capped at 250 per direction. Both-side approximate lengths of 128–384 tokens are preferred, followed by source-only, target-only, and out-of-range backfill; the respective counts are 1,521, 626, 366, and 237. Length is a preference, not a hard criterion.

The active chemistry build retains German, English, Spanish, French, Russian, and Chinese, omitting Japanese. Nine stored directions plus their source/target swaps yield 18 evaluation directions and 4,500 planned segments. Reversal does not create independent publications. The upstream split name `train` denotes the input partition, not training of our translation systems.

The export has no pinned upstream revision, so the local snapshot is needed for exact reuse.

JRC-Acquis articles. The article snapshot uses OPUS JRC-Acquis v3.0 aligned Moses files [17, 18]. It selects 250 document anchors shared across English, Spanish, German, French, and Portuguese, generating all 20 ordered directions: 5,000 pairs, 250 per direction. Reverse rows are exact swaps; shared anchors do not imply identical passage boundaries across every unordered pair. The separate definition snapshot is not included here.

After legacy markup cleanup and whitespace normalization, usable aligned units contain words, 3–180 approximate tokens on each side, and a maximum length ratio of 3. Units are concatenated within document boundaries, targeting 450 source tokens with nominal bounds of 250–700 and at most one chunk per document per pair. Strict filtering rejects residual markup, controls, all-capital noise, and incomplete boundaries; it does not identify languages automatically. Recorded article source lengths are 251–679, mean 418.6 approximate tokens, not 256. Counts use the repository whitespace counter, not a provider tokenizer. This approximation is especially limited for Chinese; the task remains segment-level despite this larger snapshot.

Partitioning and overlap. Both resources are evaluation inputs; no fine-tuning or finalized train/development/test partition is specified. Small anchor pilots are pipeline checks, not independent held-out evidence. Before final scoring, prompt-development and evaluation examples must be separated by JRC anchor and patent publication, preferably family. Identifier and normalized-text duplicate audits, including reverse directions and pilot overlap, remain pending. Public-corpus inclusion in proprietary pretraining cannot be excluded; preserved identifiers facilitate audits but do not establish contamination-free data.

3.2 Reference Terminology Annotation

Four automatic approaches operate on target references: domain-prompted LLM span proposals, Stanza/Universal Dependencies syntactic spans, XLM-R/NOBI token-classified terms, and spaCy entities, noun chunks, and filtered n-grams. Normalized duplicate keys merge provenance while retaining surface forms; LLM proposals absent from the reference are rejected. The article configuration also imports candidates from an earlier GLM-labelled manifest. This is reused automatic evidence, not human annotation, and must be controlled in extractor ablations.

Chemistry attaches evidence from local IATE, Wikidata, and AGROVOC; articles use local IATE, Wikidata, and UNTERM. These respectively supply EU terminology, multilingual labels/aliases, FAO controlled vocabulary, and official UN terminology. [1] Scope and coverage differ: UNTERM's official languages exclude German and Portuguese. Local IATE uses a CSV-derived SQLite index. Matches, variants, identifiers, and categories are stored as evidence. Lookup misses or timeouts do not establish invalidity; chemistry network lookups have a configured one-second timeout.

Domain-specific LLM curation selects numbered, enriched candidate IDs given the reference; accepted terms remain exact reference spans. Both active configurations cap candidates at 80 and refined terms at 16 per segment. They record `gpt-6-luna`, Responses API, temperature 0, 1,024 output tokens, disabled thinking, and reasoning effort `none`; this endpoint identifier is not an independently verified immutable release. Chemistry uses four workers and a 180-second LLM timeout; articles use two workers and 120 seconds. Manifests retain extractor provenance, external support (`verified_by`), and curation separately. Externally supported, LLM-selected, and human-validated are distinct statuses; no expert gold terminology set or chemical-structure validation is implemented. Chemical notation is preserved as text, not validated as molecular identity.

[1] https://iate.europa.eu/; https://www.wikidata.org/wiki/Wikidata:Introduction; https://www.fao.org/agrovoc/about; https://unterm.un.org/unterm2/.

3.3 Translation Generation

The one-shot translator sends one segment, language labels, and a chemistry or legal prompt to the selected provider, requesting only a translation and preservation of terms, formulas, identifiers, quantities, units, and legal effect as appropriate. There is no fine-tuning, retrieval augmentation, or constrained decoding. The planned paired comparison holds model and decoding settings fixed while toggling manifest-term injection. A source-only baseline sees no reference information. The other condition adds up to eight refined target terms with instructions to use them only when the concept is present: soft hints, not enforced lexical constraints.

Since these hints derive from the evaluation reference, this is explicitly an *oracle terminology* condition, not deployable source-only glossary induction. Pilot configurations name `gpt-4.1-nano` and `gpt-4.1-mini`; a legal run also names `gpt-6-luna`. The final cross-domain roster and provider versions remain unspecified. Temperature 0 does not guarantee deterministic hosted inference. Predictions, supplied terms, model metadata, and failures are saved as JSONL. Dry-run source copying is a pipeline check, not an MT baseline.

3.4 Quality and Terminology Evaluation

The primary reporting set will combine corpus SacreBLEU and chrF++, segment COMET and BERTScore, and strict/variant-aware target coverage. BLEU uses four word n-gram orders, case-sensitive `13a` tokenization, and corpus scoring [1, 2]; chrF++ uses character order 6, word order 2, and $\beta = 2$ [10]. They require hypotheses and references, reward surface agreement, and can miss consequential chemical substitutions. Effective-order sentence BLEU is diagnostic, not a substitute for corpus BLEU. This is not an official WMT25 scoring-protocol reproduction.

COMET uses source/hypothesis/reference with `Unbabel/wmt22-comet-da` [3]; BERTScore uses hypothesis/reference contextual token alignment with `xlm-roberta-large`, recording precision, recall, and F1 [4]. These are computed per segment and averaged. BERTScore precision/F1 concern embedding alignment, not chemical-term precision/F1; neither metric certifies chemical identity, formula correctness, or legal effect.

For segment i, let T_i contain applicable annotated target terms and $c_z(t)$ count occurrences of t in text z. Implemented strict coverage is

$$C_i = \frac{100}{|T_i|} \sum_{t \in T_i} \min\left(\frac{c_{h_i}(t)}{c_{r_i}(t)}, 1\right), \quad c_{r_i}(t) > 0, \tag{1}$$

with hypothesis h_i and reference r_i. Variant-aware coverage accepts explicit stored variants in the numerator. Counting uses Unicode NFKC, case folding, whitespace normalization, and substring matching, not word-boundary or chemical-entity matching. Case folding can erase meaningful chemical case distinctions; extra hallucinated terms are not penalized. Report refined-term coverage and its externally supported subset separately. Segments with no applicable terms are excluded, with counts reported. Source-conditioned terminology success requires source-term alignment; target-only annotations do not establish bilingual term accuracy.

Term-only BERTScore recall aligns the hypothesis against concatenated reference terms as a soft diagnostic. The registry additionally supports reference-free COMETKiwi, XCOMET error spans, and a domain-specific LLM MQM-style judge. The judge returns a 0–100 score and minor/major/critical counts with weights 1/2/5; it is automatic, not expert annotation or an exact WMT FSP reproduction. These remain supplementary pending access and calibration. BLEURT is optional and checkpoint-dependent; NIST and terminology precision/F1 are not selected measures.

3.5 Experimental Protocol and Reproducibility

Report domains and directions separately, macro-averaging direction means and recomputing corpus overlap rather than averaging sentence BLEU. Paired comparisons use the same segments

under baseline and oracle prompts. Proposed ablations isolate extractor families, external evidence, and curation, retaining exact-span validation. Annotation yield is not extraction accuracy without human labels; cross-segment consistency and expert error analysis are not yet measured. Proposed paired resampling groups by document/anchor and retains reversals together; statistical testing remains unimplemented.

Final scoring requires freezing the partition, model roster, metric subset, aggregation, and uncertainty procedure. Reproduction artifacts include source checksums, Git revision, locked software, extractor checkpoints/language models, exact prompts, provider identifiers and decoding settings, dated IATE exports, and lookup caches. Selection, extraction, enrichment, curation, and manifest checkpoints support stage-scoped hash reuse. Authentication/network failures are not completed examples; successful-row denominators and failure counts must remain visible.

4 Results and Analysis

We analyze ten current model runs on Chemical Patents, JRC Articles, and JRC Definitions under zero-shot and few-shot prompting, using 84 checksum-verified aggregate summaries. Historical runs and the small native sample are excluded. Each metric averages directions shared across all models and both prompts within a dataset; shared directions do not establish identical scored segments. The findings below are descriptive, without confidence intervals or significance tests.

Model comparison. Figure 1 summarizes Chosen 01 using the Luna terminology view. The mixed ranking weights semantic, lexical, and terminology family mean ranks equally, then averages the six dataset/prompt strata equally. Terminology gives equal weight to all, externally verified, and LLM-enriched groups. GPT-6 Luna ranks first, followed by Muse Glimmer and Gemma. Muse has a better lexical family rank than Gemma, whereas Gemma has a better semantic family rank, illustrating the information lost in a single aggregate ordering. These ranks depend on the model roster and weighting rule; they are not estimates of an absolute quality difference.

Model ID / recorded label	Rank	Semantic	Lexical	Terms
1. GPT-6 Luna	1	1.03	1.83	1.31
2. Muse Glimmer 30B	2	3.37	2.29	2.37
3. Gemma 4 31B	3	2.80	2.75	2.70
4. Qwen3.8 27B	4	3.07	3.12	3.61
5. Granite 4.2 30B	5	5.10	5.54	5.57
6. Nemotron 3.5 Lightning	6	6.87	5.46	5.59
7. Tiny Aya Fire	7	7.43	7.50	6.87
8. Tiny Aya Earth	8	8.50	8.62	8.33
9. Tiny Aya Water	9	8.00	8.62	8.87
10. Tiny Aya Global	10	8.83	9.25	9.76

Figure 1: Condensed Chosen 01: overall ranks for ten current runs. Lower family mean ranks are better. Model IDs are reused in Figure 2.

Prompting and terminology. Figure 2 condenses Chosen 04 to COMET and variant-aware coverage of externally verified terms. Few-shot COMET increases for 7/10 patent models,

8/10 article models, and 6/10 definition models. Corresponding coverage increases occur for 6/10, 10/10, and 6/10 models. Muse's COMET changes are +0.012, +0.014, and +0.015, respectively; Tiny Aya Fire's definition COMET decreases by 0.023, alongside a 6.16 percentage-point coverage decrease. Thus few-shot prompting does not uniformly improve either dimension. External verification denotes upstream evidence, not expert-validated terminology correctness.

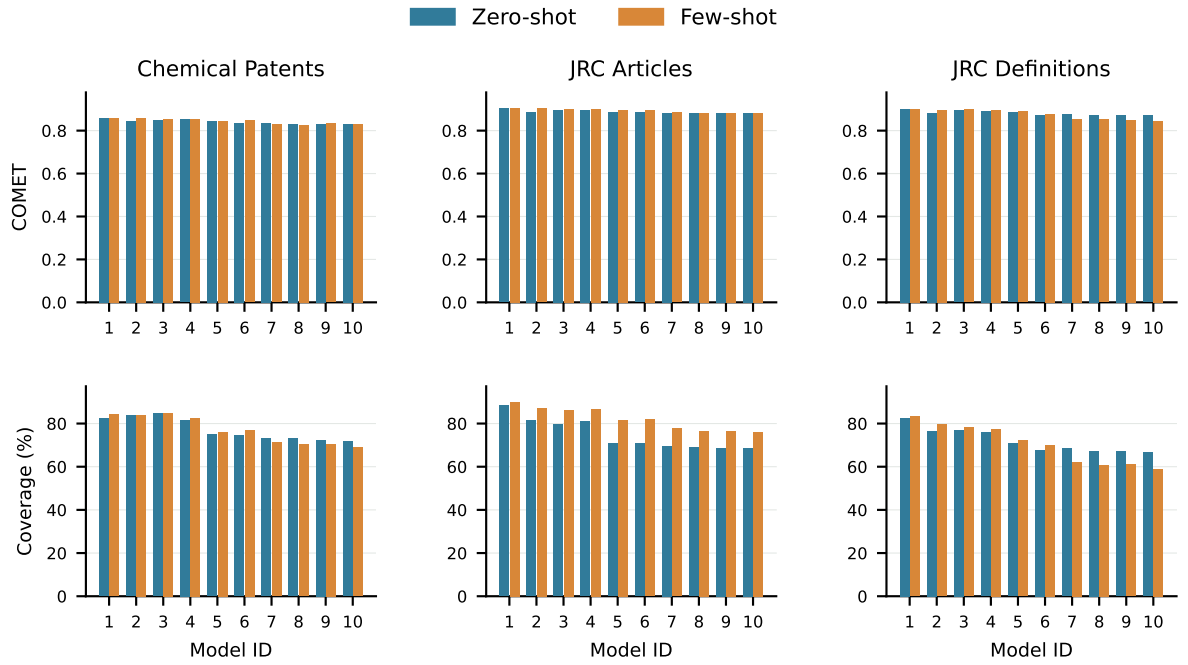


Figure 2: Condensed Chosen 04: zero-shot and few-shot scores by model ID and dataset. Coverage uses the Luna externally verified subset. Axes include zero; metric-specific support may differ.

Scope and supplementary results. The supplement retains full scorecards, all-metric prompting bars, and latency and API-cost plots (Chosen 02–03). Latency reflects different deployments; cost reprices recorded tokens rather than measuring expenditure. These diagnostics establish neither controlled efficiency nor a causal benefit of oracle terms. Matched baseline/oracle comparisons and independent error review remain future work.

5 Conclusion

The methodology links bounded parallel segments to auditable reference terminology and complementary evaluation measures. The current descriptive comparison shows that overall model rankings conceal family-level differences and that few-shot effects vary across models and domains. General quality and terminology coverage should therefore be reported separately. Oracle-term effects, matched-row uncertainty, and independently reviewed terminology correctness remain to be established.

References

[1] Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, pages 311–318, 2002.

[2] Matt Post. A call for clarity in reporting BLEU scores. In *Proceedings of the Third Conference on Machine Translation: Research Papers*, pages 186–191, 2018.

[3] Ricardo Rei, Craig Stewart, Ana C Farinha, and Alon Lavie. COMET: A neural framework for MT evaluation. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*, pages 2685–2702, 2020.

[4] Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. BERTScore: Evaluating text generation with BERT, 2020.

[5] Amr Hendy, Mohamed Abdelrehim, Amr Sharaf, Vikas Raunak, Mohamed Gabr, Hitokazu Matsushita, Young Jin Kim, Mohamed Afify, and Hany Hassan Awadalla. How good are GPT models at machine translation? a comprehensive evaluation. arXiv preprint arXiv:2302.09210, 2023.

[6] David Vilar, Markus Freitag, Colin Cherry, Jiaming Luo, Viresh Ratnakar, and George Foster. Prompting PaLM for translation: Assessing strategies and performance. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15406–15427, 2023.

[7] Yasmin Moslem, Rejwanul Haque, John D. Kelleher, and Andy Way. Adaptive machine translation with large language models. In *Proceedings of the 24th Annual Conference of the European Association for Machine Translation*, pages 227–237, 2023.

[8] Naman Goyal, Cynthia Gao, Vishrav Chaudhary, Peng-Jen Chen, Guillaume Wenzek, Da Ju, Sanjana Krishnan, Marc'Aurelio Ranzato, Francisco Guzmán, and Angela Fan. The Flores-101 evaluation benchmark for low-resource and multilingual machine translation. *Transactions of the Association for Computational Linguistics*, 10:522–538, 2022.

[9] Tom Kocmi, Ekaterina Artemova, Eleftherios Avramidis, Rachel Bawden, Ondřej Bojar, Konstantin Dranch, Anton Dvorkovich, Sergey Dukanov, Mark Fishel, Markus Freitag, Thamme Gowda, Roman Grundkiewicz, Barry Haddow, Marzena Karpinska, Philipp Koehn, Howard Lakougna, Jessica Lundin, Christof Monz, Kenton Murray, Masaaki Nagata, Stefano Perrella, Lorenzo Proietti, Martin Popel, Maja Popović, Parker Riley, Mariya Shmatova, Steinthór Steingrímsson, Lisa Yankovskaya, and Vilém Zouhar. Findings of the WMT25 general machine translation shared task: Time to stop evaluating on easy test sets. In *Proceedings of the Tenth Conference on Machine Translation*, pages 355–413, 2025.

[10] Maja Popović. chrF++: words helping character n-grams. In *Proceedings of the Second Conference on Machine Translation*, pages 612–618, 2017.

[11] Markus Freitag, George Foster, David Grangier, Viresh Ratnakar, Qijun Tan, and Wolfgang Macherey. Experts, errors, and context: A large-scale study of human evaluation for machine translation. *Transactions of the Association for Computational Linguistics*, 9:1460–1474, 2021.

[12] Md Mahfuz Ibn Alam, Ivana Kvapilíková, Antonios Anastasopoulos, Laurent Besacier, Georgiana Dinu, Marcello Federico, Matthias Gallé, Kweonwoo Jung, Philipp Koehn, and Vassilina Nikoulina. Findings of the WMT shared task on machine translation using terminologies. In *Proceedings of the Sixth Conference on Machine Translation*, pages 652–663, 2021.

[13] Nicolas Dahan, Ziqian Peng, François Yvon, and Rachel Bawden. Improving term evaluation in machine translation: Variation matters. In *Proceedings of the 17th Conference of the Association for Machine Translation in the Americas (Volume 1: Research Track)*, pages 101–134, 2026.

[14] Yongchan Chun, Minhyuk Kim, Dongjun Kim, Chanjun Park, and Heuiseok Lim. Enhancing automatic term extraction with large language models via syntactic retrieval. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 9916–9926, 2025.

[15] Kohulan Rajan, Achim Zielesny, and Christoph Steinbeck. STOUT: SMILES to IUPAC names using neural machine translation. *Journal of Cheminformatics*, 13:34, 2021.

[16] Martin Krallinger, Florian Leitner, Obdulia Rabal, Miguel Vazquez, Julen Oyarzabal, and Alfonso Valencia. CHEMDNER: The drugs and chemical names extraction challenge. *Journal of Cheminformatics*, 7(Suppl 1):S1, 2015.

[17] Ralf Steinberger, Bruno Pouliquen, Anna Widiger, Camelia Ignat, Tomaz Erjavec, Dan Tufis, and Daniel Varga. The JRC-Acquis: A multilingual aligned parallel corpus with 20+ languages. In *Proceedings of the Fifth International Conference on Language Resources and Evaluation*, pages 2142–2147, 2006.

[18] Jörg Tiedemann. Parallel data, tools and interfaces in OPUS. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation*, pages 2214–2218, 2012.

[19] Paolo Di Natale, Egon W. Stemle, Elena Chiocchetti, Marlies Alber, Natascia Ralli, Isabella Stanizzi, and Elena Benini. The LegISTyr test set: Investigating off-the-shelf instruction-tuned LLMs for terminology-constrained translation in a low-resource language variety. In *Proceedings of the 5th Conference on Language, Data and Knowledge: TermTrends 2025*, pages 1–15. Unior Press, 2025.

[20] Selma Dís Hauksdóttir and Steinthór Steingrímsson. Automated evaluation for terminology translation related to the EEA agreement. In *Proceedings of the Tenth Conference on Machine Translation*, pages 850–855, 2025.

[21] BASF-AI. AI4Chem CLIR Google Patents within-document abstract pairs. Dataset artifact.

A Terminology prompts

This appendix records the prompt families implemented in `src/chem_machine_translation/data/terminolog`. The wording should be kept synchronized with the implementation when prompt changes are made.

A.1 Chemistry candidate extractor

```
You extract terminology candidates from target reference translations for chemistry
    and patent
machine-translation benchmarks.

The text may be in any language. Return only exact spans that appear in the provided
    target text.
Do not translate, normalize, rewrite, lemmatize, abbreviate, explain, or invent terms.

Extract only terms that a domain translator should preserve consistently:
- chemical names, compounds, materials, formulas, reagents, solvents, polymers,
    proteins;
- technical processes, methods, assay/analytical terms, properties, hazards,
    identifiers;
```

```
- compact numeric/unit expressions only when the quantity itself is technically
    meaningful.

Reject common prose, boilerplate patent wording, whole clauses, sentence fragments,
    headings, dates,
citations, names, and generic single words unless they are unambiguous domain terms.

Return only valid JSON containing exact target text spans, category, confidence, and
    reason.
```

A.2 Legal candidate extractor

```
You extract legal terminology candidates from target/reference translations for legal
machine-translation benchmarks.

The text may be in any language. Return only exact spans that appear in the provided
    target text.
Do not translate, normalize, rewrite, lemmatize, abbreviate, explain, or invent terms.

Extract legal instruments, institutions, committees, agencies, programmes, funds,
    named bodies,
procedures, rights, obligations, restrictions, sanctions, remedies, legal effects,
    regulatory
domains, named legal acts, and defined terms.

Reject dates, article numbers alone, paragraph references alone, people names,
    signatures, whole
clauses, sentence fragments, generic single words, ordinary administrative prose, and
    repeated
treaty boilerplate unless the phrase is a recognized legal or institutional term.

Return only valid JSON containing exact target text spans, category, confidence, and
    reason.
```

A.3 Chemistry refiner

```
You are a terminology selector for chemistry and patent machine-translation evaluation
    .

You receive target/reference text and a numbered list of candidate terms that were
    already extracted
by other systems. Your job is to select only candidates that are useful benchmark
    terminology.

Do not invent, translate, normalize, rewrite, lemmatize, or add terms. Select only
    from the provided
candidate IDs. A selected term must be an exact span in the target/reference text.

Keep complete, domain-specific, and translation-sensitive chemistry and patent terms.
    Reject or
down-rank generic patent words, whole clauses, sentence fragments, broad prose,
    headings, citations,
partial spans, and generic verified terms unless they are part of a stronger technical
     phrase.
```

```
Return only valid JSON with candidate_id, target_term, category, quality_score, and
    reason.
```

A.4 Legal refiner

```
You are a terminology selector for legal and regulatory machine-translation evaluation
    .

You receive target/reference text and a numbered list of candidate terms that were
    already extracted
by other systems. Your job is to select only candidates that are useful benchmark
    terminology.

Do not invent, translate, normalize, rewrite, lemmatize, or add terms. Select only
    from the provided
candidate IDs. A selected term must be an exact span in the target/reference text.

Keep legal instruments, named legal acts, institutions, committees, agencies,
    programmes, funds,
defined terms, procedures, obligations, rights, restrictions, legal effects, remedies,
     and regulatory
or institutional multiword expressions whose mistranslation would matter. Reject
    generic legal words
unless they are part of a complete official term, headings, article numbers, dates,
    table-of-contents
text, boilerplate, partial spans, and verified single words that are not useful
    terminology.

Return only valid JSON with candidate_id, target_term, category, quality_score, and
    reason.
```

B Examples and visualization figures

B.1 Full quantitative comparisons

The main paper condenses Chosen 01 and Chosen 04. The following supplementary figures retain both terminology annotation views, all three datasets, and both prompting settings. Family ranks and metric-specific direction supports follow the main reporting protocol. The two entirely unavailable terminology-success-rate metrics are omitted. All/external/refined groups are alternative scored populations, not a matched-row annotation ablation. Chosen 02 reports observed deployment latency; Chosen 03 reprices recorded tokens using published API quotes. Hardware, workloads, and billing conditions are not controlled, so these are supporting diagnostics rather than efficiency estimates.

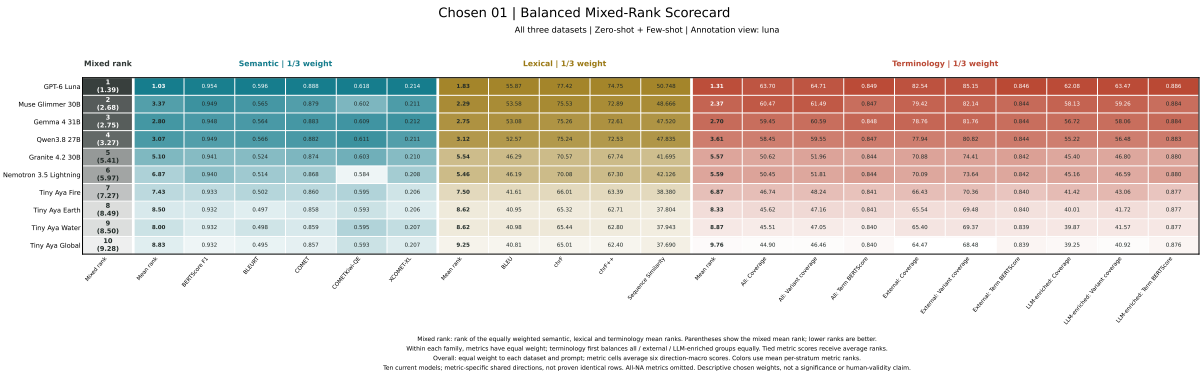


Figure 3: Chosen 01, Luna annotations: equal-weight overview of the six dataset/prompt strata.

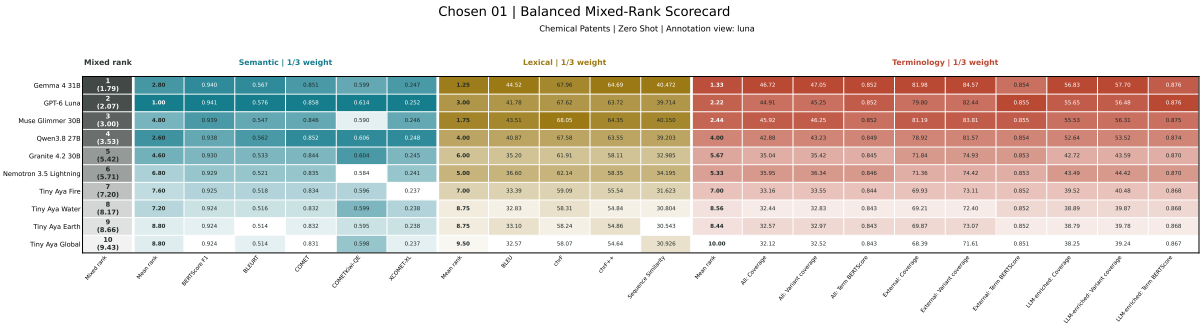


Figure 4: Chosen 01, Luna annotations: Chemical Patents, zero-shot.

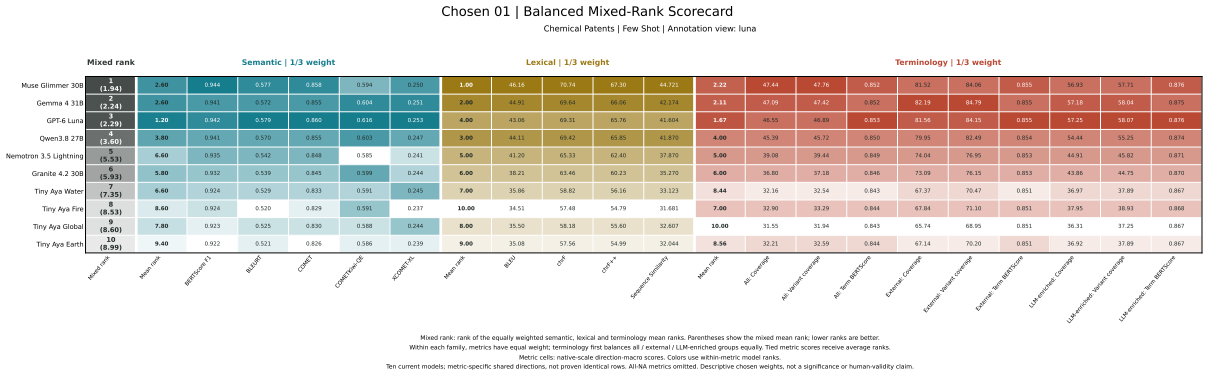


Figure 5: Chosen 01, Luna annotations: Chemical Patents, few-shot.

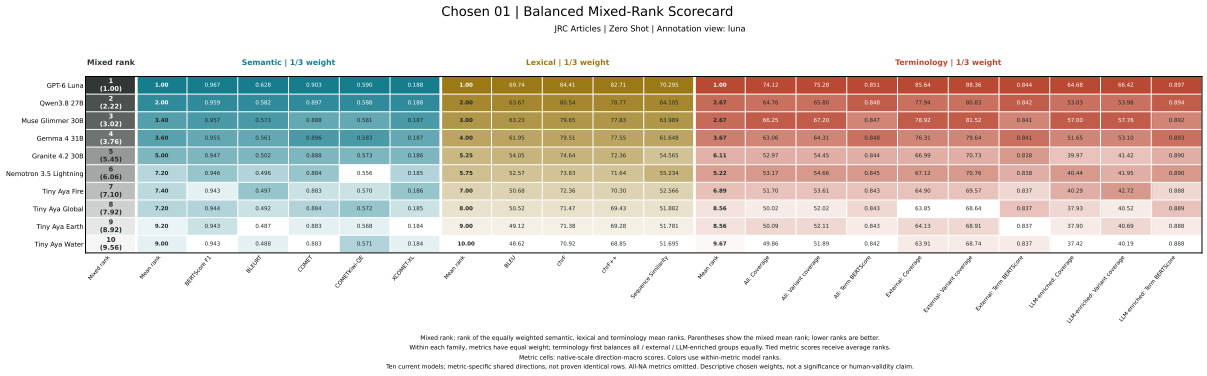


Figure 6: Chosen 01, Luna annotations: JRC Articles, zero-shot.

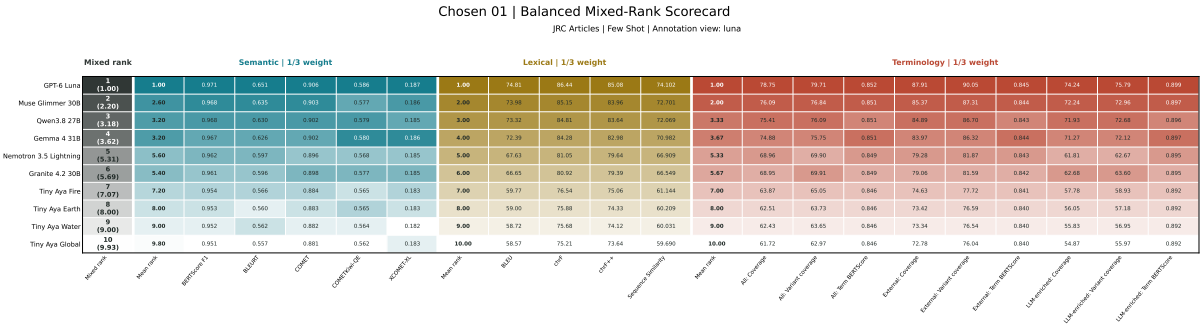


Figure 7: Chosen 01, Luna annotations: JRC Articles, few-shot.

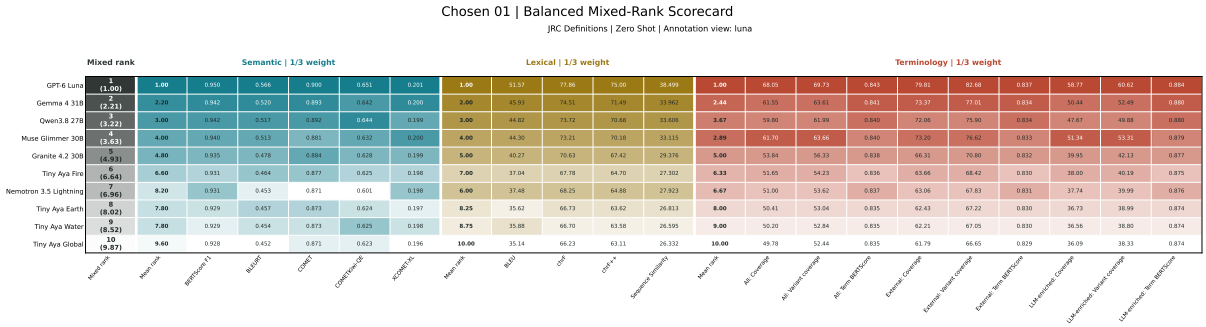


Figure 8: Chosen 01, Luna annotations: JRC Definitions, zero-shot.

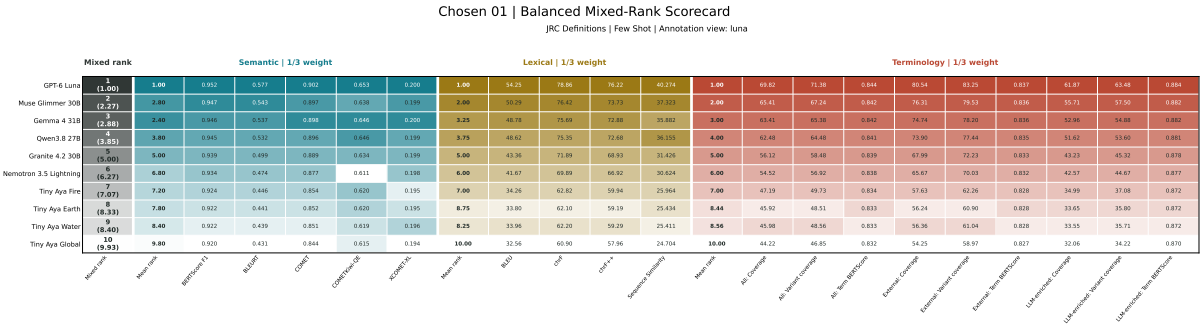


Figure 9: Chosen 01, Luna annotations: JRC Definitions, few-shot.

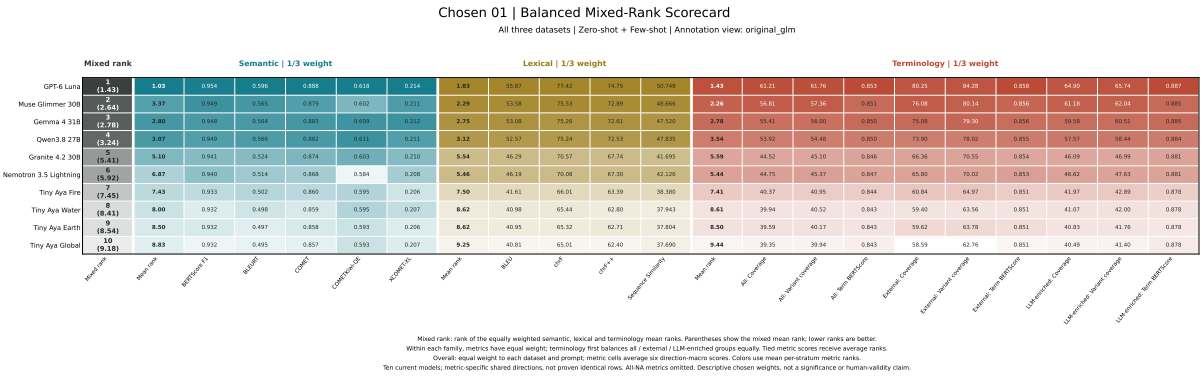


Figure 10: Chosen 01, original GLM annotations: equal-weight overview of the six dataset/prompt strata.

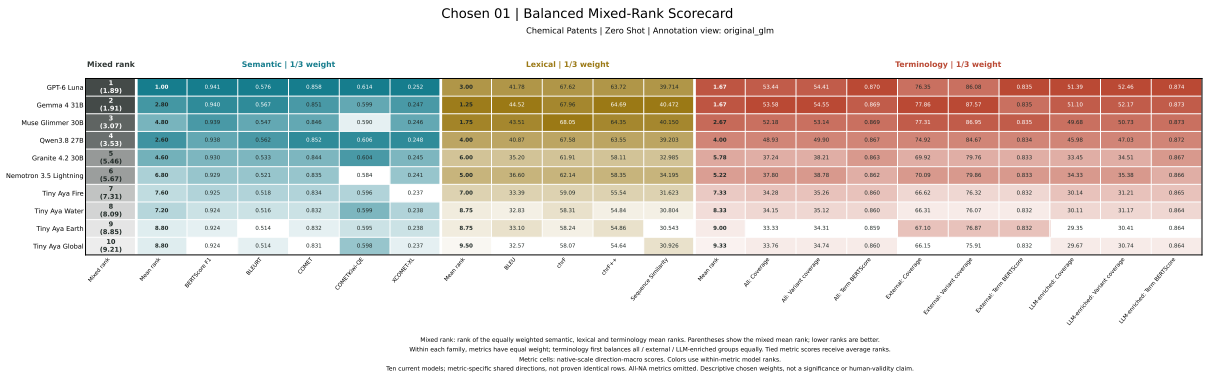


Figure 11: Chosen 01, original GLM annotations: Chemical Patents, zero-shot.

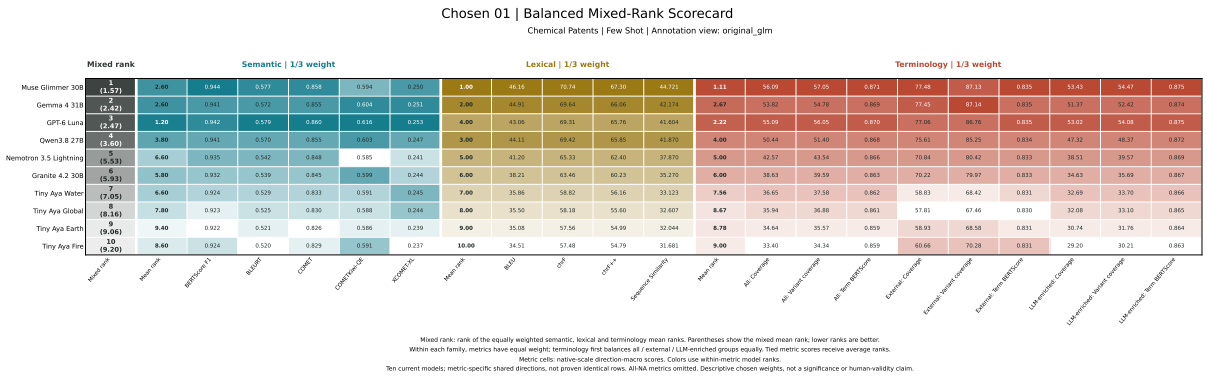


Figure 12: Chosen 01, original GLM annotations: Chemical Patents, few-shot.

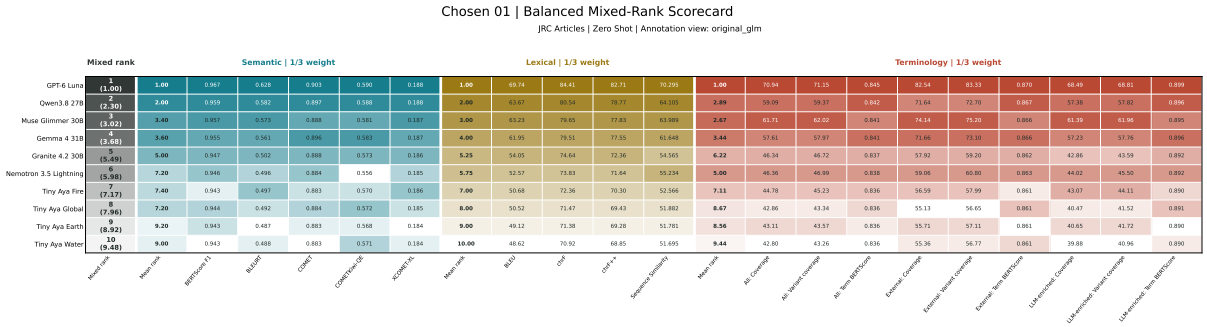


Figure 13: Chosen 01, original GLM annotations: JRC Articles, zero-shot.

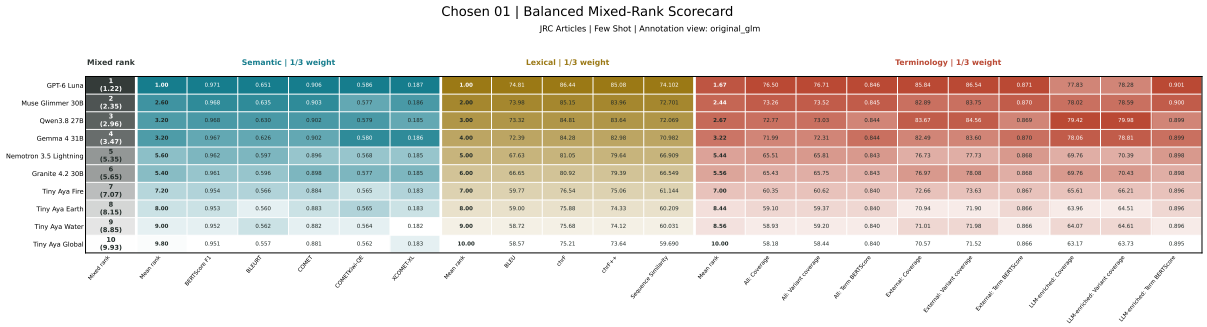


Figure 14: Chosen 01, original GLM annotations: JRC Articles, few-shot.

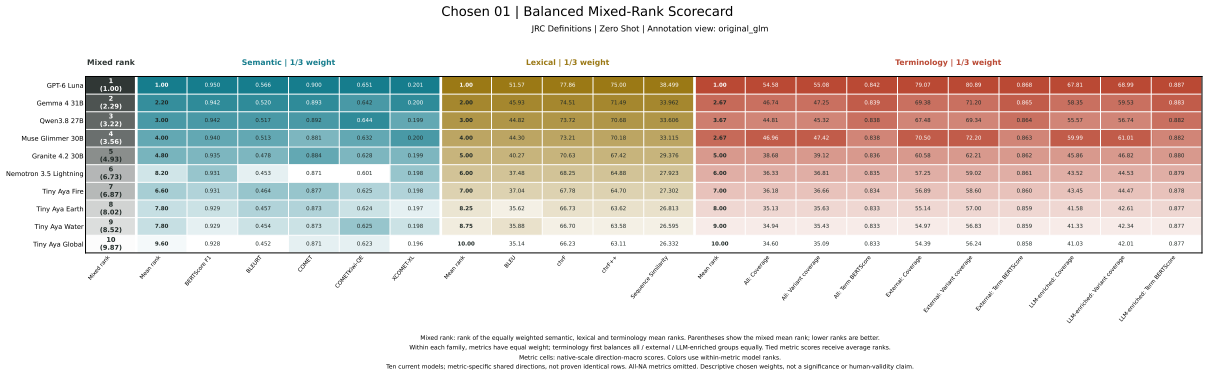


Figure 15: Chosen 01, original GLM annotations: JRC Definitions, zero-shot.

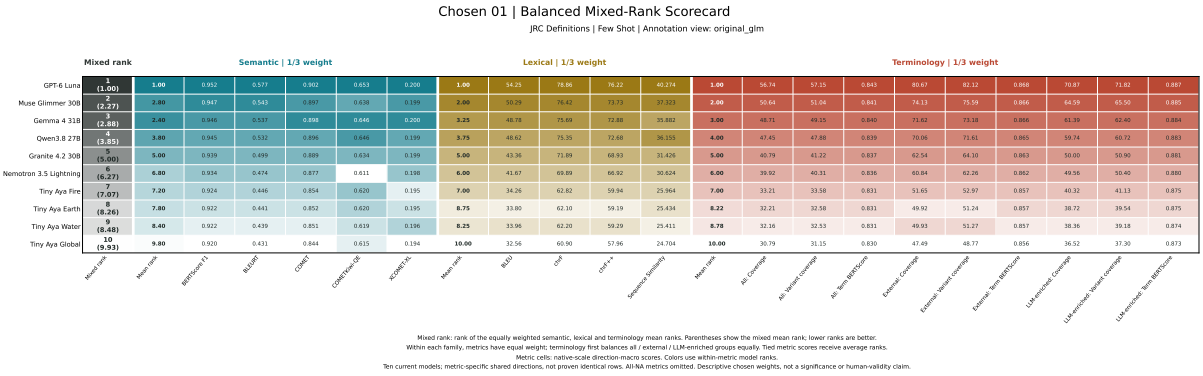


Figure 16: Chosen 01, original GLM annotations: JRC Definitions, few-shot.

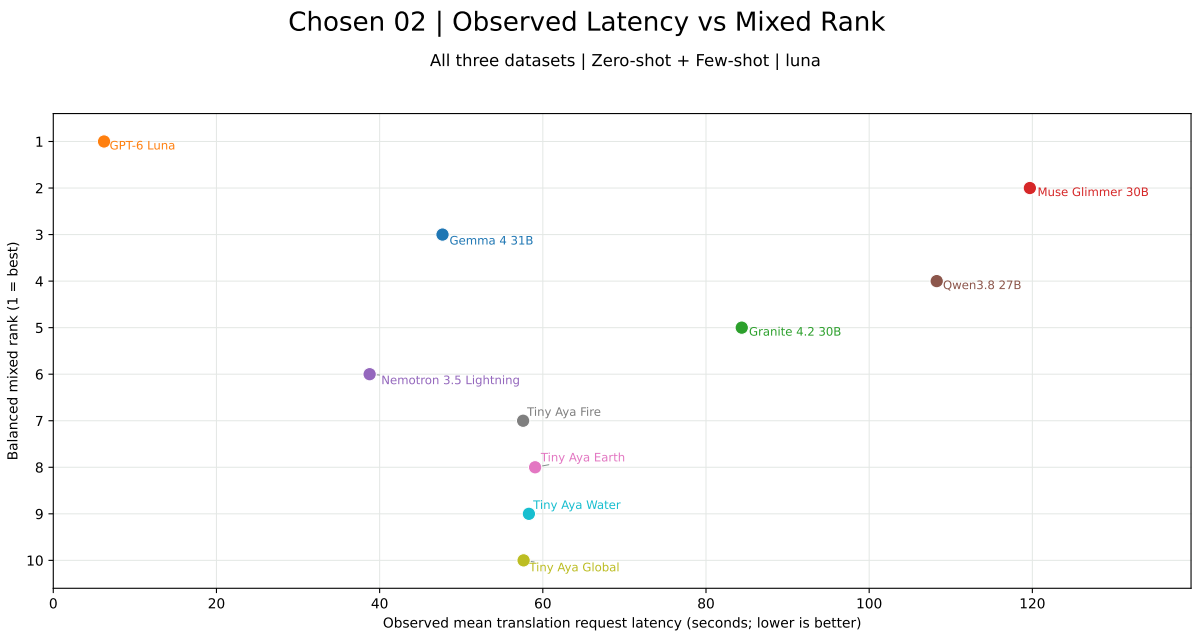


Figure 17: Chosen 02, Luna ranking; observed request latency, not hardware-normalized speed: equal-weight overview of the six dataset/prompt strata.

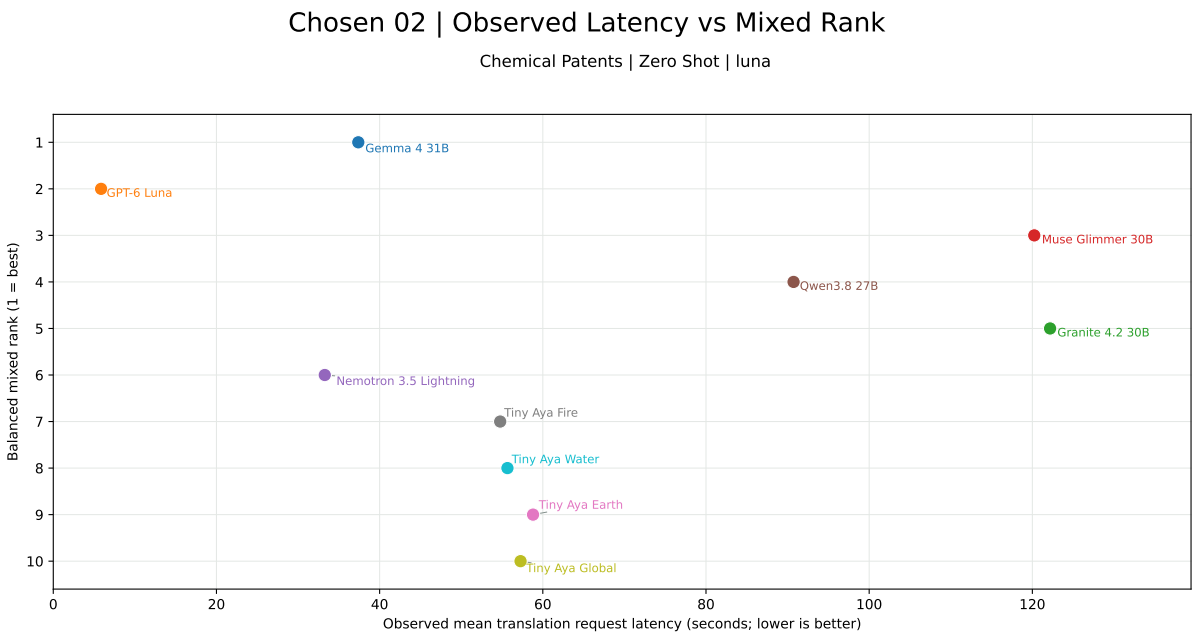


Figure 18: Chosen 02, Luna ranking; observed request latency, not hardware-normalized speed: Chemical Patents, zero-shot.

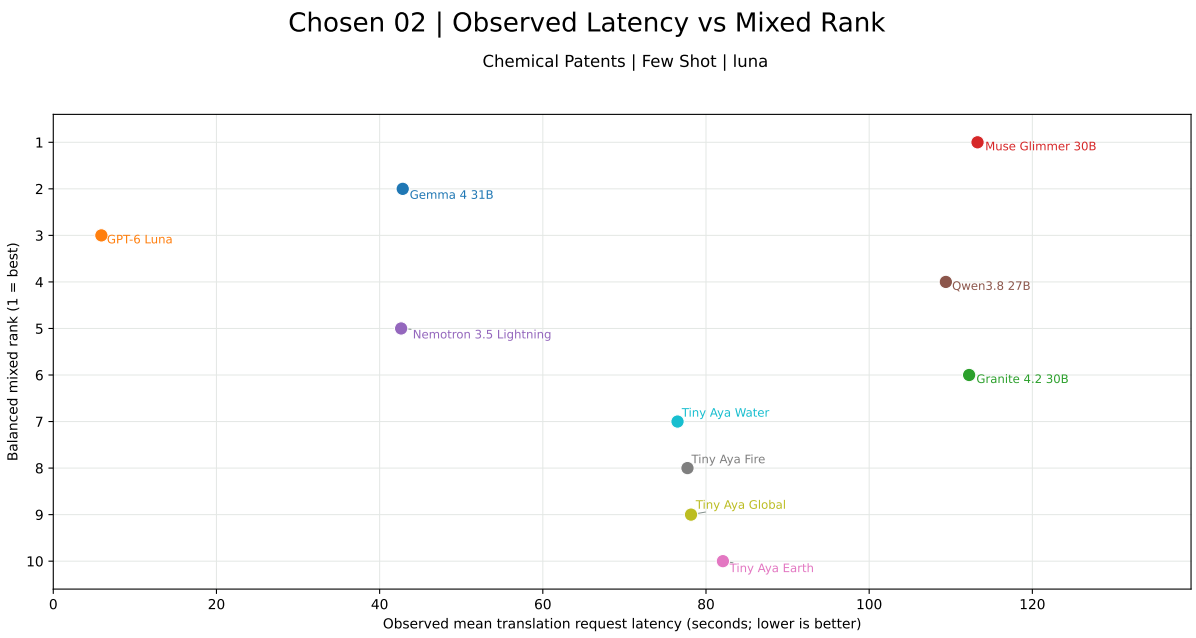


Figure 19: Chosen 02, Luna ranking; observed request latency, not hardware-normalized speed: Chemical Patents, few-shot.

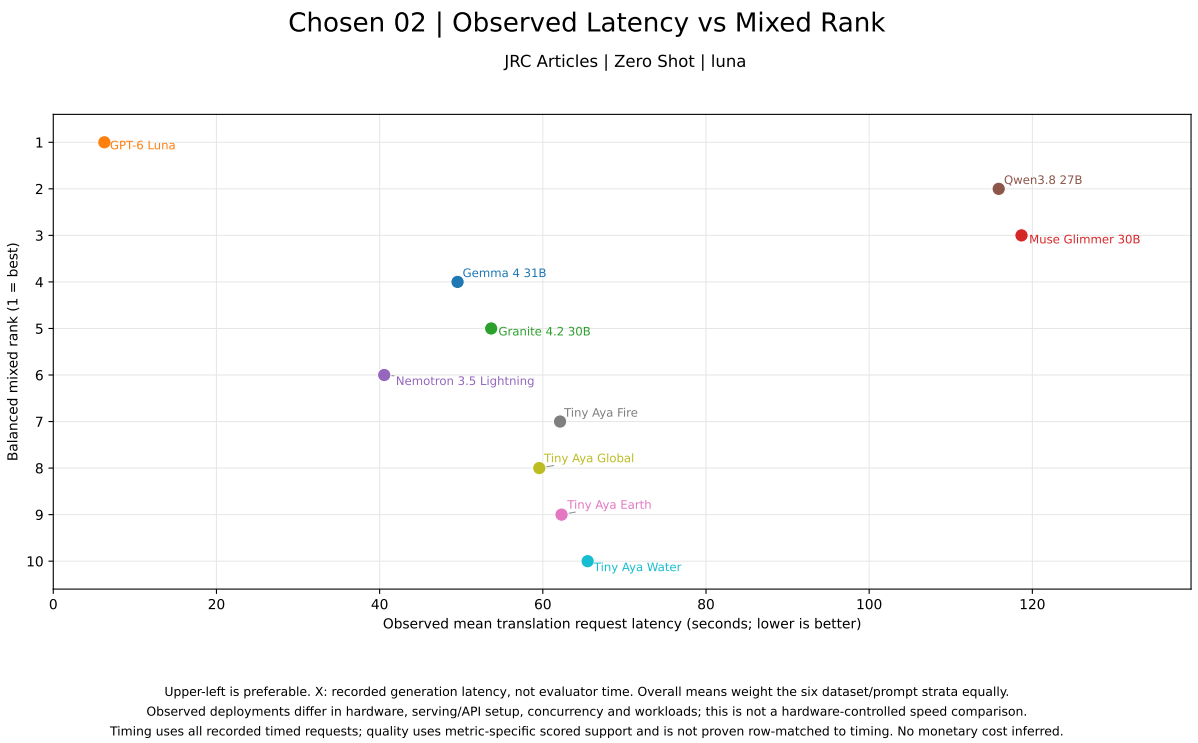


Figure 20: Chosen 02, Luna ranking; observed request latency, not hardware-normalized speed: JRC Articles, zero-shot.

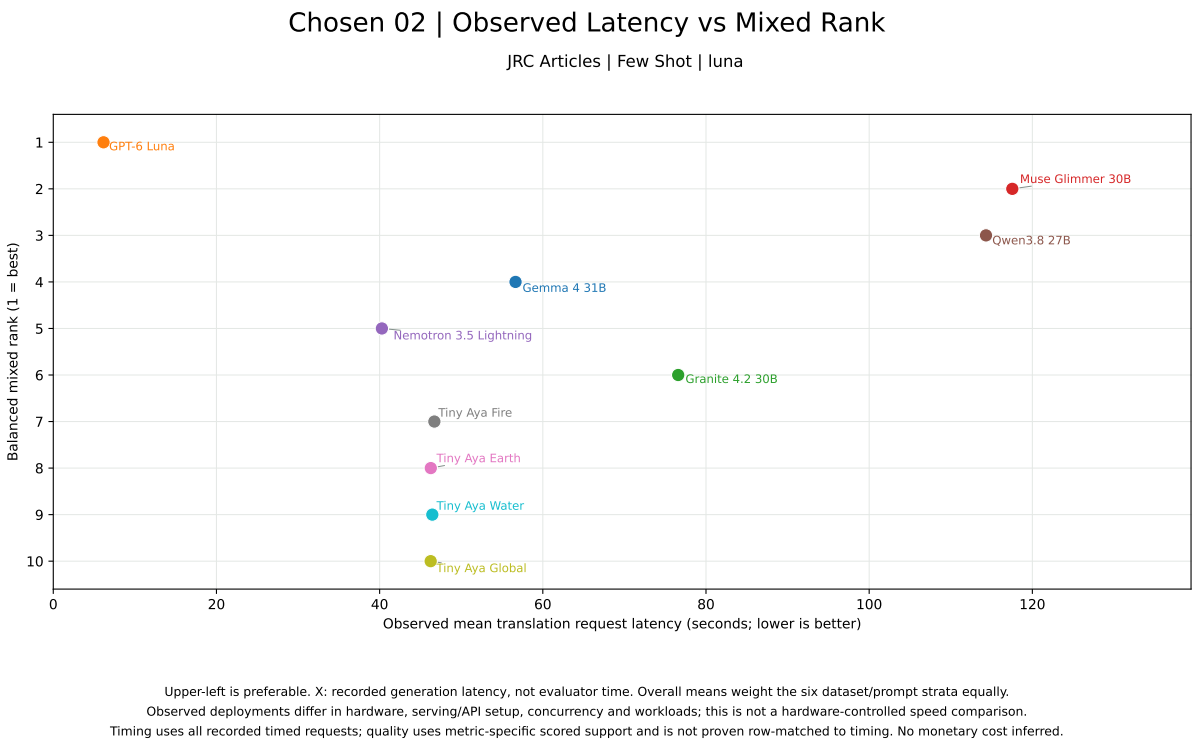


Figure 21: Chosen 02, Luna ranking; observed request latency, not hardware-normalized speed: JRC Articles, few-shot.

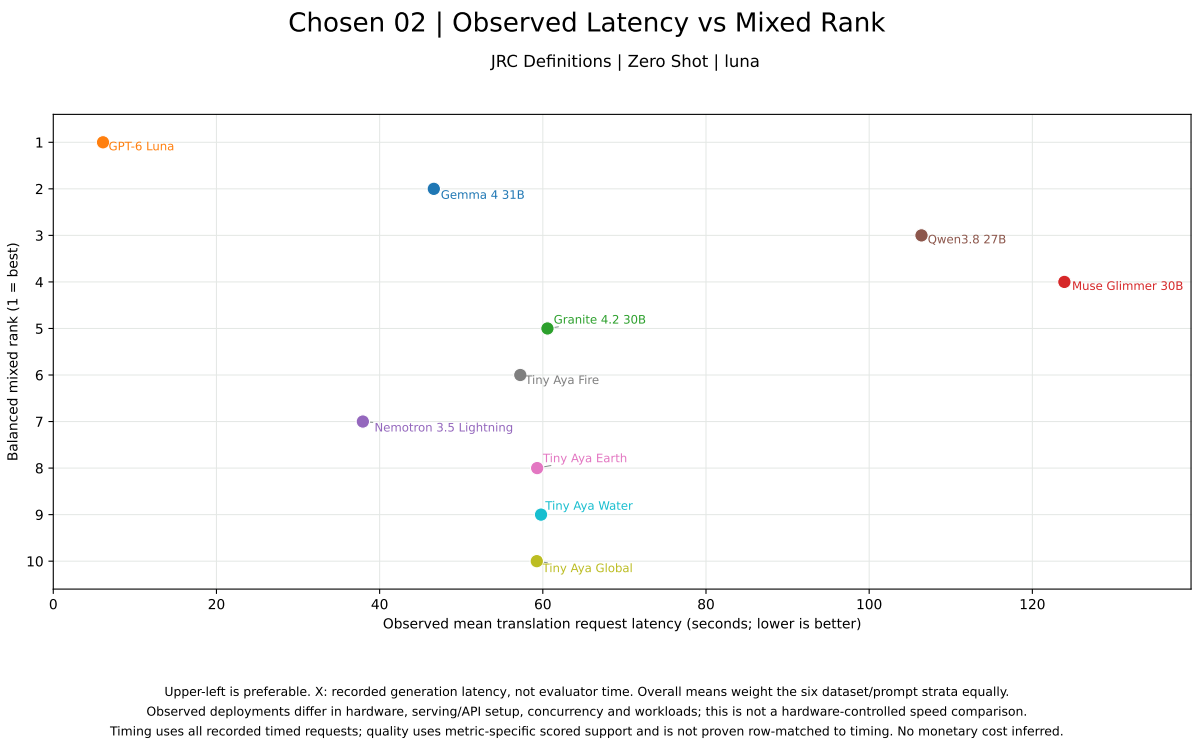


Figure 22: Chosen 02, Luna ranking; observed request latency, not hardware-normalized speed: JRC Definitions, zero-shot.

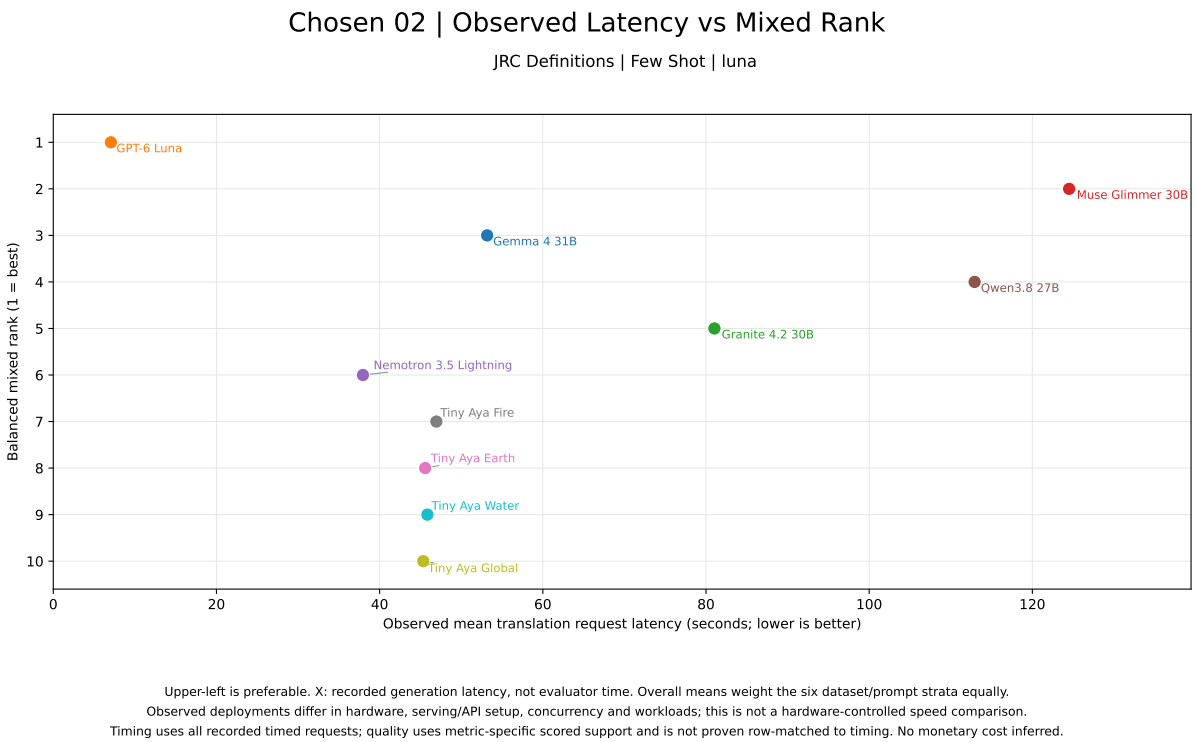


Figure 23: Chosen 02, Luna ranking; observed request latency, not hardware-normalized speed: JRC Definitions, few-shot.

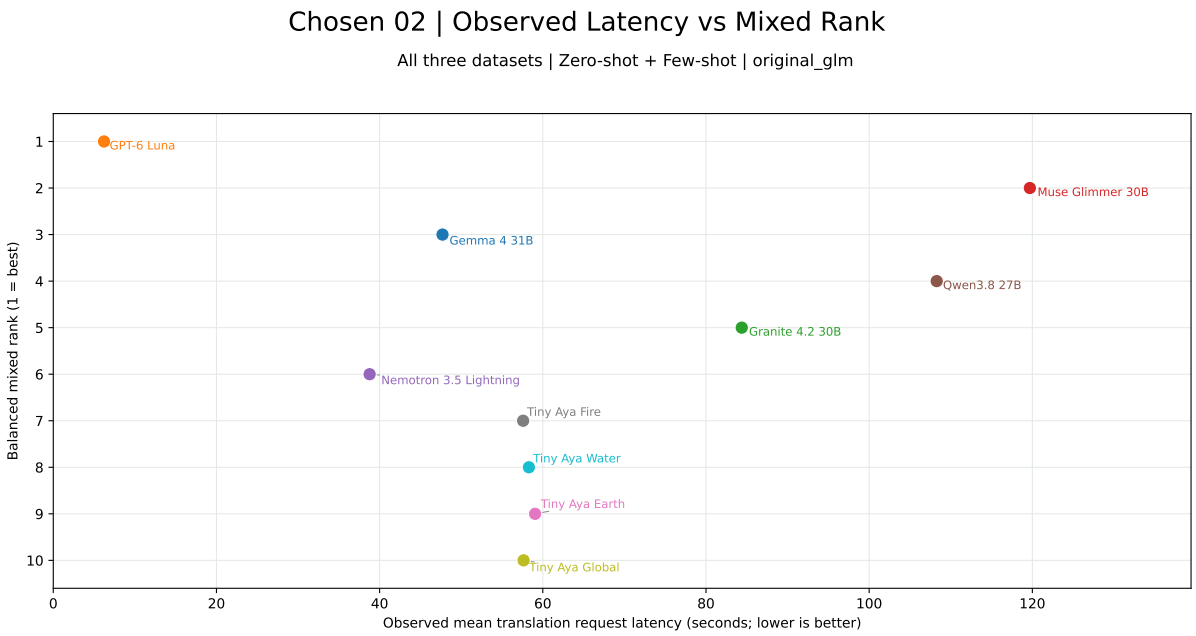


Figure 24: Chosen 02, original GLM ranking; observed request latency, not hardware-normalized speed: equal-weight overview of the six dataset/prompt strata.

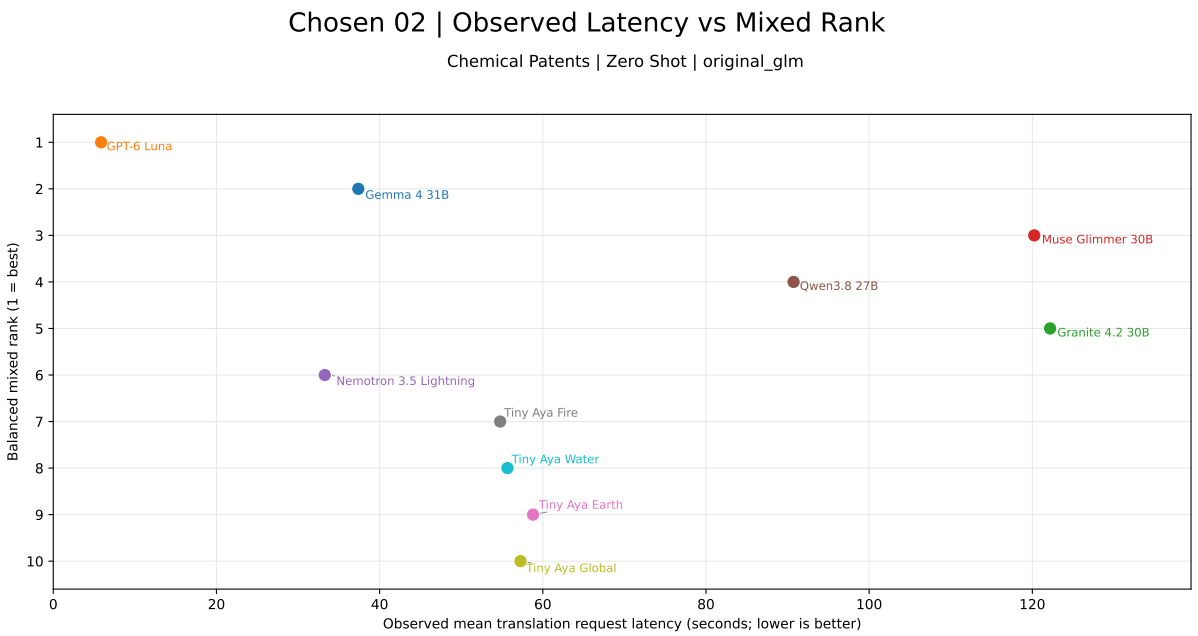


Figure 25: Chosen 02, original GLM ranking; observed request latency, not hardware-normalized speed: Chemical Patents, zero-shot.

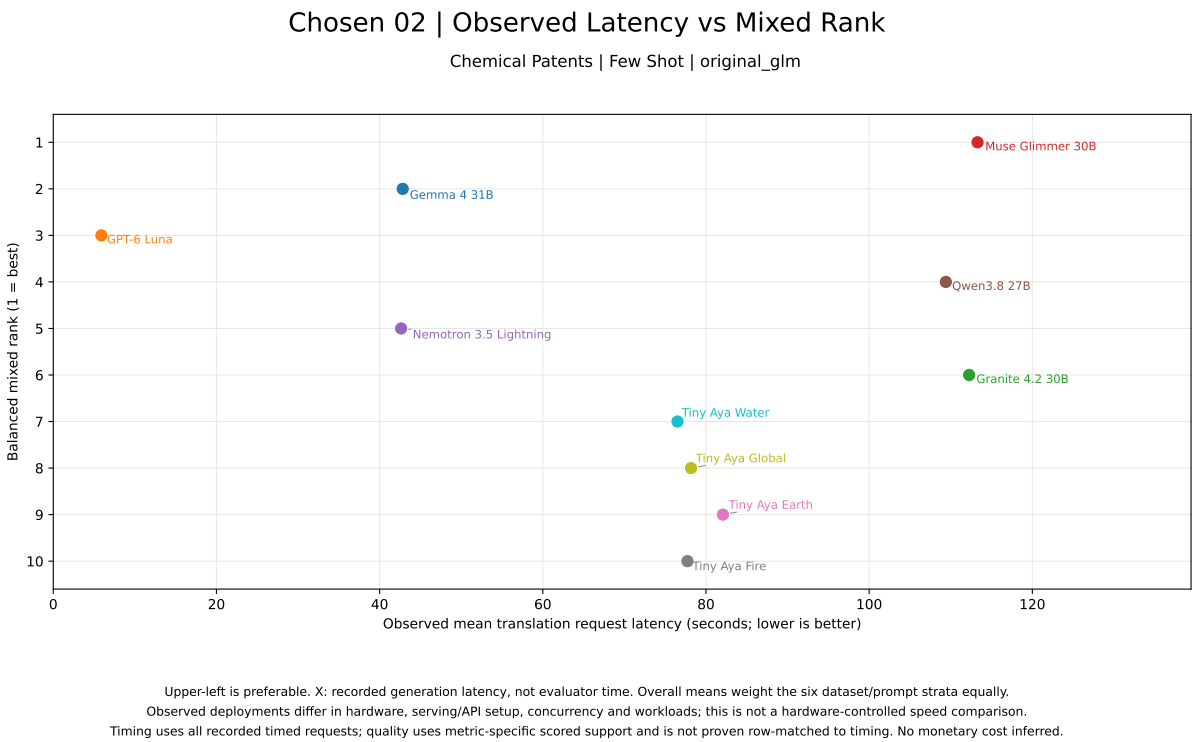


Figure 26: Chosen 02, original GLM ranking; observed request latency, not hardware-normalized speed: Chemical Patents, few-shot.

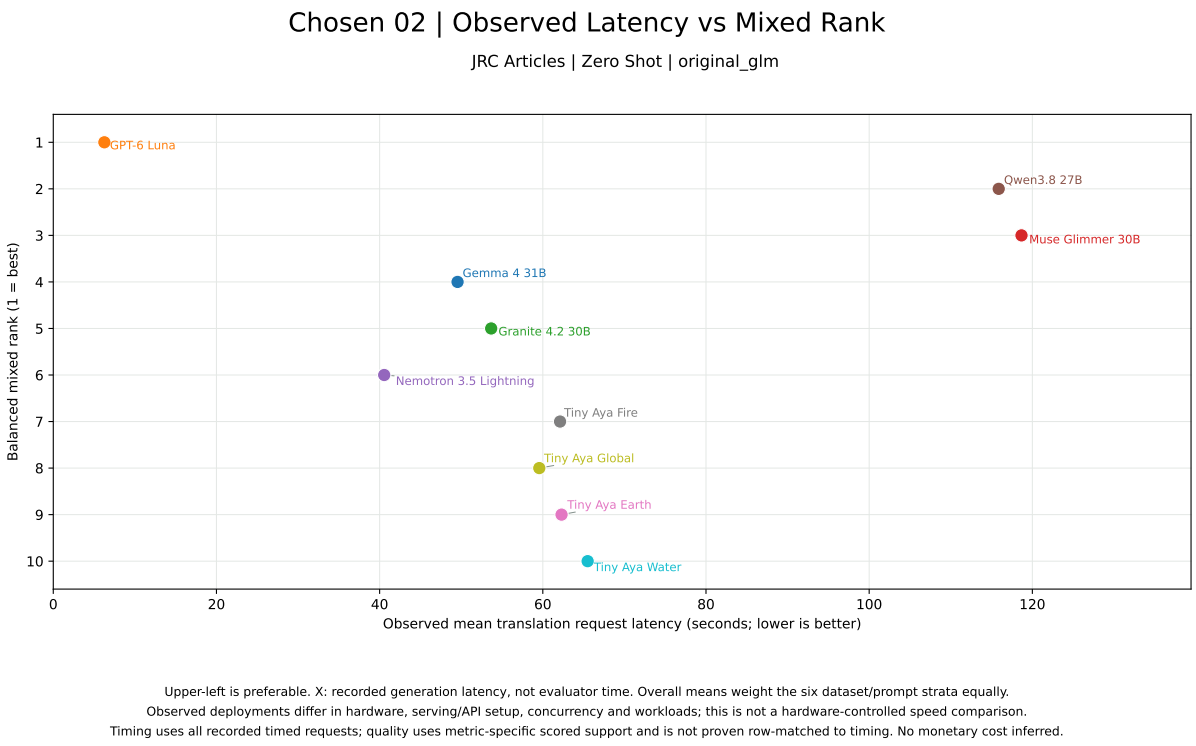


Figure 27: Chosen 02, original GLM ranking; observed request latency, not hardware-normalized speed: JRC Articles, zero-shot.

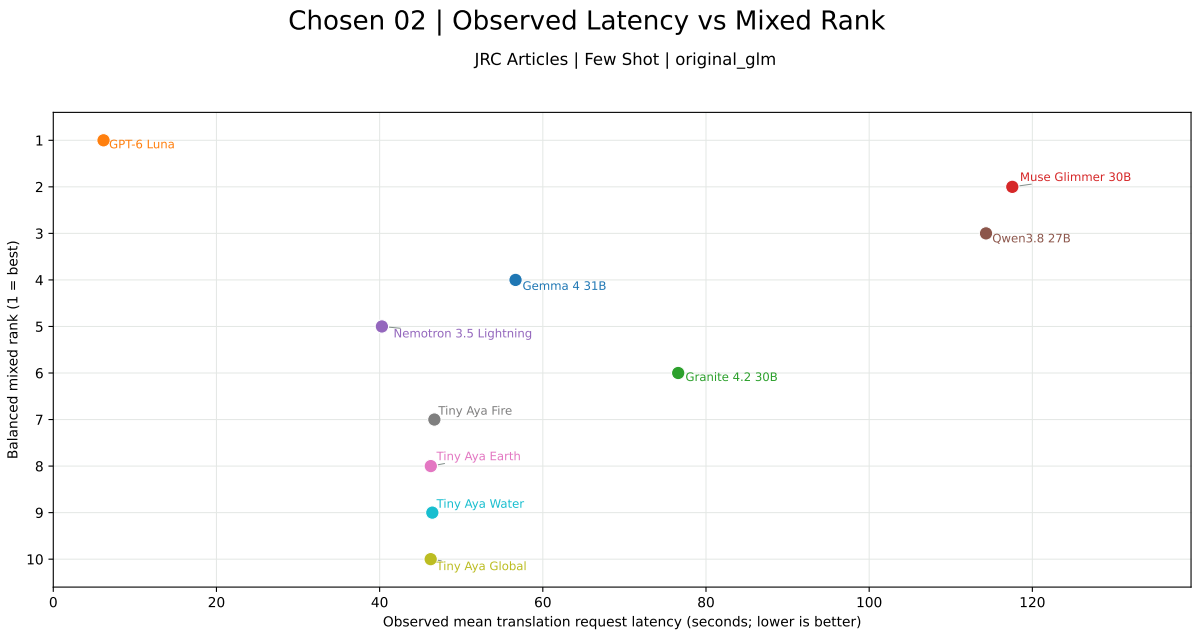


Figure 28: Chosen 02, original GLM ranking; observed request latency, not hardware-normalized speed: JRC Articles, few-shot.

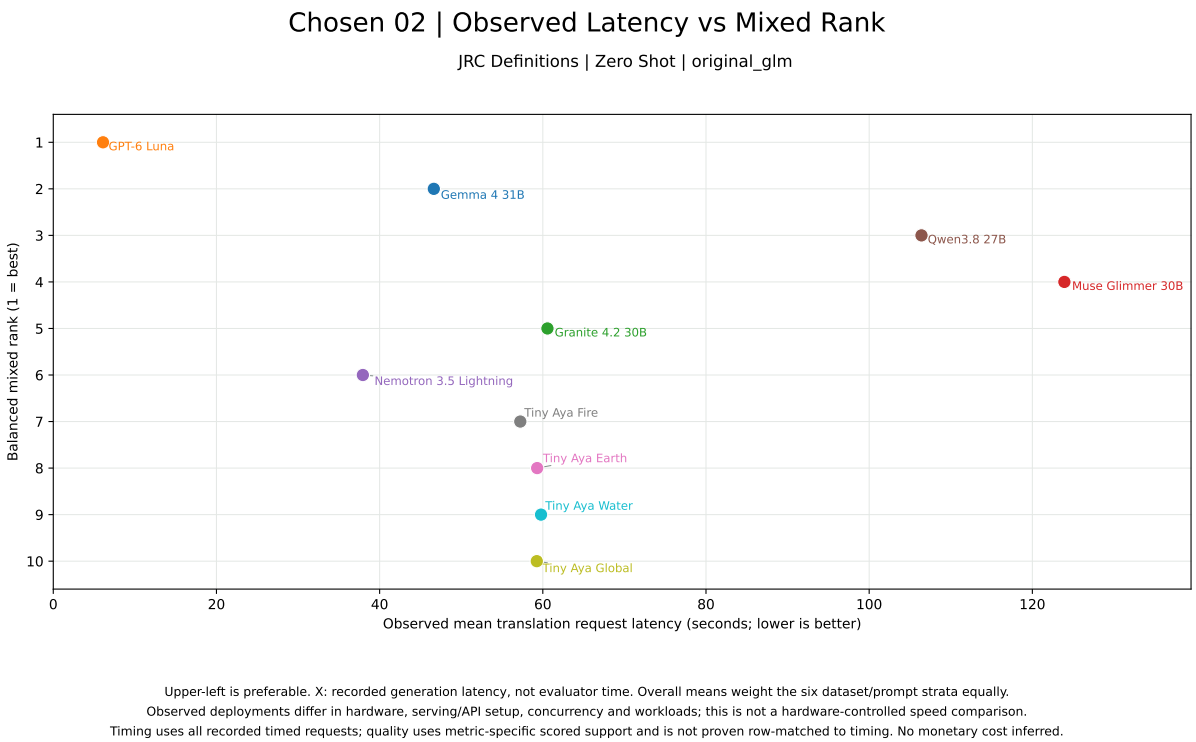


Figure 29: Chosen 02, original GLM ranking; observed request latency, not hardware-normalized speed: JRC Definitions, zero-shot.

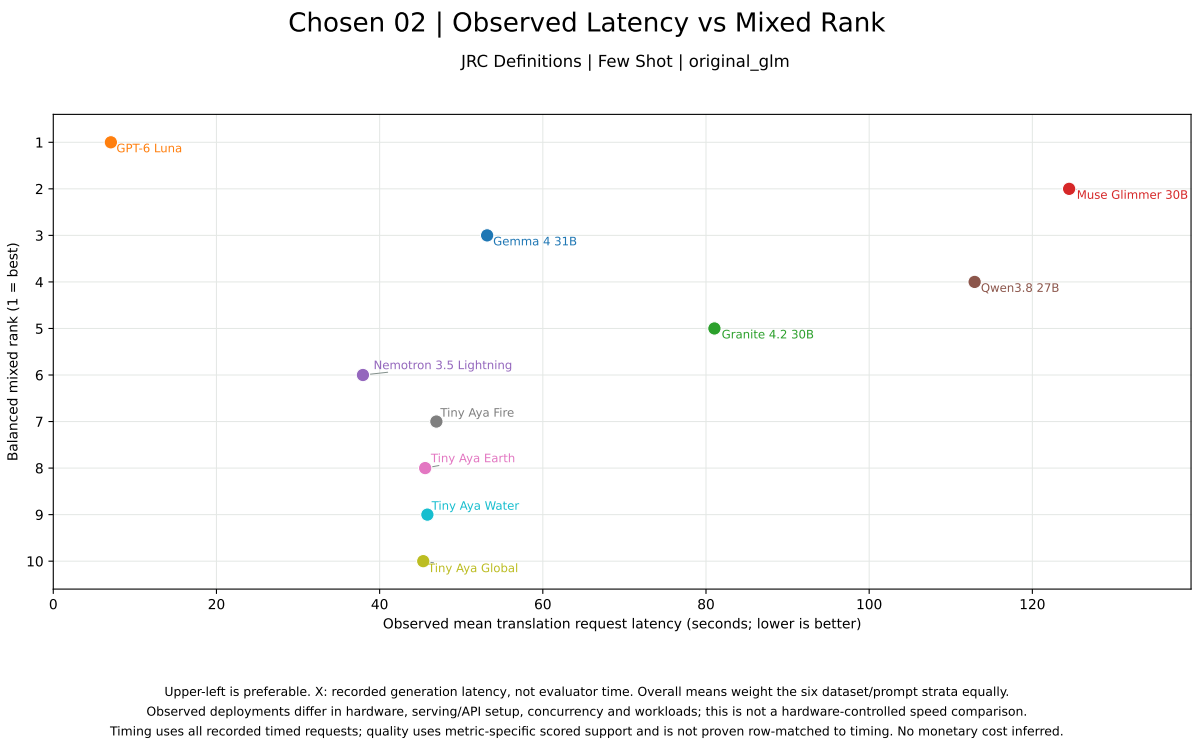


Figure 30: Chosen 02, original GLM ranking; observed request latency, not hardware-normalized speed: JRC Definitions, few-shot.

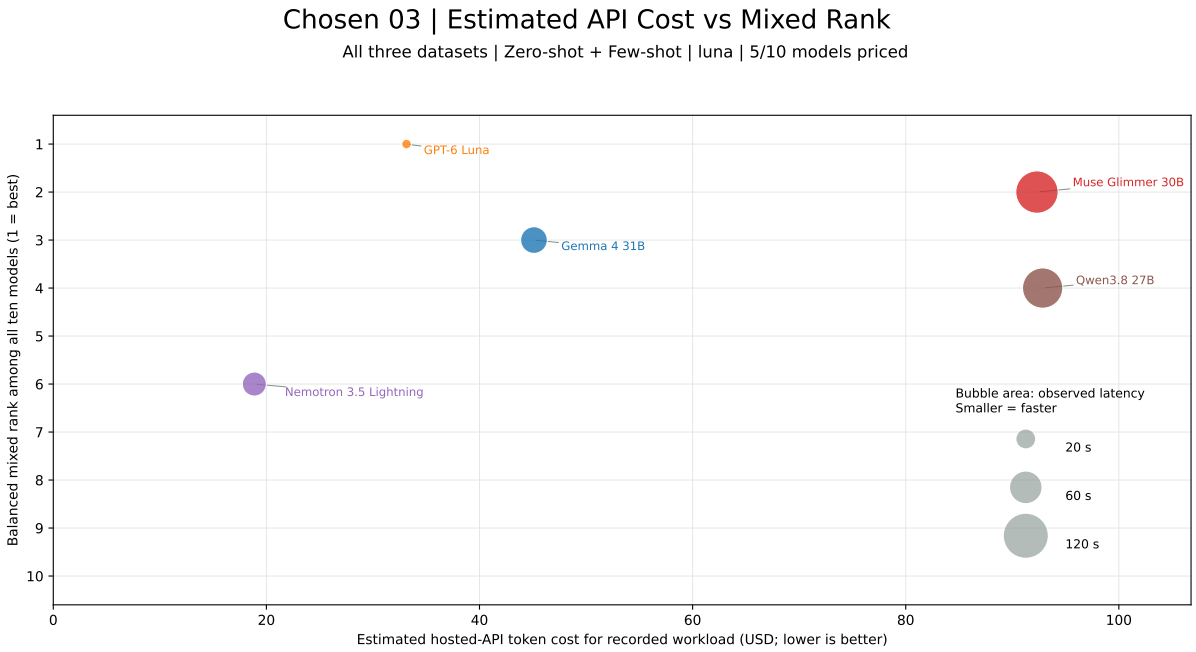


Figure 31: Chosen 03, Luna ranking; estimated API repricing, not actual bills: equal-weight overview of the six dataset/prompt strata.

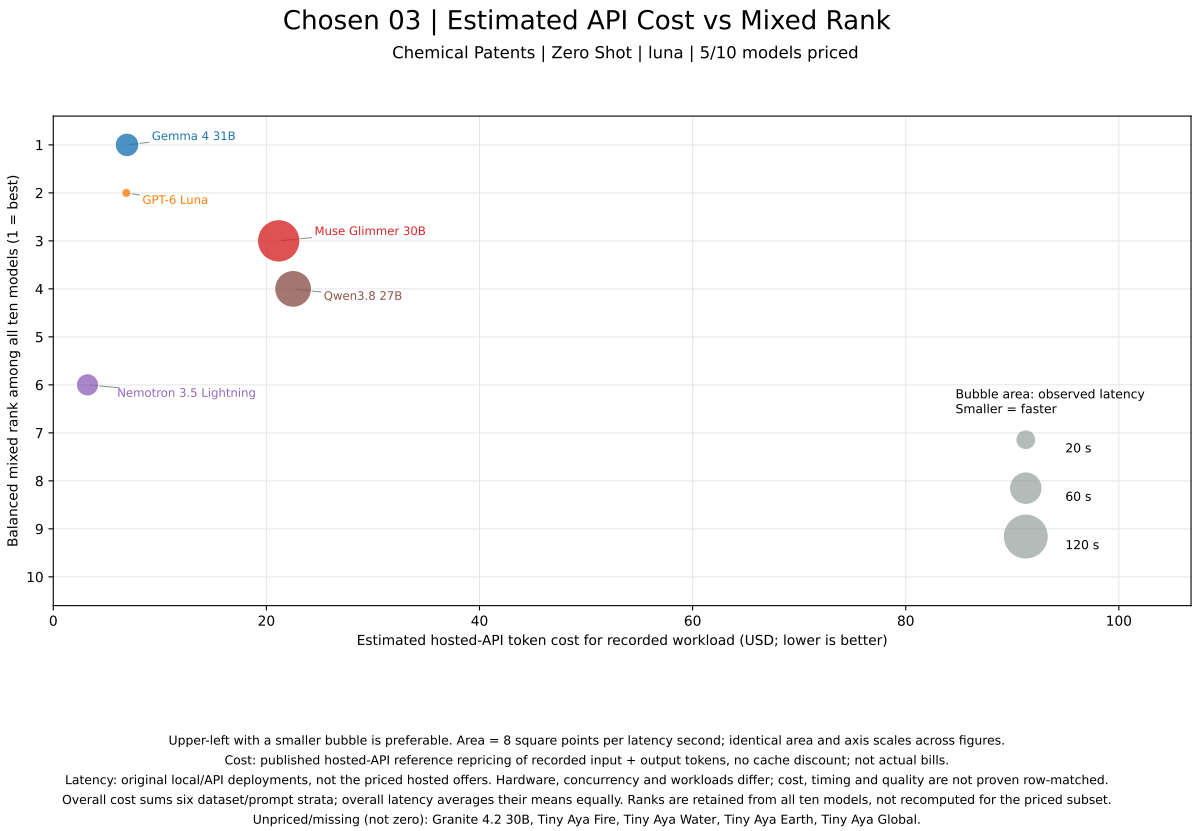


Figure 32: Chosen 03, Luna ranking; estimated API repricing, not actual bills: Chemical Patents, zero-shot.

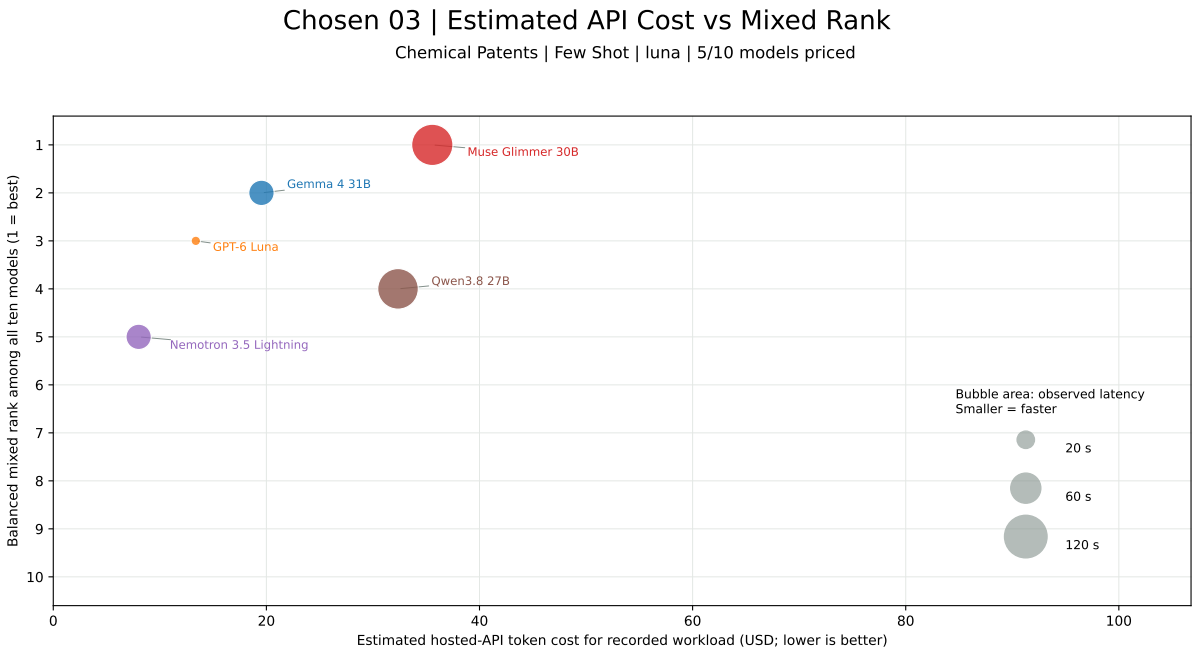


Figure 33: Chosen 03, Luna ranking; estimated API repricing, not actual bills: Chemical Patents, few-shot.

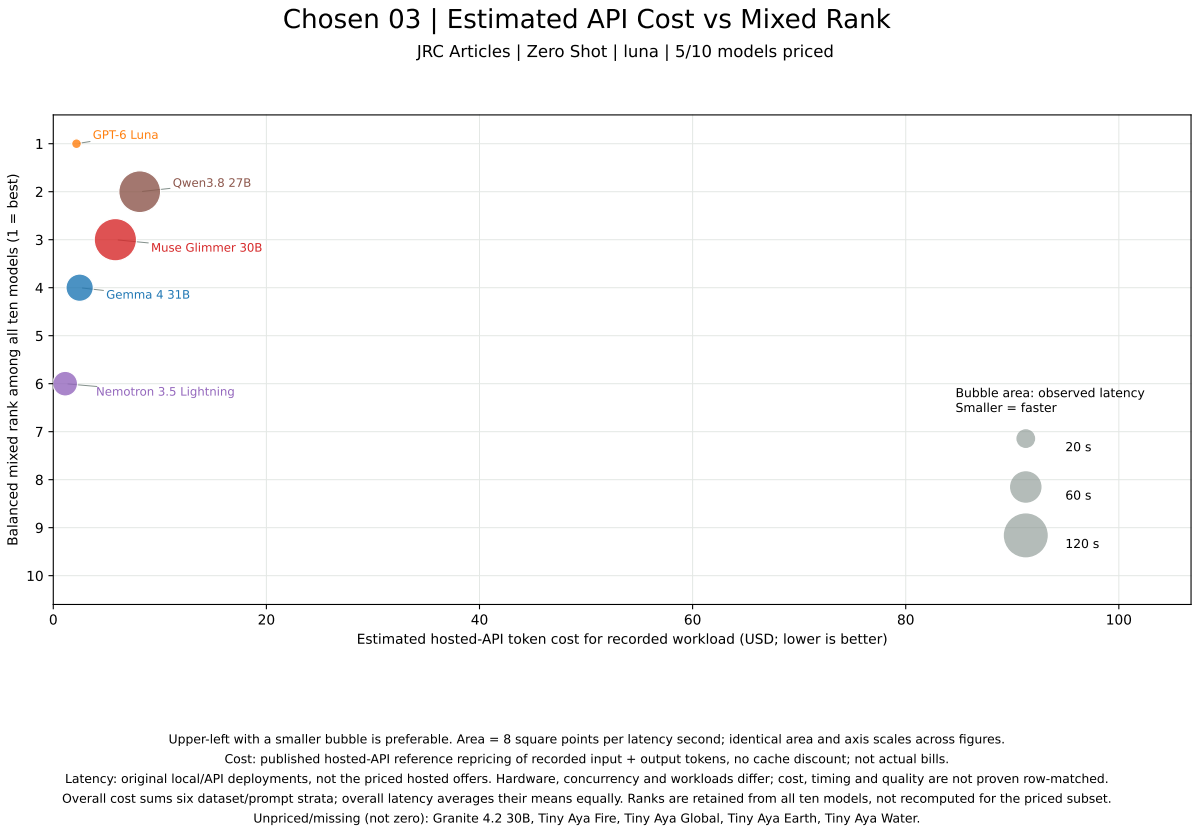


Figure 34: Chosen 03, Luna ranking; estimated API repricing, not actual bills: JRC Articles, zero-shot.

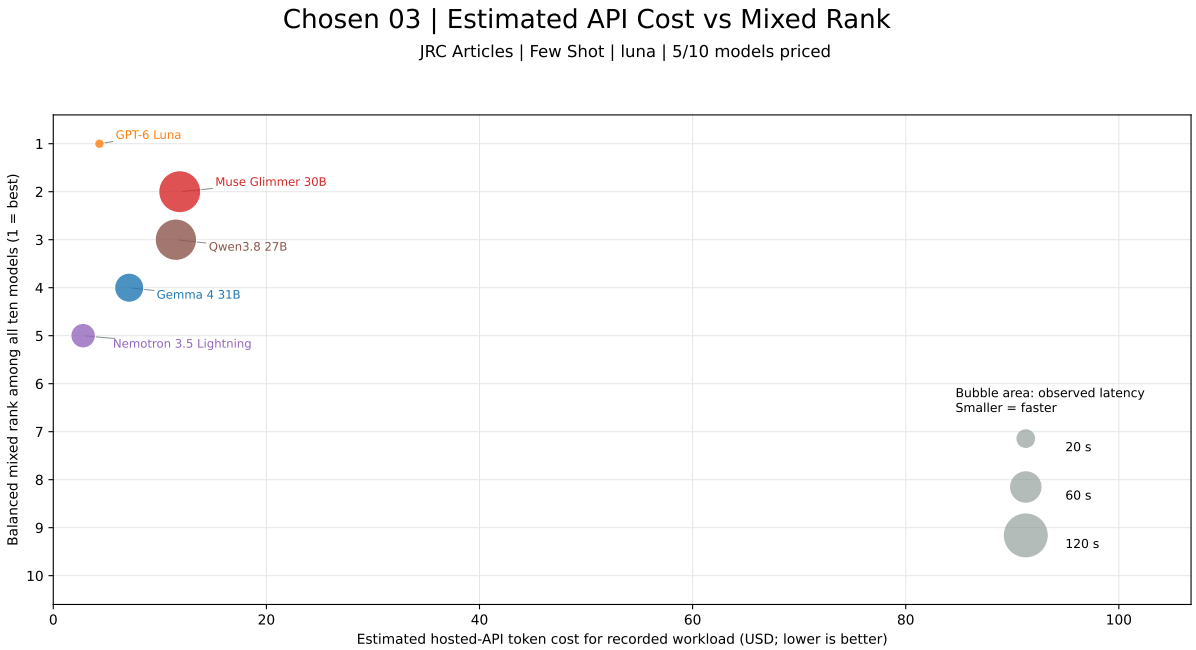


Figure 35: Chosen 03, Luna ranking; estimated API repricing, not actual bills: JRC Articles, few-shot.

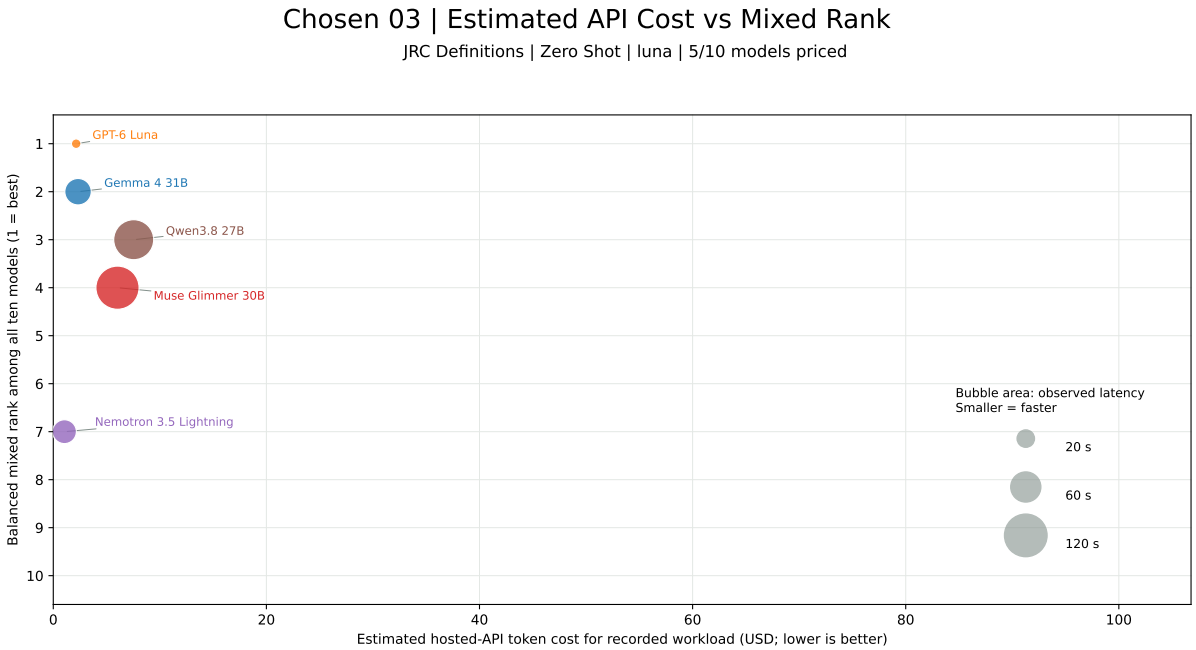


Figure 36: Chosen 03, Luna ranking; estimated API repricing, not actual bills: JRC Definitions, zero-shot.

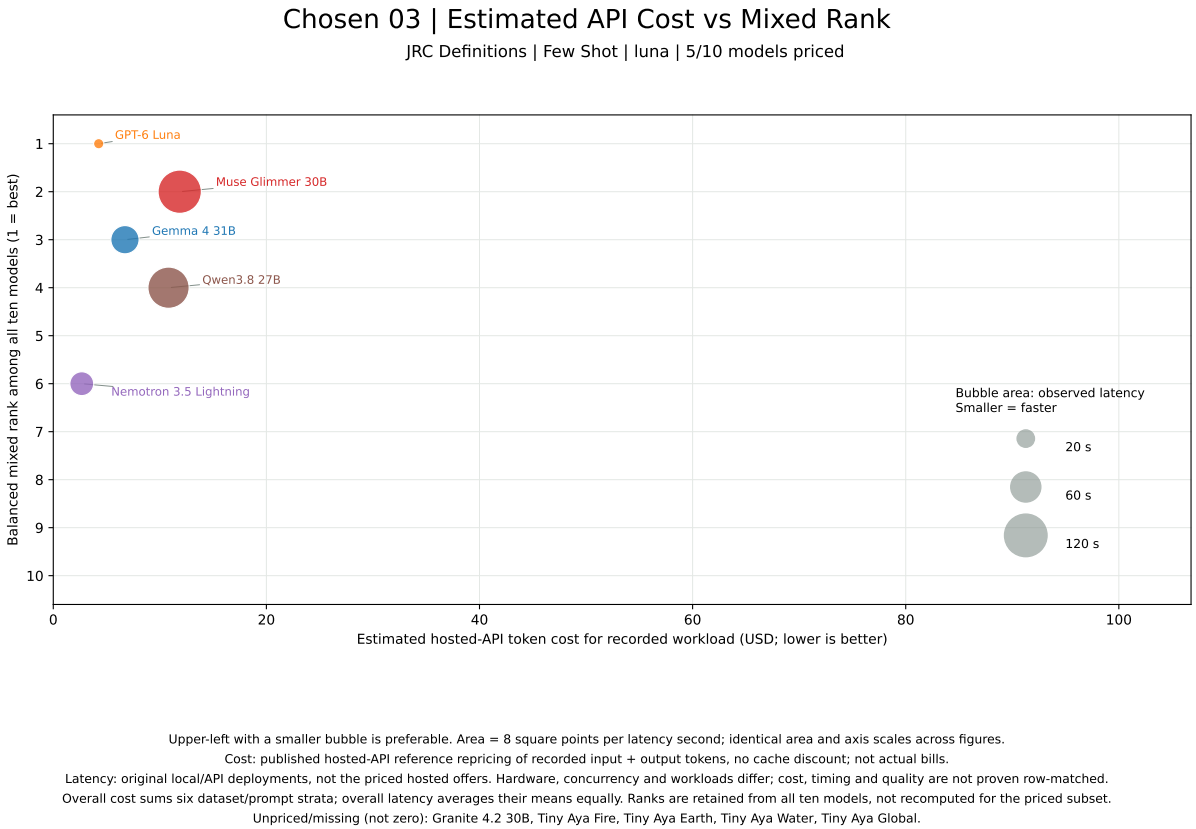


Figure 37: Chosen 03, Luna ranking; estimated API repricing, not actual bills: JRC Definitions, few-shot.

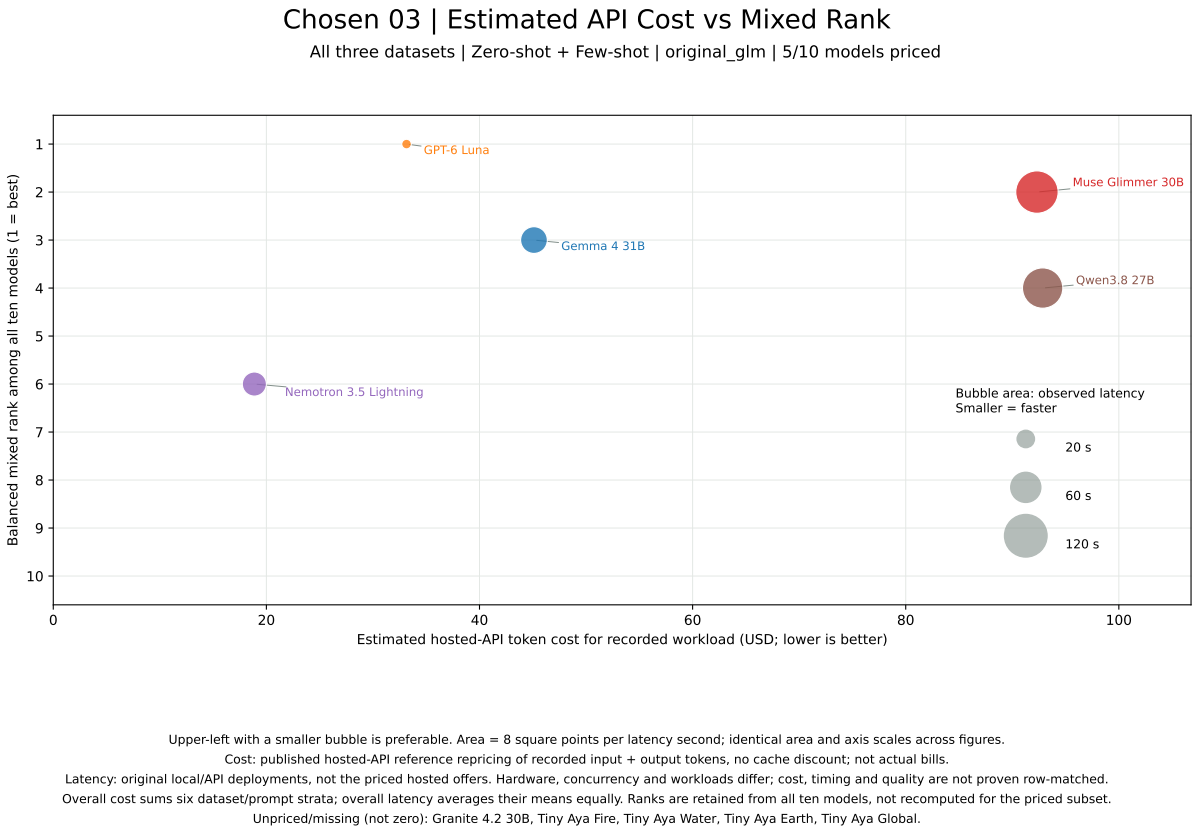


Figure 38: Chosen 03, original GLM ranking; estimated API repricing, not actual bills: equal-weight overview of the six dataset/prompt strata.

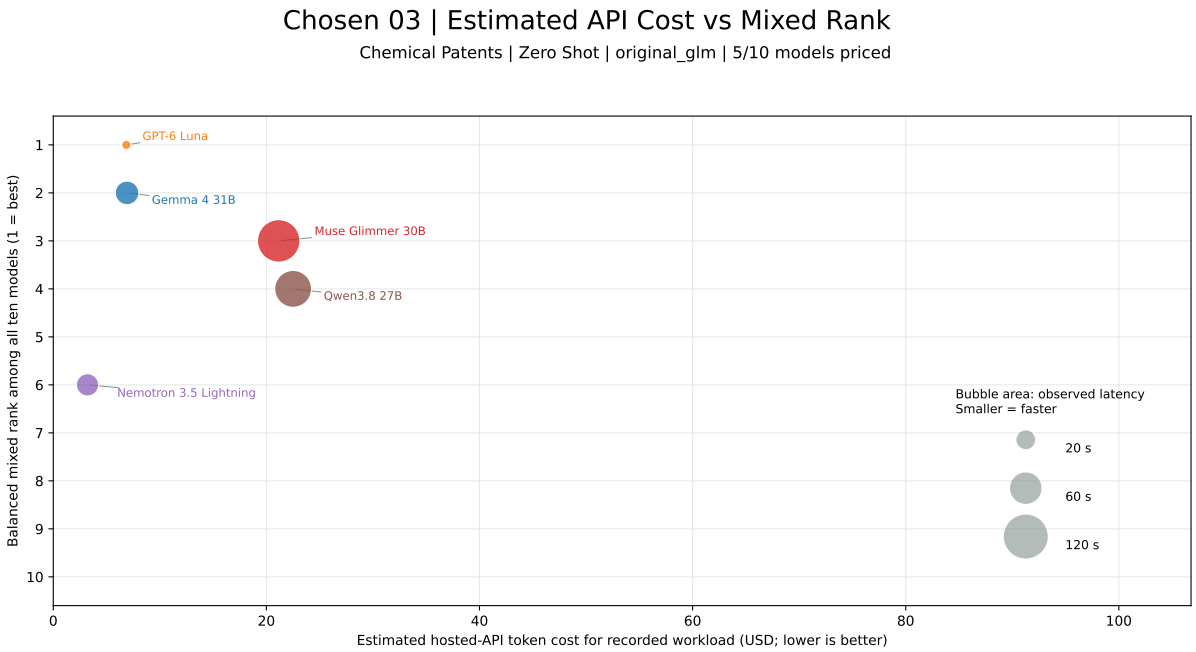


Figure 39: Chosen 03, original GLM ranking; estimated API repricing, not actual bills: Chemical Patents, zero-shot.

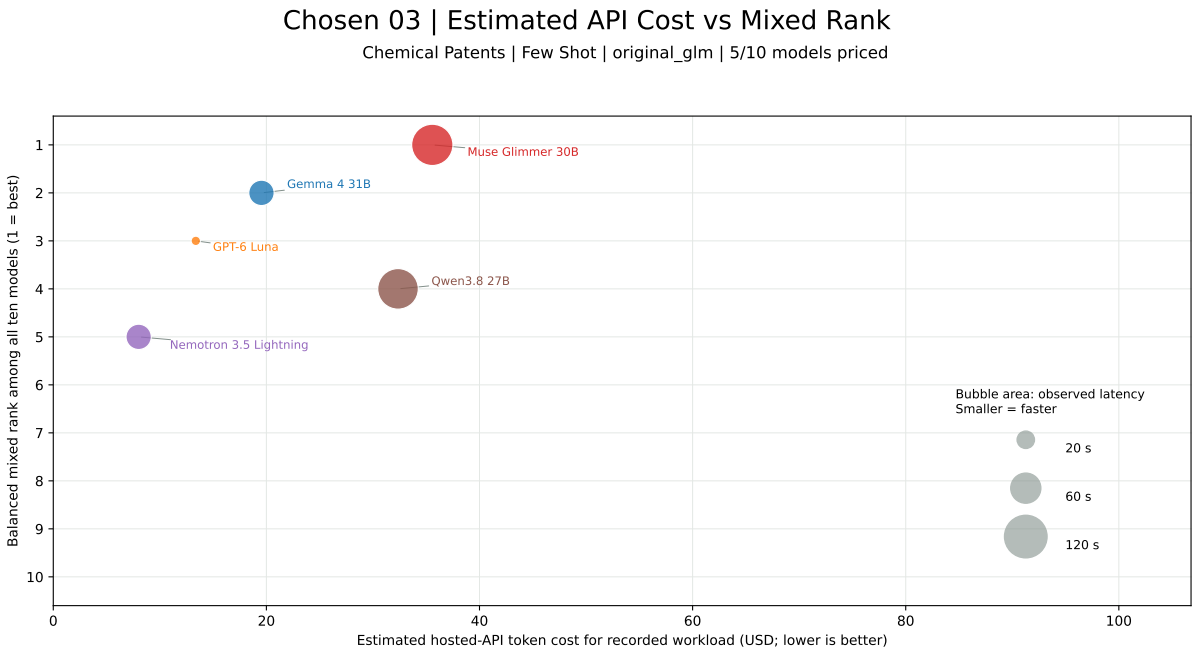


Figure 40: Chosen 03, original GLM ranking; estimated API repricing, not actual bills: Chemical Patents, few-shot.

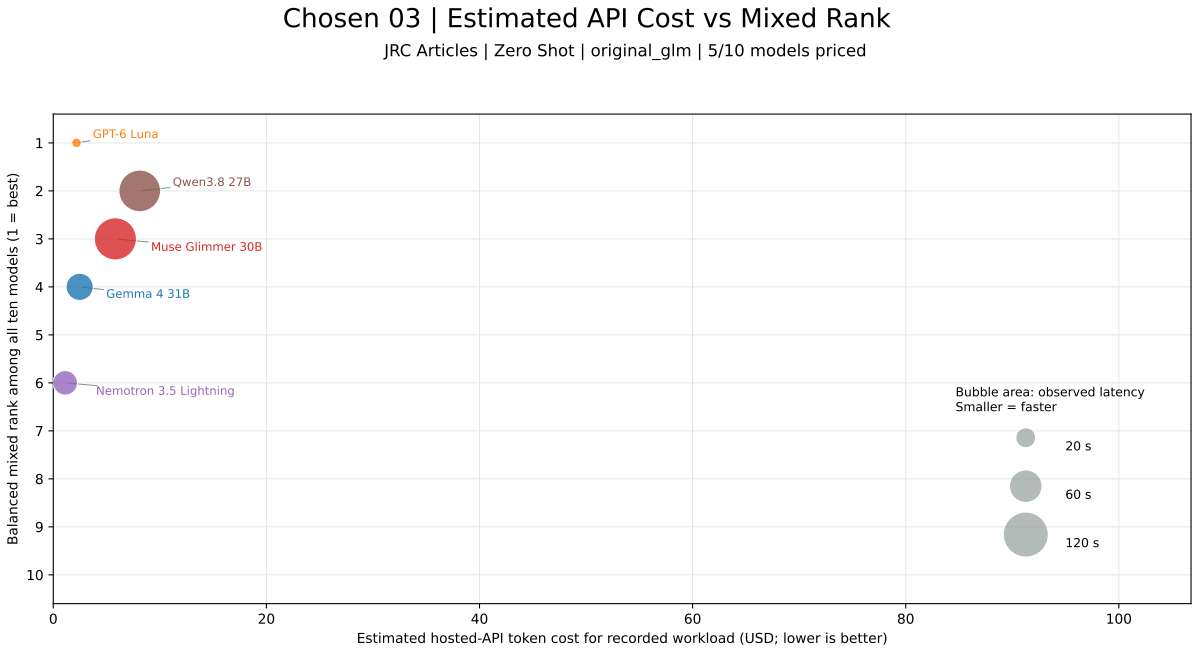


Figure 41: Chosen 03, original GLM ranking; estimated API repricing, not actual bills: JRC Articles, zero-shot.

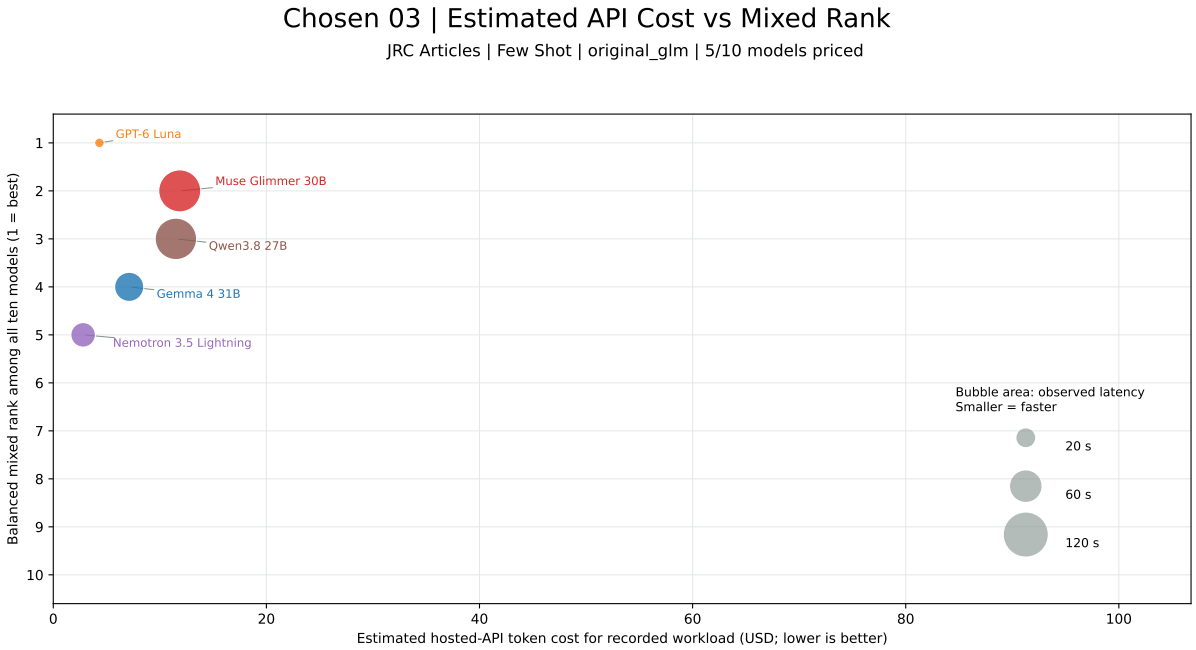


Figure 42: Chosen 03, original GLM ranking; estimated API repricing, not actual bills: JRC Articles, few-shot.

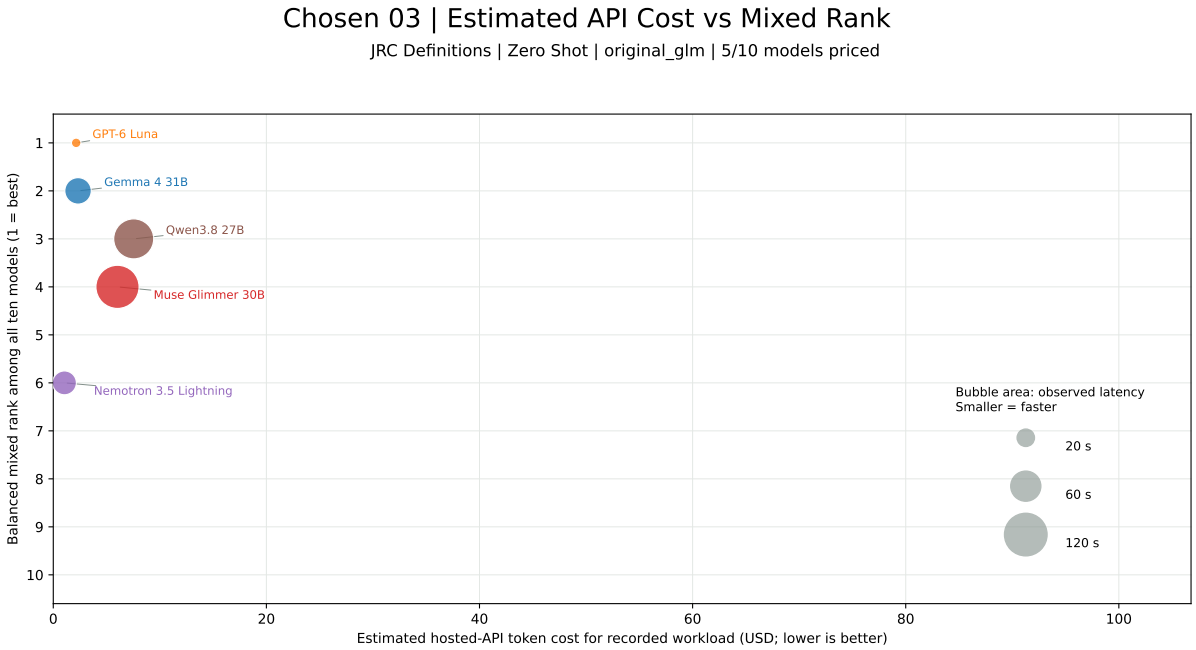


Figure 43: Chosen 03, original GLM ranking; estimated API repricing, not actual bills: JRC Definitions, zero-shot.

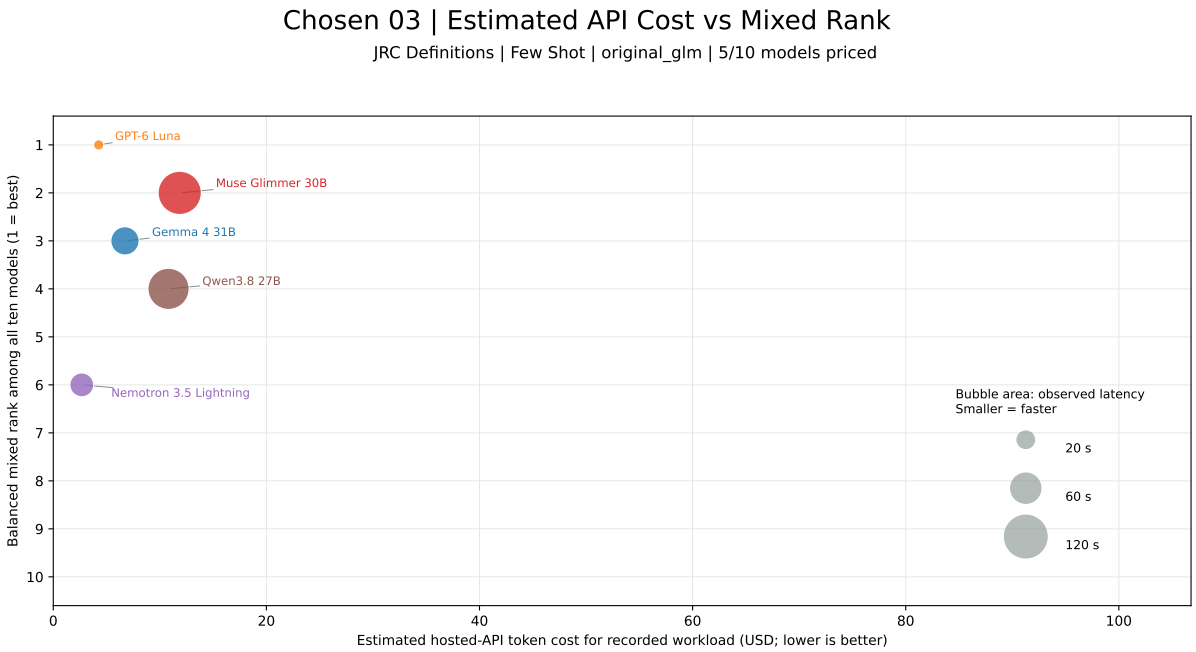


Figure 44: Chosen 03, original GLM ranking; estimated API repricing, not actual bills: JRC Definitions, few-shot.

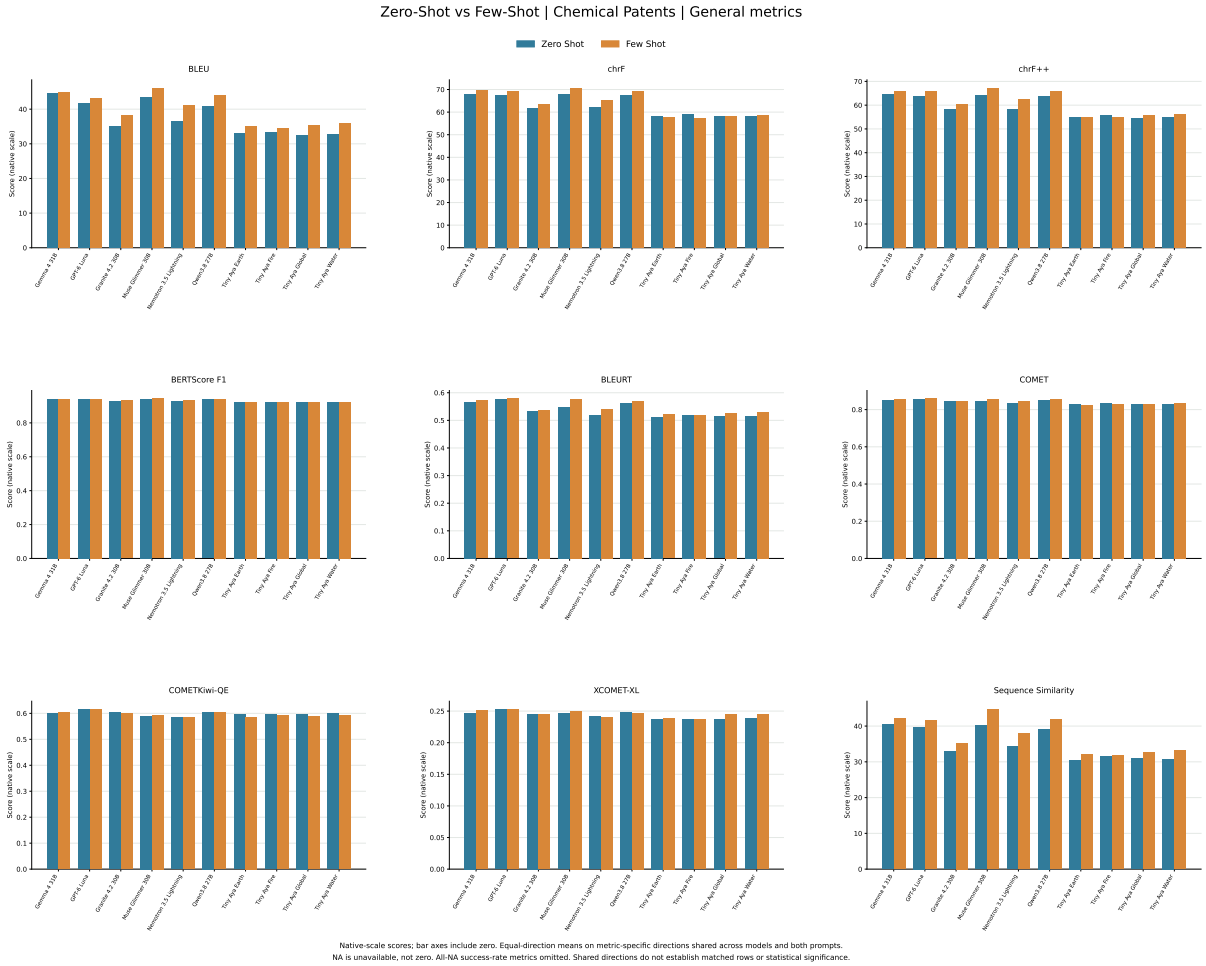


Figure 45: Chosen 04: all general metrics, Chemical Patents.



Figure 46: Chosen 04: all general metrics, JRC Articles.



Figure 47: Chosen 04: all general metrics, JRC Definitions.



Figure 48: Chosen 04: Luna terminology, Chemical Patents.

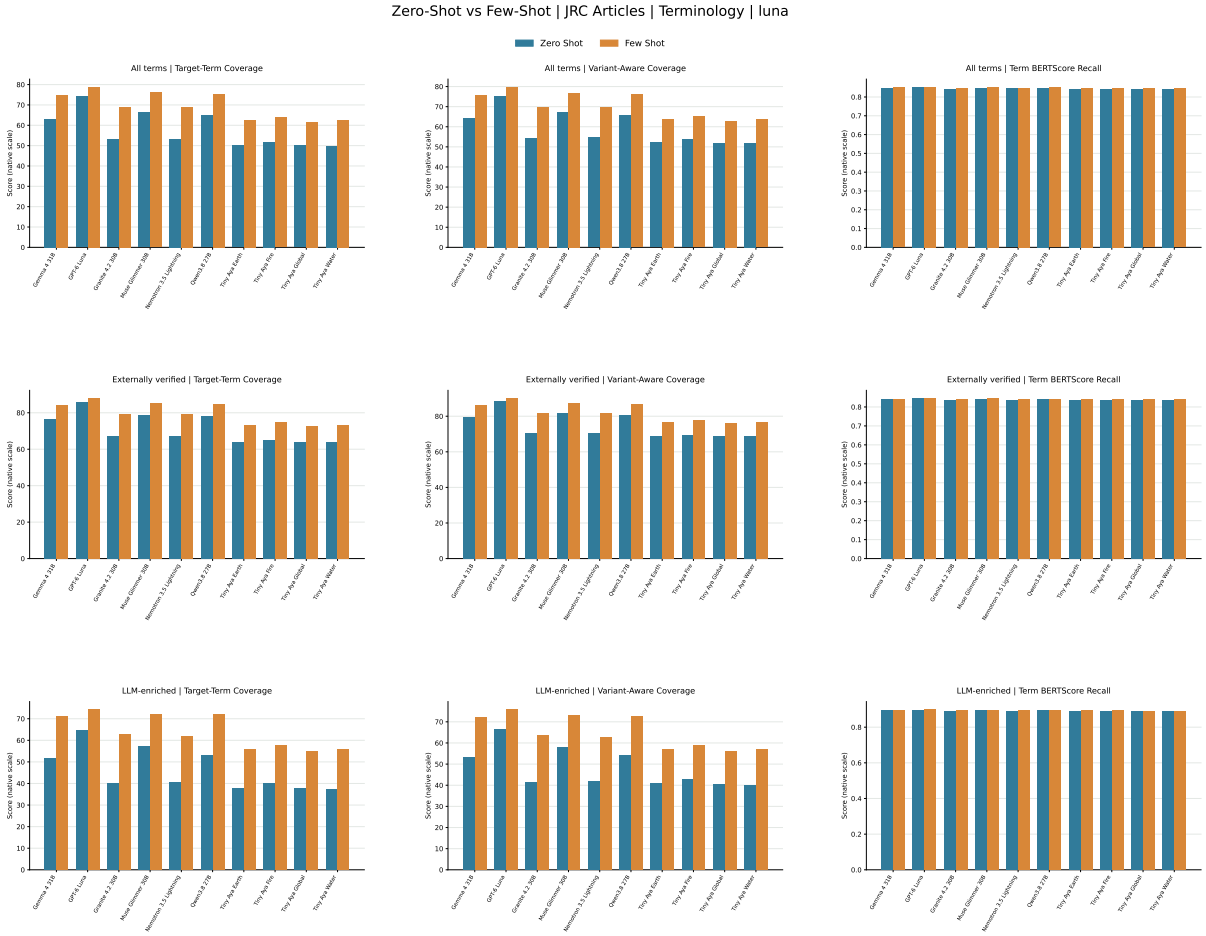


Figure 49: Chosen 04: Luna terminology, JRC Articles.



Figure 50: Chosen 04: Luna terminology, JRC Definitions.



Figure 51: Chosen 04: original GLM terminology, Chemical Patents.



Figure 52: Chosen 04: original GLM terminology, JRC Articles.



Figure 53: Chosen 04: original GLM terminology, JRC Definitions.

B.2 Qualitative terminology visualizations

This appendix collects qualitative terminology visualizations copied into `docs/paper/figures/`. They are included as debugging and explanation artifacts, not as final quantitative results.

The refiner-highlight figures use three underline lanes: gray for all extracted candidate terms, blue for terms selected by the domain-specific LLM refiner, and green for refined terms that also have external verifier evidence.

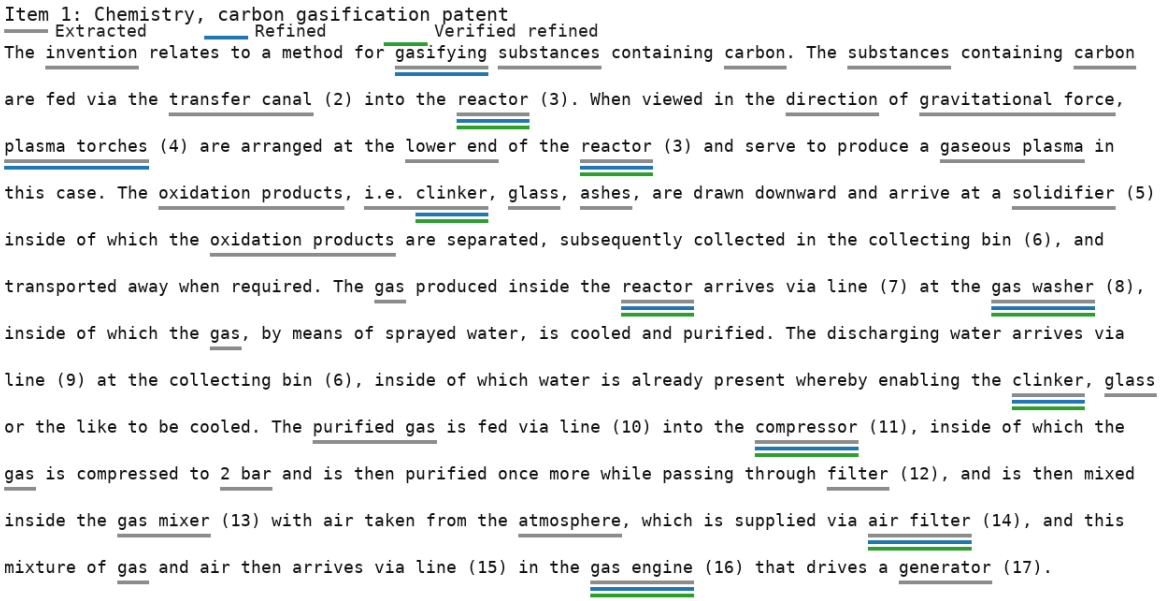


Figure 54: Chemistry patent example on carbon gasification.

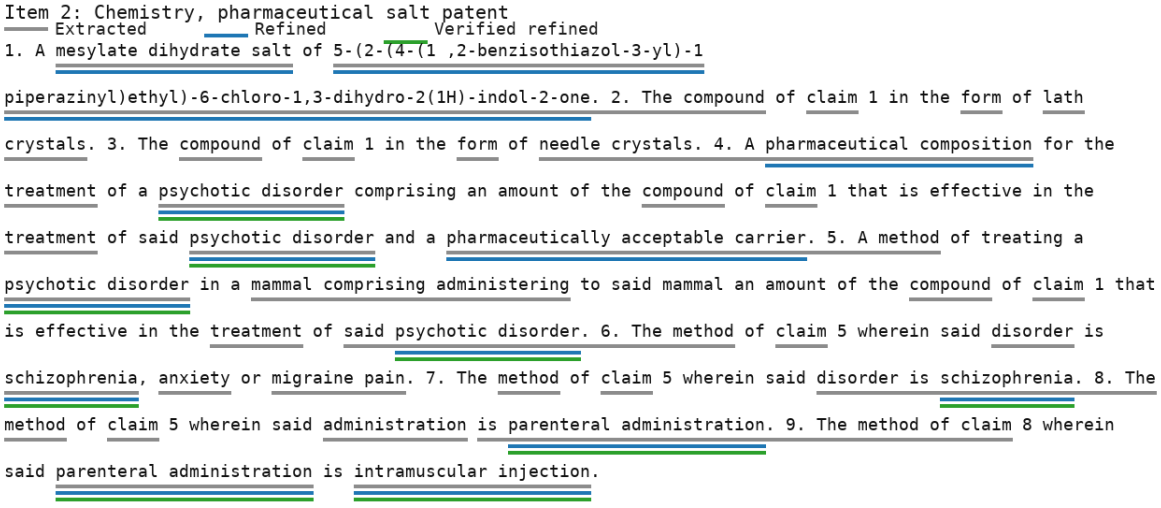


Figure 55: Chemistry patent example on pharmaceutical salts and formulation terminology.

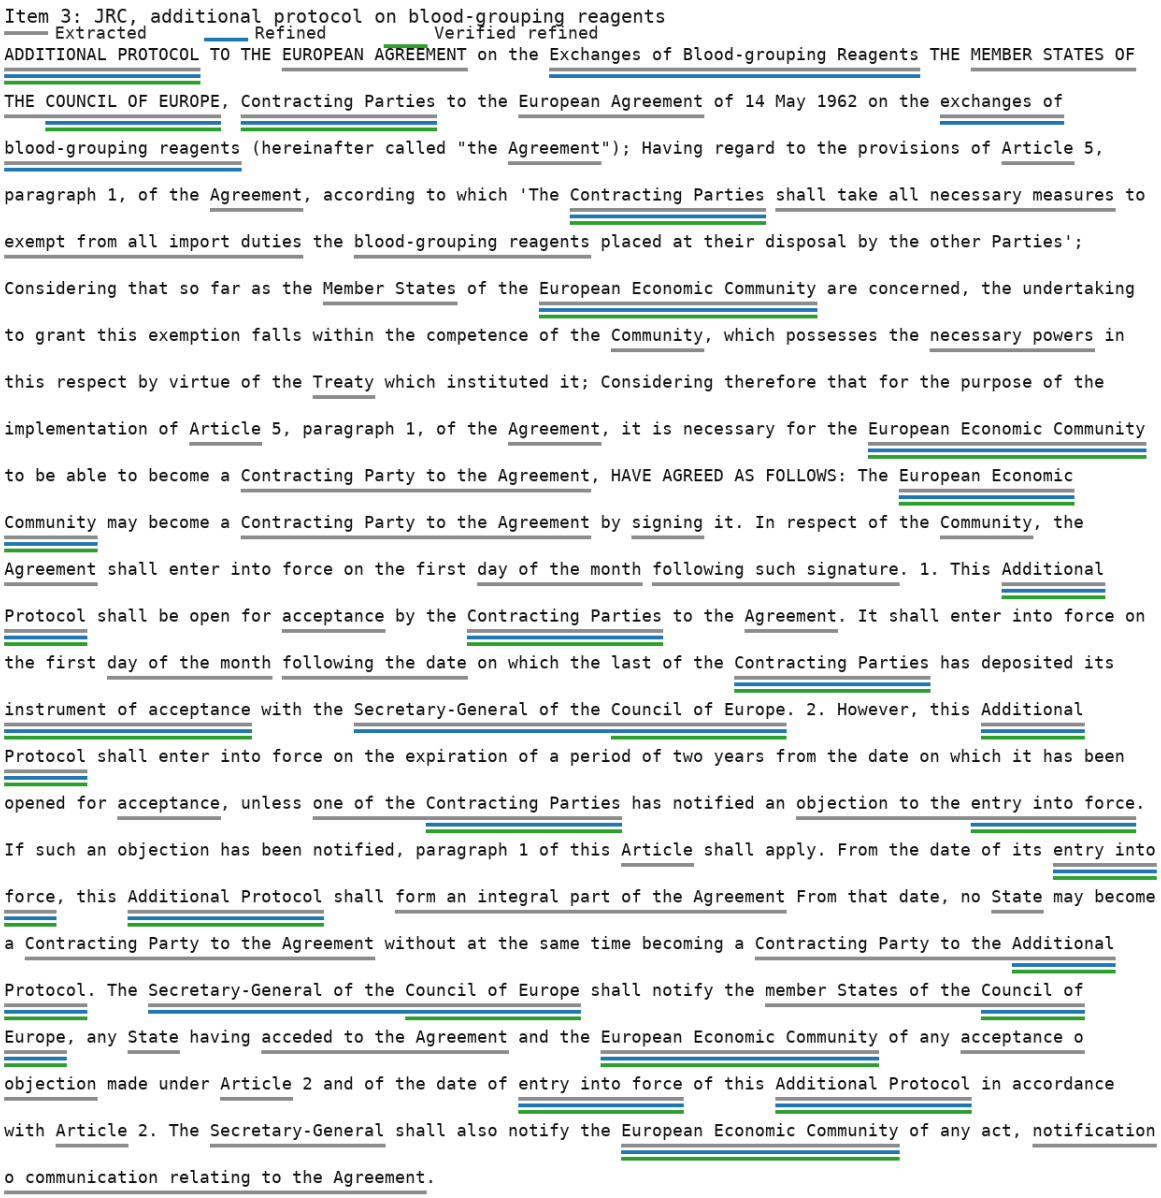


Figure 56: JRC legal example on blood-grouping reagents.

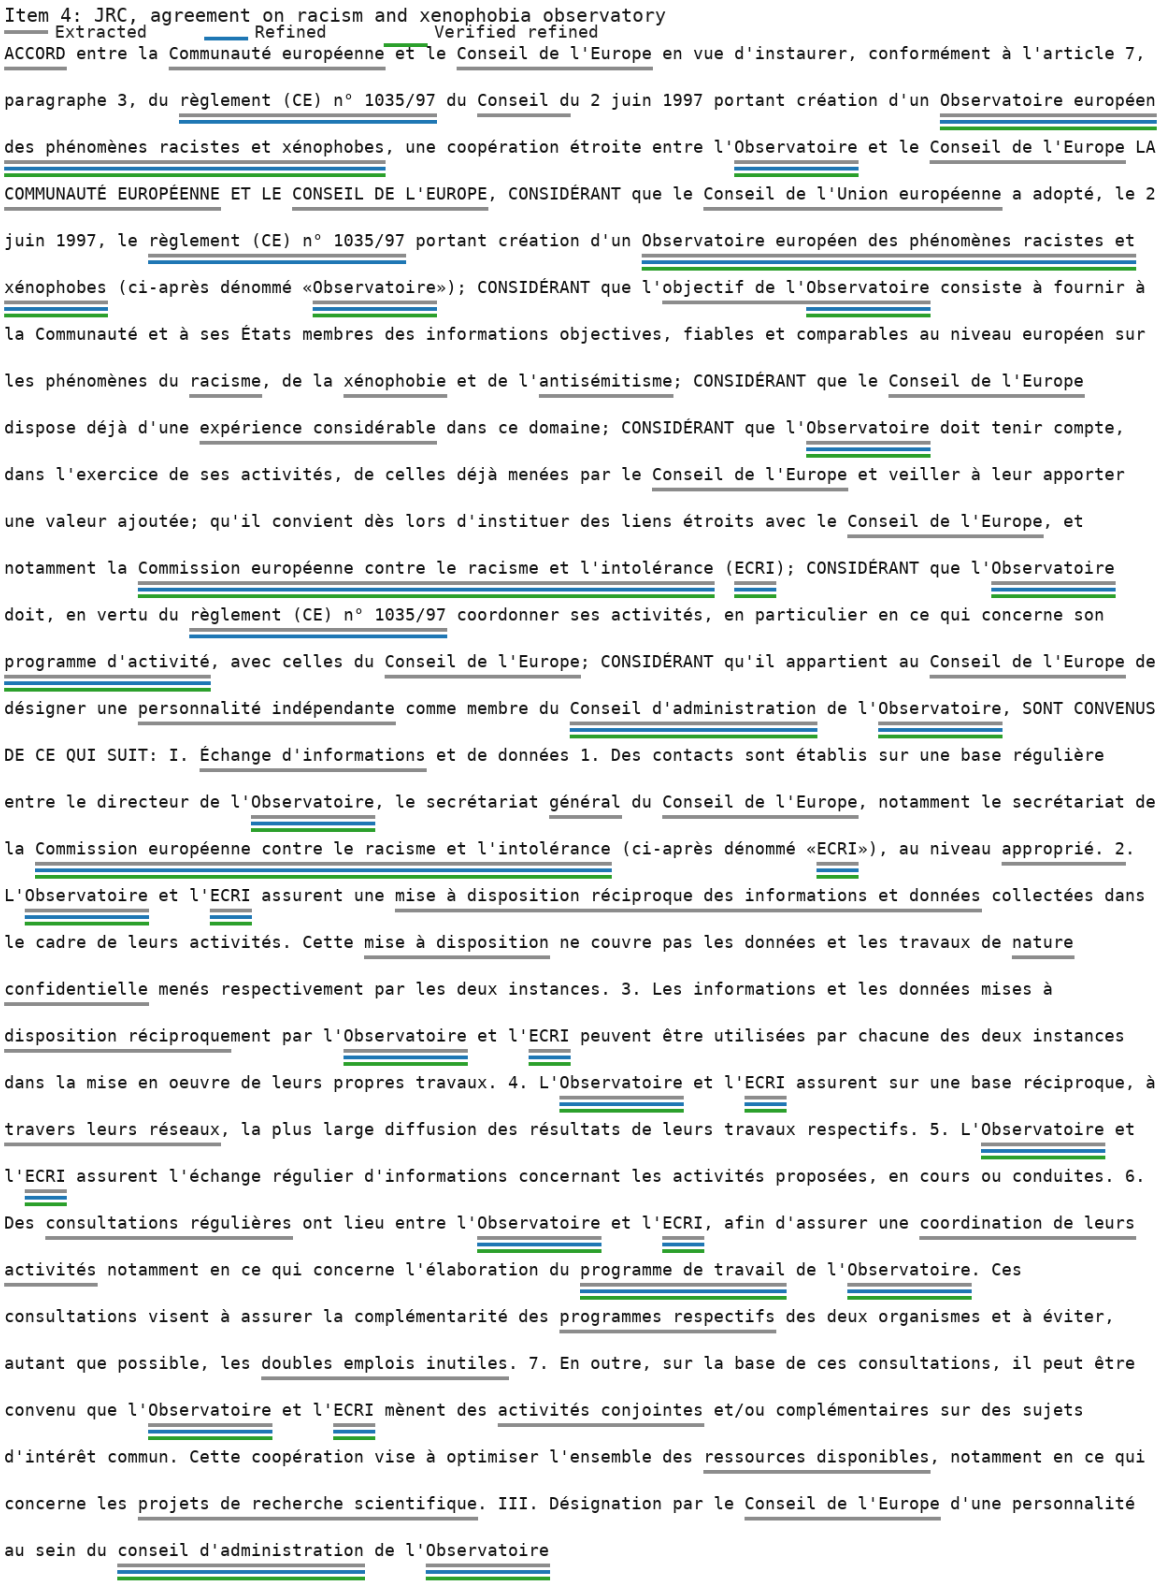


Figure 57: JRC legal example on the racism and xenophobia observatory.

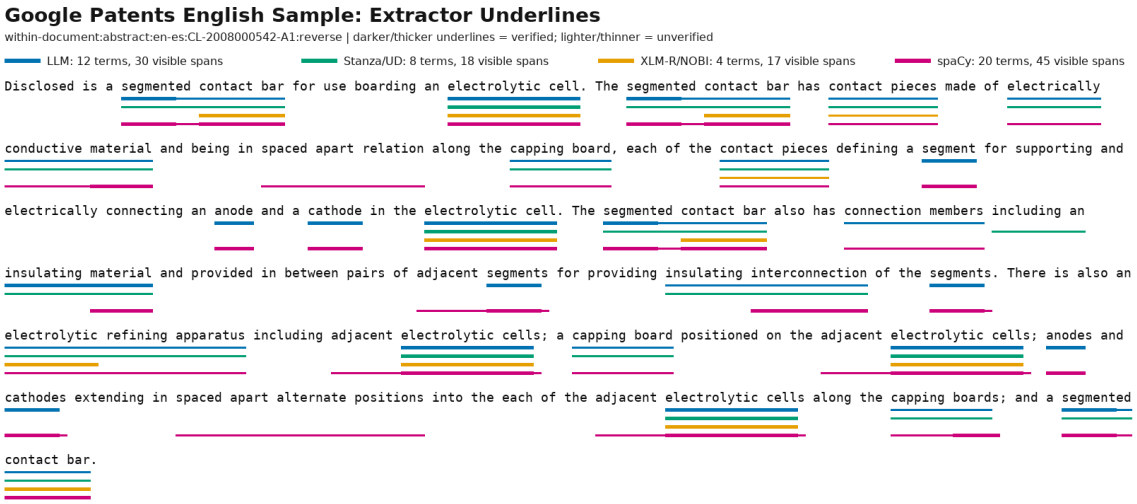


Figure 58: Google Patents English extractor diagnostic visualization.



Figure 59: JRC English extractor diagnostic visualization.