Model-to-Model Correlations | From | Variant-Aware Coverage
Datasets separate | Both prompts averaged equally

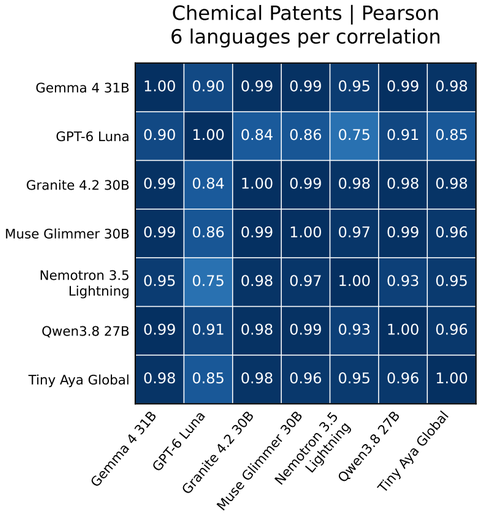

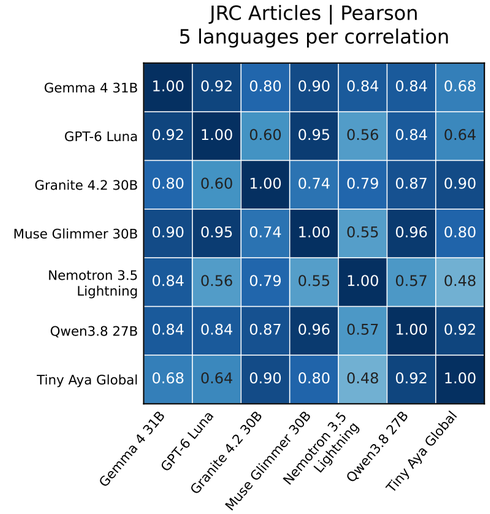

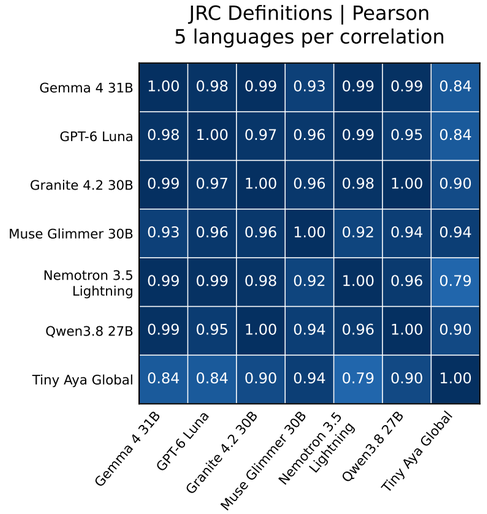

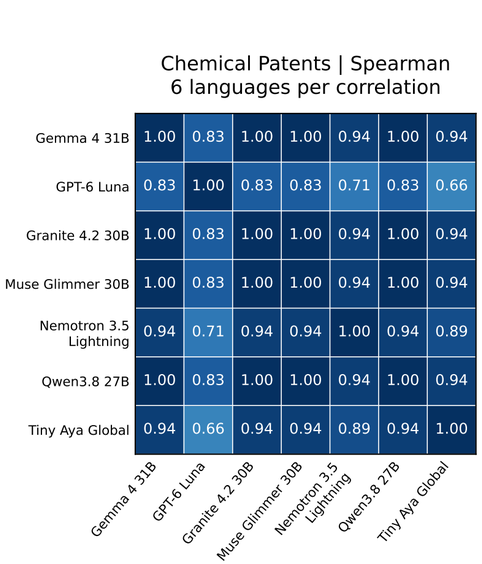

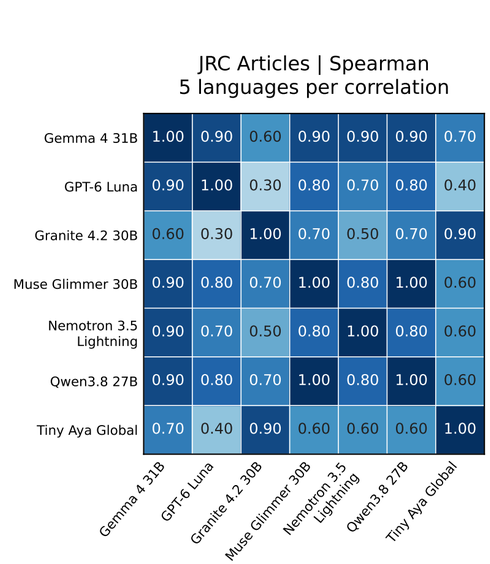

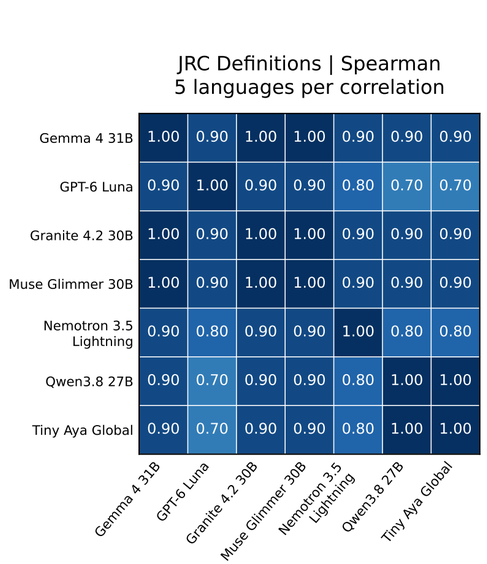



Each model pair is correlated across the same supported languages. First average partner directions within model/prompt, then average both prompts equally; no mixing metric scales or datasets.
General scores are shared; terminology uses Luna LLM-enriched annotations. All models and both prompts are required for each retained direction.
Partner sets may differ between languages. NA = constant or fewer than 3 observations. Small, dependent cohorts; row identities unverified; descriptive, not causal or significance evidence.