Model-to-Model Correlations | To | Variant-Aware Coverage
Datasets separate | Both prompts averaged equally

Chemical Patents | Pearson
6 languages per correlation

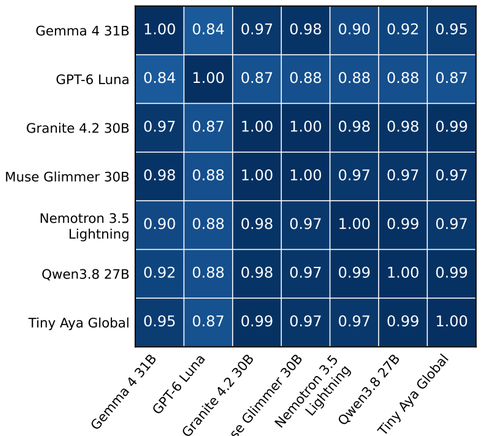

JRC Articles | Pearson
5 languages per correlation

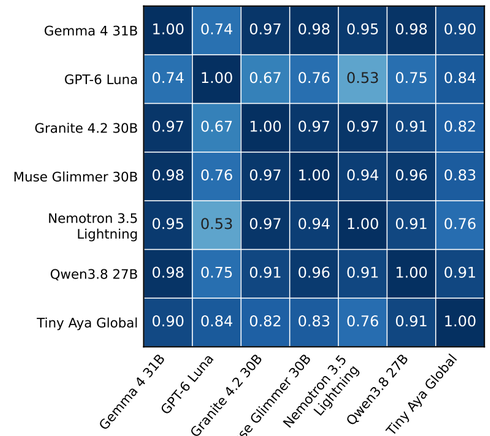

JRC Definitions | Pearson
5 languages per correlation

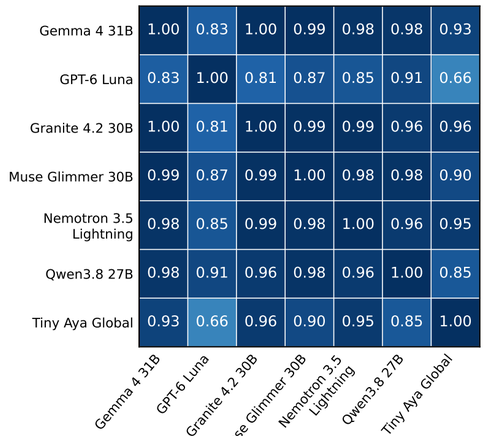



Chemical Patents | Spearman
6 languages per correlation

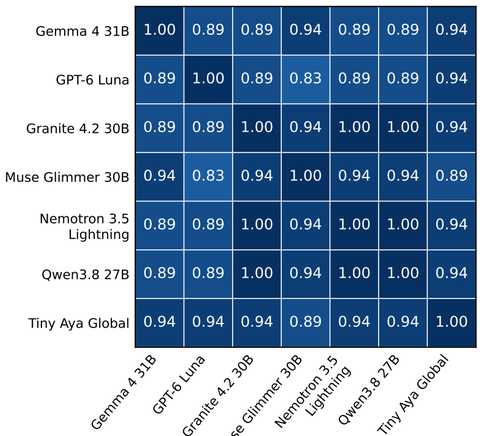

JRC Articles | Spearman
5 languages per correlation

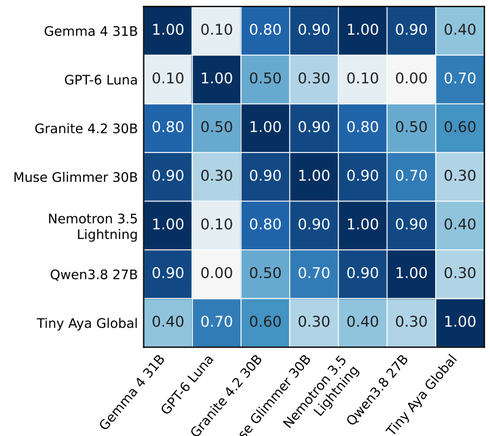

JRC Definitions | Spearman
5 languages per correlation

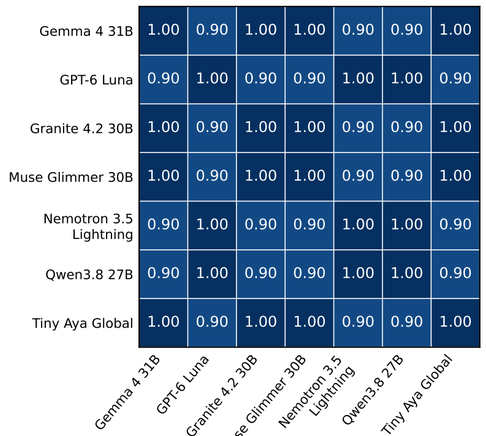

Each model pair is correlated across the same supported languages. First average partner directions within model/prompt, then average both prompts equally; no mixing metric scales or datasets.
General scores are shared; terminology uses Luna LLM-enriched annotations. All models and both prompts are required for each retained direction.
Partner sets may differ between languages. NA = constant or fewer than 3 observations. Small, dependent cohorts; row identities unverified; descriptive, not causal or significance evidence.