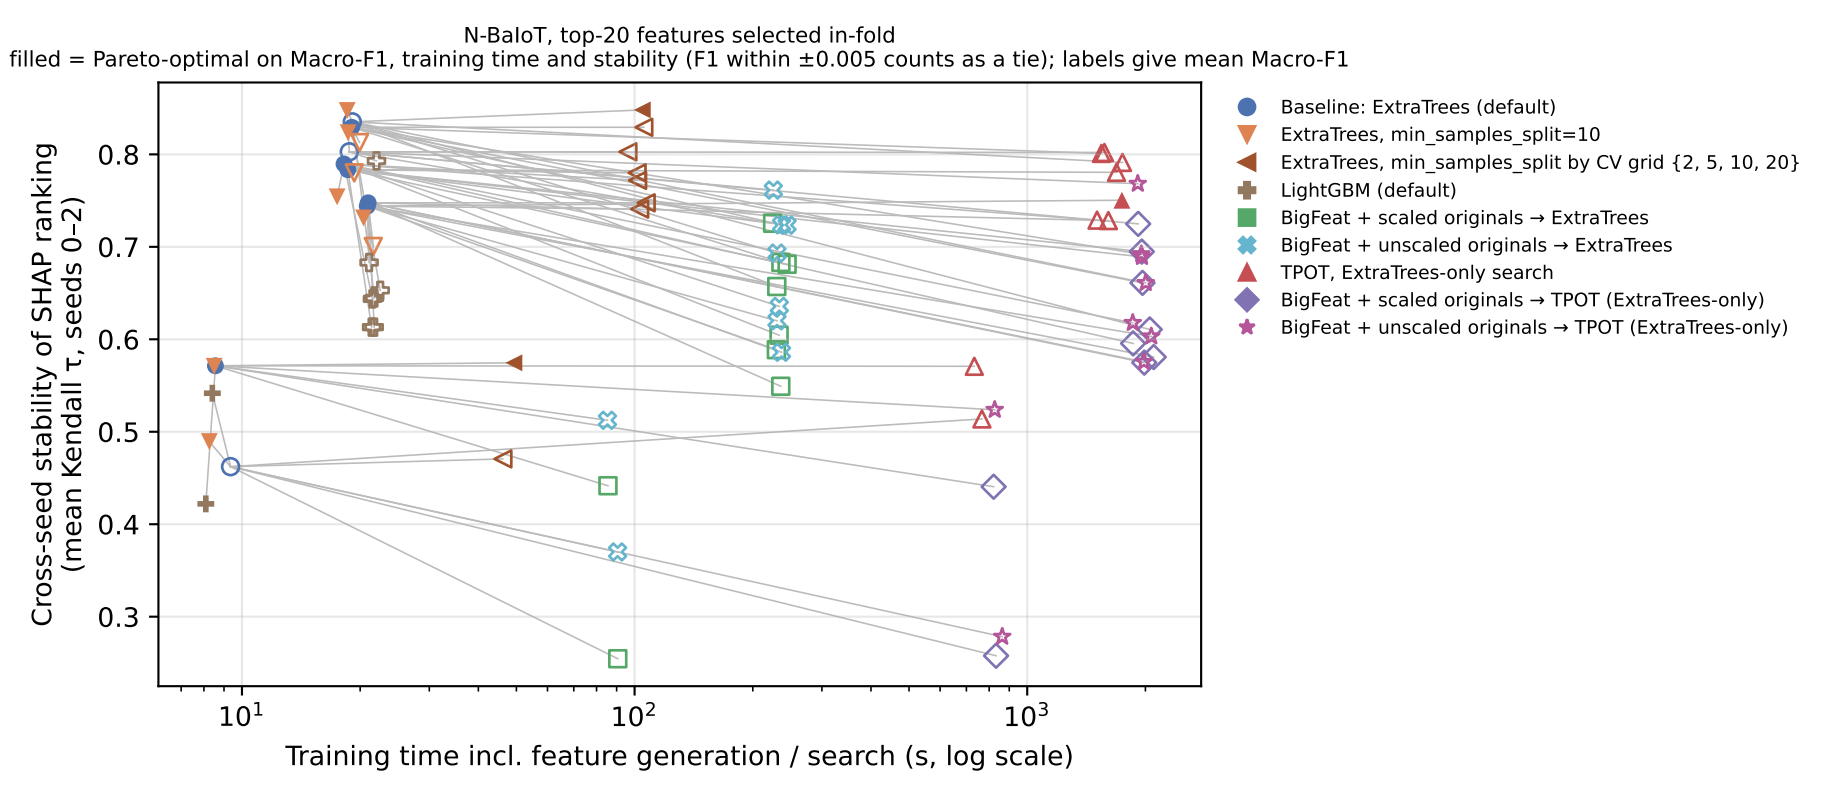
N-BaIoT, top-20 features selected in-fold
filled = Pareto-optimal on Macro-F1, training time and stability (F1 within ±0.005 counts as a tie); labels give mean Macro-F1
Cross-seed stability of SHAP ranking
(mean Kendall τ, seeds 0–2)
0.8
0.7
0.6
0.5
0.4
0.3
10^1
10^2
10^3
Training time incl. feature generation / search (s, log scale)
Baseline: ExtraTrees (default)
ExtraTrees, min_samples_split=10
ExtraTrees, min_samples_split by CV grid {2, 5, 10, 20}
LightGBM (default)
BigFeat + scaled originals → ExtraTrees
BigFeat + unscaled originals → ExtraTrees
TPOT, ExtraTrees-only search
BigFeat + scaled originals → TPOT (ExtraTrees-only)
BigFeat + unscaled originals → TPOT (ExtraTrees-only)