Duration: 5 m 5.468 s Start: Sep 08, 6:41:52.973 PM End: Sep 08, 6:46:58.441 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 1 SKIPPED - 0 SKIPPED - 0 SKIPPED - 3 5 40 50 60 40 50 60 40 50 60 Pass % 70 Pass % 70 30 Pass % 70 20 20 80 80 80 90 90 10 20 % 100 100

| Feature | | | Scenario | | | | Step | | | |
|---|-------------|---|----------|---|---|---|------|---|---|--|
| Name | Duration | T | P | F | S | T | P | F | S | |
| To be Verify the E2E Functionality in KBL website | 5 m 5.468 s | 1 | 0 | 1 | 0 | 5 | 1 | 1 | 3 | |

FAIL & SKIP SCENARIOS -- 3 --

| # | Feature Name | Scenario Name |
|---|---|---|
| 1 | To be Verify the E2E Functionality in KBL website | To Valiadte the listing Buy now functionaity for Guest user |


| TAG | | Scer | nario | | Feature | | | | |
|--------|---|------|-------|---|---------|---|---|---|--|
| Name | T | P | F | S | T | P | F | S | |
| @Case5 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |
| @E2E | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |

FEATURES SUMMARY -- 5 --



| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|-------------|
| 1 | To be Verify the E2E Functionality in KBL website | 1 | 0 | 1 | 0 | 5 m 5.468 s |


SCENARIOS SUMMARY -- 6

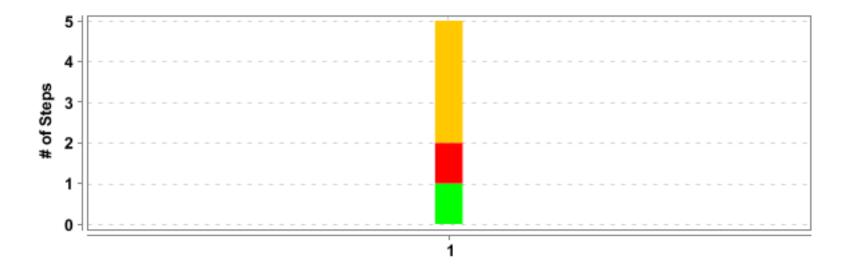


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|-------------|
| 1 | To be Verify the E2E Functionality in KBL website | To Valiadte the listing Buy now functionalty for Guest user | 5 | 1 | 1 | 3 | 5 m 5.465 s |

DETAILED SECTION -- 7 --

To be Verify the E2E Functionality in KBL website

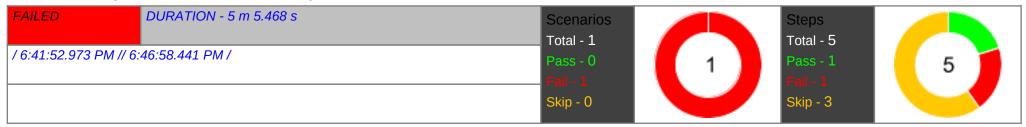

To Valiadte the listing Buy now functionaity for Guest user

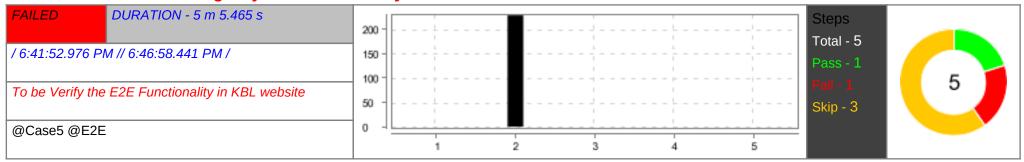

| # | Step / Hook Details | Status | Duration |
|---|--|--------|--------------|
| 1 | Given User open the Home page | PASSED | 0.053 s |
| 2 | When User go to the listing page | FAILED | 3 m 48.436 s |
| | org.openqa.selenium.TimeoutException: java.util.concurrent.TimeoutException Build info: version: '4.8.2', revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_381' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [9bc830c4b4f0756a8aae0a20305e7ac0, findElement {using=xpath, value=/linput[@id='min-price-68bed2d87a4b2']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 139.0.7258.157, chrome: {chromedriverVersion: 139.0.7258.154 (9e0d6b2b47f, userDataDir: C:\Windows\SystemTemp\scope\}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62747}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:62747/devtoo, se:cdpVersion: 139.0.7258.157, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 9bc830c4b4f0756a8aae0a20305e7ac0 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:65) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\sapply\s0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\sandFinally\s1(Filter.java:56) at org.openqa.selenium.remote.http.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\sapply\s0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\sapply\s0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\sandFinally\sspace1(Filter.java:56) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) | | |
| | at com.sun.proxy.\$Proxy39.clear(Unknown Source) | | |
| | at org.steps.KBLSteps.user_go_to_the_listing_page(KBLSteps.java:643) | | |
| | at ?.User go to the listing page(file:///E:/KBL-Project/KBL-Business%20flow/src/test/resources/Feature/E2E.feature:55) | | |
| | Caused by: java.util.concurrent.TimeoutException | | |
| | at java.util.concurrent.CompletableFuture.timedGet(CompletableFuture.java:1784) | | |
| | at java.util.concurrent.CompletableFuture.get(CompletableFuture.java:1928) | | |
| | at org.asynchttpclient.netty.NettyResponseFuture.get(NettyResponseFuture.java:206) | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:59) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) | | |
| | at com.sun.proxy.\$Proxy39.clear(Unknown Source) | | |
| | at org.steps.KBLSteps.user_go_to_the_listing_page(KBLSteps.java:643) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:234) | | |
| | at org.junit.internal.runners.statements.RunAfters.evaluate(RunAfters.java:27) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:520) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:748) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:443) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) | | |
| | * Not displayable characters are replaced by '?'. | | |
| 3 | And verify the Buy now CTA functionality | SKIPPED | 0.001 s |
| 4 | And verify the Compare now option in listing page | SKIPPED | 0.000 s |

DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|-------------|
| 5 | Then verify the added compare products in comparision page | SKIPPED | 0.000 s |
| | AFTER - org.steps.KBLHooks.End(io.cucumber.java.Scenario) | FAILED | 1 m 5.602 s |
| | org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.8.2', revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_381' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [9bc830c4b4f0756a8aae0a20305e7ac0, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 139.0.7258.157, chrome: {chromedriverVersion: 139.0.7258.154 (9e0d6b2b47f, userDataDir: C:\Windows\SystemTemp\scope}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62747}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:62747/devtoo, se:cdpVersion: 139.0.7258.157, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: | | |
| | true} Session ID: 9bc830c4b4f0756a8aae0a20305e7ac0 | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) | | |
| | at org.steps.KBLHooks.End(KBLHooks.java:44) | | |
| | Caused by: java.io.UncheckedIOException: java.io.IOException: An existing connection was forcibly closed by the remote host | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) | | |
| | at org.steps.KBLHooks.End(KBLHooks.java:44) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:110) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:234) | | |
| | at org.junit.internal.runners.statements.RunAfters.evaluate(RunAfters.java:27) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:520) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:748) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:443) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) | | |
| | Caused by: java.io.IOException: An existing connection was forcibly closed by the remote host | | |
| | at sun.nio.ch.SocketDispatcher.read0(Native Method) | | |
| | at sun.nio.ch.SocketDispatcher.read(SocketDispatcher.java:43) | | |
| | at sun.nio.ch.IOUtil.readIntoNativeBuffer(IOUtil.java:223) | | |
| | at sun.nio.ch.IOUtil.read(IOUtil.java:192) | | |
| | at sun.nio.ch.SocketChannelImpl.read(SocketChannelImpl.java:378) | | |
| | at io.netty.buffer.PooledByteBuf.setBytes(PooledByteBuf.java:256) | | |
| | at io.netty.buffer.AbstractByteBuf.writeBytes(AbstractByteBuf.java:1132) | | |
| | at io.netty.channel.socket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357) | | |

DETAILED SECTION -- 12 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:788) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) | | |
| | at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) | | |
| | at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) | | |
| | at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) | | |
| | at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) | | |
| | at java.lang.Thread.run(Thread.java:750) | | |