

# **NAAN MUDHALVAN SCHEME - 2023**

**Wanderlust: A Personalized Travel Planning and Tracking App**

**SUBMITTED BY**

**TEAM LEADER:**

**T.MOHANRAJA – ASMSU2022010814 (NAANMUDHALVAN ID)**

**TEAM MEMBER:**

**C.MATHAN– ASMSU2022010811 (NAANMUDHALVAN ID)**

**S.MICHAEL FERNANDO – ASMSU2022010812 (NAANMUDHALVAN ID)**

**U.MOHAMEDTHAMEEM ANSARI – ASMSU2022010813 (NAANMUDHALVAN ID)**

**DEPARTMENT OF COMPUTER SCIENCE**

**ADITANAR COLLEGE OF ARTS AND SCIENCE**

**VIRAPANDIANPATNAM – 628216**

# **Project Report Template**

## **1. INTRODUCTION**


### **1.1)Overview :-**

In simple words, Travel is the moving of objects or people between two geographical locations of relative distance. At times Introduction to Travel can also include movements between different destinations with short stop over's on the way to the final destination to be reached. By the way, Today's Adventurers and Nature lovers are undertake travel in search for new grounds for adventure activities and nature surrounding environments. A lot of Travel is usually undertaken as tourists who look for leisure, vacations and holidays. This usually acts as the base for boosting up the Tourism industry. According to this generation travel. People must need an application or websites to search about their travelling places to gain information about the new places where the people not gone to the places before. So that the application was created.


## 1.2) Purpose :-

- Travelling is used to feel the Emotions of the World.
- Modern life tends to be busy and pressured with little time for yourself.
- Can experience a new places information that you have not gone as before
- Many tourism trips are taken where the main purpose is relaxation, rest and enjoyment.
- Travelling can improve your communications skills.
- Travelling can help you make Memorable Memories.

## 2.1)Empathy Map:-

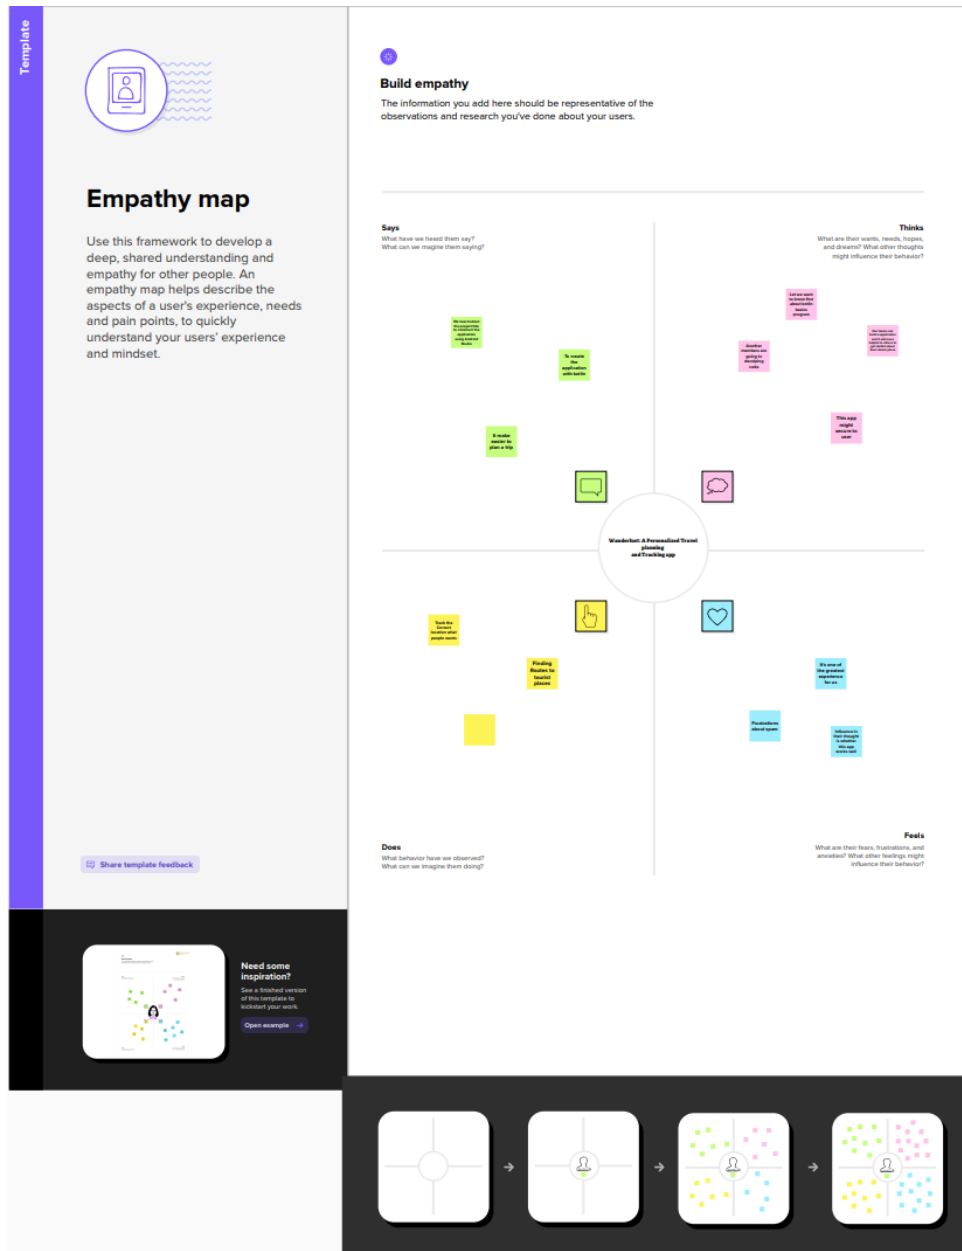

## 2.2)Brainstorming Map:-

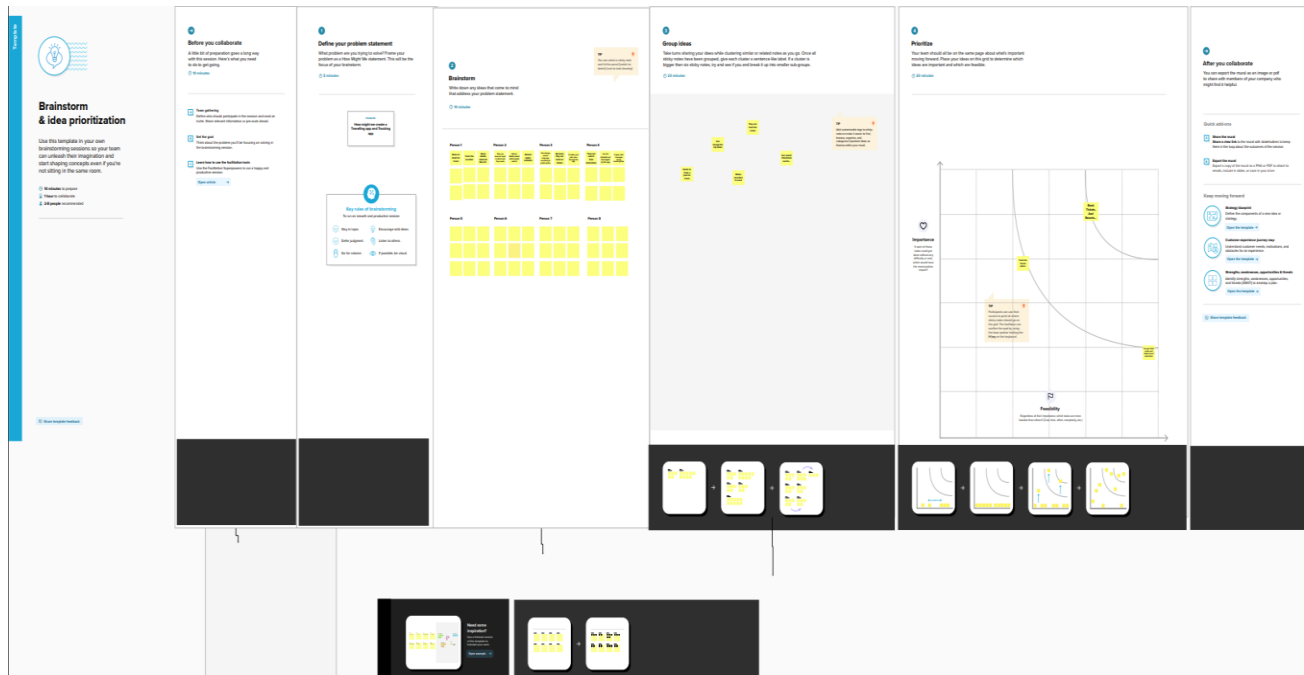

### 3. Result :-



*Register*

Username

Mohan

Email

studentraja28@gmail.com

Password

.....

Register

Have an account? [Log in](#)



# Login

Username

Mohan

Password

.....

Login

[Register](#)


[Forget password?](#)

# *Wanderlust Travel*



## **Bali**

Super saver pack with less than 100000 Rupees  
7 Days / 1 Person

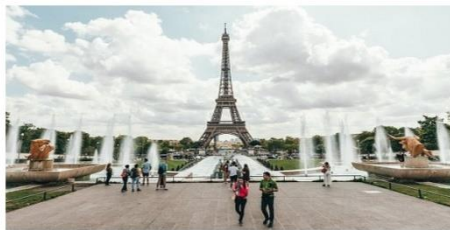

## **Paris**

Super saver pack with less than 100000 Rupees  
7 Days / 1 Person



## **Singapore**

Super saver pack with less than 100000 Rupees  
7 Days / 1 Person



## **ADVANTAGES:-**

1. Breaking from this routine helps you **reset and relax**
2. Getting out of your comfort zone and you can gain new information about new places through this app

## **DISADVANTAGES:-**

- Unexpected **costs and emergencies.**
- Not being able to exercise regularly.

## **5.Application:-**

This section should include **a clear and brief description about your Travelling procedures**. One important purpose of this section is to convince the customer that your work is valid. Here, customers can get information about their dream places.

## **6.Conclusion :-**

If an app is being built primarily for the Android platform, then using Travelling app is an easy choice. Because of Google's widespread adoption, any app based on Travelling Principles is going to feel you're your native app.

## **7. Future Scope:-**

After introduction of Further Travel planning Apps, It become one of the most wanted App. The Android OS is capable of execution of High-Quality. The Enhancement of future scope will made efficient booking services and apps that will enable the tourists to create versatile itineraries with reasonable price. The Mobile Application can be accessed virtually from Remote Place with no requirement of additional Hardware which result in faster downloading and good user interface along with increase in number of user. The Mobile App are on the Best way to move forward as the 90% of Travelling Information application very efficiently. Travelling app will suggest good worldwide places for such tour circumstances; they can search a places from any part of the Globe.

## 8.Appendix

### Source code :-

<https://github.com/smartinternz02/Owl-M-A-Material-Design-Study-App>

### CODE :-

#### User.kt

```
package com.example.travelapp

import androidx.room.ColumnInfo
import androidx.room.Entity
import androidx.room.PrimaryKey

@Entity(tableName = "user_table")
data class User(
    @PrimaryKey(autoGenerate = true) val id: Int?,
    @ColumnInfo(name = "first_name") val firstName: String?,
    @ColumnInfo(name = "last_name") val lastName: String?,
    @ColumnInfo(name = "email") val email: String?,
    @ColumnInfo(name = "password") val password: String?,
)
```

#### UserDao.kt

```
package com.example.travelapp

import androidx.room.*

@Dao
interface UserDao {

    @Query("SELECT * FROM user_table WHERE email = :email")
    suspend fun getUserByEmail(email: String): User?

    @Insert(onConflict = OnConflictStrategy.REPLACE)
    suspend fun insertUser(user: User)

    @Update
    suspend fun updateUser(user: User)

    @Delete
```

```
suspend fun deleteUser(user: User)
}
```

## UserDatabase.kt

```
package com.example.travelapp

import android.content.Context
import androidx.room.Database
import androidx.room.Room
import androidx.room.RoomDatabase

@Database(entities = [User::class], version = 1)
abstract class UserDatabase : RoomDatabase() {

    abstract fun userDao(): UserDao

    companion object {

        @Volatile
        private var instance: UserDatabase? = null

        fun getDatabase(context: Context): UserDatabase {
            return instance ?: synchronized(this) {
                val newInstance = Room.databaseBuilder(
                    context.applicationContext,
                    UserDatabase::class.java,
                    "user_database"
                ).build()
                instance = newInstance
            }
        }
    }
}
```

## Userdatabasehelper.kt

```
package com.example.travelapp

import android.annotation.SuppressLint
import android.content.ContentValues
import android.content.Context
import android.database.Cursor
import android.database.sqlite.SQLiteDatabase
import android.database.sqlite.SQLiteOpenHelper

class UserDatabaseHelper(context: Context) :
    SQLiteOpenHelper(context, DATABASE_NAME, null, DATABASE_VERSION) {

    companion object {
        private const val DATABASE_VERSION = 1
        private const val DATABASE_NAME = "UserDatabase.db"

        private const val TABLE_NAME = "user_table"
        private const val COLUMN_ID = "id"
        private const val COLUMN_FIRST_NAME = "first_name"
        private const val COLUMN_LAST_NAME = "last_name"
    }
}
```

```

private const val COLUMN_EMAIL = "email"
private const val COLUMN_PASSWORD = "password"
}

override fun onCreate(db: SQLiteDatabase?) {
    val createTable = "CREATE TABLE $TABLE_NAME (" +
        "$COLUMN_ID INTEGER PRIMARY KEY AUTOINCREMENT, " +
        "$COLUMN_FIRST_NAME TEXT, " +
        "$COLUMN_LAST_NAME TEXT, " +
        "$COLUMN_EMAIL TEXT, " +
        "$COLUMN_PASSWORD TEXT" +
        ")"
    db?.execSQL(createTable)
}

override fun onUpgrade(db: SQLiteDatabase?, oldVersion: Int, newVersion: Int) {
    db?.execSQL("DROP TABLE IF EXISTS $TABLE_NAME")
    onCreate(db)
}

fun insertUser(user: User) {
    val db = writableDatabase
    val values = ContentValues()
    values.put(COLUMN_FIRST_NAME, user.firstName)
    values.put(COLUMN_LAST_NAME, user.lastName)
    values.put(COLUMN_EMAIL, user.email)
    values.put(COLUMN_PASSWORD, user.password)
    db.insert(TABLE_NAME, null, values)
    db.close()
}

@SuppressLint("Range")
fun getUserByUsername(username: String): User? {
    val db = readableDatabase
    val cursor: Cursor = db.rawQuery("SELECT * FROM $TABLE_NAME WHERE $COLUMN_FIRST_NAME = ?", arrayOf(username))
    var user: User? = null
    if (cursor.moveToFirst()) {
        user = User(
            id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
            firstName = cursor.getString(cursor.getColumnIndex(COLUMN_FIRST_NAME)),
            lastName = cursor.getString(cursor.getColumnIndex(COLUMN_LAST_NAME)),
            email = cursor.getString(cursor.getColumnIndex(COLUMN_EMAIL)),
            password = cursor.getString(cursor.getColumnIndex(COLUMN_PASSWORD)),
        )
        cursor.close()
        db.close()
    }
    return user
}

@SuppressLint("Range")
fun getUserById(id: Int): User? {
    val db = readableDatabase
    val cursor: Cursor = db.rawQuery("SELECT * FROM $TABLE_NAME WHERE $COLUMN_ID = ?", arrayOf(id.toString()))
    var user: User? = null
    if (cursor.moveToFirst()) {
        user = User(
            id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
            firstName = cursor.getString(cursor.getColumnIndex(COLUMN_FIRST_NAME)),
            lastName = cursor.getString(cursor.getColumnIndex(COLUMN_LAST_NAME)),
            email = cursor.getString(cursor.getColumnIndex(COLUMN_EMAIL)),
        )
    }
}

```

```

password = cursor.getString(cursor.getColumnIndex(COLUMN_PASSWORD)) ,
)
    }
    cursor.close()
    db.close()
return user
    }

@SuppressLint("Range")
fun getAllUsers(): List<User> {
val users = mutableListOf<User>()
val db = readableDatabase
val cursor: Cursor = db.rawQuery("SELECT * FROM $TABLE_NAME", null)
if (cursor.moveToFirst()) {
do {
val user = User(
id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)) ,
firstName = cursor.getString(cursor.getColumnIndex(COLUMN_FIRST_NAME)) ,
lastName = cursor.getString(cursor.getColumnIndex(COLUMN_LAST_NAME)) ,
email = cursor.getString(cursor.getColumnIndex(COLUMN_EMAIL)) ,
password = cursor.getString(cursor.getColumnIndex(COLUMN_PASSWORD)) ,
)
        users.add(user)
    } while (cursor.moveToNext())
    }
    cursor.close()
    db.close()
return users
    }
}

```

## LoginActivity.kt

```

package com.example.travelapp

import android.content.Context
import android.content.Intent
import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.material.*
import androidx.compose.runtime.*
import androidx.compose.ui.Alignment
import androidx.compose.ui.Modifier
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.layout.ContentScale
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.text.input.PasswordVisualTransformation
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import androidx.core.content.ContextCompat

```

```

class LoginActivity : ComponentActivity() {
private lateinit var databaseHelper: UserDatabaseHelper
override fun onCreate(savedInstanceState: Bundle?) {
super.onCreate(savedInstanceState)
    databaseHelper = UserDatabaseHelper(this)
    setContentView {
LoginScreen(this, databaseHelper)
}
}
}
@Composable
fun LoginScreen(context: Context, databaseHelper: UserDatabaseHelper) {

var username by remember { mutableStateOf("") }
var password by remember { mutableStateOf("") }
var error by remember { mutableStateOf("") }

Column(
modifier = Modifier.fillMaxSize().background(Color.White),
horizontalAlignment = Alignment.CenterHorizontally,
verticalArrangement = Arrangement.Center
) {

Image(painterResource(id = R.drawable.trav), contentDescription = "")

    Text(
fontSize = 36.sp,
fontWeight = FontWeight.ExtraBold,
fontFamily = FontFamily.Cursive,
text = "Login"
)

    Spacer(modifier = Modifier.height(10.dp))

    TextField(
value = username,
onValueChange = { username = it },
label = { Text("Username") },
modifier = Modifier.padding(10.dp)
        .width(280.dp)
    )

    TextField(
value = password,
onValueChange = { password = it },
label = { Text("Password") },
visualTransformation = PasswordVisualTransformation(),
modifier = Modifier.padding(10.dp)
        .width(280.dp)
    )

    if (error.isNotEmpty()) {
        Text(
text = error,
color = MaterialTheme.colors.error,
modifier = Modifier.padding(vertical = 16.dp)
        )
    }

    Button(
onClick = {
if (username.isNotEmpty() && password.isNotEmpty()) {
val user = databaseHelper.getUserByUsername(username)

```



```

if (user != null && user.password == password) {
    error = "Successfully log in"
context.startActivity(
    Intent(
        context,
MainActivity::class.java
    )
)
//onLoginSuccess()
}
else {
    error = "Invalid username or password"
}

    } else {
        error = "Please fill all fields"
    }
},
modifier = Modifier.padding(top = 16.dp)
) {
Text(text = "Login")
}
Row {
    TextButton(onClick = {context.startActivity(
        Intent(
            context,
RegisterActivity::class.java
        )
    )})
    { Text(text = "Register") }
    TextButton(onClick = {
    })

    {
        Spacer(modifier = Modifier.width(60.dp))
        Text(text = "Forget password?")
    }

    }
}

private fun startMainPage(context: Context) {
    val intent = Intent(context, MainActivity::class.java)
    ContextCompat.startActivity(context, intent, null)
}

```

## RegisterActivity.kt

```

package com.example.travelapp

import android.content.Context
import android.content.Intent
import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.material.*
import androidx.compose.runtime.*
import androidx.compose.ui.Alignment
import androidx.compose.ui.Modifier
import androidx.compose.ui.graphics.Color

```

```

import androidx.compose.ui.layout.ContentScale
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.text.input.PasswordVisualTransformation
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import androidx.core.content.ContextCompat

class RegisterActivity : ComponentActivity() {
    private lateinit var databaseHelper: UserDatabaseHelper
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        databaseHelper = UserDatabaseHelper(this)
        setContent {
            RegistrationScreen(this, databaseHelper)
        }
    }
}

@Composable
fun RegistrationScreen(context: Context, databaseHelper: UserDatabaseHelper) {

    var username by remember { mutableStateOf("") }
    var password by remember { mutableStateOf("") }
    var email by remember { mutableStateOf("") }
    var error by remember { mutableStateOf("") }

    Column(
        modifier = Modifier.fillMaxSize().background(Color.White),
        horizontalAlignment = Alignment.CenterHorizontally,
        verticalArrangement = Arrangement.Center
    ) {

        Image(painterResource(id = R.drawable.tra), contentDescription = "")

        Text(
            fontSize = 36.sp,
            fontWeight = FontWeight.ExtraBold,
            fontFamily = FontFamily.Cursive,
            text = "Register"
        )

        Spacer(modifier = Modifier.height(10.dp))
        TextField(
            value = username,
            onValueChange = { username = it },
            label = { Text("Username") },
            modifier = Modifier
                .padding(10.dp)
                .width(280.dp)
        )

        TextField(
            value = email,
            onValueChange = { email = it },
            label = { Text("Email") },
            modifier = Modifier
                .padding(10.dp)
                .width(280.dp)
        )
    }
}

```

```

        TextField(
            value = password,
            onValueChange = { password = it },
            label = { Text("Password") },
            visualTransformation = PasswordVisualTransformation(),
            modifier = Modifier
                .padding(10.dp)
                .width(280.dp)
        )

        if (error.isNotEmpty()) {
            Text(
                text = error,
                color = MaterialTheme.colors.error,
                modifier = Modifier.padding(vertical = 16.dp)
            )
        }

        Button(
            onClick = {
                if (username.isNotEmpty() && password.isNotEmpty() && email.isNotEmpty()) {
                    val user = User(
                        id = null,
                        firstName = username,
                        lastName = null,
                        email = email,
                        password = password
                    )
                    databaseHelper.insertUser(user)
                    error = "User registered successfully"
                    // Start LoginActivity using the current context
                    context.startActivity(
                        Intent(
                            context,
                            LoginActivity::class.java
                        )
                    )
                } else {
                    error = "Please fill all fields"
                }
            },
            modifier = Modifier.padding(top = 16.dp)
        ) {
            Text(text = "Register")
        }
        Spacer(modifier = Modifier.width(10.dp))
        Spacer(modifier = Modifier.height(10.dp))

        Row() {
            Text(
                modifier = Modifier.padding(top = 14.dp), text = "Have an account?"
            )
            TextButton(onClick = {
                context.startActivity(
                    Intent(
                        context,
                        LoginActivity::class.java
                    )
                )
            })
        }
    })
}

```

```

{
    Spacer(modifier = Modifier.width(10.dp))
    Text(text = "Log in")
}

}

}

}

private fun startLoginActivity(context: Context) {
    val intent = Intent(context, LoginActivity::class.java)
    ContextCompat.startActivity(context, intent, null)
}

```

## MainActivity.kt

```

package com.example.travelapp

import android.content.Context
import android.content.Intent
import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.clickable
import androidx.compose.foundation.layout.*
import androidx.compose.foundation.rememberScrollState
import androidx.compose.foundation.verticalScroll
import androidx.compose.material.Card
import androidx.compose.material.Text
import androidx.compose.runtime.Composable
import androidx.compose.ui.Alignment
import androidx.compose.ui.Modifier
import androidx.compose.ui.draw.scale
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.res.stringResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.text.style.TextAlign
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp

class MainActivity : ComponentActivity() {
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContent {
            TravelApp(this)
        }
    }

    @Composable
    fun TravelApp(context: Context) {
        Column(
            modifier = Modifier
                .padding(20.dp)
                .verticalScroll(rememberScrollState())

        ) {
            Text(

```

```

fontSize = 40.sp,
color = Color(android.graphics.Color.rgb(120, 40, 251)),
fontFamily = FontFamily.Cursive,
text = "Wanderlust Travel"
)

        Spacer(modifier = Modifier.height(20.dp))

// 01
Card(
    modifier = Modifier
        .fillMaxWidth()
        .height(250.dp)
        .clickable {
context.startActivity(
                    Intent(context, BaliActivity::class.java)

                )
},
    elevation = 8.dp
)
{
    Column(
        horizontalAlignment = Alignment.CenterHorizontally
    ) {
        Image(
            painterResource(id = R.drawable.bali), contentDescription = "",
            modifier = Modifier
                .height(150.dp)
                .scale(scaleX = 1.2F, scaleY = 1F)
        )

        Text(
            text = stringResource(id = R.string.place_1),
            fontSize = 18.sp
        )

        Text(
            text = stringResource(id = R.string.description),
            fontWeight = FontWeight.Light,
            fontSize = 16.sp,
            textAlign = TextAlign.Center,
        )

        Text(
            text = stringResource(id = R.string.plan), color = Color.Gray,
            fontSize = 16.sp
        )
    }

    Spacer(modifier = Modifier.height(20.dp))

//02
Card(
    modifier = Modifier
        .fillMaxWidth()
        .height(250.dp)
        .clickable {
context.startActivity(
                    Intent(context, ParisActivity::class.java)

```

```

        )
    },
    elevation = 8.dp
    )
    {
        Column(
            horizontalAlignment = Alignment.CenterHorizontally
        ) {
            Image(
                painterResource(id = R.drawable.paris), contentDescription = "",
                modifier = Modifier
                    .height(150.dp)
                    .scale(scaleX = 1.2F, scaleY = 1F)
            )

            Text(
                text = stringResource(id = R.string.place_2),
                fontSize = 18.sp
            )

            Text(
                text = stringResource(id = R.string.description),
                fontWeight = FontWeight.Light,
                fontSize = 16.sp,
                textAlign = TextAlign.Center,
            )

            Text(
                text = stringResource(id = R.string.plan), color = Color.Gray,
                fontSize = 16.sp
            )
        }
    }

    Spacer(modifier = Modifier.height(20.dp))

    //03
    Card(
        modifier = Modifier
            .fillMaxWidth()
            .height(250.dp)
            .clickable {
                context.startActivity(
                    Intent(context, SingaporeActivity::class.java)
                )
            },
        elevation = 8.dp
    )
    {
        Column(
            horizontalAlignment = Alignment.CenterHorizontally
        ) {
            Image(
                painterResource(id = R.drawable.singapore), contentDescription = "",
                modifier = Modifier
                    .height(150.dp)
                    .scale(scaleX = 1.2F, scaleY = 1F)
            )

            Text(

```

```

text = stringResource(id = R.string.place_3),
fontSize = 18.sp
)

Text(
text = stringResource(id = R.string.description),
fontWeight = FontWeight.Light,
fontSize = 16.sp,
textAlign = TextAlign.Center,
)

                Text(
text = stringResource(id = R.string.plan), color = Color.Gray,
fontSize = 16.sp
                )
        }

    }

Spacer(modifier = Modifier.height(20.dp))
}
}
}

```

## BaliActivity.kt

```

package com.example.travelapp

import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.foundation.rememberScrollState
import androidx.compose.foundation.verticalScroll
import androidx.compose.material.MaterialTheme
import androidx.compose.material.Surface
import androidx.compose.material.Text
import androidx.compose.runtime.Composable
import androidx.compose.ui.Modifier
import androidx.compose.ui.draw.scale
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.res.stringResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import com.example.travelapp.ui.theme.TravelAppTheme

class BaliActivity : ComponentActivity() {
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContent {
            TravelAppTheme {
                // A surface container using the 'background' color from the theme
                Surface(
                    modifier = Modifier.fillMaxSize(),
                    color = MaterialTheme.colors.background
                ) {

```

```

PlaceOne()
}

    }

}

}

@Composable
fun PlaceOne() {
    Column(modifier = Modifier.background(color = Color.White)
        .padding(20.dp)
        .verticalScroll(rememberScrollState()))
    {
        Text(
            fontSize = 40.sp,
            color = Color(android.graphics.Color.rgb(120, 40, 251)),
            fontFamily = FontFamily.Cursive,
            text = stringResource(id = R.string.place_1),
        )
        Image(
            painterResource(id = R.drawable.bali), contentDescription = "",
            modifier = Modifier
                .padding(16.dp)
                .fillMaxWidth()
                .height(200.dp)
                .scale(scaleX = 1.2F, scaleY = 1F)
        )
        Text(
            color=Color.Black,
            text = "Day 1: Arrival and Relaxation\n" +
                "Arrive in Bali and check into your hotel or accommodation.\n" +
                "Spend the day relaxing and getting acclimated to the island.\n" +
                "If you have time, explore the nearby area or head to the beach.\n" +
                "\n" +
                "Day 2: Ubud Tour\n" +
                "Start your day early and head to Ubud, a cultural and artistic hub in Bali.\n" +
                "Visit the Monkey Forest and the Ubud Palace.\n" +
                "Take a tour of the Tegalalang Rice Terrace, a beautiful UNESCO World Heritage Site.\n" +
                "End your day with a traditional Balinese dance performance.\n" +
                "\n" +
                "Day 3: Temple Hopping\n" +
                "Visit some of Bali's most famous temples, such as Tanah Lot and Uluwatu.\n" +
                "Take in the stunning views of the ocean and cliffs.\n" +
                "Enjoy a sunset dinner at one of the many restaurants near the temples.\n" +
                "\n" +
                "Day 4: Waterfalls and Beaches\n" +
                "Take a day trip to Bali's beautiful waterfalls, such as Tegenungan or Gitgit.\n" +
                "Spend the afternoon at one of Bali's world-renowned beaches, like Seminyak or Nusa Dua.\n" +
                "\n" +
                "Day 5: Island Hopping\n" +
                "Take a day trip to one of Bali's neighboring islands, such as Nusa Lembongan or Gili Islands.\n" +
                "Snorkel or scuba dive in the clear waters and relax on the beach.\n" +
                "\n" +
                "Day 6: Cultural Activities\n" +
                "Visit a traditional Balinese village and learn about the island.\n" +

```



```

"\n" +
"Day 7: Departure\n" +
"Explore the surrounding area and take in the stunning sunset views.\n" +
"Have dinner at a local restaurant before returning to your accommodation."
)

}
}

```

## ParisActivity.kt

```

package com.example.travelapp

import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.foundation.rememberScrollState
import androidx.compose.foundation.verticalScroll
import androidx.compose.material.MaterialTheme
import androidx.compose.material.Surface
import androidx.compose.material.Text
import androidx.compose.runtime.Composable
import androidx.compose.ui.Modifier
import androidx.compose.ui.draw.scale
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.res.stringResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import com.example.travelapp.ui.theme.TravelAppTheme

class ParisActivity : ComponentActivity() {
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContent {
            TravelAppTheme {
                // A surface container using the 'background' color from the theme
                Surface(
                    modifier = Modifier.fillMaxSize(),
                    color = MaterialTheme.colors.background
                ) {
                    Greeting()
                }
            }
        }
    }

    @Composable
    fun Greeting() {
        Column(
            modifier = Modifier.background(color = Color.White)
                .padding(20.dp)
                .verticalScroll(rememberScrollState())
        )
    }
}

```

```

    ) {
Text(
fontSize = 40.sp,
color = Color(android.graphics.Color.rgb(120, 40, 251)),
fontFamily = FontFamily.Cursive,
text = stringResource(id = R.string.place_2),
)
Image(
painterResource(id = R.drawable.paris), contentDescription = "",
modifier = Modifier
    .padding(16.dp)
    .fillMaxWidth()
    .height(200.dp)
    .scale(scaleX = 1.2F, scaleY = 1F)
)
Text(
color=Color.Black,
text = "Day 1: Arrival and Introduction\n" +

"Check into your accommodation and freshen up\n" +
"Take a stroll around the neighborhood to get acquainted\n" +
"Visit the Eiffel Tower, preferably in the evening when it is lit up\n" +
"Have a relaxing dinner at a nearby restaurant\n" +

"\n" +
"Day 2: Art and History\n" +

"Visit the Louvre Museum to see some of the world's most famous art pieces\n" +
"Stroll through the Tuileries Garden and the Place de la Concorde\n" +
"Visit the Orsay Museum, which houses a large collection of impressionist art\n" +
"Have dinner at a local French restaurant\n" +

"\n" +
"Day 3: French Culture and Food\n" +

"Visit the Montmartre neighborhood to see the famous Basilique du Sacré-Cœur and Place du
Tertre\n" +
"Explore the historic neighborhood of Le Marais\n" +
"Try some delicious French pastries at a local bakery\n" +
"Have dinner at a brasserie to taste some classic French cuisine\n" +

"\n" +
"Day 4: Architecture and Gardens\n" +

"Visit the Palace of Versailles, a UNESCO World Heritage site, and explore its beautiful
gardens\n" +
"Walk along the Champs-Élysées and stop at the Arc de Triomphe\n" +
"Visit the Sainte-Chapelle, a beautiful Gothic chapel with stunning stained-glass
windows\n" +
"Have dinner at a local restaurant in the 7th arrondissement\n" +

"\n" +
"Day 5: Shopping and Sightseeing\n" +

"Visit the Notre-Dame Cathedral and climb up to the top for a stunning view of the
city\n" +
"Explore the Latin Quarter and visit the Panthéon\n" +
"Go shopping at the famous Galeries Lafayette or Printemps department stores\n" +
"Have dinner at a local bistro\n" +

"\n" +
"Day 6: Parisian Parks and Museums\n" +

```

```

"Visit the Musée Rodin and explore its beautiful gardens\n" +
"Stroll through the Luxembourg Gardens and visit the Luxembourg Palace\n" +
"Visit the Centre Pompidou, a modern art museum in the Marais neighborhood\n" +
"Have dinner at a local restaurant in the Latin Quarter\n" +
"\n" +
"Day 7: River Cruise and Farewell\n" +

"Take a boat cruise along the Seine River to see the city from a different perspective\n"
+
"Visit the Musée de l'Orangerie, which houses Monet's famous water lilies paintings\n" +
"Have a farewell dinner at a Michelin-starred restaurant"
)
}
}

```

## SingaporeActivity.kt

```

package com.example.travelapp

import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.foundation.rememberScrollState
import androidx.compose.foundation.verticalScroll
import androidx.compose.material.MaterialTheme
import androidx.compose.material.Surface
import androidx.compose.material.Text
import androidx.compose.runtime.Composable
import androidx.compose.ui.Modifier
import androidx.compose.ui.draw.scale
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.res.stringResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import com.example.travelapp.ui.theme.TravelAppTheme

class SingaporeActivity : ComponentActivity() {
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContent {
            TravelAppTheme {
                // A surface container using the 'background' color from the theme
                Surface(
                    modifier = Modifier.fillMaxSize(),
                    color = MaterialTheme.colors.background
                ) {
                    Greeting2()
                }
            }
        }
    }

    @Composable
    fun Greeting2() {

```

```

Column(
    modifier = Modifier.background(color = Color.White)
        .padding(20.dp)
        .verticalScroll(rememberScrollState())
    ) {
    Text(
        fontSize = 40.sp,
        color = Color(android.graphics.Color.rgb(120, 40, 251)),
        fontFamily = FontFamily.Cursive,
        text = stringResource(id = R.string.place_3),
    )
    Image(
        painterResource(id = R.drawable.singapore), contentDescription = "",
        modifier = Modifier
            .padding(16.dp)
            .fillMaxWidth()
            .height(200.dp)
            .scale(scaleX = 1.2F, scaleY = 1F)
    )
    Text(
        color = Color.Black,
        text = "Day 1:\n" +
        "Morning: Visit Gardens by the Bay and marvel at the Supertree Grove and the Flower Dome
        and Cloud Forest conservatories.\n" +
        "Afternoon: Explore the Marina Bay Sands complex, which includes a casino, luxury
        shopping mall, and observation deck with a stunning view of the city.\n" +
        "\n" +
        "Day 2:\n" +
        "Morning: Explore the historic district of Chinatown, including the Buddha Tooth Relic
        Temple and Museum and the Sri Mariamman Temple.\n" +
        "Afternoon: Visit the nearby Clarke Quay for lunch and to explore its waterfront
        restaurants, bars, and shops.\n" +
        "\n" +
        "Day 3:\n" +
        "Morning: Take a tour of the UNESCO-listed Botanic Gardens, one of the world's most
        famous and significant tropical gardens.\n" +
        "Afternoon: Head over to the National Museum of Singapore, which houses a vast collection
        of historical and cultural artifacts.\n" +
        "\n" +
        "Day 4:\n" +
        "Morning: Visit the Singapore Zoo and admire the wildlife, including orangutans, tigers,
        and elephants.\n" +
        "Afternoon: Head over to Sentosa Island and relax at one of its many beaches or try some
        of the many attractions such as Universal Studios Singapore or Adventure Cove
        Waterpark.\n" +
        "\n" +
        "Day 5:\n" +
        "Morning: Go on a nature walk at MacRitchie Reservoir, which offers hiking trails and
        stunning views of the city skyline.\n" +
        "Afternoon: Visit Little India, a vibrant and colorful neighborhood, and explore the
        shops, temples, and food stalls.\n" +
        "\n" +
        "Day 6:\n" +
        "Morning: Explore the trendy neighborhood of Tiong Bahru, known for its hip cafes and
        boutiques, as well as its Art Deco architecture.\n" +

```

```

"Afternoon: Visit the National Gallery Singapore, which houses the largest public
collection of modern art in Singapore and Southeast Asia.\n" +
"\n" +
"Day 7:\n" +

"Morning: Take a day trip to the nearby island of Pulau Ubin, where you can rent a "
)
}
}

```

## AndroidManifest.kt

```

<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:tools="http://schemas.android.com/tools">

<application
    android:allowBackup="true"
    android:dataExtractionRules="@xml/data_extraction_rules"
    android:fullBackupContent="@xml/backup_rules"
    android:icon="@mipmap/ic_launcher"
    android:label="@string/app_name"
    android:supportsRtl="true"
    android:theme="@style/Theme.TravelApp"
    tools:targetApi="31">
    <activity
        android:name=".RegisterActivity"
        android:exported="false"
        android:label="RegisterActivity"
        android:theme="@style/Theme.TravelApp" />
    <activity
        android:name=".SingaporeActivity"
        android:exported="false"
        android:label="@string/title_activity_singapore"
        android:theme="@style/Theme.TravelApp" />
    <activity
        android:name=".ParisActivity"
        android:exported="false"
        android:label="@string/title_activity_paris"
        android:theme="@style/Theme.TravelApp" />
    <activity
        android:name=".BaliActivity"
        android:exported="false"
        android:label="@string/title_activity_bali"
        android:theme="@style/Theme.TravelApp" />
    <activity
        android:name=".MainActivity"
        android:exported="true"
        android:label="@string/app_name"
        android:theme="@style/Theme.TravelApp"/>
    <activity
        android:name=".LoginActivity"
        android:exported="true"
        android:label="@string/app_name"
        android:theme="@style/Theme.TravelApp">
        <intent-filter>
        <action android:name="android.intent.action.MAIN" />

        <category android:name="android.intent.category.LAUNCHER" />
        </intent-filter>
    </activity>
</application>

</manifest>

```

**THANK YOU**