# DAY 1 NOTES: HTML + CSS Basics

100 Days of Web | Mohd Haider Akhtar | Built: Personal Portfolio Page

## FLOW 1: How your page gets built

`index.html` structure (HTML) → `link tag` connects the CSS → `style.css` looks (CSS) → `Browser` reads + draws → `Your page` on screen

## FLOW 2: Daily Git ritual (keeps the streak alive)

`Write code` in VS Code → `git add .` pick the files → `git commit -m` save a snapshot → `git push` upload it → `GitHub` streak +1

## HTML CHEAT SHEET (skeleton + content)

| Tag | What it does |
|---|---|
| `<h1> to <h6>` | Headings. h1 is biggest |
| `<p>` | A paragraph of text |
| `<ul> <li>` | Bullet list and its items (**ol** = numbered) |
| `<a href="">` | A link to another page |
| `<div>` | Plain box to group things for styling |
| `<section id="">` | Page block. The id is a jump target (#about) |
| `<header> <nav> <footer>` | Top area, menu links, bottom area |
| `<head>` | Hidden info: title, CSS link, meta |
| `<body>` | Everything visible on the page |

Most tags open and close: `<p>text</p>`. Forget the closing tag and the layout breaks.

## CSS CHEAT SHEET (looks + layout)

`selector { property: value; }` **what** to style, then **how**.

| | |
|---|---|
| `p / .card / #about` | Selector by tag / class / id |
| `color, background-color` | Text color, background color |
| `padding / margin` | Space inside / outside the box |
| `display: flex; gap` | Put items in a row, with spacing |
| `border-radius` | Round the corners |
| `box-shadow` | Soft shadow under a card |
| `:hover` | Style only while mouse is over it |
| `@media (max-width:600px)` | Styles only on small (mobile) screens |

**BOX MODEL: every element is a box**

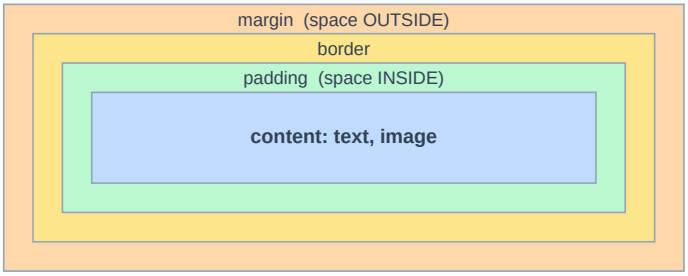


## LEARNING TRICKS

- **HTML = skeleton, CSS = skin.** Content goes in HTML, looks go in CSS.
- **Memory hook: P**adding = **I**nside, **M**argin = **O**utside.
- Change **one value**, save (Ctrl+S), refresh. Watch what changes.
- Type code yourself. Never only copy-paste.
- Right-click any website, then **Inspect**, to read its HTML and CSS.
- Use the right tag: **ul/li** for lists, not h4 for every item.

## COMMON MISTAKES

- Missing closing tag like **</p>** breaks the layout.
- Never type **< >** from examples in the terminal. They are placeholders.
- Forgot Ctrl+S before refresh, so you see old output.
- **git not recognized?** Install Git, then restart VS Code.
- HTML and CSS go in **two separate files**, not one.
- No styling? Check the CSS **link tag** in head and the file name.

## FLEXBOX IN 10 SECONDS

```
.cards { display: flex; gap: 20px; }
```




Desktop: items sit side by side in a row.

```
@media (max-width: 600px) { flex-direction: column; }
```




Mobile: items stack in a column.

## SELF-TEST (answer without looking)

1. Padding vs margin: which is inside the box?
2. Which tags make a bullet list?
3. How does the browser find your CSS?
4. Three Git commands to upload your work?
5. What does @media (max-width: 600px) do?

*Answers: padding / ul + li / link tag in head / add, commit, push / mobile-only styles*

**DONE TODAY: portfolio page, Git setup, first push. NEXT: Day 2, Water Booking landing page + media queries.**