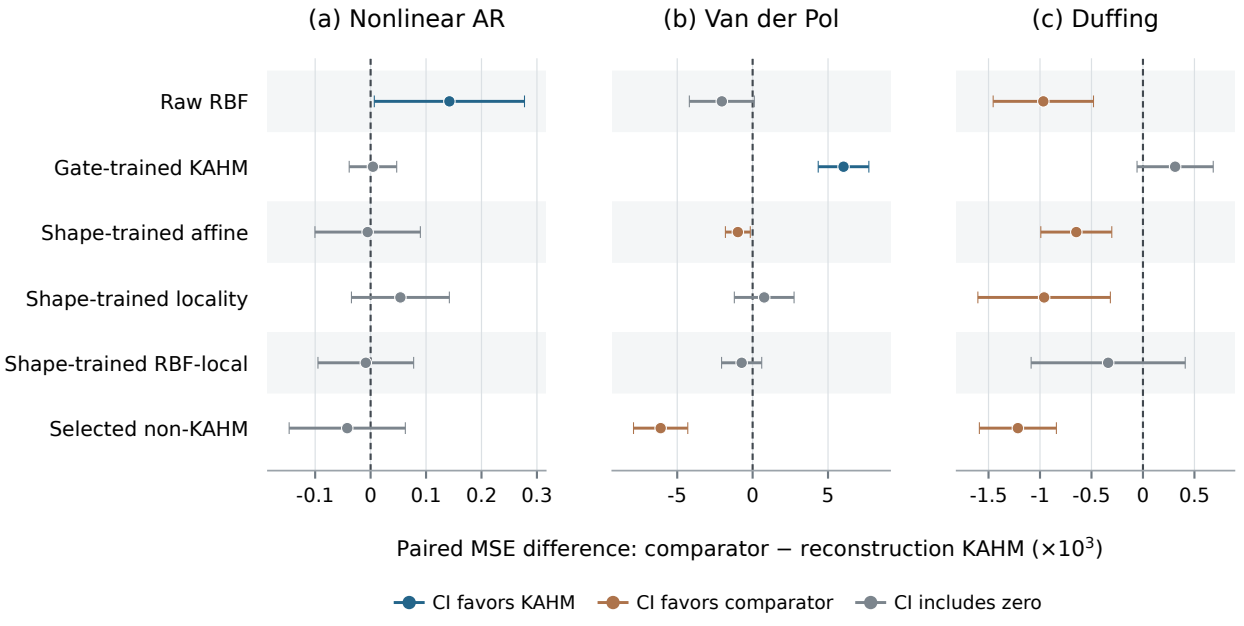
(a) Nonlinear AR
(b) Van der Pol
(c) Duffing
Raw RBF
Gate-trained KAHM
Shape-trained affine
Shape-trained locality
Shape-trained RBF-local
Selected non-KAHM
-0.1
0
0.1
0.2
0.3
-5
0
5
-1.5
-1
-0.5
0
0.5
Paired MSE difference: comparator − reconstruction KAHM (×10^3)
CI favors KAHM
CI favors comparator
CI includes zero