Confirmation: equal weighting of 4 original source families

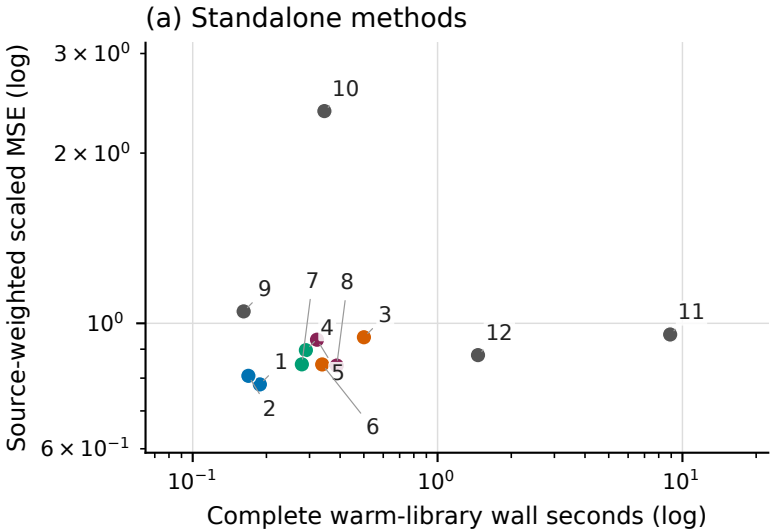

1 Raw ridge
2 Raw RBF
3 Affine local
4 Locality local
5 KAHM local
6 Raw + affine
7 Raw + locality
8 Raw + KAHM
9 Seasonal naive
10 Holt
11 Histogram boosting
12 MLP

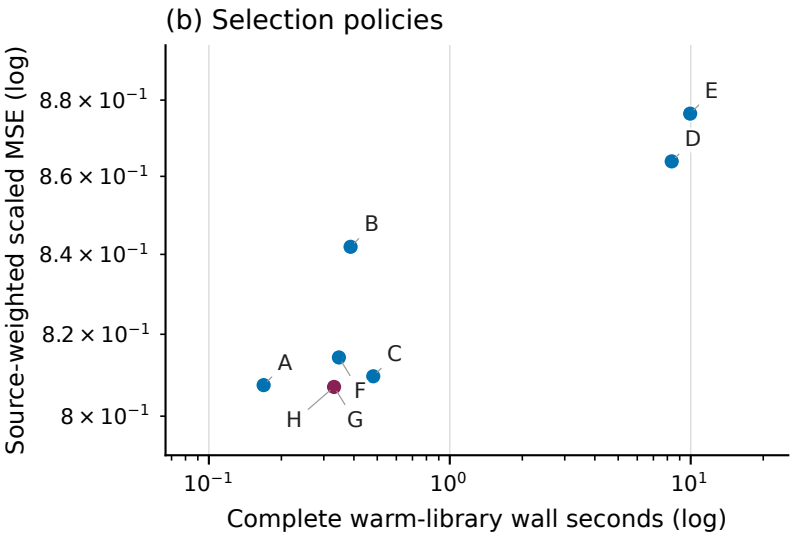

A Always raw
B Always raw + KAHM
C Validation: matched pair
D Validation: raw portfolio
E Validation: full portfolio
F Cheap probe
G Metadata + probe
H Metadata + probe + geometry

Lower loss and lower cost are preferable. Costs include required selection work.
Offline diagnostic development and process/library setup are separate; no uncertainty bars.