Kernel Affine Hull Representations for Time-Series Forecasting: Distinctness, Stability, and Predictive Limits*

Anonymous authors

Abstract

We investigate when Kernel Affine Hull Machine (KAHM) reconstruction supplies useful functions for a finite time-series forecast decoder. Exact identities show that direct normalized target transfer is a kernel-ridge ratio and that some symmetric banks give redundant raw features. An irregular-reference construction proves that KAHM reconstruction departures can instead extend the raw feature span of the common affine coordinates and matched RBF reconstruction. A separately bounded feature map and centered ridge readout give a uniform correction-magnitude bound; this generic stability result does not guarantee forecast accuracy. We then complete a locally frozen, matched experiment with ten procedures, 192 task suites and 24 independent repetitions across three known nonlinear laws and a linear base-law control, at two added-noise levels. The bounded KAHM departure reduces nonlinear aggregate normalized MSE by 12.58% against the shared gate-and-coordinate basis, meeting the fixed 3% useful-effect criterion. Its point gains against matched RBF departure and raw RBF are 1.17% and 3.92%; neither establishes the required 3% margin under the six-comparison simultaneous analysis. KAHM error is 1.77% higher than boosted trees and 6.04% higher than the validation-selected non-KAHM policy. All declared stability screens and the linear-control noninferiority condition pass. Thus two of six required comparisons pass and the fixed decision stops this forecasting-performance branch. The earlier direct-training and amended online-development results remain separate, including unfavorable comparisons and failures. The completed evidence establishes conditional basis distinctness, bounded corrections and a useful reconstruction contribution beyond the common basis, while leaving a distinctive practical KAHM forecasting advantage unestablished. The conclusion is restricted to the declared procedures and known laws; it is not an impossibility theorem for all geometric predictors.

1 Introduction

A useful forecasting representation must make target-relevant structure accessible to the decoder that is actually fitted. Kernel Affine Hull Machines (KAHMs) construct nonlinear reconstruction maps from local reference observations (Kumar et al., 2024). Accurate reconstruction alone does not show that these maps help predict a future observation. Nor does algebraic nonlinearity establish a useful statistical contribution at a specified sample size and computation budget. This paper studies those questions separately: whether a reconstruction supplies a distinct basis, whether its correction can be controlled, and whether the complete fitted procedure improves reserved forecasts beyond matched alternatives.

The distinction begins with the decoder's inputs. A local reconstructor can recover every point on an affine line while its zero residual discards position. Existing local KAHM forecasters already expose gated principal coordinates as well as reconstruction scores, so a new experiment must account for those coordinates. We therefore examine full-coordinate *reconstruction departures*: the difference between a nonlinear reconstruction

*AI tools assisted with protocol development, implementation, numerical and statistical verification, analysis, and writing. The authors are responsible for the scientific content. This research preprint has not been submitted for peer review. Anonymous author metadata is retained from the supplied manuscript.

and its matched local affine projection, multiplied by the same locality gate. The common gate and principal-coordinate block is identical in the KAHM and RBF arms. An affine departure is identically zero, providing the nested common-feature control. Deterministic reconstruction cannot add information beyond the observed history; it can change the functions available to a restricted, regularized decoder.

The algebra makes this candidate testable without assuming it is novel or useful. Directly transferring normalized KAHM weights to reference targets is exactly a normalized kernel-ridge ratio. Some symmetric reference banks also yield identical augmented raw KAHM and RBF feature spans. An explicit irregular three-reference construction, by contrast, proves that raw KAHM departures need not lie in the common-plus-RBF span. These results establish conditional basis distinctness, not a new general regression principle. Ridge penalties and the separately bounded feature transforms are not invariant under arbitrary reparameterizations, so empirical attribution concerns the complete declared procedure (Appendix N).

Stability is a second requirement. A preceding online development study completed 144 amended runs and 387,900 scored forecasts. A documented solver repair removed numerical exceptions, yet extreme corrections remained and were reproduced by a fresh solve in an examined state (Section 7). A correct linear solve does not control extrapolation of its input features. The final fixed-geometry experiment therefore uses A-fitted blockwise normalization, an explicit radial bound, and centered ridge residual heads. We prove a uniform bound on the correction's magnitude, with the free intercept and mean-SSE penalty convention stated explicitly. It is generic ridge algebra; it neither bounds the raw baseline nor guarantees accuracy, and it does not retroactively repair the earlier adaptive procedure.

The final experiment compares ten complete forecasting procedures across three previously studied nonlinear laws and a linear Gaussian base-law control, at two added observation-noise levels. Twenty-four independent repetitions give 192 task suites. Separate episode splits A, B, C and D, generated from independent base episodes and unit-noise streams with a shared A-estimated noise amplitude, respectively fit the maps, select horizon-specific hyperparameters, calibrate correction strengths and a non-KAHM policy, and evaluate the frozen choices. Prepared inputs, scientific source and the six-contrast analysis were frozen locally before reserved forecasts were computed. This is a prospective local checkpoint, not public preregistration. The five nonlinear contrasts require a useful improvement of at least 3% over the common block, matched RBF departure, raw RBF, boosted trees and the C-selected non-KAHM policy. A sixth contrast requires noninferiority within 5% of ridge on the linear control. These are prespecified research-allocation margins, not application-derived utility thresholds. Section 5 reports the complete result and its fixed decision.

The cumulative evidence remains separated by study (Table 1). Historical controlled interventions identify information lost by reconstruction scores and show conditional finite-decoder gains. Natural-source and scaling studies delimit transfer. An additive correction study preserves failed fits and an explicitly amended successful-subset analysis. Shared proxy-metric learning does not establish its added value. Direct training of KAHM bandwidths and gate temperatures against forecast error yields two favorable, six unfavorable and ten unresolved synthetic comparisons; none of its favorable primary intervals is against an equally trained non-KAHM local control. Three planned natural tasks lack training-query windows, leaving that full aggregate undefined. The adaptive development study fails its accuracy criteria at both capacity tiers. These findings motivate the final mechanism test; they are not pooled with it as additional independent observations.

The contribution is a completed investigation of three separable properties. First, exact identities, a redundancy condition and an irregular-bank construction identify what the normalized KAHM map can add to the chosen raw feature span. Second, an explicit bounded-feature readout gives a reproducible correction guarantee under its stated assumptions. Third, a matched, fixed-budget experiment tests whether this procedure supplies useful forecasting value, with complete selection, failure and cost accounting. The earlier empirical record supplies context and counterexamples, while retaining its original inferential scope. Local coordinates, learned forecasting representations, differentiable ridge solves (Bertinetto et al., 2019) and residual correction are established ideas. The research claim concerns these specific geometric constructions and their observed predictive limits.

A new realization of a known simulation law is not a new application. Likewise, a failed finite procedure is not an impossibility theorem for all decoders on a representation. The final experiment's stopping rule makes those

Table 1: Completed evidence stages and their interpretation. Procedures, normalizations, populations and statistical families remain distinct. The final mechanism experiment is a completed fixed-protocol evaluation; evidence is not pooled across stages.

Stage	Question	Evidential status
Controlled mechanism and capacity	Does the code retain predictive position and can the decoder exploit it?	Target interventions and fresh known-law samples; conditional gains.
Natural-source study	Does raw-plus-KAHM improve practical raw-input prediction?	Separate reserved collections; unfavorable aggregate.
Scaling sensitivity	Does rescaling change the comparison?	Paired reuse of inspected data; exploratory transfer evidence.
Additive correction	Does the retained raw pathway improve utility?	Failed fits and an amended successful-subset analysis remain explicit.
Proxy metric and donors	Do supervised metric fitting and excluded donor residuals help?	Public execution freeze; 48 tasks, 768 forecasts; no established KAHM-specific advantage.
Gate-temperature pilot	Does forecast supervision improve gates?	Nine exploratory tasks; distinct generator and search budget.
Direct reconstruction training	Do trained bandwidths outperform matched trained controls?	Public freeze; 43 feasible of 46 planned tasks; 2 favorable, 6 adverse and 10 unresolved synthetic comparisons.
Budgeted online adaptation	Does maintained geometry justify its cost?	144 amended development runs; both accuracy decisions defer; inspected natural inputs and preserved initial failure.
Reconstruction departures	Do distinct, bounded reconstruction functions improve a fixed decoder?	Local prospective freeze; 192 task suites, 24 independent repetitions and six fixed margin contrasts.

boundaries operational: an adverse or unresolved result at the fixed budget ends this forecasting-performance branch without selecting a favorable subset or expanding the same experiment. The stronger general question is which representation and decoder conditions permit prediction, a question that requires its own formal assumptions and evidence rather than an unsupported performance claim.

2 Related work

Reconstruction geometry and local prediction. Prediction from delay coordinates using local approximation predates the present representations (Farmer & Sidorowich, 1987). The question here is which specific reconstruction-derived basis, together with its fitted decoder, improves on matched alternatives. KAHMs were introduced for geometrically informed classification, including a differential-privacy application (Kumar et al., 2024), and developed for collaborative learning (Kumar et al., 2025). Earlier geometric classification uses affine feature lines (Li & Lu, 1999); kernel sparse representation studies reconstruction-based codes in implicit feature spaces (Gao et al., 2010). Their original task results do not establish that a reconstruction score preserves the variation required by a different predictive target. Local coordinate coding connects localized representations with approximation of smooth functions (Yu et al., 2009). Local tangent coding explicitly augments coding weights with weighted principal-direction displacements (Yu & Zhang, 2010), the feature form used here. With linear readouts this also resembles local affine experts (Jacobs et al., 1991). The historical banks are fitted without outcomes; Section 12 instead learns an input metric from training residuals and shares it across all four gates. Its Gaussian regression proxy follows supervised metric learning (Weinberger & Tesauro, 2007); the contribution is a controlled test of transfer to KAHM, rather than the invention of metric learning.

Reconstruction objectives and predictive dynamics. Reconstruction and forecasting objectives have already been combined in learned dynamical representations. Lusch et al. (2018) train autoencoder coordinates with reconstruction, latent linearity and multistep prediction losses. Liu et al. (2023) instead optimize a

residual Koopman forecaster without the canonical binding reconstruction loss. These precedents preclude a novelty claim based merely on connecting a reconstruction map to future prediction. Our final experiment fixes the geometric bank, exposes full reconstruction departures to a restricted residual readout, and tests their value against a same-kernel RBF reconstruction with matched block standardization and radial bounding. The direct-target weight-transfer identity in Proposition 11 further identifies a normalized kernel-ridge reparameterization that must not be renamed as an independent forecasting principle. The conditional distinctness and redundancy results in Appendix N locate the narrower basis question actually tested.

Bounded online kernel models. Fixed-budget kernel recursive least squares already couples support management with nonlinear tracking (Van Vaerenbergh et al., 2010). Our separate adaptive development experiment uses a simpler FIFO sliding-window kernel-ridge comparator with a calibration-selected blend with raw ridge. It is not an implementation of that paper's pruning and label-update rule, and its outcome does not compare against the full class of modern adaptive kernel methods. Likewise, the centered-ridge correction bound in Proposition 14 is elementary regularization algebra; it does not establish predictive superiority or stability of an arbitrary geometry-refresh process.

Target information and finite fitting. Supervised dimension reduction asks which features preserve the input–target relationship (Fukumizu et al., 2004). Predictive $\mathcal{V}$-information distinguishes information accessible to a restricted observer (Xu et al., 2020). Our interventions and finite-decoder comparisons make a related distinction without estimating unrestricted Bayes risk. Nyström approximation (Williams & Seeger, 2001; Rudi et al., 2015) changes both fitting and computation; equal requested landmark counts do not equate function classes, realized ranks, or costs. Retaining the outer affinity normalizer Z gives the elementary invertible reparameterization in Equation (8), not a new information-recovery theorem. This affinity normalizer is distinct from the signed reconstruction sum $kC\mathbf{1}$ and its relative-cancellation guard in Equation (16).

Forecast evaluation and selection. Residual correction and additive fitting under squared error are established constructions (Bühlmann & Yu, 2003). Our additive extension uses them to preserve a raw-history prediction pathway while isolating the utility of KAHM and simpler geometric corrections. Zero correction is an available forecast, not a guarantee that validation chooses it whenever augmentation would harm generalization. Feature-based forecast selection, ranking, and combination have substantial precedents (Prudêncio & Ludermir, 2004; Montero-Manso et al., 2020; Talagala et al., 2022; 2023). Landmarking uses inexpensive learners to characterize a task (Pfahringer et al., 2000); our paid validation probe follows that principle. The tested increment is whether two geometric descriptors improve a specified diagnostic beyond metadata and that probe. Model-selection bias (Cawley & Talbot, 2010) and forecast-evaluation pitfalls (Hewamalage et al., 2023) motivate chronological splits, explicit cost scopes, and separation of development from reserved original sources. The Monash archive supplies the natural datasets (Godahewa et al., 2021).

Relationship to close prediction-limit studies. Kumar & Kargaran (2026) study successor soft coordinates, norm-bounded linear prediction certificates, and Koopman closure. A related unpublished manuscript (Anonymous, 2026) develops observed-output risk certificates under declared decoder sensitivity. That manuscript also reports input-scaling ablations for earlier prediction architectures. The present scaling sensitivity concerns the distinct local-coordinate and raw-augmented pipelines evaluated here. Those studies share KAHM source machinery and some generator definitions; they already distinguish fitted accuracy from predictor-class risk. The present target intervention, encoding ablations, fresh capacity comparison, and reserved natural-source evaluation address finite fitted procedures. Their paired-MSE intervals and measured selection costs do not extend the earlier class-risk or minimum-feasible-cost certificates. In particular, Kumar & Kargaran (2026) already evaluate their certificates on fixed four-state designs and independent Van der Pol datasets. The finite-procedure comparisons here do not supply a new impossibility certificate: a failure of one candidate and fixed comparison would not exclude all predictors based on a representation. Conversely, a zero lower risk certificate does not demonstrate that an accurate predictor exists.

3 Predictive usefulness and the justification of complexity

The question "when is a forecasting representation useful?" depends on what information is retained, which predictor is fitted, and what resources the complete procedure consumes. We distinguish these objects before comparing KAHM representations. Let X be an available causal history, Y its fixed future target, and $\Gamma_{\mathcal{D}}$ a representation fitted using development data $\mathcal{D}$. A forecasting procedure includes the representation, decoder, regularization, and selection rule. Conditional on its fitted state, it returns a fixed forecast $\widehat{f}$ for a new evaluation unit. The studies below specify their own target, origin law, aggregation, and evaluation unit; their risks are not interchangeable.

Information retention and finite-decoder access. A representation may discard distinctions needed to predict Y. This is different from making those distinctions difficult for the chosen decoder to use. In particular, appending a deterministic feature map to the raw history gives $(X, \Gamma_{\mathcal{D}}(X))$, from which X is exactly recoverable. Conditional on the fitted state, this preserves the raw-history Bayes information; it does not create additional information about the future (Proposition 8). An improvement from raw augmentation must concern the finite fitting procedure, its regularization, or its numerical behavior. Conversely, an information- preserving augmentation can worsen that procedure's generalization.

Predictive structure relative to a fixed baseline. There is a useful oracle distinction before selecting a finite decoder. Condition on the fitted state, fix a raw forecast f_0, and let $e = Y - f_0(X)$ and $Z = \Gamma_{\mathcal{D}}(X)$, with $\mathbb{E}\|e\|_2^2 < \infty$. Write $R(f) = \mathbb{E}\|Y - f(X)\|_2^2$ for squared-error risk under this conditional evaluation law. The standard conditional-expectation projection identity gives the best square-integrable correction $q^*(Z) = \mathbb{E}[e \mid Z]$ and

$$R(f_0) - \inf_{q \in L_2(P_Z)} R(f_0 + q \circ \Gamma_{\mathcal{D}}) = \mathbb{E}\|\mathbb{E}[e \mid Z]\|_2^2. \tag{1}$$

Thus the representation contains useful mean-predictive structure for this baseline's residual precisely when that conditional mean is nonzero with positive probability. This is a standard projection fact, not a new KAHM theorem (Appendix J.1). It is relative to the specified baseline and evaluation law: unpredictable residual variation does not become useful structure merely because baseline MSE is large. A deterministic Z can make existing structure easier for a restricted procedure to use without adding information to the raw history. The oracle ranges over all square-integrable corrections; neither its gain nor the conditional mean is estimated by our finite experiment. Whether a particular learned correction accesses that structure is a separate empirical question.

An operational utility comparison. For two frozen forecasts $\widehat{f}_0$ and $\widehat{f}_s$, evaluated on the same unit E and squared-loss aggregation ℓ, define

$$\Delta_s = \mathbb{E}\Big[\ell(\widehat{f}_0; E) - \ell(\widehat{f}_s; E) \mid \mathcal{D}\Big]. \tag{2}$$

Positive Δ_s means the richer fitted forecast improves expected loss under that evaluation law. A practically useful improvement must also be compared with a declared margin and measured resource requirements. Selection is part of the procedure: a rule pays for the features, probes, and candidate fits needed to make its choice even when it retains the baseline. Evaluation of that rule uses outcomes unavailable to its fitting and selection. Repetitions of training and independently sampled evaluation units assess different forms of variability.

The procedure must also return a forecast on the declared task. A model whose candidate class contains the baseline can still fail during feature fitting or search before selecting that baseline. Without a prespecified failure fallback, its full-roster risk is undefined. We therefore retain fit coverage as part of the utility assessment, rather than treating missing predictions as favorable error outcomes.

For an application that specifies a minimum useful improvement δ and a resource budget B, the operational question is whether the evidence supports $\Delta_s \geq \delta$ at a complete cost $C_s \leq B$, compared with the available alternatives. A large baseline error alone is insufficient: it can include unpredictable variation as well as structure accessible to a correction. The present study reports error–cost profiles and tests a fixed validation

rule. It does not assume a universal deployment budget or identify a universal exchange rate between prediction error and computation.

What an empirical cost decision establishes. An observed accuracy–cost advantage concerns the fitted procedures being compared. It does not show that every cheaper representation or decoder fails an accuracy requirement. The stronger necessity statement requires lower bounds that apply to the entire class, a declared sensitivity budget, and the sampling assumptions of the related certificate framework (Anonymous, 2026). Here we study empirical predictive utility and measured cost. We neither estimate unrestricted Bayes risk on natural data nor certify minimum feasible representation complexity.

Preserving a useful forecasting pathway. Raw-history retention alone need not retain the original finite decoder class. In the original natural study, concatenating features changes Gaussian distances and the Nyström basis (Section 9). The extension therefore examines an additive forecast

$$\widehat{f}_{g,\gamma}(x) = \widehat{f}_0(x) + \gamma \widehat{q}_g(x), \qquad 0 \le \gamma \le 1, \tag{3}$$

where the raw forecast $\widehat{f}_0$ remains fixed while a correction $\widehat{q}_g$ is fitted using KAHM, affine, or locality features. Setting $\gamma = 0$ recovers the baseline exactly. Residual fitting is established (Bühlmann & Yu, 2003); the question is which geometric correction, if any, is useful under the specified data and computation budgets.

For fixed $\widehat{f}_0$ and $\widehat{q}_g$, an elementary squared-loss identity gives

$$R(\widehat{f}_{g,\gamma}) - R(\widehat{f}_0) = \gamma^2 \mathbb{E}\|\widehat{q}_g(X)\|_2^2 - 2\gamma \mathbb{E}\langle Y - \widehat{f}_0(X), \widehat{q}_g(X)\rangle. \tag{4}$$

All expectations condition on the frozen fitted state. For a nonzero correction, positive residual alignment is necessary and permits a sufficiently small positive mixing weight to improve the population risk. The identity is a motivation, not a new risk certificate: its population quantities are unknown during fitting, a finite weight grid can miss the improving interval, and validation can select a worse forecast. Appendix J.2 provides the derivation and the distinction between feasible baseline recovery and fitted generalization.

4 Geometry, predictive encoding, and decoder access

Matched reconstruction rules. Let z be a training-standardized input. The controlled study uses three k-means blocks with 2, 4, and 8 local models. Each model c has at most 24 shared reference rows V_c, their center μ_c, and a common orthonormal principal basis P_c of effective rank at most $\min(2, d-1, n_c-1)$. Scaling, partitions, references, bases, and scoring are held fixed when the reconstruction rule is changed. The two rules are

$$r_c^{\mathrm{A}}(z) = \mu_c + P_c P_c^\top (z - \mu_c), \qquad r_c^{\mathrm{K}}(z) = V_c^\top \left(\frac{k_c(z) B_c}{k_c(z) B_c \mathbf{1}} \right)^\top. \tag{5}$$

Here $k_c(z)$ is the Gaussian query-kernel row in the local covariance metric and B_c is the fitted regularized inverse; their exact construction is given in Appendix B. KAHM weights may be signed. The archived controlled experiments retain the upstream float32 references and replace an exactly zero denominator by one; a separate numerical analysis below examines Gaussian underflow. This common-bank substitution isolates a reconstruction component rather than comparing independently optimized complete systems.

What the predictor receives. For either reconstruction, the matched discrepancy combines radial and angular errors:

$$\begin{aligned} &q_c(z) = 1 - \exp\{-\|z - r_c(z)\|_2\}, \qquad b_c(z) = \pi^{-1} \arccos\!\left(\mathrm{clip}\!\left(\frac{\langle z, r_c(z)\rangle}{\|z\|_2 \|r_c(z)\|_2}, -1, 1 \right) \right), \\ &T_c(z) = \sqrt{\{q_c(z)^2 + b_c(z)^2\}/2}, \qquad w_c(z) = (1 - T_c(z) + \tau)^\omega, \qquad \phi_c(z) = \frac{w_c(z)}{Z(z)}, \quad Z(z) = \sum_{j \text{ in block}} w_j(z), \end{aligned} \tag{6}$$

with $\tau = 10^{-6}$, $\omega = 16$, and cosine zero when its denominator is zero. Affinities from the three blocks are concatenated. In addition to ϕ, the ablations supply the full score T, one $\log Z$ per block, raw inputs, or gated local coordinates

$$\Gamma_{\mathrm{local}}(z) = \left[\phi(z), \{\phi_c(z) P_c^\top (z - \mu_c)\}_{c=1}^{14}\right]. \tag{7}$$

This is the established local-tangent feature form (Yu & Zhang, 2010); the investigation concerns the choice and predictive role of the gates.

These distinctions matter even before fitting. The outer normalization has the exact inverse

$$T_c = 1 + \tau - \exp\{(\log \phi_c + \log Z)/\omega\}. \tag{8}$$

Thus T and $(\phi, \log Z)$ retain the same information, without necessarily having the same fitted risk under a finite decoder. Likewise, positive gates and full column rank of the stack of $P_c^\top$ suffice to recover z from Equation (7): divide by each gate, add $P_c^\top \mu_c$, and solve the stacked linear system. Numerical full rank and positive inspected gates are observed in all 144 controlled forecasting banks; these retrospective checks do not guarantee stable inversion or population-wide gate bounds (Appendix C.5). Rank deficiency is not proof of information loss because the gates can also encode information.

A controlled target intervention. Let $S \sim \mathrm{Unif}\{-1, +1\}$, $T \sim \mathrm{Unif}[-1, 1]$, and $\epsilon \sim \mathrm{Unif}[-0.1, 0.1]$ be independent. Define

$$X = (T, c\cos(\pi T) + 0.5S), \qquad Y_\lambda = \sqrt{1-\lambda}\, S + \sqrt{3\lambda}\, T + \epsilon, \quad c \in \{0, 1\}, \quad \lambda \in \{0, \tfrac{1}{2}, 1\}. \tag{9}$$

Within each repetition and curvature, changing λ leaves input samples, noise, and the fitted bank fixed. The signal variance is one and the Bayes MSE is $1/300$. Targets move from branch identity to signed position, while difficulty for a particular decoder may also change. A code invariant to $Q(t, x_2) = (-t, x_2)$ loses the odd conditional-mean component $\sqrt{3\lambda}T$ and has Bayes MSE at least $1/300 + \lambda$. For an approximately invariant code and a κ-Lipschitz decoder,

$$R(g \circ \Gamma) - R_X^{\mathrm{Bayes}} \geq \left(\sqrt{\lambda} - \kappa\delta_\Gamma/2\right)_+^2, \quad \delta_\Gamma^2 = \mathbb{E}[d_U(\Gamma(X), \Gamma(QX))^2]. \tag{10}$$

The measured reflection differences are descriptive; neither a population bound on δ_Γ nor a common Lipschitz budget for the fitted heads is asserted. Appendix A supplies the precise assumptions and proofs, including why small local reconstruction residuals alone are insufficient: reconstructing X from the query is different from reconstructing it through the predictor's retained code.

On straight branches with the position target, affine-affinity ridge MSE is 1.002694, versus 0.024668 for KAHM affinities, although affine reconstruction is nearly exact. The corresponding training-standardized reflection RMS is about 7.5×10^{-9} for affine affinities and 1.40 for KAHM. A locality-aware affine score reduces MSE to 0.004641; affine local coordinates attain 0.00333, close to the Bayes error. The evidence therefore identifies positional encoding as useful in this comparison, rather than an exclusive KAHM advantage. On curved branches, both codes substantially distinguish reflected positions. Full branch results, reconstruction diagnostics, and scoring controls appear in Appendix D.

5 Reconstruction departures as predictive bases

The earlier interventions change how local reconstructions control a forecasting representation. We now test whether the reconstruction itself supplies useful functions to a restricted decoder once a shared local affine basis is retained. This section evaluates one specified construction against a fixed comparison family within a bounded experimental budget. Every feature is a deterministic function of the observed history: additional basis functions do not add statistical information beyond that history.

5.1 A distinct mechanism, with explicit cases of redundancy

Let z be an A-standardized history, and let a fixed local bank supply reference rows Q_j, principal directions P_j, center μ_j and a positive regularizer λ_j. The KAHM and matched positive-kernel reconstructions are

$$A_{K,j}(z) = \frac{k_j(z)(K_j + \lambda_j I)^{-1} Q_j}{k_j(z)(K_j + \lambda_j I)^{-1}\mathbf{1}}, \qquad A_{R,j}(z) = \frac{k_j(z) Q_j}{k_j(z)\mathbf{1}}. \tag{11}$$

Both maps use the same reference histories and covariance-whitened projected Gaussian kernel. The affine reconstruction is $A_{A,j}(z) = \mu_j + (z - \mu_j)P_j P_j^\top$ in row-vector notation. Shared gates $g_j(z)$ use a blockwise softmax of squared center-distance logits; the gate does not depend on which reconstruction is being compared.

The common basis ψ_0 contains all g_j and all gated principal coordinates $g_j(z)(z - \mu_j)P_j$. The reconstruction departures are

$$d_K(z) = \mathrm{concat}_j\, g_j(z)\{A_{K,j}(z) - A_{A,j}(z)\}, \qquad d_R(z) = \mathrm{concat}_j\, g_j(z)\{A_{R,j}(z) - A_{A,j}(z)\}. \tag{12}$$

The full history-coordinate departures enter the decoder, including their components outside the local principal subspaces. Substituting the affine reconstruction makes the departure identically zero and recovers the common basis. Thus the common-only arm is an ablation of the added basis; the RBF arm is the comparison with matched reference, kernel, gate and feature dimensions.

The reconstruction identity alone does not establish a new predictive function class. Transferring normalized KAHM weights directly to reference targets is exactly a ratio of two kernel-ridge predictions, one for the target and one for the constant vector (Proposition 11). Symmetric two-point reference banks can also make d_K and d_R linearly interchangeable after the common coordinates are included (Proposition 12). Conversely, Proposition 13 proves a strict raw-span distinction for an irregular three-point scalar bank. The inherited-compatible example $Q = (-1, 0, 2)^\top$ supplies such a certificate. This proves existence of a distinct reconstruction basis, not predictive superiority for every fitted bank. Feature transformations and isotropic ridge penalties can change fitted forecasts even when two raw spans coincide; the empirical estimand is the complete specified procedure.

5.2 A bounded residual decoder

Each feature block is centered and scaled using A alone. It then passes through the radial map

$$T_R(v) = \frac{v}{\sqrt{1 + \|v\|_2^2 / R^2}}, \qquad R = \sqrt{\text{block width}}. \tag{13}$$

The map is nonexpansive and has norm at most R. The common and departure blocks are transformed separately, with no subsequent standardization:

$$\psi_K = [T_{R_0}(\widetilde{\psi}_0), T_{R_d}(\widetilde{d}_K)], \qquad \psi_R = [T_{R_0}(\widetilde{\psi}_0), T_{R_d}(\widetilde{d}_R)].$$

Consequently, appending a departure cannot rescale the common block. Three bank partitions with 2, 4 and 8 local models, rank two and at most 24 references per local model give 42 common and 168 departure coordinates. The bank is unsupervised and fixed from A; this experiment does not further optimize its references, directions or kernels against B targets.

For each horizon, a raw-history ridge baseline $f_{0,h}$ is retained and

$$\widehat{y}_{t+h} = f_{0,h}(x_t) + \gamma_h q_h(x_t), \qquad q_h(x) = b_h + \psi(x)^\top w_h. \tag{14}$$

The correction fits A baseline residuals using mean squared error plus $\alpha_h \|w_h\|^2$, with a free intercept. B selects $\alpha_h \in \{10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}, 1\}$ separately by horizon. C then selects $\gamma_h \in \{0, 1/4, 1/2, 1\}$, again separately by horizon. There is no refit on B or C, and D targets never enter either selection API.

The free intercept matters to stability. If $\bar{e}_h$ and $\sigma_{e,h}$ are the A residual mean and centered RMS, and $\bar{\psi}$ is the A feature mean after bounding, Proposition 14 gives

$$\|w_h\| \le \frac{\sigma_{e,h}}{2\sqrt{\alpha_h}}, \qquad |\gamma_h q_h(x)| \le |\gamma_h| \left[|\bar{e}_h| + (R + \|\bar{\psi}\|) \frac{\sigma_{e,h}}{2\sqrt{\alpha_h}} \right]. \tag{15}$$

Here R is the radius of the concatenated bounded features. This generic ridge bound limits the correction, not the raw baseline or total forecast error. It does not establish a global input Lipschitz constant through a signed-denominator fallback boundary. For the unnormalized signed reconstruction weights, define

$$a_j(z) = k_j(z)(K_j + \lambda_j I)^{-1}, \qquad \rho_j(z) = \frac{|a_j(z)\mathbf{1}|}{\|a_j(z)\|_1} \quad \text{when } \|a_j(z)\|_1 > 0. \tag{16}$$

This dimensionless ratio measures signed cancellation and is invariant to common positive rescaling of the query kernel. If $\rho_j \le 10^{-10}$, or required quantities are undefined or nonfinite, the local reconstruction is replaced by its affine map, making that local departure zero. Every affected row remains recorded.

5.3 A fixed test of useful basis value

The primary candidate is the bounded KAHM departure. Its five primary comparators are the common basis, bounded RBF departure, raw-history-plus-RBF, histogram gradient boosting, and a C-selected non-KAHM policy. Raw ridge, persistence, and KAHM/RBF ablations that omit only the departure bound complete the ten-method roster. All non-ridge arms use C-selected mixing with the common baseline. The policy selects one complete calibrated non-KAHM procedure by C normalized error; neither KAHM arm is eligible. It is not a D oracle. Raw RBF and boosting receive the same A/B/C roles and horizon-specific model selection. Their exact grids and the accounting of their costs are recorded in Appendix O.

The roster contains four laws, two added-noise levels and 24 fresh repetition seeds: 192 task suites. The nonlinear AR, Van der Pol and Duffing laws are the inherited numerical observation laws already investigated earlier. A stable linear Gaussian AR(2) base law is the negative control. Added Gaussian observation noise has standard deviation η times the standard deviation of all unaugmented A episode values, with $\eta \in \{0, 0.1\}$; it affects both histories and observed future targets. The underlying episodes, unit-noise arrays, retained rows and fitting seed are paired across noise levels. The oscillator observations already contain inherited sensor noise at $\eta = 0$. Fresh realizations of these known laws are not new application evidence.

A/B/C/D contain 64/32/32/128 length-72 episodes, generated from independent base-episode and unit-noise streams. The augmented splits share the A-estimated noise amplitude. History length is 12, horizons are $(1, 4, 12)$, and origin stride is four. The first three roles retain 512/256/256 rows; D retains all 1,664 origins. The protocol, analysis, executable sources and prepared inputs were frozen locally before reserved forecasts, at commit `6d666b0fa3d8`. This was not public preregistration or independent replication. Historical studies retain their own estimands and are not pooled with this experiment.

For task t, method m and horizon h, the loss scale is $v_{th} = \max\{\mathrm{Var}_A(Y_h), 10^{-12}\}$, using the retained A target rows and population variance convention. The task loss is

$$L_{tm} = \frac{1}{3} \sum_{h \in \{1,4,12\}} \frac{\mathrm{MSE}_{D,t,m,h}}{v_{th}}.$$

Each repetition averages its six nonlinear law/noise conditions equally. For each comparator m, the primary useful-effect contrast is $d_{rm} = 0.97L_{rm} - L_{rK}$. The linear-control aggregate instead averages its two noise levels and uses $d_{r,\mathrm{lin}} = 1.05L_{r,\mathrm{ridge}} - L_{rK}$. Every one-sided lower bound

$$\bar{d} - t_{1-0.05/6,23}\, s_d/\sqrt{24}$$

must be strictly positive. These are six Bonferroni-adjusted paired-mean t comparisons, with independent repetitions as the sampling units. Their finite-sample interpretation relies on the paired-mean approximation; overlapping windows and paired noise levels do not increase the sample size. The 3% improvement margin and 5% linear tolerance are chosen research allocation thresholds, not application-derived requirements or a definition of universal effectiveness. Twenty-four repetitions is a fixed budget, not a demonstrated power calculation.

The complete gate also requires finite, technically complete outputs, the feature/coefficient/correction bounds, and a taskwise maximum absolute KAHM error no more than five times the ridge maximum. The last

Table 2: All six fixed primary contrasts for bounded KAHM departure. The first five rows use the nonlinear aggregate and $\bar{d} = 0.97L_m - L_K$; the last uses the linear-control aggregate and $\bar{d} = 1.05L_m - L_K$. "Gain" is the point estimate $100(1 - L_K/L_m)$; a negative value favors the comparator. The lower bound is for the absolute margin gap, not the percentage gain. All six one-sided Bonferroni bounds use 24 independent repetitions and 23 degrees of freedom. Each required bound must exceed zero.

Comparator	L_K	L_m	Gain (%)	$\bar{d}$	Lower bound	Pass
Common basis	0.02993	0.03423	12.58	0.00328	0.00295	Yes
RBF departure (bounded)	0.02993	0.03028	1.17	-0.00055	-0.00079	No
Raw RBF	0.02993	0.03115	3.92	0.00029	-8.286×10^{-5}	No
Boosted trees	0.02993	0.02941	-1.77	-0.00140	-0.00194	No
C-selected non-KAHM policy	0.02993	0.02822	-6.04	-0.00255	-0.00299	No
Linear control: ridge	0.89810	0.89632	-0.20	0.04303	0.04161	Yes

requirement is a coarse engineering screen. No activation-rate or runtime-ratio threshold is used. A wholly failed method or any final prediction-cell recovery blocks an efficacy conclusion. Once technically complete, failure to satisfy every condition stops this forecasting-performance branch; a pass supports separate reserved application testing. Neither a favorable subset nor extra repetitions may be selected after D to change this decision.

5.4 Completed mechanism-study results

The bounded KAHM departure has nonlinear aggregate NMSE 0.02993. Its point relative gains over the common basis, matched bounded RBF departure, raw RBF, boosted trees and C-selected policy are 12.58%, 1.17%, 3.92%, −1.77% and −6.04%, respectively. Positive values denote smaller mean KAHM loss; these percentages are point estimates, not confidence bounds. 1 of the five useful-superiority conditions pass, and the linear-control noninferiority condition passes. Every declared feature, coefficient, correction and maximum-error screen passes. The comparison with the common basis establishes useful aggregate value for this bounded reconstruction-and-decoder procedure under the declared margin. The frozen decision is therefore to *stop this forecasting-performance branch*. The complete required KAHM-specific predictive advantage is not established at the chosen budget. This does not prove equivalence, make all reconstruction features useless, or establish impossibility for every time-series law. A favorable descriptive law, noise level or horizon cannot replace the aggregate specified before evaluation.

The positive common-basis comparison and the failed overall decision are compatible. A bounded reconstruction departure supplies useful functions to this decoder, while the matched positive-RBF reconstruction supplies much of the same predictive value. KAHM's point improvement over that matched arm is below the prespecified 3% threshold. Its point improvement over raw RBF exceeds 3%, but the simultaneous lower bound remains below zero, so that useful-effect claim is unresolved. Boosting and the selected policy have smaller aggregate point losses. The evidence therefore supports useful reconstruction features without establishing the required KAHM-specific practical advantage.

Figure 1 retains every declared law and noise level for the matched reconstruction control and selected practical policy. The complete ten-method condition table and all horizon-level results remain available in the appendix and repository. These descriptive comparisons characterize where a restricted decoder benefits or loses; they are not a new selection rule for a favorable forecasting niche.

The maximum taskwise KAHM-to-ridge maximum-error ratio is 1.553, against the declared limit of five. The saved checks record 0 feature-bound, 0 coefficient-bound and 0 correction-bound violations. C activates the bounded KAHM correction on 432 of 432 nonlinear task/horizon cells and 54 of 144 linear-control cells. Activation means a nonzero selected mixing coefficient; it is not evidence that the correction improves D loss. Mean charged fit-and-selection time is 0.0833 seconds for bounded KAHM departure and 0.0658 seconds for its matched bounded RBF departure; detailed costs and accounting boundaries appear in Appendix O.

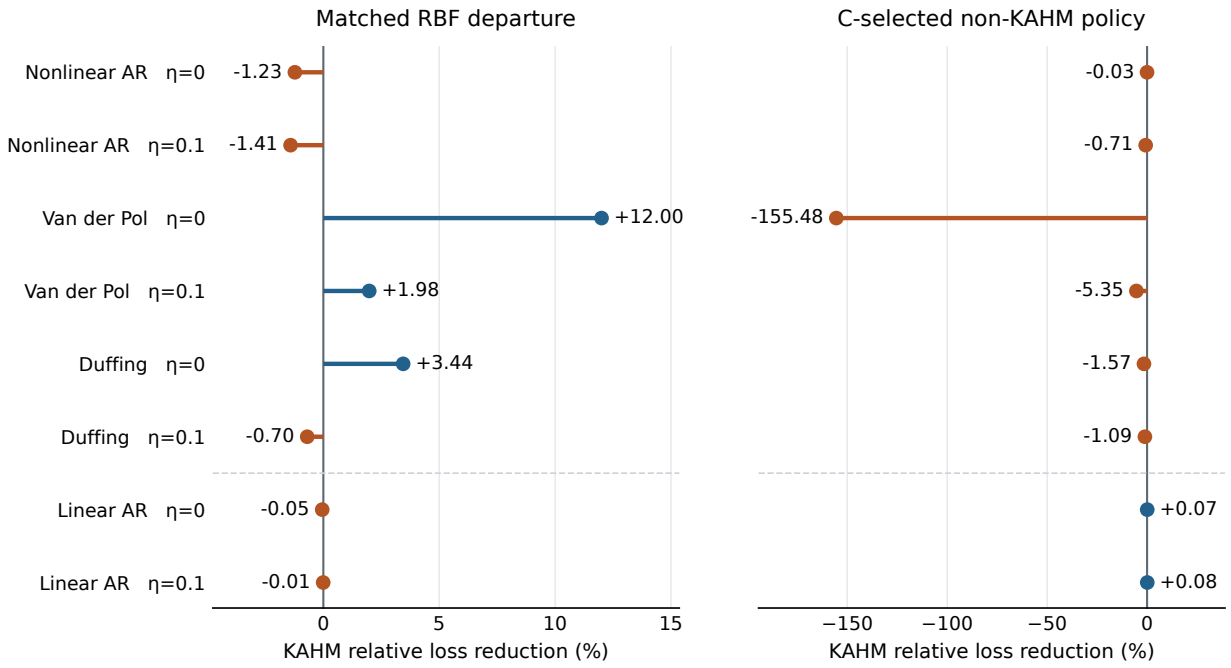


Figure 1: Descriptive conditionwise gains of bounded KAHM departure over the matched bounded RBF departure and C-selected non-KAHM policy. Each point is $100(1 - \overline{L}_K/\overline{L}_m)$ over all 24 repetitions of that condition; positive values favor KAHM. Panels have separate horizontal scales and numeric labels show each value. There are no conditionwise confidence claims or post-D selection. The dashed divider separates the nonlinear laws from the linear base-law negative control.

The functional certificate, deterministic correction bound and empirical decision answer different questions. Distinct functions may still be unhelpful at the observed sample size and decoder penalty. A bounded correction may still be inaccurate. Conversely, an unresolved useful-effect contrast does not show that the two representations are identical. The complete evidence therefore supports conclusions about this specified reconstruction-to-prediction mechanism, with the declared law, noise, data and decoder restrictions.

6 Training local reconstruction for the forecast

The shared proxy metric in Section 12 does not train the deployed KAHM forecast. We next intervene on the reconstruction and gate parameters themselves. This section specifies a forecasting family and a matched evaluation, with historical pilot evidence kept separate. Its public execution checkpoint freezes the numerical implementation, analysis, exact task roster and prepared inputs before full evaluation. This is a prospective checkpoint informed by previous results, not an external registration or independent replication.

6.1 A horizon-specific KAHM forecaster

For a scalar series observed through time t, write its history as $x_t = (y_{t-L+1}, \ldots, y_t)^\top$ and its target at offset h as y_{t+h}. Training-only standardization gives z_t. A shared local bank supplies reference columns Q_c, center μ_c, principal basis P_c and a fixed positive kernel regularizer λ_c. Three blocks request 2, 4 and 8 local models, each with at most 24 references and rank at most two. As in Equation (7), the predictor receives the gate and its gated principal coordinates. The complete forecast is

$$\widehat{y}_{t+h} = f_{0,h}(x_t) + \gamma_h\{a_h + \beta_h^\top \widetilde{\Gamma}_{g,h}(z_t; \theta_h)\}, \tag{17}$$

where f_0 is a retained raw-history ridge baseline, $\widetilde{\Gamma}$ uses an A-fitted feature standardizer, and $\gamma_h \in \{0, 1/4, 1/2, 1\}$. The baseline penalty is selected inside A, refitted on A, and held fixed. Every geometric arm

therefore learns the residuals of the same deployed baseline; neither donor residuals nor a pretest refit is bundled into this intervention.

For each block b and horizon h, a bounded log bandwidth $\xi_{b,h} \in [-\log 4, \log 4]$ modifies both the reference and query KAHM kernels:

$$K_c(\xi)_{ij} = \exp\{-D_{c,ij}\exp(-2\xi)\}, \qquad k_c(z;\xi)_i = \exp\{-d_{c,i}(z)\exp(-2\xi)\},$$
$$a_c(z;\xi) = (K_c(\xi) + \lambda_c I)^{-1} k_c(z;\xi), \qquad r_c(z;\xi) = \frac{Q_c a_c(z;\xi)}{\mathbf{1}^\top a_c(z;\xi)}. \tag{18}$$

Here D and d are the inherited local covariance-whitened projected squared distances divided by twice the positive effective rank. A degenerate rank-zero local model uses its fixed center instead of a kernel solve. The regularizer, reference membership, covariance and principal directions remain fixed. A second bounded parameter $\eta_{b,h}$ multiplies each block's folding-score logits by $\exp(\eta_{b,h})$ before softmax. Thus the intervention changes the normalized signed KAHM reconstruction as well as its use in the forecasting gate. It does not learn every KAHM component.

Both kernel matrices in Equation (18) must change with bandwidth: changing only a query similarity would define a different procedure. For fixed reference columns, put $M = K + \lambda I$, $a = M^{-1}k$, $s = \mathbf{1}^\top a$ and $r = Qa/s$. At points where M is invertible and $s \neq 0$, ordinary matrix differentiation gives

$$da = M^{-1}(dk - dM\, a), \qquad dr = \frac{(Q - r\mathbf{1}^\top)\, da}{s}. \tag{19}$$

This identity explains both how a bandwidth can alter reconstruction and why signed-denominator cancellation matters. It is not a novelty claim for differentiating through a linear solve. The present bounded optimizer does not require analytic derivatives. Common log-kernel shifting protects underflow; a relative denominator guard of 10^{-10} rejects unsafe A/B/C candidates. If a selected map is unsafe on D, its entire affected horizon falls back to the frozen baseline, with paid work and fallback recorded. Historical arithmetic and outcomes are unchanged.

6.2 Actual forecast supervision and matched controls

For each candidate θ_h and $\alpha \in \{0.01, 0.1, 1\}$, a ridge head minimizes A residual sum of squares plus $\alpha\|\beta\|^2$, with an unpenalized intercept. The geometry objective is actual B forecast MSE for Equation (17) at $\gamma_h = 1$, divided by a positive A-only target-variance scale. C then selects the penalty and mixing weight, separately for each horizon. Zero correction is the first incumbent; only strict C improvement replaces it. D labels are never passed to the fitting API. A/B/C/D denote distinct roles, not four opportunities to inspect the final evaluation.

The affine control trains a projection gain, $r_c = \mu_c + \exp(\xi_b)P_cP_c^\top(z - \mu_c)$. The locality control trains the balance between normal and center distance, with logit $-\exp(\xi_b)\|z - r_c^{\mathrm{A}}\|^2/v_c - 0.1\exp(-\xi_b)\|z - \mu_c\|^2/s_c$. The RBF-local control trains tangent/normal anisotropy, with logit

$$-\frac{\exp(\xi_b)\|P_c^\top(z-\mu_c)\|^2 + \exp(-\xi_b)\|(I - P_cP_c^\top)(z-\mu_c)\|^2}{2s_c}.$$

The scales s_c, v_c are fixed from A references. Each family uses the same three gate-temperature parameters $\eta_{b,h}$ and three shape parameters $\xi_{b,h}$. Identity parameters recover the fixed family; fixing $\xi = 0$ gives its gate-only intervention. Equal parameter counts and data do not imply equal functional capacity.

Each gate-only and reconstruction/shape fit receives at most 256 actual objective evaluations per horizon and penalty, with the same bounded optimizer, zero initialization, stopping rule and finite-incumbent policy. The fixed, gate-trained and reconstruction/shape-trained versions of the four families give twelve geometric procedures. Raw ridge, raw history plus Nyström RBF, histogram gradient boosting, phase-correct seasonal naive, and one C-selected non-KAHM policy complete the 17-method roster. The policy chooses one complete non-KAHM method by aggregate C loss and pays for all required candidates, counting shared nodes once. It is not a D-selected oracle. Appendix L records the baseline grids, chronological rules, and cost scope.

6.3 Development evidence and reserved evaluation

The preceding exploratory pilot trained gate temperatures alone on three fresh seeds per known law, with independently implemented generators and 160 objective evaluations. It reduced mean KAHM MSE by 0.53% on nonlinear AR, 30.21% on Van der Pol and 11.29% on Duffing relative to that pilot's fixed KAHM. The best directly trained local control remained more accurate on every law, and raw RBF was substantially stronger on Van der Pol and Duffing. All 99 selected forecasts and optimizer outcomes are preserved. These nine exploratory tasks do not enter the new inference family or supply unseen source-transfer evidence.

The new simulation study uses the recovered inherited generators, twelve fresh seeds per law, and independent A/B/C/D episodes numbering 64/32/32/128. Histories contain 12 observations and target offsets are 1, 4 and 12. The three training/selection roles are capped at 512/256/256 rows; D retains all 1,664 rows. Its 36 tasks are fresh repetitions of known laws. The natural study adds ten series from four previously unused Monash collections (Godahewa et al., 2021): Dominick weekly retail, rideshare hourly prices, Wikipedia daily web traffic, and one long sunspot daily series. Series eligibility and deterministic hash selection use A only. The initial rideshare context was shortened from 48 to 24 hours after an A-only availability check, before the public freeze and any forecast evaluation; the daily seasonal lag and eligibility threshold remain unchanged.

Natural A/B/C/D boundaries are chronological 50/20/15/15 percent, with all targets inside their assigned segment and earlier observations available as history. Missing windows are omitted without interpolation. Thus the estimand concerns the retained available windows of these single-vintage archives. It does not establish historical real-time data release availability. Error scales use A-only seasonal differences, with the prespecified first-difference fallback. The planned aggregate weights series equally within collections and then weights four collections equally. A preparation audit after A-only selection found no complete B windows in all three selected rideshare series. These planned tasks remain feasibility failures, so the complete four-collection accuracy aggregate is undefined. An availability-conditioned description of the other seven series and three collections is reported separately; it does not replace that estimand.

The synthetic primary family has 18 paired comparisons: on each law, reconstruction-trained KAHM versus raw RBF, gate-trained KAHM, each reconstruction-trained local control, and the non-KAHM policy. Two-sided Bonferroni t intervals use twelve repetition-level paired differences and 11 degrees of freedom, under their normal approximation. Coverage concerns this family only. Natural results are descriptive, including leave-one-collection-out sensitivity; overlapping origins and ten series do not turn four purposively selected collections into a large source sample. All procedures, failures and fallback costs are retained.

6.4 Audited results and predictive contribution

All 43 feasible task suites complete, yielding 731 task–method prediction records from 782 planned outputs. The three preidentified rideshare tasks account for the 51 unavailable outputs; there are no additional task failures, invalid objective evaluations or numerical fallback events. The frozen audit passes 543,017 checks, including reconstruction of 144 generated episode batches and replay of all 731 selected states on both C and D. A separately written calculation recomputes the scalar losses, A-only natural scales and all 18 paired intervals without importing the model or analyzer. These are consistency and replay checks, not independent experimental replications.

Table 3 reports every declared procedure. Relative to fixed KAHM, reconstruction training lowers mean synthetic MSE by 0.42%, 61.81% and 12.76% on nonlinear AR, Van der Pol and Duffing, respectively. Relative to gate-only KAHM the reductions are 0.09%, 41.43% and 5.51%. The latter Van der Pol increment is resolved by the simultaneous analysis; the AR and Duffing gate increments are not. The fixed-map comparisons are descriptive, outside that primary family.

The 18-contrast family yields 2 positive, 6 negative and 10 unresolved intervals (Figure 2; complete numerical intervals in Table 67). The positive comparisons are KAHM versus raw RBF on nonlinear AR, with a 2.87% mean reduction and absolute difference interval $[6.65\times10^{-6}, 2.776\times10^{-4}]$, and KAHM versus gate-only KAHM on Van der Pol, with a 41.43% reduction and interval $[0.004349, 0.007709]$. Differences are comparator minus KAHM, so a positive interval favors KAHM. These intervals are for absolute paired MSE differences, not percentages.

Table 3: All procedures in the direct-reconstruction study. Synthetic entries are mean MSE over twelve repetitions per law. The last column is scaled MSE for seven available series, averaged within each of three available collections and then equally across collections. The planned four-collection aggregate is undefined. "Reconstruction" denotes the specified shape intervention for non-KAHM controls.

Procedure	Nonlinear AR	Van der Pol	Duffing	Natural subset scaled MSE
Ridge	0.005304	0.045166	0.007212	0.38563
Raw RBF	0.0049509	0.0064823	0.0043907	0.36301
Boosted trees	0.005059	0.0024251	0.0077638	0.3522
Seasonal naive	0.0088262	0.29404	0.040538	0.46013
Fixed KAHM	0.0048288	0.022324	0.0061418	0.39407
Fixed affine	0.0048524	0.018702	0.0053904	0.38001
Fixed locality	0.0048879	0.015133	0.005206	0.37626
Fixed RBF-local	0.0047977	0.017581	0.0058852	0.3862
Gate KAHM	0.004813	0.014554	0.0056708	0.39619
Gate affine	0.0048022	0.010615	0.0050184	0.38952
Gate locality	0.0048618	0.013712	0.0045407	0.38233
Gate RBF-local	0.0047522	0.011134	0.0059965	0.36779
Reconstruction KAHM	0.0048087	0.0085249	0.0053583	0.37194
Reconstruction affine	0.0048034	0.0075449	0.0047109	0.38172
Reconstruction locality	0.0048625	0.0092922	0.0043984	0.37483
Reconstruction RBF-local	0.0048001	0.0077975	0.0050204	0.36383
Selected non-KAHM	0.0047666	0.0024251	0.0041435	0.38247

The adverse comparisons are equally material. On Van der Pol, shape-trained affine and the C-selected policy beat reconstruction-trained KAHM. The policy selects boosted trees in all twelve repetitions. On Duffing, raw RBF, shape-trained affine, shape-trained locality and the policy beat KAHM. No law resolves all six primary comparisons in KAHM's favor, and no positive primary interval is against an equally shape-trained non-KAHM local control. Unresolved differences do not establish equivalence. The experiment therefore identifies useful direct training within the KAHM family, especially on Van der Pol, without establishing distinctive superiority of its reconstruction rule.

Available natural evidence. The complete four-collection comparison remains undefined. On the explicitly conditional three-collection subset, KAHM has scaled MSE 0.371935, compared with ridge's 0.385625 (3.55% lower), fixed KAHM's 0.394070 and gate-only KAHM's 0.396192. Raw RBF (0.363007), boosted trees (0.352201) and shape-trained RBF-local (0.363835) remain more accurate in aggregate. KAHM improves the C-selected policy's 0.382472 by 2.75%; that policy's validation selection is not a test-set oracle. Source results are retained in Table 68.

The ridge improvement is concentrated in Dominick: KAHM has scaled MSE 0.316351, versus 0.357402 for ridge. Excluding that collection leaves only a 0.00229% mean improvement over ridge across the other two collections. C selects zero KAHM correction on twelve of the 21 available natural horizons, including every Sunspot horizon. These observations limit a broad transfer interpretation and show why an aggregate gain cannot be equated with a uniformly useful new representation.

Optimization and measured resources. The run retains 3096 geometry optimizations and 406832 actual objective evaluations. There are 2,491 optimizer convergence exits, 604 evaluation-budget exits and one abnormal optimizer stop; the best finite incumbent is retained in every case. No invalid objective evaluation or numerical fallback is observed. This accounting distinguishes a completed forecast from optimizer convergence.

Mean charged synthetic pipeline time is 10.725 seconds for reconstruction-trained KAHM, versus 0.914 for gate-only KAHM, 0.0774 for fixed KAHM, 0.0172 for raw RBF and 0.653 for boosted trees. Equally shape-trained affine, locality and RBF-local take 6.973, 2.722 and 2.766 seconds, respectively. On the seven available natural tasks, KAHM averages 7.929 seconds, versus 0.0130 for raw RBF and 0.655 for boosted trees. Its mean selected serialized state is 104.2 KiB there, versus 57.9 KiB for raw RBF and 383.3 KiB for

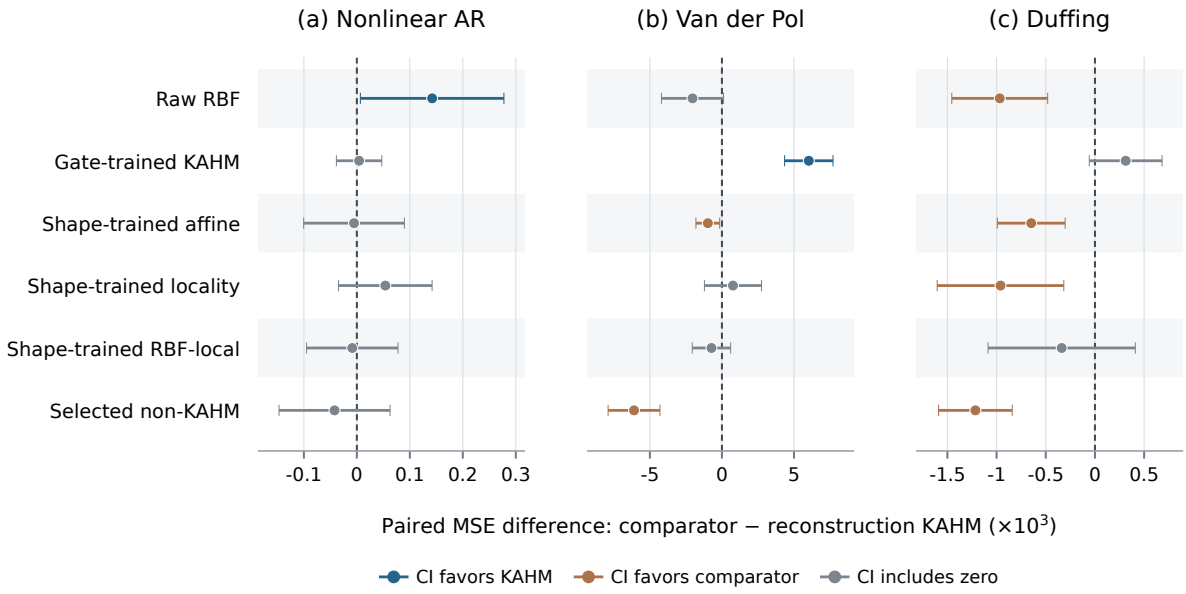


Figure 2: All 18 predeclared comparisons with reconstruction-trained KAHM. Points and intervals are comparator-minus-KAHM MSE differences multiplied by 1,000. Blue intervals favor KAHM, orange favor the comparator, and gray include zero. The two-sided Bonferroni t family uses twelve paired repetitions per law and 11 degrees of freedom. Panel scales differ. A positive result against gate-only KAHM identifies an intervention gain; it does not by itself distinguish KAHM from the trained local controls.

boosted trees; zero-correction choices can omit a geometric bank, so these are selected-state measurements, not intrinsic storage lower bounds. Table 69 and Figure 11 give the complete resource comparison. Costs include the recorded training, selection, query and state-packing work. They do not measure update latency or minimal deployment cost. The observed accuracy gains thus do not remove the need to justify KAHM-specific complexity against the stronger alternatives.

7 Budgeted online adaptation: a completed development decision

Question and scope. A subsequent development study tested whether updates to local KAHM geometry under fixed reference and replay budgets provide enough predictive benefit to justify a larger evaluation. The complete design comprises twelve streams, six methods and two capacity tiers: 144 runs and 387,900 scored forecasts after the numerical amendment described below. Four stationary nonlinear AR streams are paired by innovations with four recurring A/B streams; the latter alternate regimes every 256 observations, and both regimes occur in the initial fitting prefix. Regime labels are never supplied to the forecasters. Three Dominick weekly series and one Sunspot daily series are deliberately reused from previously inspected inputs. This supplies development evidence from one generator and two selected natural collections, with no claim of new-source confirmation. Appendix M records the chronology, decision thresholds and source identities.

A simpler adaptive prototype. All geometric methods retain a sliding-window raw ridge baseline and residual heads. Fixed KAHM updates its heads with unchanged initial geometry; adaptive KAHM, affine and RBF-local share the bounded reference-refresh policy. Each adaptive refresh coherently re-encodes replay histories and rebuilds residual heads. The sixth method is sliding-window Gaussian kernel ridge with a free intercept and recursive add/delete inverse updates. Its forecast also uses the calibrated blend with raw ridge: correction weight one gives the kernel prediction and zero gives raw ridge. Thus the reported KRR arm is a selected forecasting procedure, not an unblended kernel forecast on every horizon, and it is not the published

KRLS-T algorithm. The small tier allows 64 shared geometric references and 128 replay rows per horizon, and the large tier allows 128 and 256. Kernel supports are capped separately per horizon; these quotas are not equal byte or computational allocations. Bandwidths and gate temperatures are fixed, so this prototype is not a streaming reproduction of the forecast-trained model in the preceding study.

Chronology and numerical amendment. The first 35% of each stream initializes the model, 35–50% supplies chronological calibration, and the latter half supplies evaluation. Only matured labels enter an update. Forecasts are recorded before their targets arrive and remain immutable. Each horizon selects a correction weight from $\{0, 0.25, 0.5, 1\}$ on matured calibration targets, then retains that weight during evaluation. The original complete attempt had four correction-head failures and 8,659 framework fallback forecasts. Amendment A1 replaces accumulated correction normal equations with a centered, column-equilibrated augmented ridge solve using pivoted QR, preserving the objective, penalties, data, scalers, reference policy and decision rules. All geometric arms receive the repair, and the full roster is repeated. The amended runs have no unexpected model exceptions, framework fallback forecasts or observed cap violations. Both attempts are preserved; their source freezes were local checkpoints, not public preregistration. The repeat follows observed outcomes and is not independent confirmation.

Table 4: Budgeted adaptive development study: scaled MSE, lower is better. Origins are averaged within horizon, horizons within series, and series within collection. The natural mean gives Dominick and Sunspot equal weight. The two capacity tiers are quotas, not equal-byte allocations. All non-ridge arms, including KRR, use calibration-selected mixing with the common ridge baseline. No losses are pooled with earlier studies.

Method	Stationary	Recurring	Dominick	Sunspot	Natural mean
Small: 64 shared references / 128 replay rows per horizon					
Raw ridge	2.2402	3.4583	1.6144	2.3697	1.9920
Fixed KAHM	2.2407	3.4583	1.6134	2.3697	1.9915
Adaptive KAHM	2.2399	3.4583	1.6135	2.3697	1.9916
Adaptive affine	2.2407	3.4583	1.6137	3.4004	2.5071
Adaptive RBF-local	2.2428	3.4583	1.6160	2.3697	1.9928
Sliding-window KRR	2.2491	3.3578	0.8685	2.3897	1.6291
Large: 128 shared references / 256 replay rows per horizon					
Raw ridge	2.0275	3.3623	0.8471	2.1045	1.4758
Fixed KAHM	2.0375	3.4031	0.8464	2.1045	1.4754
Adaptive KAHM	2.0280	1.376×10^8	0.8444	2.1045	1.4744
Adaptive affine	2.0364	1.061×10^6	0.8446	2.2085	1.5266
Adaptive RBF-local	2.0290	3.7036	0.8460	2.1045	1.4752
Sliding-window KRR	2.0551	3.2079	0.5954	2.1045	1.3499

Predictive outcome. Table 4 reports MSE divided by an initial-prefix seasonal-difference scale. The scale and online schedule differ from earlier sections, precluding direct comparisons of their numerical scores. Both complete tiers fail the recurring and natural-data accuracy criteria and receive the decision Defer. Adaptive KAHM's natural mean loss exceeds kernel ridge by 22.26% at the small tier and 9.22% at the large tier. At each tier, only two of twelve natural horizon/series combinations activate a KAHM correction; every Sunspot horizon selects zero. Small-tier recurring corrections are all zero, while nine of twelve large-tier recurring corrections are active. Baseline recovery at zero correction does not demonstrate added geometric value. The descriptive advancement criteria are development triage rules, not a hypothesis test or a universal definition of effectiveness.

Extrapolation persists after the numerical repair. For recurring seed 20261101, origin 1554 and horizon 12, large-tier adaptive KAHM predicts 175,555.08 when the target is -0.9815. At the preserved diagnostic state, the largest absolute standardized query feature is about 3.20×10^6, compared with 392 in the current supervised replay. A fresh centered SVD solve reproduces the large correction. The minimum relative signed denominator, defined by the ratio in Equation (16), is 0.354, safely above its 10^{-10} guard.

Adaptive affine also exhibits severe extrapolation under a fresh solve. These post-run observations identify a representation–decoder stability problem in the examined states. They are consistent with a query falling outside the observed feature range of matured-label replay, but do not isolate the causal contributions of scaling, label delay and geometry refreshes. No forecasts were removed, clipped or retuned to obtain the reported decision.

Cost and research consequence. Adaptive KAHM passes the monitored 20 ms p99 screen on every stream: the worst per-stream values are 9.89 and 11.75 ms. There are nevertheless 4 service intervals above 20 ms among 21,662 evaluation observation steps; the screen is not an enforced per-step deadline. Service includes updates, geometry refreshes, feature/head rebuilds and prediction, but excludes evidence serialization and scoring. The eager prototype maintains geometry even when its correction is disabled. Resource details appear in Table 70. This result establishes measured implementation feasibility under the stated screen while withholding support for an adaptive forecasting advantage. The fixed-geometry reconstruction-departure experiment in Section 5 subsequently tests a distinct readout and an explicit correction bound. Its result is reported separately, rather than treated as a repair or confirmation of the adaptive prototype. The development outcome does not rule out every other adaptive or forecast-trained KAHM formulation.

8 Conditional gains in controlled forecasting

The controlled forecasting laws are nonlinear autoregression (AR), Van der Pol, and Duffing. Each repetition independently generates 128 training, 128 validation, and 512 test episodes of length 72. Histories have length 12 and predict offsets 1, 4, and 12 at 13 origins per episode. Entire episodes stay within a split; MSE averages origins and horizons within episodes and then episodes. Appendix B specifies the numerical generators and fitting rules.

The first study has 24 full data-and-fit repetitions in each of nine primary settings: six branch targets and three forecasting laws. Adding local coordinates to KAHM affinities improves ridge prediction beyond the fixed practical margin in 8 settings. On Van der Pol, mean MSE falls from 0.111108 to 0.014475, although affine local coordinates perform better with the same ridge head. The first stage uses a 29-contrast family of Bonferroni paired Student intervals. This supports retaining local position, while leaving the complete representation–decoder choice unresolved.

A separate follow-up, motivated by those outcomes, freezes its candidates, margins, and analysis before generating 24 fresh repetitions per forecasting law. It compares raw histories, affine local features, KAHM local features, and full KAHM scores with 64 or 256 Gaussian Nyström landmarks. The head appends linear coordinates to the finite nonlinear basis, standardizes basis columns, and uses an ordinary Euclidean ridge penalty. Validation selects among three bandwidth multipliers and seven penalties; the fitted model uses training observations only. Equal landmark counts do not imply equal realized ranks, function classes, or computational costs.

Table 5 retains all favorable, adverse, and unresolved comparisons. KAHM local features outperform raw and affine local features on Van der Pol at both widths in every repetition. At 256 landmarks, mean MSEs are 0.000871969, 0.001654150, and 0.001078003, respectively: descriptive reductions of 47.3% and 19.1% relative to the controls. The two simultaneous lower endpoints, 0.00075496 and 0.00018100, exceed the frozen practical margin 0.00014891; both 64-landmark comparisons also clear it. Raw inputs win on AR at both widths, and both controls win on Duffing. KAHM–affine differences on AR remain unresolved. The separate 29- and 12-contrast families do not imply a joint 95% coverage statement. Their inferential units are complete repetitions, not windows or horizons (Appendix C).

Numerical sensitivity and an adverse natural-data check. The original Gaussian query evaluation can produce an all-zero row before signed normalization. Replacing $\exp \ell_j$ by $\exp(\ell_j - \max_i \ell_i)$ preserves exact normalized weights whenever the denominator is nonzero (Proposition 7). In a post-hoc check reusing the 24 Van der Pol follow-up samples and banks, with affected heads refitted and validation-tuned, exactly zero normalizers fall from 99,762 among 2,236,416 query–local-model evaluations to zero. KAHM-local mean MSE changes by less than 4×10^{-13} at either width, whereas full-score losses improve by roughly 0.37–0.39%. Row

Table 5: All 12 primary fresh-sample capacity contrasts. Entries are mean MSEs and paired differences over 24 independent full repetitions, multiplied by 10^3; Δ is control minus KAHM-local loss. Intervals use the follow-up's separate 95% Bonferroni paired Student family. Coverage relies on normality or its approximation for paired differences; these are not distribution-free guarantees.

System	M	Control	Control MSE	KAHM local MSE	Δ [interval]
Nonlinear AR	64	Raw	4.4238	4.8795	−0.4556 [−0.5235, −0.3878]
Nonlinear AR	64	Affine local	4.9120	4.8795	0.0325 [−0.0031, 0.0680]
Nonlinear AR	256	Raw	4.6958	5.1749	−0.4791 [−0.6013, −0.3569]
Nonlinear AR	256	Affine local	5.2347	5.1749	0.0598 [−0.0131, 0.1327]
Van der Pol	64	Raw	2.8586	1.0266	1.8320 [1.7369, 1.9271]
Van der Pol	64	Affine local	1.3767	1.0266	0.3501 [0.2755, 0.4247]
Van der Pol	256	Raw	1.6541	0.8720	0.7822 [0.7550, 0.8094]
Van der Pol	256	Affine local	1.0780	0.8720	0.2060 [0.1810, 0.2311]
Duffing	64	Raw	3.4597	4.2154	−0.7557 [−1.0831, −0.4282]
Duffing	64	Affine local	3.0549	4.2154	−1.1605 [−1.4707, −0.8503]
Duffing	256	Raw	2.8364	4.0736	−1.2372 [−1.5242, −0.9503]
Duffing	256	Affine local	2.7981	4.0736	−1.2756 [−1.5702, −0.9810]

scaling addresses this underflow pathway; it does not prevent signed cancellation or supply new independent confirmation.

On a fixed grouped split of Airfoil Self-Noise (Brooks et al., 1989), raw RBF obtains mean group-weighted MSE 15.6898 dB^2, compared with 20.9313 for KAHM-local RBF. The validation selector chooses raw RBF in all 24 fits. These seeds characterize fitting variability on one static-regression dataset and split, not independent natural forecasting evidence. Together, the controlled results motivate testing local features as conditional candidates. They neither explain Van der Pol through the branch symmetry nor predict transfer to new source families; Section 9 examines that question separately.

9 Natural forecasting: transfer, cost, and predicting benefit

9.1 A separate source-level evaluation

The natural study fixes four development families (Electricity, NN5, Tourism, and FRED-MD) and four confirmation families (Traffic, Hospital, Saugeen River flow, and US births). Versions, licenses, eligibility rules, and chronological windows are specified in Appendix F. Training-prefix eligibility and a fixed salted ordering select 26 series. Two history–horizon regimes, two capacities, and two seeds yield 208 runs: 128 development and 80 confirmation. Related series, windows, horizons, capacities, and seeds remain within their original source families. The units describing transfer breadth are the four confirmation families.

Each series uses chronological 60/20/20 percent training/validation/test blocks, and every target horizon lies entirely within its split. All learned transformations and feature bases use the permitted training data. Validation chooses hyperparameters; a final refit uses eligible pretest targets, and test outcomes never retune parameters. Contexts can use earlier observed values. At most 64 validation and 64 test origins are retained by a fixed spacing rule; missing windows are excluded identically for every method, without interpolation or replacement series. Mean-squared forecast error is divided by a fixed initial-training seasonal-difference scale. Aggregation gives each source family equal weight, followed by its nested task levels. These descriptive quantities are not pooled with the controlled-study confidence families.

The twelve candidates include raw ridge and raw finite-RBF predictors; affine-, locality-, and KAHM-gated local predictors, with and without the full raw history; and seasonal naive, Holt, histogram boosting, and a small MLP. The primary matched pair is raw RBF (R) versus raw plus KAHM (K). The raw-augmented code is

$$T_{\mathrm{raw}+g}(x) = \big(z(x),\, \phi_g(z(x)),\, (\phi_{g,c}(z(x))P_c^\top(z(x)-\mu_c))_c\big). \tag{20}$$

It retains every standardized history coordinate. For a fixed fitted state the raw input is therefore recoverable and Bayes information is unchanged (Proposition 8). Finite fitted performance can still change: appended features alter Gaussian distances, the Nyström basis, and ridge regularization, and the resulting nonlinear classes need not be nested.

Small/medium configurations cap training windows at 512/1,024 and RBF landmarks at 32/64. Each method fits its own preprocessing and geometry; affine/locality alternatives never fit a KAHM kernel. Within a method, features and head statistics are reused across penalties $\{0.01, 1, 100\}$. The selected model is refitted from scratch. These are specified finite procedures, not equally timed or exhaustively tuned algorithms. Detailed heads, practical controls, capacity caps, and numerical conventions appear in Appendices E–F.

9.2 Which computational work is charged?

Measured warm-library pipelines include required preparation/loading, preprocessing, validation search, selection bookkeeping, chosen refitting, forecasting, and serialization. Libraries are initialized beforehand; imports and process launch are separately exposed. Wall and CPU time, model bytes, and process high-water memory have distinct recorded scopes. Let S_m denote method m's search nodes, F_m its final fit and forecast, and m^* a validation-selected candidate. Its charged work is

$$C_{\mathrm{val}} = \sum_{v \in \mathcal{D}_{\mathrm{data}} \cup (\bigcup_{m \in \mathcal{A}} S_m) \cup F_{m^*}} c_v + c_{\mathrm{decision}}. \tag{21}$$

Unique dependency nodes are counted once. A diagnostic selector likewise pays for all required descriptors and probes, even when it rejects KAHM. Acquiring development labels and fitting the small diagnostic regressions are separate offline investments. No assumed deployment count is used to amortize them. The costs describe measured implementations on one CPU environment; they are not intrinsic complexity or hardware-independent speed ratios.

9.3 Accuracy and cost on reserved sources

All 208 declared runs completed with every candidate present; saved forecasts reconstruct all 2,496 task–method losses. Table 6 retains all twelve confirmation candidates. Raw plus KAHM has 4.26% higher aggregate error than raw RBF, at 2.30 times its measured warm-library pipeline cost. Raw ridge has lower aggregate error than both. Against raw RBF, KAHM raises mean loss by 0.50% on Traffic, 12.27% on Hospital, and 3.53% on US births; it lowers loss by 1.53% on Saugeen, where raw ridge also performs better. Leaving out any one confirmation family still leaves the KAHM aggregate above raw RBF. This sensitivity check is descriptive and does not turn four selected sources into a population-wide inference.

The structural controls clarify attribution. Raw plus KAHM improves aggregate loss over raw plus affine and raw plus locality by only 0.46% and 0.50%, respectively. Each comparison favors KAHM on two source means and the control on two; KAHM costs 14.65% and 38.82% more. These mixed differences do not identify nonlinear reconstruction as a general source of advantage. At the small/medium settings, KAHM raises loss against raw RBF by about 2.00/6.70%; the settings change both sample caps and model sizes, so their effects are not separately identified.

The favorable development mean also needs qualification. KAHM reduced loss against raw RBF by 42.45%, but FRED-MD supplied 96.62% of the net absolute reduction. Removing that family reduces the apparent gain to 4.65%. Raw plus affine had lower mean loss and cost than KAHM in each development family, and raw ridge had the lowest overall development loss. Consequently, the development comparison alone did not establish a KAHM-specific benefit.

Implementation overhead is substantial. Selection cleanup, including explicit garbage collection, contributes 0.1381 of raw RBF's 0.1688 seconds and 0.1825 of KAHM's 0.3874 seconds. Search and final refit are also reported separately (Table 29). The 2.30-fold ratio describes the supplied warm workflow; it is not a cold-start end-to-end deployment ratio. Figure 3 retains the full accuracy–cost comparison, including selectors that must pay to choose a model.

Table 6: All twelve standalone methods on the reserved natural sources. Scaled MSE and warm-library wall time use equal source-family weights and the frozen within-source hierarchy. Times include required preprocessing, search, refitting, prediction, serialization, and measured bookkeeping; imports and launch are separate. These are descriptive results from four source families.

Method	Scaled MSE	Wall seconds per task
Raw ridge	0.7798	0.1880
Raw RBF	0.8075	0.1688
Affine local	0.9449	0.5002
Locality local	0.8964	0.2898
KAHM local	0.9354	0.3218
Raw + affine	0.8458	0.3379
Raw + locality	0.8462	0.2791
Raw + KAHM	0.8419	0.3874
Seasonal naive	1.0498	0.1614
Holt	2.3729	0.3449
Histogram boosting	0.9555	8.9103
MLP	0.8785	1.4626

9.4 The frozen benefit diagnostic

Four fixed ridge diagnostics predict $\log[(\ell_R + 10^{-12})/(\ell_K + 10^{-12})]$ from metadata M, M plus geometry G, M plus a cheap validation probe P, or $M + P + G$. Metadata describe training size, horizon/history ratio, and lag-one autocorrelation; geometry adds gate entropy and an affine-projection residual. The paid probe compares reduced-capacity raw/KAHM fits on validation data. A positive estimated log benefit selects KAHM; ties select raw. Development standardization and training hold out whole source families. All variants are then fitted on development and frozen before confirmation; confirmation outcomes cannot choose the variant or threshold.

The primary geometric increment, $M + P + G$ versus $M + P$, changes none of the 80 confirmation decisions. Both achieve scaled MSE 0.807085 at about 0.3309 seconds. The probe already computes the geometric descriptors, so they need no extra bank fit in this pair. Log-benefit RMSE nonetheless increases from 0.184549 to 0.184680. The shared decision rule improves aggregate loss over always raw by only 0.054%, at 1.96 times its pipeline cost. It improves one source mean, worsens one, and ties two. Metadata-plus-geometry also makes exactly the same choices as metadata alone, while paying for extra feature acquisition. All variants and validation-portfolio controls remain in Table 30.

Offline learning requires more than fitting a small ridge regression. Acquiring the matched development outcomes and shared probe/metadata dependencies costs 80.83 seconds of summed measured pipeline work; all four final ridge fits together add about 0.032 seconds. Shared dependencies must not be added repeatedly across variants. These observations provide no validated geometric adoption criterion for the tested procedure. They also do not establish that usefulness is unpredictable by a different, independently evaluated diagnostic.

10 Post-hoc sensitivity to geometry scaling

The preceding studies fix training z-score geometry scaling. To test whether that choice determines their practical interpretation, a bounded follow-up replaces it with training min–max scaling to $[-1, 1]$, without clipping future inputs. Raw skips and references remain standardized; all targets, splits, seeds, head grids, capacities, and query conventions remain fixed. The protocol and execution code were published before the sensitivity fits, after the original outcomes had been inspected. These are paired post-hoc comparisons on reused sources and draws, not fresh confirmation. Appendix I specifies the intervention, costs, retained evidence, and complete results. The frozen benefit diagnostic is not refitted or reevaluated for min–max geometry.

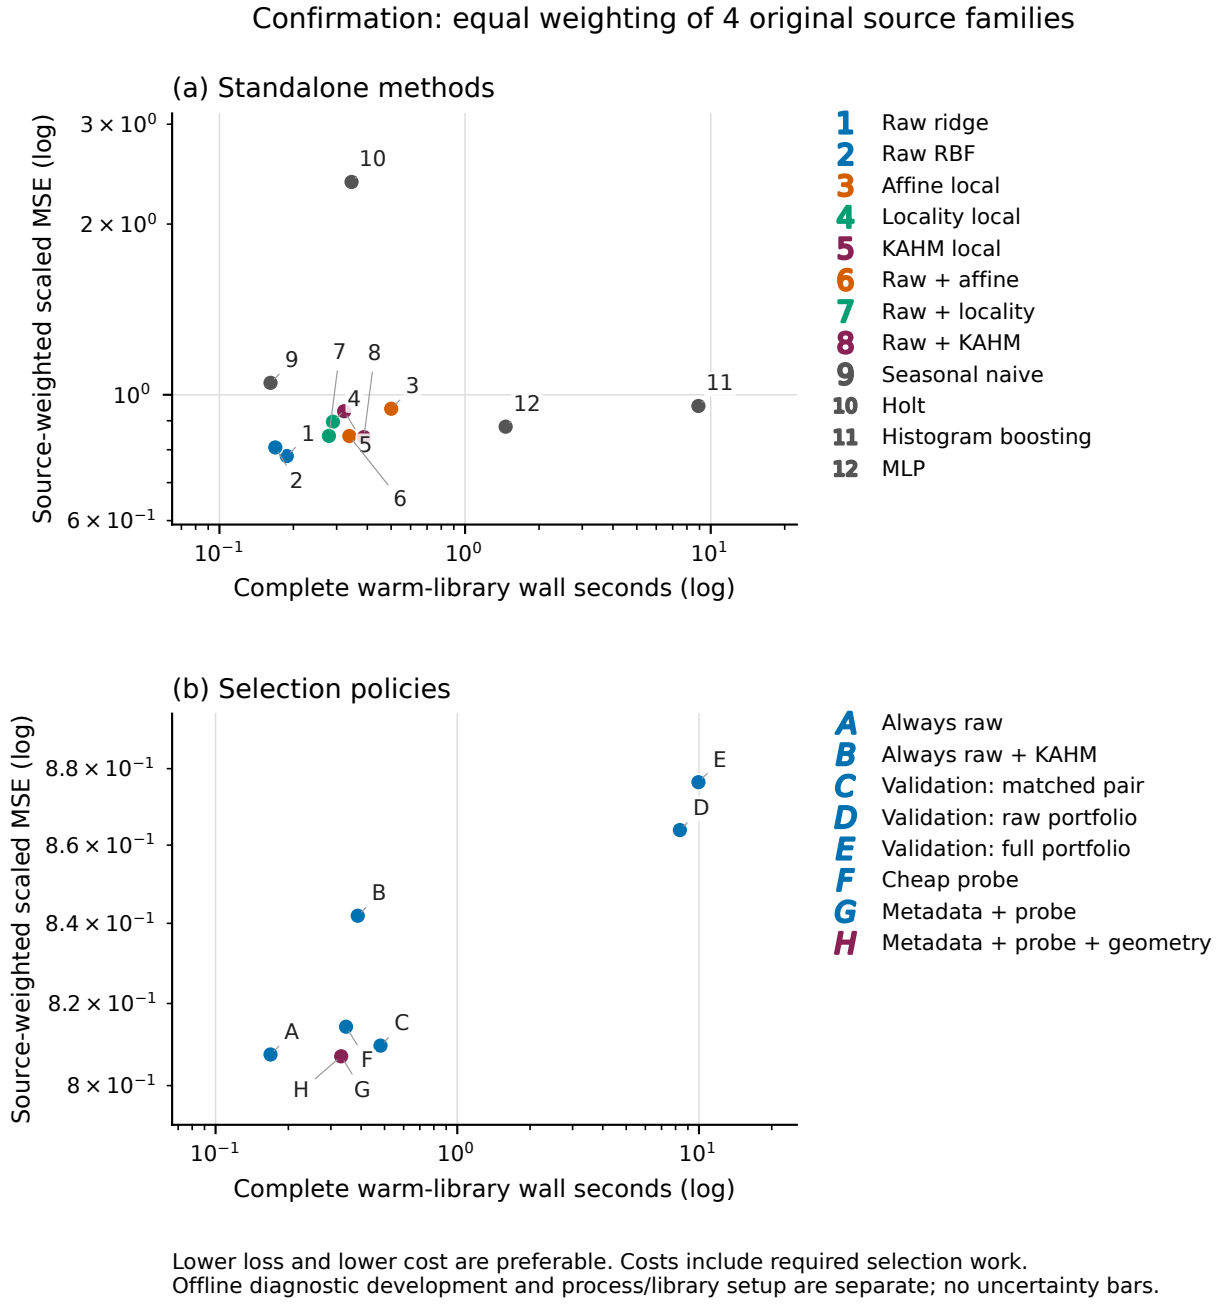


Figure 3: Reserved-source accuracy and measured warm-library cost. All points use the same source hierarchy. The standalone and selector panels have separate scales so that all declared candidates remain visible. Selector costs include required searches and probes. Confirmation outcomes are used to evaluate these procedures, not to fit a new selection rule.

Natural-source ranking. All 208 configurations are rerun for the three raw-augmented geometric methods under both scalers, with unchanged raw RBF and ridge references. On the four formerly reserved sources, KAHM's source-balanced scaled MSE changes from 0.8419 to 0.8422, an increase of 0.03% (Table 7). The min–max arm remains 4.29% above raw RBF and 8.00% above raw ridge. Min–max KAHM beats raw RBF on only Saugeen, and raw ridge has lower loss on all four source means. Leaving out any one family still

Method	Standard MSE	Min–max MSE	Change (%)
Raw ridge	0.7798	0.7798	fixed
Raw RBF	0.8075	0.8075	fixed
Raw + affine	0.8458	0.8596	+1.62
Raw + locality	0.8462	0.8488	+0.31
Raw + KAHM	0.8419	0.8422	+0.03

Table 7: Geometry-scaling sensitivity on the four formerly reserved natural sources. Scaled MSE uses the original source hierarchy. Standard arms reproduce the frozen results; min–max changes geometry only, retains the raw skip, and applies no input clipping. Change is $100(\ell_{\text{minmax}}/\ell_{\text{standard}} - 1)$; negative favors min–max. Raw references are fixed. All new comparisons are post-hoc sensitivity.

Law	M	Raw	KAHM std.	KAHM min–max	Affine min–max	Locality min–max
Nonlinear AR	64	4.4238	4.8795	4.8678	4.8940	4.9414
Nonlinear AR	256	4.6958	5.1749	5.1584	5.1807	5.2577
Van der Pol	64	2.8586	1.0266	1.0248	1.3482	1.1240
Van der Pol	256	1.6541	0.8720	0.8740	1.0812	0.9448
Duffing	64	3.4597	4.2154	4.0951	2.9981	2.8227
Duffing	256	2.8364	4.0736	3.7741	2.7742	2.6921

Table 8: Controlled geometry-scaling sensitivity on all 24 original complete draws per law and both landmark counts M. Mean MSE is multiplied by 10^3. Raw inputs remain standardized; the min–max columns change only the fitted geometry scaler. Locality is the added matched coordinate control. These paired reused-draw comparisons are descriptive, with full dispersion and the score-only representation in Table 47.

leaves min–max KAHM above raw RBF. Thus this specified scaling alternative does not reverse the aggregate natural-data comparison.

The near-unchanged aggregate is not an equivalence guarantee. KAHM's loss falls by 0.15% on Traffic and 0.86% on Hospital, but rises by 0.90% on Saugeen and 0.35% on US births. Small-capacity loss increases by 0.99%, whereas medium-capacity loss falls by 0.96%; these settings still jointly vary sample and model-size caps. The original development aggregate worsens by 7.70%, with heterogeneous source effects. The same intervention also changes the affine and locality controls; it does not isolate an effect of nonlinear KAHM reconstruction.

In this new execution, KAHM's source-balanced mean min–max warm method time is 0.5561 seconds per task, versus 0.3804 for standardized KAHM and 0.1762 for the remeasured raw RBF reference: ratios of 1.46 and 3.16, respectively. These include search, selection cleanup, refit, forecast, and serialization. A retained Saugeen search/cleanup outlier contributes to the new timing aggregate. They are single-execution, implementation-specific observations, not an intrinsic computational penalty of min–max scaling or a cold-start deployment claim.

Controlled finite-decoder comparisons. All 24 original complete draws for each law and both landmark counts are reused. Both scaler arms retain raw, affine-local, KAHM-local, and KAHM-score features; a matched locality-coordinate control is explicitly added. Table 8 reports every law/capacity cell, with all representations and paired dispersion in Appendix I. The main mean-loss ordering persists: raw RBF remains better than KAHM local coordinates on autoregression and Duffing, whereas KAHM local coordinates remain better than raw and both local controls on Van der Pol at both capacities. KAHM-local scaling changes range from a 0.23% increase on Van der Pol at 256 landmarks to a 7.35% reduction on Duffing at 256 landmarks. The latter lowers MSE from 4.0736 to 3.7741 in units of 10^{-3}, but remains above raw (2.8364), min–max affine (2.7742), and min–max locality (2.6921). Scaling can materially change an error without reversing the scientific comparison. These reused-draw mean comparisons carry no new confirmatory confidence claim.

11 Preserving raw forecasts while testing geometric utility

The preceding studies motivate a distinct question. Does KAHM help when its contribution is a correction to an unchanged raw forecast, and how does that contribution depend on training data and the raw decoder? The extension separates these factors and tests a fixed adoption rule on four additional archive collections. Its protocol, candidate grid, data roster, and execution sources are frozen before its full model evaluations. This is a prospective execution freeze, not external preregistration. The earlier evidence and post-hoc scaling analysis remain separately reported; no outcome from those archives is reclassified as new confirmation.

11.1 Forecasts, controls, and selection

The raw baseline is the inherited finite Gaussian Nyström predictor with appended linear history coordinates, column standardization, and a ridge head. Its requested M landmarks and regularization are fitted using the raw history only. For each $g \in \{\text{KAHM}, \text{affine}, \text{locality}\}$, we fit a separate ridge head on the local-coordinate features of Equation (7), using the raw model's training residuals as targets. The additive forecast is Equation (3). The correction has its own standardization and ridge penalty; it does not change raw distances, landmarks, coefficients, or regularization, and it introduces no additional Nyström basis. Residuals are in-sample training residuals, not cross-fitted residuals. This choice is part of the evaluated procedure and can limit the structure left for the correction to learn.

All geometries use the same partitions, principal-direction configuration, reference-selection rules, and fitting seeds. The geometry bank uses three blocks of 2, 4, and 8 local models, requested rank two, at most 24 references per local model, and at most 512 fitting histories. KAHM uses the stable Gaussian query arithmetic described in Section 8; affine and locality controls do not fit KAHM kernels. The concatenated raw-plus-KAHM architecture from the original natural study is also fitted under this extension's limits. It preserves raw information but changes the finite kernel geometry, so it is a different complete procedure, not a restricted version of the additive model. Raw ridge, persistence/seasonal-naive prediction, and a fixed histogram-gradient-boosting control complete the comparison.

Validation first chooses the raw RBF penalty from $\{0.01, 1, 100\}$. Holding this raw forecast fixed, each correction searches the same three penalties and weights $\gamma \in \{0, 0.25, 0.5, 1\}$. There are ten distinct correction candidates: one zero correction and nine positive-weight choices. Ties favor smaller γ, followed by the fixed penalty order. These extra validation opportunities are part of the additive procedure; equal landmark counts do not equalize search size, effective function classes, or cost. The main KAHM policy uses its selected correction only if validation MSE is at least 5% below that of the selected raw baseline. A second declared policy applies the same threshold to the validation-best choice across all three geometries. The 5% threshold is a research sensitivity, not a test-set guarantee or an application-derived minimum. Every policy pays for the corrections it examines, including corrections it declines.

11.2 Training size, raw decoder capacity, and new sources

The synthetic factorial crosses the three inherited forecasting laws, $N \in \{32, 128\}$ independent training episodes, and $M \in \{16, 64\}$ raw RBF landmarks. Twelve fresh repetitions use seeds 9100–9111, for 144 configurations. Within a law and repetition, the 32 training episodes are a prefix of the same 128-episode collection, and all four $N \times M$ settings share 64 validation and 128 test episodes. Episodes retain length 72, history 12, offsets 1, 4, and 12, and 13 origins per episode. All training origins can fit the decoder; the 512-history limit applies only to the geometry bank. Selected forecasts use training-only fitting, without adding validation episodes, so N remains an interpretable factor. This changes the raw predictor's capacity while holding the correction's declared architecture fixed; it does not vary every source of model complexity.

Synthetic MSE averages target coordinates and origins within episodes, then episodes. The primary loss differences compare additive KAHM with raw RBF and concatenated KAHM in each of the 12 law–N–M cells. All 24 contrasts use a separate family of 95% Bonferroni paired Student intervals over 12 complete repetitions. Their coverage relies on a normal approximation for repetition-level differences; origins and horizons do not increase the replication count. Affine, locality, and practical-control means are reported without promoting their descriptive comparisons into that primary interval family.

The archive-source evaluation uses Weather, Solar Weekly, COVID-19 Deaths, and Car Parts with missing values from the Monash archive (Godahewa et al., 2021; 2020l;j;i;h). They were absent from the original eight-source study. Solar Weekly is an aggregation of simulated NREL solar-production series; it is not an independent observational solar deployment. Three training-prefix-eligible series per collection are selected by a fixed hash ordering. Eligibility and selection cannot use validation/test forecasting performance, and selected series are not replaced because later evaluation is unfavorable or unavailable. The roster is listed in Appendix J.4.

Each series has chronological 60/20/20 training, validation, and test segments. Weather and COVID use a 28-step history and all seven next steps as direct targets; Solar Weekly and Car Parts use a six-step history and two-step target. Fits use at most 512 available training windows and evaluations at most 64 origins per segment, sampled evenly. After validation selection, selected configurations are refitted on admissible pretest windows under the same cap. Inputs use only past observations, including already observed test values at later origins; test targets cannot retune the fitted model. Missing values are not interpolated. A training-only seasonal-difference MSE, with a declared first-difference fallback, supplies the fixed scale. The two requested landmark counts give 24 configurations. Aggregation weights capacities equally within series, series equally within source, and the four sources equally. These are descriptive comparisons on four selected collections, not 24 independent domains or a random sample of applications.

The main model-pipeline cost covers raw search, geometry and correction search, validation forecasts, selected refits, final prediction, and model serialization. Shared raw work is charged once for an additive procedure or policy. Data preparation is recorded separately, as are model size and prediction cost. Imports, downloads, prediction-artifact writes, and research reporting are outside model timing. Policy costs are unions of measured required components, not separately timed full-policy executions. One task and one numerical-library thread are active during timing. Wall time and available CPU components are recorded separately. The accuracy–cost comparison therefore describes this implementation and hardware, without claiming a minimum necessary representation complexity. Additional fitting and audit details appear in Appendix J.4.

11.3 Controlled utility across data and decoder budgets

Table 9: New synthetic factorial: mean test MSE multiplied by 10^3, over 12 fresh complete repetitions per cell. N counts training episodes; M counts raw RBF landmarks. All correction heads are ridge heads. These are cell means; simultaneous primary intervals appear in Figure 4.

Law	N	M	Raw RBF	Concat.	+KAHM	+Affine	+Locality
Nonlinear AR	32	16	4.8715	4.9851	4.7525	4.7586	4.7584
Nonlinear AR	32	64	5.0133	5.3388	5.0157	5.0190	5.0173
Nonlinear AR	128	16	4.6648	4.6592	4.5701	4.5805	4.5753
Nonlinear AR	128	64	4.4806	4.7006	4.4806	4.4840	4.4832
Van der Pol	32	16	22.0913	7.0925	15.6100	15.1578	12.8848
Van der Pol	32	64	9.2066	2.6518	8.2892	8.3880	8.0522
Van der Pol	128	16	20.5463	7.5690	14.4955	13.8986	11.5027
Van der Pol	128	64	8.4031	2.4087	7.4507	7.5359	7.0687
Duffing	32	16	7.3080	8.5619	6.6154	5.3215	5.6464
Duffing	32	64	5.3159	5.0348	5.2959	4.7693	5.0240
Duffing	128	16	6.6937	7.6252	5.8873	4.7225	4.8299
Duffing	128	64	4.3215	4.0529	4.2667	3.6788	3.8379

Table 9 reports every law–data–capacity cell, including the simpler geometric controls. Figure 4 shows all primary intervals. Their lower endpoints exceed zero in 5 of 12 comparisons with raw RBF and 6 of 12 comparisons with concatenated KAHM; upper endpoints are below zero in 0 and 4 comparisons, respectively. An interval spanning zero is unresolved under this family, not evidence of equality. Complete numeric intervals and the ridge, persistence, boosting, and fixed-policy controls are retained in Tables 51 and 50.

The five resolved gains over raw RBF comprise all four Van der Pol cells and Duffing at $N = 128, M = 16$. The six resolved gains over concatenated KAHM comprise all four autoregression cells and both 16-landmark

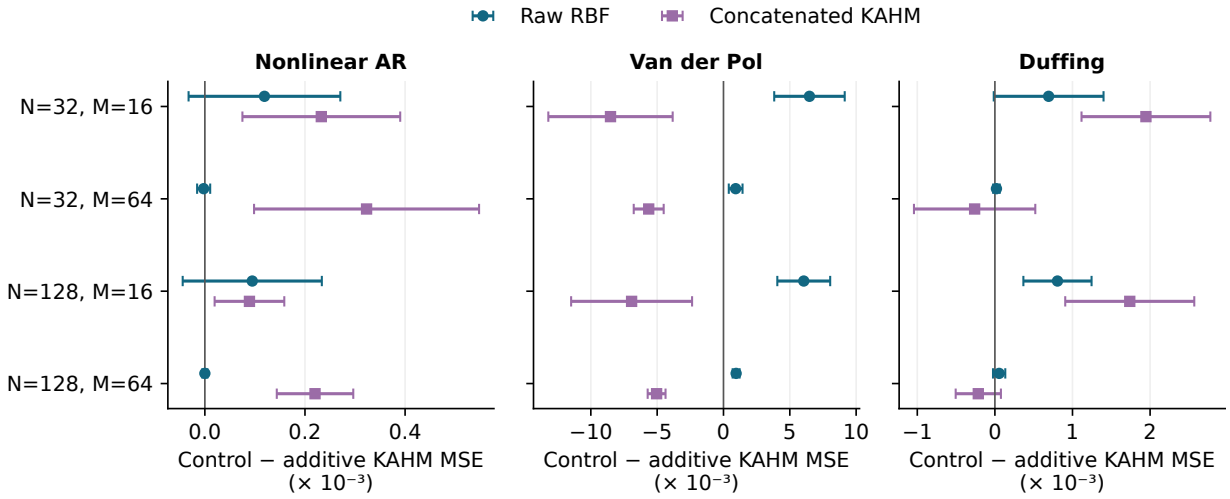


Figure 4: Every primary contrast in the new factorial. Points and bars are mean control-minus-additive-KAHM MSE and the separate 95% Bonferroni paired Student intervals over 12 complete repetitions. Positive values favor additive KAHM. Each panel has its own horizontal range in the same units; shared data within repetitions pair the $N \times M$ comparisons. Coverage requires the stated normal approximation and does not imply a joint claim with earlier interval families.

Duffing cells. Conversely, concatenated KAHM beats the additive construction in all four Van der Pol cells. The mean gain over raw RBF on Van der Pol is larger at 16 than at 64 landmarks for each training size, consistent with the correction exploiting structure left by a limited raw decoder; this is a descriptive capacity pattern, not a tested interaction or a universal law of model size.

KAHM-specific benefit is not established by these raw-baseline contrasts. At least one simpler additive control has lower mean error in every Van der Pol and Duffing cell. Additive KAHM has the lowest mean among the three additive geometries in the four autoregression cells, but its raw-baseline intervals there remain unresolved. The fixed boosting control has the lowest mean among all standalone methods in three Van der Pol cells; concatenated KAHM is lowest at $N = 32, M = 64$. Thus the zero-correction construction preserves a valuable forecast option without making its ridge correction the best way to use KAHM geometry. Neither these means nor equal raw landmark budgets establish equal computational cost or a geometry-specific population advantage.

11.4 Archive-source utility, selection, and cost

Fit feasibility is part of the result. All 144 synthetic configurations complete. On the archive roster, 22 of 24 configurations complete every procedure. The two capacities for Car Parts series T1324 each have 23 training histories but only seven distinct histories. The declared eight-group bank produces fewer nonempty groups than requested, and the unchanged implementation raises an error rather than silently dropping a group. Concatenated KAHM and all three additive geometries fail on both configurations, producing eight failed model fits. Both declared policies also fail because their required correction candidate is unavailable. Raw ridge, raw RBF, naive, and boosting forecasts remain available on all 24 configurations. This is a shared bank-fitting failure; it does not isolate the KAHM kernel as its cause. No model was refitted under a changed configuration and no series was replaced.

Consequently, the full-roster KAHM and policy mean losses are undefined. The reporting amendment retains those failures and adds an explicitly post-hoc matched-success diagnostic on the 22 configurations where every procedure completes. This subset has 11 series: three each from Weather, Solar, and COVID, and two from Car Parts. Sources retain equal weight, with the remaining Car Parts series now sharing that source's

weight. This comparison conditions on successful fitting and changes the prespecified roster; it is not the original full-roster estimand or a new confirmatory transfer result. All-24 baseline outcomes remain visible.

Table 10: New archive-source coverage and losses. Full-roster scaled MSE uses all 24 configurations and is undefined (dash) for procedures with failed fits. Matched loss and wall seconds use only the post-hoc 22-configuration common-support diagnostic (11 series, including two Car Parts series), with equal source weights. Pipeline costs include all required searches, validation, selected refit, prediction, and serialization. Policy costs are unions of measured required components, including rejected corrections; they are not separately timed full policy executions. Conditioning on success does not complete the prespecified full-roster evaluation.

Procedure	Outputs	Full-roster MSE	Matched MSE	Matched seconds
Raw ridge	24/24	1.2848	0.8466	0.0015
Raw RBF	24/24	9.6633	9.1730	0.0037
Concatenated KAHM	22/24	—	1.2111	0.0691
Additive KAHM	22/24	—	9.1443	0.0498
Additive affine	22/24	—	9.3312	0.0369
Additive locality	22/24	—	9.5624	0.0379
Persistence / seasonal naive	24/24	1.5720	1.2062	0.0012
Histogram gradient boosting	24/24	10.7552	10.3174	0.6380
KAHM 5% rule	22/24	—	9.2460	0.0467
All-geometry 5% rule	22/24	—	9.2624	0.0869

Table 10 reports coverage, full-roster losses where defined, and the separate matched-success diagnostic. Source-specific losses, leave-one-source-out summaries, actual decoder dimensions, and all selected mixing weights appear in Appendix J.5. Among the 22 completed archive comparisons, the KAHM policy adopts a correction on 7 configurations and the all-geometry policy on 12. Their decisions use only validation outcomes. Their matched-success costs include searching corrections even when the selected test forecast is the raw baseline, but do not redefine the two failed policy evaluations as successful raw decisions.

On the matched-success diagnostic, raw RBF, concatenated KAHM, and additive KAHM have scaled MSEs 9.1730, 1.2111, and 9.1443, respectively. The additive improvement over raw RBF is only 0.31% at 13.29 times its measured model-pipeline wall cost. Raw ridge is both more accurate, at 0.8466, and cheaper, at 0.41 times the raw RBF cost. Concatenated KAHM substantially improves this weak raw RBF comparator on the diagnostic subset, but remains worse than raw ridge and has undefined full-roster loss because of the two failed fits. This is why utility must be judged against credible simpler alternatives as well as a matched architectural baseline.

The KAHM 5% rule has matched-success loss 9.2460 at 12.45 times raw RBF's model-pipeline cost; the all-geometry rule has loss 9.2624 at 23.17 times its cost. Neither improves aggregate error on that subset. Positive validation gains therefore do not establish beneficial test corrections after the pretest refit.

The source detail explains the small additive KAHM aggregate change: COVID is its only improving source mean, Solar is unchanged, and Weather and Car Parts worsen. Excluding COVID reverses the aggregate direction (Table 57); this is sensitivity of the same diagnostic, not additional evidence. The saved-prediction decomposition likewise has KAHM alignment exceeding correction energy only on COVID, zero correction on Solar, and negative net gains on the other two sources (Table 59). The identity verifies how the realized corrections change squared error without estimating the oracle residual structure or rescuing the incomplete full-roster evaluation.

12 Shared proxy-metric geometry and donor residuals

The preceding archive comparison makes improvement over a weak raw RBF predictor an insufficient adoption criterion. It also leaves two distinct questions open: whether donor residuals improve correction fitting, and whether a geometry trained with predictive targets transfers usefully to KAHM. We specify a further bounded study before its full execution, with a stronger ridge reference and equally trained geometric controls. The

new source, protocol, roster and dependency freeze are separate from all earlier studies. This is a prospective execution checkpoint, not external preregistration; the motivation uses the already observed earlier results.

12.1 Baseline, residual targets, and matched procedures

The base f_0 is a raw-history ridge predictor, with its penalty selected on a separate validation segment. Four gates use the same partition and reference-selection rules: KAHM reconstruction, affine reconstruction, locality-aware affine, and a center-distance RBF gate. All retain the affinity-gated principal coordinates of Equation (7). The RBF-local control therefore describes local affine experts; it is distinct from the raw Nyström predictor. Requested banks contain $2, 4, 8$ groups, rank two, at most 24 references per group and 512 fitting histories. The established stable KAHM query is unchanged.

For each gate we fit three procedures: an identity metric with in-sample residuals, an identity metric with out-of-fold (OOF) donor residuals, and a learned metric with those same OOF residuals. Banks use all training histories. All three correction heads use exactly the same eligible rows, so the natural-data OOF procedure does not gain a different correction sample simply by excluding its initial donor prefix. Each head is a separately standardized ridge correction with an explicit zero option:

$$\widehat{f}_g(x) = f_0(x) + \gamma q_g\big(\Gamma_g(x)\big), \qquad \gamma \in \{0, \tfrac{1}{4}, \tfrac{1}{2}, 1\}.$$

The baseline and correction penalties use the same seven-value grid $\{10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}, 1, 10, 100\}$. The base is selected first and held fixed. Zero correction precedes the 21 positive penalty–weight candidates; only a strict validation improvement replaces the incumbent. Both studies retain their selected training-only fits, without a pretest refit. An available zero option remains a candidate, not a generalization guarantee.

Synthetic donors exclude complete independent episodes in four folds. Natural-series donors use three forward blocks following an initial 40% of training origins; every donor target must have been available at the first forecast origin of its query block. A donor selects its own ridge penalty using an inner split of its own available data. The final base's outer-validation choice never feeds backward into donor fitting. Appendix K.2 gives the boundary and small-sample rules. This design distinguishes episode cross-fitting from chronological prediction; it does not assert that ordinary K-fold evaluation is invalid for every autoregressive model (Bergmeir et al., 2018).

Honest donor errors can still differ from final-model errors. Condition on fitted maps, put $Z = \Gamma(X)$, and consider one fresh evaluation law Q. For the final base and a fixed donor f_d, define

$$m_0(Z) = \mathbb{E}_Q[Y - f_0(X) \mid Z], \qquad b_d(Z) = \mathbb{E}_Q[f_0(X) - f_d(X) \mid Z].$$

The donor-optimal correction is $q_d = m_0 + b_d$. Under finite second moments, define $R_H(f) = H^{-1}\mathbb{E}_Q\|Y - f(X)\|_2^2$. Then

$$R_H(f_0) - R_H(f_0 + q_d \circ \Gamma) = \frac{1}{H}\mathbb{E}_Q\|m_0(Z)\|_2^2 - \frac{1}{H}\mathbb{E}_Q\|b_d(Z)\|_2^2. \tag{22}$$

This elementary projection identity, proved with its fitted-correction extension in Appendix K.1, explains why donor exclusion alone does not establish improvement of a different final predictor. Chronological folds need not share Q. Our recorded donor/final disagreement on correction-training rows is a descriptive diagnostic, not an estimate of either oracle term in Equation (22).

12.2 A residual-supervised metric shared across geometries

We learn a positive diagonal input metric through a Gaussian kernel-regression proxy, following the supervised metric-learning principle of Weinberger & Tesauro (2007). Let z_i denote training-standardized histories and s_i the donor residual vectors, centered by output and divided by one pooled residual standard deviation. The shared scalar division preserves relative original-unit horizon weights. On at most 256 training correction

rows, set

$$d_\theta^2(z_i, z_j) = \sum_{k=1}^{d} e^{\theta_k}(z_{ik} - z_{jk})^2, \qquad p_{ij}(\theta) = \frac{\exp\{-d_\theta^2(z_i, z_j)/(2\sigma^2)\}}{\sum_{l \in A_i} \exp\{-d_\theta^2(z_i, z_l)/(2\sigma^2)\}}, \quad j \in A_i, \tag{23}$$

$$\mathcal{J}(\eta) = \frac{1}{|I|H} \sum_{i \in I} \left\| s_i - \sum_{j \in A_i} p_{ij}(\theta) s_j \right\|_2^2 + \frac{0.05}{d} \|\theta\|_2^2, \qquad \theta = \eta - \overline{\eta}\mathbf{1}. \tag{24}$$

The admissible donor set A_i excludes the query's episode for synthetic data, or origins within $L + H$ steps for natural data; I contains queries with at least one donor. The bandwidth σ^2 is the identity-metric median positive admissible squared distance and remains fixed during optimization. The box $|\eta_k| \le \log(16)/2$ bounds the ratio between the largest and smallest metric weights by 16; their geometric mean is one. These are bounds on the free η coordinates, not the individual centered θ coordinates.

L-BFGS-B uses the analytic gradient and at most 40 iterations. Identity is the declared fallback for an unavailable or nonfinite objective, constant residuals, or a worse final iterate. Finite improved iterates at the iteration limit are retained with their convergence status. No validation or test outcomes enter this optimization. Natural metric donors may be earlier or later within the training period: this is offline supervised fitting, separate from the forward construction of baseline residuals.

The same learned weights are applied *after* input standardization for all four geometric gates; subsequent partitioning and local models are refitted under that metric. This is a supervised kernel proxy transferred to KAHM and its controls, not end-to-end minimization of KAHM forecasting loss. Its training objective may decrease without improving the final decoder. The comparison with equally trained local controls tests whether any benefit is specific to the KAHM reconstruction.

12.3 Declared evaluation and complete accounting

Twelve new repetitions on each of the inherited nonlinear AR, Van der Pol and Duffing laws give 36 synthetic tasks. Each uses 128 training, 64 validation and 128 test episodes, history 12, direct offsets $1, 4, 12$ and the inherited observation law. Six prespecified comparisons per law isolate learned-OOF KAHM versus ridge, learned versus identity metric for OOF KAHM, OOF versus in-sample targets at the identity metric, and learned-OOF KAHM versus each of the three equally trained geometric controls. All 18 comparisons receive two-sided Bonferroni-adjusted paired Student intervals over the 12 complete repetition differences. Their coverage uses a normal approximation; origins and horizons do not increase the replication count. These fresh simulations supply new stochastic evidence on known laws, not new-domain confirmation.

Four additional Monash collections (Godahewa et al., 2021) provide Australian state electricity demand, Bitcoin activity indicators, Melbourne pedestrian counts, and KDD2018 air quality. Three series per collection are selected by frozen training-prefix eligibility and hash ordering. The 12-series roster and split rules are specified in Appendix K.2. These are new source collections; broad application domains overlap some earlier work. They are not a random sample of future forecasting applications. Natural results use equal weights for series within source and for the four sources; overlapping windows do not create independent source replications.

The 16 procedures comprise the 12 geometric corrections, ridge, raw Nyström-plus-linear regression, naive prediction, and a jointly fitted raw-plus-KAHM ridge readout. The last is a secondary architecture control and differs from the earlier concatenated Nyström procedure. New group-count reductions and predefined ridge fallbacks retain tasks with degenerate local data. Fewer than eight eligible correction rows or a failed secondary joint head invokes a fallback for the affected arms while retaining the available baselines. These rules do not retrospectively replace the previous utility study's failed fits. Full-roster results remain unavailable if a primary baseline or required task output is missing.

Warm pipeline cost charges each method for its complete required baseline, donor, metric, bank, head-selection and serialization work, including rejected candidates and fallbacks. Shared components are charged once per

standalone procedure. These are measured component sums on one host, not repeated end-to-end deployment timings or minimum possible complexity. Tables 11 and 12 report the declared comparisons; Appendix K.4 retains all contrasts, source-level results, fitting diagnostics, and resource records.

12.4 Results: predictive gains and their attribution

All 48 tasks and 768 method–task forecast outputs completed, without fallbacks. Learned-OOF KAHM reduces mean synthetic MSE relative to ridge by 11.18% on nonlinear AR, 53.26% on Van der Pol, and 19.44% on Duffing. All three adjusted paired intervals favor the correction. However, the three learned-versus-identity metric intervals and the three OOF-versus-in-sample target intervals all include zero. These comparisons do not establish equivalence; they leave the incremental benefits of the two proposed changes unresolved at the declared precision. Among nine comparisons with equally trained geometric controls, none favors KAHM with an interval excluding zero. Five favor the control: locality and RBF-local on Van der Pol, and all three on Duffing. The other four remain unresolved. Thus the 18-contrast family contains three favorable, five unfavorable, and ten unresolved results for its designated candidates (Appendix K.4). The secondary raw RBF predictor also has lower mean MSE than learned-OOF KAHM on every law; this mean ranking has no additional confirmatory interval.

On the four new archive collections, learned-OOF KAHM has source-balanced scaled MSE 1.272128 versus ridge's 1.300458, a descriptive 2.18% reduction. Its charged mean pipeline time is 0.1622 s versus 0.001299 s for ridge, or 124.9× on this host. The identity-metric in-sample KAHM procedure achieves a lower loss, 1.264589 (2.76% below ridge), at 39.3× ridge's time. The best registered archive mean is 1.257888 for identity-metric, in-sample RBF-local correction. Learned-OOF affine and locality also have lower means than learned-OOF KAHM, at 1.268679 and 1.266922, respectively. Figure 5 places the modest archive accuracy changes alongside their measured computational cost; the added metric stage is not supported as a default improvement by these results.

Learned-OOF KAHM improves the mean in each of the four collections, but improves only seven of the 12 individual series, worsens four, and exactly retains ridge on one through zero correction. Omitting each collection in turn leaves descriptive aggregate gains of 1.49–3.35%. This sensitivity check shows that the sign does not depend on retaining any one collection; it does not expand the population represented by four selected collections or supply an independent replication. Together, the new results establish utility over the selected ridge reference in the stated settings while leaving a KAHM-specific advantage unsupported. They also retain the earlier evidence that useful local forecasting structure can be captured by simpler geometric controls.

Table 11: Fresh synthetic repetitions: mean test MSE $\times 10^3$ over all 12 independent repetitions per law, with equal episode, origin and horizon weights. Every declared procedure is shown. A dash denotes an incomplete full roster; baseline fallbacks retain their actual forecasts. Differences are assessed by the 18 prespecified paired intervals in Table 61, not by ranking these means.

Procedure	Nonlinear AR	Van der Pol	Duffing
Raw ridge	5.057	44.140	6.916
Raw RBF	4.442	8.316	4.172
Persistence / seasonal naive	8.549	293.407	37.977
Joint raw + KAHM	4.465	17.009	5.277
Fixed, IS KAHM	4.478	21.380	5.468
Fixed, IS Affine	4.470	18.986	4.706
Fixed, IS Locality	4.503	13.699	4.508
Fixed, IS RBF local	4.427	15.987	5.318
Fixed, OOF KAHM	4.481	21.383	5.469
Fixed, OOF Affine	4.473	18.983	4.721
Fixed, OOF Locality	4.506	13.700	4.512
Fixed, OOF RBF local	4.431	15.988	5.321
Learned, OOF KAHM	4.492	20.629	5.572
Learned, OOF Affine	4.460	18.879	4.736
Learned, OOF Locality	4.530	13.968	4.536
Learned, OOF RBF local	4.408	15.460	5.328

Table 12: The new-collection archive experiment: equal-collection means of equal-series scaled MSE and charged standalone wall seconds, covering four collections and three series per collection. Scaling uses training-only seasonal-difference MSE (first-difference fallback). Change is relative to raw ridge; negative is favorable. Fallbacks predict raw ridge and retain attempted computation. Missing tasks make the affected full-roster means undefined. These are descriptive results, with no population confidence intervals or independence claims for adjacent origins.

Procedure	Outputs	Scaled MSE	Change (%)	Seconds	Fallbacks
Raw ridge	12/12	1.3005	0.00	0.001	0
Raw RBF	12/12	1.9483	49.82	0.005	0
Persistence / seasonal naive	12/12	1.8476	42.07	0.004	0
Joint raw + KAHM	12/12	1.4530	11.73	0.058	0
Fixed, IS KAHM	12/12	1.2646	-2.76	0.051	0
Fixed, IS Affine	12/12	1.2584	-3.24	0.029	0
Fixed, IS Locality	12/12	1.2635	-2.84	0.028	0
Fixed, IS RBF local	12/12	1.2579	-3.27	0.027	0
Fixed, OOF KAHM	12/12	1.2767	-1.83	0.056	0
Fixed, OOF Affine	12/12	1.2731	-2.11	0.034	0
Fixed, OOF Locality	12/12	1.2735	-2.07	0.032	0
Fixed, OOF RBF local	12/12	1.2746	-1.99	0.031	0
Learned, OOF KAHM	12/12	1.2721	-2.18	0.162	0
Learned, OOF Affine	12/12	1.2687	-2.44	0.142	0
Learned, OOF Locality	12/12	1.2669	-2.58	0.141	0
Learned, OOF RBF local	12/12	1.2848	-1.20	0.139	0

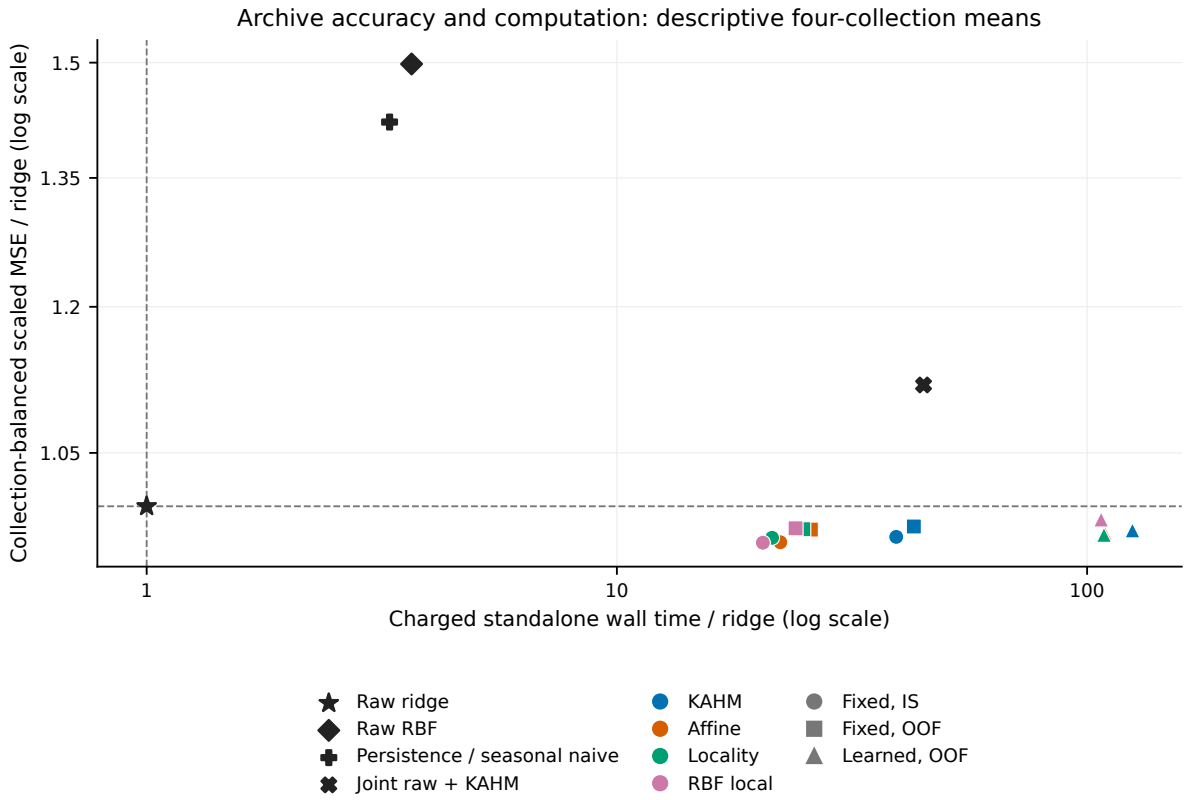


Figure 5: Accuracy and charged computation on the four new archive collections. Both axes divide the source-balanced method mean by the corresponding ridge mean and use logarithmic scales. Lower loss and lower time are preferable. Circles, squares, and triangles distinguish identity/in-sample, identity/OOF, and learned/OOF procedures. Times charge the complete required components of each method, including selection; they are descriptive measurements from one host. The plot shows all 16 procedures without implying uncertainty intervals or a population-wide ranking.

13 Interpretation and limitations

The final mechanism result. The final experiment separates three conclusions. KAHM reconstruction can supply raw functions outside a matched affine-plus-RBF span under explicit reference conditions. A blockwise bounded feature map and correctly scaled ridge solve give a uniform correction bound. The complete bounded KAHM procedure also improves the shared-coordinate control by 12.58% on the declared nonlinear aggregate. None of these statements establishes that the KAHM reconstruction is the practically preferable predictor. Its 1.17% advantage over matched RBF departure does not meet the 3% criterion; its 3.92% point advantage over raw RBF has an unresolved simultaneous useful-margin bound. Boosted trees and the C-selected non-KAHM policy have lower aggregate error. The linear-control noninferiority condition and all stability screens pass, but four of six required margin criteria are not established. The fixed research decision is therefore to stop this forecasting-performance branch.

The positive finding remains: the full reconstruction departure helps the specified regularized readout beyond its common basis. The experiment does not identify the KAHM normalization as a sufficiently valuable contribution over the matched reconstruction and practical procedures. All 432 nonlinear KAHM correction cells are active, so the result cannot be explained as universal recovery of the raw baseline. The algebraic distinctness witness is an existence result; it does not show that every fitted bank adds a new raw direction, that its added functions align with a future target, or that the available sample supports their estimation.

What the combined evidence supports. The branch intervention shows how accurate reconstruction can coexist with a poor predictive code, and how explicit position or a locality-aware score can repair it. The fresh synthetic study shows that representation and finite decoder must be evaluated jointly: KAHM helps on a declared law while other controls win on others. The separate natural-source study shows that those controlled gains do not suffice to recommend its tested augmentation broadly. These results concern different procedures and populations; neither the natural failures erase the controlled effects nor the controlled effects override the natural failures. The later paired scaling check leaves the natural aggregate ranking intact under the specified unclipped min–max alternative. It strengthens that bounded comparison without extending it to every preprocessing choice or future source population. The main controlled local-coordinate comparisons retain their mean ordering, although Duffing's KAHM error changes appreciably. Robustness of a ranking within these two fixed scaler arms is a narrower statement than invariance of the representation or loss.

The additive extension adds a distinct qualification. Preserving the raw forecast makes a zero correction feasible for a successfully fitted model, but does not establish that the correction is useful, that KAHM is the best correction geometry, or that the procedure completes every fit. The synthetic factorial finds gains against raw RBF in selected cells, while concatenated KAHM, simpler additive controls, or boosting are better in others. The two archive fitting failures prevent a full-roster geometric loss comparison. On the explicitly post-hoc matched-success diagnostic, raw ridge is substantially more accurate and cheaper than the geometric alternatives, and neither frozen 5% policy improves the raw RBF aggregate. An architectural safeguard and a validation margin are therefore useful design choices to evaluate, not adoption guarantees.

The target-geometry study adds evidence for a more specific time-series role. KAHM local features can correct a ridge forecast on all three known synthetic laws and modestly improve the new archive aggregate. Those improvements are properties of the complete procedures. The simultaneous comparisons do not establish a benefit from switching to donor residuals or learning the shared proxy metric, and five favor simpler matched geometries. Raw RBF also has lower mean error on each synthetic law in this experiment. On the archive, fixed-metric in-sample KAHM is both more accurate and cheaper than learned-metric OOF KAHM. Thus the successful ridge correction does not identify supervised metric learning, donor exclusion, or the KAHM gate as its unique source.

For evaluating another reconstruction-based feature map, the resulting questions are concrete. Does fitting complete on the declared inputs? Does the code retain target-relevant position? Does a simpler locality or affine control recover the same benefit? Does the comparison persist with a raw-input control and an explicitly specified decoder? Does it survive complete selection costs and evaluation on reserved original sources? The present experiments demonstrate why each check can change the interpretation. They do not provide an automatic test for choosing a representation.

Limits of the benefit diagnostic. The four tested rules use a small set of descriptors and one reduced-capacity probe. In particular, the descriptors omit downstream landmark count; when the training cap is nonbinding, different capacities can receive identical descriptors. History and horizon also change together. Moreover, selecting by the sign of expected log loss ratio need not minimize expected scaled MSE: heterogeneous loss magnitudes matter even when each realized log ratio has the same sign as the corresponding raw-minus-KAHM loss difference. We therefore report the actual decision losses and costs as well as prediction error. The failed geometric increment motivates the separately frozen additive extension and new archive sources in Section 11. It does not justify retuning a diagnostic on the already inspected confirmation outcomes and reporting them as a new test.

Limits of data, inference, and computation. The eight source families in the original natural study were selected for diversity and feasibility, not sampled randomly from future applications. Four families per phase support bounded descriptive comparisons; related windows, settings, and seeds do not enlarge that number. Longer Hospital and Traffic regimes have only 21 and 29 initial training windows, and one NN5 regime retains seven test origins. Missing-window exclusion defines an available-window estimand. FRED-MD is a fixed retrospective snapshot whose upstream transformations and release-time revisions are not fully audited here.

The original natural candidates are local univariate forecasters with two capacity settings and finite grids. The study is not a comprehensive neural or pretrained forecasting benchmark. The MLP reaches its iteration cap in 68 of 80 selected confirmation refits; all such fits and warnings remain reported. Equal landmark counts do not imply equal effective capacities, and that study's two settings jointly vary sample and model-size caps. CPU timings are implementation-specific, include material bookkeeping, and expose imports/launch separately. Process high-water RSS includes interpreter and input storage and cannot resolve incremental memory use. Model bytes, training memory, energy, and financial cost are different quantities.

The controlled Student intervals rely on their stated paired-difference assumptions. The original 29- and 12-contrast families and the new 24-contrast additive extension and 18-contrast target-geometry study retain separate coverage claims, without a joint 95% guarantee across the entire paper. The branch reflection and saved-bank conditioning checks are descriptive; they supply neither a population Lipschitz bound nor a distribution-free KAHM performance certificate. Replaying fixed seeds and reconstructing saved losses verifies computation without producing new source evidence.

The scaling analysis compares two fixed preprocessing choices on those same observations. It does not test clipping, all alternative scalers, local-only natural models, or a new scaler-selection rule. Near-equal natural aggregate errors do not prove statistical equivalence or scale invariance. Conversely, an observed controlled change describes the complete refitted pipeline: partitioning, truncated directions, reference-energy regularization, gates, and finite decoder geometry can all change together. Further component attribution or a newly chosen procedure would require another specified study and fresh reserved evidence for a new transfer claim.

Scope of the additive extension. The new factorial separates the number of training episodes from the raw decoder's requested landmark count. It holds the declared geometric bank configuration and ridge-correction class fixed; it does not identify an optimal KAHM rank, reference count, or decoder family. More training data can also change the fitted partitions and residual targets. The correction learns in-sample residuals of a selected raw predictor, so insufficient residual structure, overfitting in either stage, the coarse penalty and mixing grids, and finite validation data can all affect its usefulness. A favorable comparison identifies a useful complete procedure under that protocol; an adverse comparison does not establish that every KAHM decoder or every residual-fitting construction must fail.

The new archive evaluation contributes four selected collections, three series per collection, two requested capacities, and one fitting seed. Solar Weekly has simulation provenance. This is a bounded extension of source coverage, not a representative survey of forecasting domains. Actual landmark counts and retained kernel ranks can be below their requested values on short series. The initial chronological validation rule is applied before a pretest refit, which changes the baseline, residual targets, and correction together. No positive test guarantee follows from a 5% validation margin, an exact zero-correction option, or a positive

alignment computed after observing test outcomes. In fact, the shared geometric-bank fit fails on both capacities of one Car Parts series, before a zero-correction choice can be evaluated. Full-roster geometric and policy mean losses are therefore undefined. The amended 22-configuration comparison is conditional on successful fitting, with only two Car Parts series, and cannot be presented as completion of the prespecified full-roster evaluation. The robust fallback and revised grouping rules in Section 12 are changed procedures evaluated separately; they do not replace these historical failures.

The utility decision is also application-dependent. This study supplies measured loss–cost pairs and fixed policy outcomes; it does not impose a deployment latency budget, a memory ceiling, or an exchange rate between accuracy and resources. Component-sum policy costs expose required shared work but are not separately timed end-to-end executions. Actual serialized state is not a lower bound on model storage, and a single execution cannot resolve small timing differences as precisely as a repeated benchmark. These limits matter when translating a favorable error comparison into a claim that additional representation complexity is justified.

Scope of proxy-metric geometry and donor residuals. The proxy-metric experiment tests one constrained diagonal metric, one fixed Gaussian proxy bandwidth, one 256-row metric cap, one regularization strength and a finite family of readouts. All metric fits converge under the optimizer's criterion, but the median regularized objective reduction is small. Convergence and a lower training proxy are not evidence of a useful forecast geometry. The experiment is not an exhaustive search over supervised metrics, and it does not train KAHM's reconstruction parameters directly against forecast error. Its three known laws, four selected collections, fixed contexts/horizons, and capped training sizes bound the conclusion. Neither overlapping windows nor multiple gates expand the number of independent natural collections.

Donor exclusion prevents a predictor from fitting its own query label; it does not make donor and final-model residual distributions identical. The elementary identity in Equation (22) conditions on fixed maps under a common evaluation law. Chronological folds can have different laws and sample sizes, so their observed prediction disagreement supplies a diagnostic rather than an oracle-risk certificate. The new comparison also makes no pretest refit, holding the selected base fixed. This differs materially from the earlier utility study and avoids attributing all between-study changes to residual honesty.

The archive gain from learned-metric KAHM is 2.18%, while the charged standalone procedure costs about 0.162 seconds per task versus 0.00130 seconds for ridge on the recorded host. The ratio of approximately 125 therefore accompanies small absolute times at the tested scale; it is neither an intrinsic algorithmic constant nor evidence of deployment infeasibility. Fixed-metric KAHM and simpler controls nevertheless supply better observed accuracy–cost pairs here. Computation includes the paid metric, donors and selection, and conservatively retains test bank transform costs when validation chooses zero correction. It does not measure peak incremental memory, streaming update latency or optimized production kernels.

Scope of direct reconstruction training. The earlier direct-training intervention trains bounded bandwidths and temperatures while holding references, local covariance, principal directions and original kernel regularization fixed. It tests one finite local search with three head penalties, four correction weights and finite A/B/C samples. The matched controls receive equal supervision and search ceilings within each intervention, but have different functional forms. Neither a successful optimizer termination nor a better B objective establishes an optimal representation or improved D prediction. A null or adverse comparison constrains this procedure, not every possible KAHM forecaster. Raw ridge, RBF and gradient boosting are practical comparators at this scale; the study is not a comprehensive neural or pretrained-model benchmark.

The natural feasibility finding has a different cause from the earlier geometric fit failures. The three A-selected rideshare series have no complete B windows, so the declared training procedure cannot start. Numerical fallback during prediction does not repair absent training queries. Their membership was not changed after this finding. The planned four-collection efficacy aggregate is undefined; the available seven-series, three-collection description is conditional on feasibility. This transparent restriction prevents a completed-subset comparison from being presented as full source coverage. A future missing-data procedure must specify its interpolation or causal imputation and label-availability rules before evaluation on new evidence.

The synthetic intervals rely on the stated paired-difference normal approximation, using twelve repetitions per known law and a separate 18-contrast family, not a paper-wide confidence claim. Three available purposive archive collections support descriptive comparisons, not population intervals. Serialized state bytes measure retained model files rather than incremental memory. Warm component sums include eager query work and selected-state packing; a minimal deployment implementation could have different costs. No application latency limit, memory ceiling or accuracy–cost exchange rate is imposed here.

What stability has and has not established. The new cap acts on separately normalized common and departure blocks, with no later readout scaling. It removes one source of uncontrolled correction magnitude under the stated finite-feature assumptions. The largest taskwise maximum-error ratio to ridge is 1.553, below the fixed screen of five, with no feature-, coefficient- or correction-bound violation. This is compatible with worse average forecasting loss: bounded corrections can still be systematically unhelpful. The bound does not control the unbounded raw baseline, supply a population risk guarantee, or imply continuity across a local fallback boundary. It is not an online geometry-stability theorem. The separately evaluated adaptive prototype retains its extreme forecasts and failed accuracy decisions; the new fixed-bank experiment does not replace those outcomes.

Scope of the final statistical decision. The three nonlinear laws were already known during development, and the new seeds supply independent realizations conditional on that choice. The noise intervention shares underlying episodes across levels and uses an A-estimated amplitude. The linear control has a finite burn-in from fixed initial conditions; exact stationarity is not assumed. Conditional on the realized added-noise amplitude, the reserved linear process is Gaussian, while across repetitions that random scale induces a mixture. The chosen ten procedures, ranks, reference counts, readout penalties, feature bounds, noise levels and horizons delimit the comparison. The study does not evaluate long multivariate forecasting, an application selected independently of these results, or a comprehensive set of neural and pretrained models. In particular, useful performance against the common ablation is not sufficient evidence for deployment.

The six one-sided Bonferroni bounds rely on the stated independent-paired- repetition approximation. Twenty-four repetitions provide a fixed budget, not a power calculation or a distribution-free result. The 3% and 5% margins are prospective research-allocation screens. The failure against raw RBF includes unresolved precision around the useful margin; it must not be described as a demonstrated raw-RBF victory or equivalence. Neither retrospective condition selection nor extra repetitions are used to reverse the result. The six-contrast family is separate from all historical families, with no paper-wide confidence guarantee.

Research consequence. The last bounded mechanism test has now been executed. Its outcome gives no basis to expand this KAHM forecasting-performance branch into another application search or another adaptive variant. The completed contribution concerns the relationship between reconstruction, a restricted decoder, regularization and prediction. Conditional raw-span distinctness, a correction bound and predictive utility are separate properties, and the record supplies explicit examples of why one does not establish the next. Any stronger impossibility statement would require a theorem for a specified representation, decoder class and evaluation law. The existing prediction-limit certificates (Kumar & Kargaran, 2026; Anonymous, 2026) address such declared classes; the empirical stop decision here must not be substituted for their assumptions or interpreted as universal impossibility.

14 Conclusion

This paper reports completed theoretical and empirical investigations of KAHM forecasting representations. Exact normalized-kernel identities identify redundant or reparameterized constructions, and an irregular reference bank proves that a KAHM reconstruction departure can be a distinct raw basis function. A separately bounded feature map and centered ridge head give a uniform correction-magnitude bound. The final matched experiment then tests useful predictive value on 192 complete task suites, with 24 independent repetitions and a locally frozen six-contrast decision.

The bounded KAHM departure improves the shared gate-and-coordinate basis by 12.58%, but its 1.17% gain over matched RBF departure is below the required useful-effect margin. The 3.92% point gain over raw RBF

does not establish that margin under simultaneous inference; boosted trees and the selected non-KAHM policy have lower aggregate error. Stability and linear-control noninferiority pass, while four required margin criteria are not established. The prespecified outcome ends this forecasting-performance branch. Earlier conditional gains, unavailable tasks, numerical failures, and amended adaptive development remain part of the scientific record.

The resulting claim is precise: geometric reconstruction can supply useful functions to a finite forecasting decoder, but neither basis distinctness nor a bounded correction establishes a distinctive KAHM forecasting advantage. The paper and repository preserve the mathematical conditions, executable procedures, complete forecasts, independent-code checks and limitations that support this conclusion.

Reproducibility and research transparency

The public repository preserves the original scientific source code, execution freezes, and archived outcomes separately from the `extensions/forecasting_utility` and `extensions/target_geometry` studies. Historical bundles retain their original scope: the natural forecast arrays reconstruct 2,496 task–method losses, and the separate scaling analysis contains 1,664 natural method runs and 1,440 controlled head fits. Its compact controlled episode losses and recorded full-prediction audit are distinguished from recreating the omitted full controlled prediction arrays. Those archives are not silently replaced by the present extension.

The earlier forecasting-utility extension has its own protocol and dependency freeze, published before full evaluation, and a reproducibility bundle retaining all 1,336 successful standalone forecasts from 1,344 attempted fits in 168 configurations. Eight geometric fits and four dependent policy evaluations fail on two Car Parts configurations; their records remain in the bundle. Successful policy forecasts reuse their selected standalone outputs. A dated reporting amendment records the post-hoc matched-success archive diagnostic, while preserving the undefined full-roster geometric losses. The bundle also retains targets, split/origin hashes, complete validation candidates, selected settings, warning/failure accounting, dataset provenance, measured computation nodes, and analysis tables. It covers this extension; it does not claim to embed the original studies' complete bundles or the separate certificate paper. A distinct manuscript-source bundle contains the editable LaTeX and generated displays for this revised research draft.

The independent forecasting-utility audit reconstructs final losses from saved predictions, checks the fixed selector decisions and their cost dependencies, and verifies exact baseline recovery at zero correction. The manuscript asset builder independently reconstructs the residual alignment identity and checks the reported hierarchical aggregation. Generated tables, figures, and numerical macros carry input/output hashes. These computational checks establish consistency of supplied evidence; they do not create independent replications, establish a universal complexity criterion, or replace scientific review.

The target-geometry study has a distinct public protocol checkpoint `0d7ee3c17515eb1d922cdd302facd2b7874dc9a9`, created before its confirmatory execution. Its 55-file scientific freeze includes the protocol, numerical source, input roster, prepared arrays and independent analysis. The complete 48-task run retains all 768 final forecasts, validation candidates, donor boundaries, metric objectives, warnings, input hashes and computation nodes. Its independent audit reconstructs inputs and final losses, verifies donor exclusions and the metric proxy, and checks selection against recorded grids without independently refitting every validation candidate. No reporting amendment or task replacement was needed for this run. That study's reproduction bundle covers this target-geometry study and its frozen numerical dependencies; historical archives retain their stated scope. The editable manuscript bundle includes all generated displays needed to compile the integrated draft.

The direct-reconstruction extension has its own public checkpoint `39174d06dffc7e28fed73dbbf866e539560dd021`. It preserves 32 scientific files and all 46 prepared input sets before model evaluation. The three anticipated rideshare availability failures remain in its roster; its planned four-collection efficacy aggregate is undefined. This freeze is separate from the exploratory gate pilot and from all previous execution checkpoints. The separate direct-reconstruction reproduction bundle includes that frozen extension, exact inherited numerical dependencies, selected fitted states, optimizer trials, predictions and failure records, as well as the separately preserved pilot. Repository task archives losslessly

contain original execution files; unpacking verifies their identities before the frozen audit consumes them. These post-execution containers are packaging, not revisions of the scientific protocol or recorded outcomes.

The final reconstruction-mechanism study has a separate local checkpoint `6d666b0fa3d8e0ee90a357ea7970def94e9fdda7`. Its freeze records 239 source, configuration and input files, including the complete 192-task prepared roster, before the first reserved forecast. Publication of this local record after execution does not make it public preregistration. All ten procedures finish on every task, giving 1,920 saved task–procedure prediction arrays and 9,584,640 scored forecast values. The inferential units remain 24 independent repetition aggregates. The frozen analyzer imports no forecasting implementation and reconstructs every loss and all six fixed contrasts from saved predictions. A separate internal audit uses independently written feature evaluation, ridge forward passes and tree traversal; it checks selected normal equations, window chronology, B/C selections and the six primary statistics without refitting the forecasters. Recorded scores for discarded B candidates can be checked for selection consistency, but their unsaved coefficients are not independently replayed. This is computational verification, not external replication.

Selected-state replay reproduces all 1,920 prediction arrays exactly on the recorded environment. Per-method resource charges, query norm and signed-denominator diagnostics, all selected multipliers and complete condition/horizon tables accompany the data. Post-execution lossless archives may replace bulky loose evidence files in the public tree; their inventories and restoration helper verify every original byte before the frozen checks run. Packaging changes neither source hashes nor scientific outcomes. The manuscript asset builders reconstruct the adaptive and final-mechanism displays from their separate saved records. The current source ZIP compiles independently of the forecasting code, and the new reproduction ZIP covers the completed mechanism study and its exact inherited dependencies. Historical studies retain their own reproduction packages and their documented numerical sensitivities.

References

Anonymous. A hierarchy of risk certificates for forecasting representations. Unpublished related manuscript; cited anonymously for review, 2026.

Christoph Bergmeir, Rob J. Hyndman, and Bonsoo Koo. A note on the validity of cross-validation for evaluating autoregressive time series prediction. *Computational Statistics & Data Analysis*, 120:70–83, 2018. doi: 10.1016/j.csda.2017.11.003. URL `https://robjhyndman.com/publications/cv-time-series/`.

Luca Bertinetto, Joao F. Henriques, Philip H. S. Torr, and Andrea Vedaldi. Meta-learning with differentiable closed-form solvers. In *International Conference on Learning Representations*, 2019. URL `https://openreview.net/forum?id=HyxnZh0ct7`.

Thomas Brooks, D. Pope, and Michael Marcolini. Airfoil self-noise. UCI Machine Learning Repository, 1989. URL `https://archive.ics.uci.edu/dataset/291/airfoil+self+noise`. Dataset; Creative Commons Attribution 4.0 International license.

Peter Bühlmann and Bin Yu. Boosting with the L_2 loss: Regression and classification. *Journal of the American Statistical Association*, 98(462):324–339, 2003. doi: 10.1198/016214503000125.

Gavin C. Cawley and Nicola L. C. Talbot. On over-fitting in model selection and subsequent selection bias in performance evaluation. *Journal of Machine Learning Research*, 11(70):2079–2107, 2010. URL `https://jmlr.org/papers/v11/cawley10a.html`.

J. Doyne Farmer and John J. Sidorowich. Predicting chaotic time series. *Physical Review Letters*, 59(8): 845–848, 1987. doi: 10.1103/PhysRevLett.59.845.

Kenji Fukumizu, Francis R. Bach, and Michael I. Jordan. Dimensionality reduction for supervised learning with reproducing kernel hilbert spaces. *Journal of Machine Learning Research*, 5:73–99, 2004. URL `https://jmlr.org/papers/v5/fukumizu04a.html`.

Shenghua Gao, Ivor Wai-Hung Tsang, and Liang-Tien Chia. Kernel sparse representation for image classification and face recognition. In Kostas Daniilidis, Petros Maragos, and Nikos Paragios (eds.), *Computer Vision—ECCV 2010*, volume 6314 of *Lecture Notes in Computer Science*, pp. 1–14. Springer, 2010. doi: 10.1007/978-3-642-15561-1_1. URL https://link.springer.com/chapter/10.1007/978-3-642-15561-1_1.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. Electricity Weekly Dataset. Zenodo, 2020a. URL https://zenodo.org/records/4656141. Version 3. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. Hospital Dataset. Zenodo, 2020b. URL https://zenodo.org/records/4656014. Version 2. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. NN5 Daily Dataset (with Missing Values). Zenodo, 2020c. URL https://zenodo.org/records/4656110. Version 3. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. Saugeen River Flow (SaugeenDay) Dataset. Zenodo, 2020d. URL https://zenodo.org/records/4656058. Version 2. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. Tourism Monthly Dataset. Zenodo, 2020e. URL https://zenodo.org/records/4656096. Version 3. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. Traffic Weekly Dataset. Zenodo, 2020f. URL https://zenodo.org/records/4656135. Version 3. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. US Births Dataset. Zenodo, 2020g. URL https://zenodo.org/records/4656049. Version 2. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. Car parts dataset (with missing values), 2020h. URL https://zenodo.org/records/4656022. Version 2. Monash Time Series Forecasting Repository.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. COVID-19 deaths dataset, 2020i. URL https://zenodo.org/records/4656009. Version 2. Monash Time Series Forecasting Repository.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Rob Hyndman, and Pablo Montero-Manso. Solar weekly dataset, 2020j. URL https://zenodo.org/records/4656151. Version 3. Monash Time Series Forecasting Repository.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Pablo Montero-Manso, and Rob Hyndman. FRED-MD Dataset. Zenodo, 2020k. URL https://zenodo.org/records/4654833. Version 2. Dataset. Creative Commons Attribution 4.0 International.

Rakshitha Godahewa, Christoph Bergmeir, Geoff Webb, Pablo Montero-Manso, and Rob Hyndman. Weather dataset, 2020l. URL https://zenodo.org/records/4654822. Version 2. Monash Time Series Forecasting Repository.

Rakshitha Godahewa, Christoph Bergmeir, Geoffrey I. Webb, Rob J. Hyndman, and Pablo Montero-Manso. Monash time series forecasting archive. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, volume 1, 2021. URL https://datasets-benchmarks-proceedings.neurips.cc/paper_files/paper/2021/file/eddea82ad2755b24c4e168c5fc2ebd40-Paper-round2.pdf.

Hansika Hewamalage, Klaus Ackermann, and Christoph Bergmeir. Forecast evaluation for data scientists: common pitfalls and best practices. *Data Mining and Knowledge Discovery*, 37:788–832, 2023. doi: 10.1007/s10618-022-00894-5. URL https://link.springer.com/article/10.1007/s10618-022-00894-5.

Robert A. Jacobs, Michael I. Jordan, Steven J. Nowlan, and Geoffrey E. Hinton. Adaptive mixtures of local experts. *Neural Computation*, 3(1):79–87, 1991. doi: 10.1162/neco.1991.3.1.79. URL https://www.cs.toronto.edu/~fritz/absps/jjnh91.pdf.

Mohit Kumar and Somayeh Kargaran. Prediction limits and Koopman closure of geometry-induced soft state abstractions. arXiv:2609.32652v3, 2026. URL https://arxiv.org/abs/2609.32652v3.

Mohit Kumar, Bernhard A. Moser, and Lukas Fischer. On mitigating the utility-loss in differentially private learning: A new perspective by a geometrically inspired kernel approach. *Journal of Artificial Intelligence Research*, 79:515–567, 2024. doi: 10.1613/jair.1.15071. URL https://jair.org/index.php/jair/article/view/15071.

Mohit Kumar, Alexander Valentinitsch, Magdalena Fuchs, Mathias Brucker, Juliana Bowles, Adnan Husakovic, Ali Abbas, and Bernhard A. Moser. Geometrically inspired kernel machines for collaborative learning beyond gradient descent. *Journal of Artificial Intelligence Research*, 83, 2025. doi: 10.1613/jair.1.16821. URL https://jair.org/index.php/jair/article/view/16821.

Stan Z. Li and Juwei Lu. Face recognition using the nearest feature line method. *IEEE Transactions on Neural Networks*, 10(2):439–443, 1999. doi: 10.1109/72.750575. URL https://www.dsp.utoronto.ca/juwei/Publication/IEEE_NN.pdf.

Yong Liu, Chenyu Li, Jianmin Wang, and Mingsheng Long. Koopa: Learning non-stationary time series dynamics with Koopman predictors. In *Advances in Neural Information Processing Systems*, volume 36, 2023. doi: 10.52202/075280-0538. URL https://papers.nips.cc/paper_files/paper/2023/hash/28b3dc0970fa4624a63278a4268de997-Abstract-Conference.html.

Bethany Lusch, J. Nathan Kutz, and Steven L. Brunton. Deep learning for universal linear embeddings of nonlinear dynamics. *Nature Communications*, 9:4950, 2018. doi: 10.1038/s41467-018-07210-0.

Pablo Montero-Manso, George Athanasopoulos, Rob J. Hyndman, and Thiyanga S. Talagala. FFORMA: Feature-based forecast model averaging. *International Journal of Forecasting*, 36(1):86–92, 2020. doi: 10.1016/j.ijforecast.2019.02.011. URL https://robjhyndman.com/publications/fforma/.

Bernhard Pfahringer, Hilan Bensusan, and Christophe Giraud-Carrier. Meta-learning by landmarking various learning algorithms. In *Proceedings of the Seventeenth International Conference on Machine Learning*, pp. 743–750. Morgan Kaufmann, 2000. URL https://ml.cms.waikato.ac.nz/publications/2000/landmarking_icml2000.pdf.

Ricardo B. C. Prudêncio and Teresa B. Ludermir. Meta-learning approaches to selecting time series models. *Neurocomputing*, 61:121–137, 2004. doi: 10.1016/j.neucom.2004.03.008. URL https://www.cin.ufpe.br/~tbl/artigos/neurocomputing61.pdf.

Alessandro Rudi, Raffaello Camoriano, and Lorenzo Rosasco. Less is more: Nyström computational regularization. In *Advances in Neural Information Processing Systems*, volume 28, pp. 1657–1665, 2015. URL https://proceedings.neurips.cc/paper/2015/hash/03e0704b5690a2dee1861dc3ad3316c9-Abstract.html.

Thiyanga S. Talagala, Feng Li, and Yanfei Kang. FFORMPP: Feature-based forecast model performance prediction. *International Journal of Forecasting*, 38(3):920–943, 2022. doi: 10.1016/j.ijforecast.2021.07.002. URL https://arxiv.org/abs/1908.11500.

Thiyanga S. Talagala, Rob J. Hyndman, and George Athanasopoulos. Meta-learning how to forecast time series. *Journal of Forecasting*, 42(6):1476–1501, 2023. doi: 10.1002/for.2963. URL https://onlinelibrary.wiley.com/doi/10.1002/for.2963.

Steven Van Vaerenbergh, Ignacio Santamaría, Weifeng Liu, and José C. Príncipe. Fixed-budget kernel recursive least-squares. In *IEEE International Conference on Acoustics, Speech and Signal Processing*, pp. 1882–1885, 2010. URL https://gtas.unican.es/files/pub/vanvaerenbergh2010_fbkrls.pdf.

Kilian Q. Weinberger and Gerald Tesauro. Metric learning for kernel regression. In *Proceedings of the Eleventh International Conference on Artificial Intelligence and Statistics*, volume 2 of *Proceedings of Machine Learning Research*, pp. 612–619, 2007. URL https://proceedings.mlr.press/v2/weinberger07a.html.

Christopher K. I. Williams and Matthias Seeger. Using the Nyström method to speed up kernel machines. In Todd K. Leen, Thomas G. Dietterich, and Volker Tresp (eds.), *Advances in Neural Information Processing Systems*, volume 13, pp. 682–688. MIT Press, 2001. URL https://proceedings.neurips.cc/paper/2000/hash/19de10adbaa1b2ee13f77f679fa1483a-Abstract.html. Proceedings of NIPS 2000.

Yilun Xu, Shengjia Zhao, Jiaming Song, Russell Stewart, and Stefano Ermon. A theory of usable information under computational constraints. In *International Conference on Learning Representations*, 2020. URL https://openreview.net/forum?id=r1eBeyHFDH.

Kai Yu and Tong Zhang. Improved local coordinate coding using local tangents. In *Proceedings of the 27th International Conference on Machine Learning*, pp. 1215–1222, 2010. URL https://icml.cc/2010/papers/454.pdf.

Kai Yu, Tong Zhang, and Yihong Gong. Nonlinear learning using local coordinate coding. In *Advances in Neural Information Processing Systems*, volume 22, pp. 2223–2231, 2009. URL https://proceedings.neurips.cc/paper/2009/hash/2afe4567e1bf64d32a5527244d104cea-Abstract.html.

A Supporting Mathematical Statements

The statements in this appendix make the interpretation of the experiments precise. They are elementary supporting results; we do not claim a new KAHM approximation theorem. All conditional expectations below are understood up to almost-sure equality. For scalar square-integrable Y, write $m(X) = \mathbb{E}[Y \mid X]$ and $R_X^{\mathrm{Bayes}} = \mathbb{E}[(Y - m(X))^2]$. When a representation has been learned from independent training data, the statements apply conditionally on that fitted representation.

Proposition 1 (Information retained by a representation)**.** *For a measurable representation $U = \Gamma(X)$,*

$$R_U^{\mathrm{Bayes}} - R_X^{\mathrm{Bayes}} = \mathbb{E}[(m(X) - \mathbb{E}[m(X) \mid U])^2].$$

For any square-integrable prediction $f(U)$,

$$R(f \circ \Gamma) - R_X^{\mathrm{Bayes}} = \|m - f \circ \Gamma\|_{L^2}^2.$$

Proof. Write $Y - f(U) = (Y - m(X)) + (m(X) - f(U))$. The cross term has expectation zero after conditioning on X. Minimizing the second term over U-measurable predictions gives the conditional expectation $\mathbb{E}[m(X) \mid U]$. □

Proposition 2 (Restoring the outer score normalizer)**.** *Let $T_1, \ldots, T_C \in [0, 1]$, $\omega > 0$, and $\tau > 0$. Define*

$$\ell_c = \omega \log(1 - T_c + \tau), \qquad z = \log \sum_{j=1}^{C} \exp(\ell_j), \qquad \phi_c = \exp(\ell_c - z).$$

Then T and (ϕ, z) generate the same information in exact arithmetic, and

$$T_c = 1 + \tau - \exp\{(\log \phi_c + z)/\omega\}.$$

For multiple separately normalized blocks, one z is required per block.

Proof. Strict positivity of $1 - T_c + \tau$ implies $\phi_c > 0$. Hence $\log \phi_c + z = \ell_c$, which gives the inverse. Both directions are measurable. Applying this argument to each block gives the multiple-block statement. □

If scores are clipped before normalization, the inverse restores the clipped scores. It does not restore discarded reconstruction vectors or guarantee equal finite-head performance. In particular, the inverse is nonlinear, so affine function classes on T and on (ϕ, z) need not coincide. This proposition concerns the outer association normalizer, not the signed denominator in the KAHM reconstruction.

Proposition 3 (A sufficient condition for an injective local code)**.** *Fix a fitted bank with bases P_c and centers μ_c. Suppose its gates are measurable and strictly positive, and let A be the matrix obtained by vertically stacking the matrices $P_c^\top$. If A has full column rank d, then*

$$z \longmapsto \left[\phi(z), \{\phi_c(z) P_c^\top (z - \mu_c)\}_c\right]$$

is injective. In particular, this code and z generate the same information, and their Bayes risks agree for every square-integrable target.

Proof. The code contains both $\phi_c(z) > 0$ and its product with $P_c^\top(z - \mu_c)$. Division and addition of the fixed vector $P_c^\top \mu_c$ recover $P_c^\top z$ for every c. Stacking these vectors gives Az. Full column rank gives the measurable inverse $z = (A^\top A)^{-1} A^\top (Az)$. Conversely, the code is a measurable function of z, so the generated information and Bayes risks agree. □

The gates in Equation (6) are strictly positive in exact arithmetic because $\tau > 0$. The rank assumption is a sufficient condition, not a necessary one: when A is rank deficient, the gates themselves may retain additional information. It must be checked for each fitted bank. Very small gates and an ill-conditioned A can make the displayed inverse numerically unstable, and its existence does not make it accessible to every finite decoder or fitting procedure.

Proposition 4 (A score symmetry and its prediction consequence)**.** *Let Q be orthogonal on a preprocessed input space. Suppose that each group's reconstruction obeys $r_c(Qx) = Q r_c(x)$ and that Q preserves group identities. The radial–angular score in Section 4, its block affinities, and the block log normalizer are invariant under Q.*

For the branch law in Equation (9)*, let $Q(x_1, x_2) = (-x_1, x_2)$. Any representation $U = \Gamma(X)$ satisfying $\Gamma(QX) = \Gamma(X)$ almost surely has*

$$R_U^{\mathrm{Bayes}} = \frac{1}{300} + \lambda + (1 - \lambda)\mathbb{E}[(S - \mathbb{E}[S \mid U])^2].$$

Consequently $R_U^{\mathrm{Bayes}} \geq 1/300 + \lambda$, with equality when U determines S.

Proof. Orthogonality preserves norms and inner products, including the zero-norm convention for the angle. Equivariance therefore preserves each radial and angular discrepancy, hence its combined score. Block normalization and its log normalizer are deterministic functions of those scores.

For the branch law, replacing T by $-T$ leaves the joint distribution of (S, T) unchanged and leaves U unchanged. Thus $\mathbb{E}[T \mid U] = 0$. Also S is even under this reflection, whereas T is odd. It follows that $\mathbb{E}[(S - \mathbb{E}[S \mid U])T] = 0$. Expanding the square in Proposition 1, using $\mathbb{E}[T^2] = 1/3$ and $\mathrm{Var}(\epsilon) = 1/300$, yields the displayed identity. □

The first assertion also holds when Q permutes reconstructors within a group whose score is their minimum. Permuting distinct groups, however, can permute the affinity coordinates rather than leaving the representation unchanged. Nor does a raw-input reflection necessarily commute with a training-fitted scaler. Finite learned partitions and reference sets need not satisfy the proposition's assumptions. The measured near-invariance of one learned code is therefore a diagnostic, not a proof that its Bayes risk equals the exact-symmetry lower bound. Tiny nonzero differences could in principle be used by an unrestricted decoder.

Proposition 5 (Approximate symmetry under a decoder budget)**.** *Let Q be a measurable, distribution-preserving involution on the input space: $Q^2X = X$ almost surely and QX has the law of X. Let d_U be a measurable pseudometric on the representation space and g be κ-Lipschitz for this pseudometric. Assume $m, g \circ \Gamma \in L^2$ and*

$$\delta_\Gamma^2 = \mathbb{E}[d_U(\Gamma(X), \Gamma(QX))^2] < \infty.$$

With $m_o = (m - m \circ Q)/2$,

$$R(g \circ \Gamma) - R_X^{\mathrm{Bayes}} \geq (\|m_o\|_{L^2} - \kappa\delta_\Gamma/2)_+^2.$$

For the branch law, $\|m_o\|_{L^2} = \sqrt{\lambda}$.

Proof. The operator $Vh = h \circ Q$ is an isometric involution on $L^2(P_X)$. The even and odd components $h_e = (h + Vh)/2$ and $h_o = (h - Vh)/2$ are orthogonal. In particular, with $f = g \circ \Gamma$,

$$\|m - f\|_{L^2}^2 = \|m_e - f_e\|_{L^2}^2 + \|m_o - f_o\|_{L^2}^2 \geq \|m_o - f_o\|_{L^2}^2.$$

The Lipschitz condition gives $|f_o(X)| \leq \kappa d_U(\Gamma(X), \Gamma(QX))/2$, so $\|f_o\|_{L^2} \leq \kappa\delta_\Gamma/2$. Apply the reverse triangle inequality and Proposition 1. For the branch law, $m_o(X) = \sqrt{3\lambda}\,T$ and $\mathbb{E}[T^2] = 1/3$. □

An empirical reflection distance is not automatically a population upper bound for δ_Γ. A valid numerical lower bound obtained from this proposition would need uncertainty control in that direction and a verified decoder Lipschitz constant for the same metric. Neither is asserted for the experiment's unconstrained diagnostic heads.

Proposition 6 (Reconstruction through the predictor's representation)**.** *Suppose a version of m is L-Lipschitz on a domain containing X and $h(U)$ almost surely, and $\mathbb{E}\|X - h(U)\|_2^2 \leq \varepsilon_{\mathrm{rec}}^2$. Then*

$$R_U^{\mathrm{Bayes}} - R_X^{\mathrm{Bayes}} \leq L^2\varepsilon_{\mathrm{rec}}^2.$$

If h is additionally L_h-Lipschitz from the declared representation metric and $\kappa \geq LL_h$, the same upper bound applies to the infimum excess risk over κ-Lipschitz decoders:

$$\inf_{\mathrm{Lip}(g) \leq \kappa} \{R(g \circ \Gamma) - R_X^{\mathrm{Bayes}}\} \leq L^2\varepsilon_{\mathrm{rec}}^2.$$

If a particular decoder f instead satisfies $\|m \circ h - f\|_{L^2(P_U)} \leq \delta_{\mathrm{head}}$, then

$$R(f \circ \Gamma) - R_X^{\mathrm{Bayes}} \leq (L\varepsilon_{\mathrm{rec}} + \delta_{\mathrm{head}})^2.$$

Proof. Conditional expectation is the L^2 projection onto the U-measurable functions. The admissible prediction $m(h(U))$ gives

$$\mathbb{E}[(m(X) - \mathbb{E}[m(X) \mid U])^2] \leq \mathbb{E}[(m(X) - m(h(U)))^2] \leq L^2\mathbb{E}\|X - h(U)\|_2^2.$$

For the constrained statement, $m \circ h$ has Lipschitz constant at most LL_h. For a particular f, the triangle inequality in L^2 gives $\|m - f \circ \Gamma\|_{L^2} \leq L\varepsilon_{\mathrm{rec}} + \delta_{\mathrm{head}}$. Use Proposition 1 in each case. □

The essential assumption is the existence of h as a function of the retained representation. A KAHM reconstruction evaluated on the raw query is not such a function merely because its residual is small. The domain assumption also matters: a conditional mean initially defined only on the support of X must have the specified Lipschitz version at $h(U)$.

Proposition 7 (Common scaling of an inner kernel row)**.** *Let k be a finite kernel row, let B be the fixed fitted matrix, and suppose $kB\mathbf{1} \neq 0$. For every real $a > 0$,*

$$\frac{akB}{akB\mathbf{1}} = \frac{kB}{kB\mathbf{1}}.$$

Thus evaluating a Gaussian query row by $\exp(\ell_j - \max_i \ell_i)$ preserves its normalized signed weights in exact arithmetic whenever the original denominator is nonzero.

Proof. The common factor cancels from numerator and denominator. For finite log-kernel values, the centered exponential row is the original row times $a = \exp(-\max_i \ell_i) > 0$ in real arithmetic. □

This statement neither rescales the training kernel nor permits replacing B. It does not address a genuinely zero signed denominator or prevent cancellation. The purpose of the implemented change is to avoid evaluating an entire query row as floating-point zero before normalization.

B Generators, Shared Components, and Decoders

B.1 Exact forecasting laws and target construction

The nonlinear AR generator starts with independent $u_0, u_1 \sim \mathrm{Unif}[-0.8, 0.8]$ and uses

$$u_{t+1} = \tanh\{1.25u_t - 0.65u_{t-1} + 0.25\sin(3u_t) + \eta_{t+1}\}, \qquad \eta_t \overset{\text{iid}}{\sim} \mathrm{Unif}[-0.1, 0.1].$$

The first 80 stored values are discarded; the next 72 are the episode. Each episode uses an independent initial state and innovation sequence.

The Van der Pol and Duffing systems respectively use

$$\dot{x} = v, \qquad \dot{v} = (1 - x^2)v - x,$$
$$\dot{x} = v, \qquad \dot{v} = -0.2v + x - x^3 + 0.3\cos(1.2t + \theta).$$

Initial positions and velocities are independent $\mathrm{Unif}[-2, 2]$ draws for each episode, and $\theta \sim \mathrm{Unif}[0, 2\pi]$ is independently sampled for each episode. The phase draw is unused for Van der Pol but is retained in the common generator's random-stream order. Both systems are integrated using float64 classical fourth-order Runge–Kutta with step 0.025, burn-in time 10, and observation interval 0.1. At the 72 observation times, the sensor is

$$u_t = 0.95\tanh(x_t) + \eta_t, \qquad \eta_t \overset{\text{iid}}{\sim} \mathrm{Unif}[-0.02, 0.02].$$

Sensor noise is sampled before numerical integration in the frozen generator. These define numerical data laws. We do not treat the resulting samples as exact solutions of the continuous equations or assume stationarity after burn-in.

For all three laws, zero-based forecast origins are $11, 15, \ldots, 59$. At origin t, the input is $(u_{t-11}, \ldots, u_t)$ and the three targets are $(u_{t+1}, u_{t+4}, u_{t+12})$. There are 13 origins per episode. Training, validation, and test contain respectively 128, 128, and 512 independently generated episodes. They therefore contain 1,664, 1,664, and 6,656 rows, but rows within an episode are dependent.

The branch law is Equation (9). Training has 1,024 points for the primary study, with the first 256 points giving the secondary nested sample-size condition. Validation and test have 512 and 2,048 independent points. At each repetition, the same latent draws of S, T, ϵ generate both curvatures; within each curvature and training size, one fitted bank serves all three target mixtures. Latent labels never train the partitions. Since $T = X_1$ and $S = 2\{X_2 - c\cos(\pi X_1)\}$, the raw inputs determine the signal. Its variance is $(1 - \lambda) + 3\lambda/3 = 1$, and the independent noise variance is $1/300$. The support bound $|Y| \le \sqrt{1 - \lambda} + \sqrt{3\lambda} + 0.1 \le 2.1$ justifies the common clipping range.

The master random seed is 20261030. Separate phase identifiers and child streams determine pilot, first confirmation, natural fitting, and fresh capacity inputs and fits. The capacity phase identifier is 4. The archive contains the executable stream rules and the realized identifiers. Reusing a replicate label across phases does not reuse its observations. Common randomness within a repetition supports pairing; it does not create additional independent repetitions.

B.2 Training the common bank and defining the locality control

The input mean and population-standard-deviation convention ($1/n$ variance divisor) are fitted on all training rows. A standard deviation at most 10^{-12} is replaced by one. At most 1,600 training rows, sampled without

replacement, are used for clustering and reference selection. Each of the three independent k-means block fits uses five initializations and at most 150 iterations. Its cluster counts are 2, 4, and 8. At most 24 reference rows per cluster are sampled without replacement and converted to float32 before the unchanged upstream autoencoder is called. The effective requested rank is $\min(2, d-1, n_c-1)$, subject to upstream numerical rank determination. The common reference mean and the resulting upstream principal basis define the affine control.

For completeness, the pinned local KAHM fit can be written as follows. Let $H \in \mathbb{R}^{d\times n_c}$ contain the float32 reference columns, and set $q_i = P_c^\top H_i$. The basis is obtained from the centered reference covariance with divisor $n_c - 1$, retaining eigenvalues above machine epsilon. The requested rank is reduced if a retained projected coordinate has range below 10^{-3}, until that condition is removed or rank one is reached. With effective rank r_c and unbiased projected covariance Σ_c, the training kernel is

$$K_{ij} = \exp\left\{-\frac{(q_i - q_j)^\top \Sigma_c^{-1}(q_i - q_j)}{2r_c}\right\}.$$

Writing $\nu = \|H\|_F^2/(dn_c)$, initialize $\rho_0 = 2.5\nu$ and iterate

$$B_j = (K + \rho_j I)^{-1}, \qquad \rho_{j+1} = 2\nu + \frac{\|H - H(KB_j)^\top\|_F^2}{dn_c}.$$

The routine stops when $|\rho_{j+1} - \rho_j| \le 10^{-3}$ or after 100 iterations, returning the last computed B_j. This regularizer is determined from reference inputs alone, independently of the supervised target. Query kernels use the same projected covariance metric and $1/(2r_c)$ Gaussian scale. A cluster with fewer than two usable references or no positive empirical-variance direction has the recorded center reconstruction fallback; other numerical failures are not silently replaced by another method.

The two reconstruction methods have the same input basis but not identical functional capacity. KAHM uses its nonlinear query weights to combine full-dimensional reference vectors; it need not remain inside the truncated affine PCA plane. A shared basis does not make its reconstruction an affine projection. The experiment isolates the reconstruction operator within the specified bank, not all possible advantages of independently optimized complete systems.

The alternative affine locality score is essential to interpreting the straight-branch comparison. In standardized input space, let

$$s_c = \max\left\{\frac{1}{n_c}\sum_{i\in c}\|z_i - \mu_c\|_2^2, 10^{-6}\right\},$$
$$v_c = \max\left\{\frac{1}{n_c}\sum_{i\in c}\|(I - P_cP_c^\top)(z_i - \mu_c)\|_2^2, 0.05s_c, 10^{-6}\right\}.$$

It uses

$$b_c(z) = \frac{\|z - r_c^{\mathrm{A}}(z)\|_2^2}{v_c} + 0.1\frac{\|z - \mu_c\|_2^2}{s_c}, \qquad \psi_c(z) = \frac{\exp(-b_c(z))}{\sum_{j \text{ in block}}\exp(-b_j(z))}.$$

This retains a center-distance term that distinguishes positions along an otherwise exactly reconstructed line. It changes the scoring rule and is a secondary control, not part of the primary reconstruction substitution. A radial-basis locality control similarly normalizes $\exp\{-\|z - \mu_c\|_2^2/(2\,\mathrm{median}_j\, s_j)\}$ within a block.

There are 14 stored affinity coordinates and three block-sum constraints, giving an affine-dimension upper bound of 11 for the concatenated affinities. Appending the three log normalizers gives 17 stored coordinates. Local augmentation gives 28 coordinates for the two-dimensional branches and 42 for the 12-dimensional forecasting histories. The added coordinates are $\phi_c P_c^\top(z - \mu_c)$, computed from the original query in the shared basis; full reconstruction vectors are not passed to these heads.

For reconstruction diagnostics, each query's squared reconstruction distance is divided by input dimension. The best-model diagnostic takes the minimum across local models in each block; the weighted diagnostic

takes the sum with that reconstruction's own affinity weights. Both then average across queries, blocks, and repetitions. Thus the weighted summary is an affinity-weighted average of individual errors, not the reconstruction error of the affinity-weighted vector. These descriptive summaries are not additional primary forecast contrasts.

B.3 Ridge and finite nonlinear heads

Each input feature column is standardized using training data alone. Standard deviations below 10^{-8} are replaced by one. The ridge fit minimizes mean squared training error plus $\alpha\|W\|_F^2$, with an unpenalized intercept. The fixed penalty grid is

$$\alpha \in \{10^{-8}, 10^{-6}, 10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}, 1\}.$$

Validation chooses the penalty. Forecast horizons share that choice; the three branch targets choose separately.

The nonlinear head first selects M training rows without replacement as landmarks in the standardized input-feature space. For a fixed budget, the common seed selects the same row indices across the representations, though their feature values differ. Let b^2 be the median strictly positive squared landmark distance, excluding distances at most 10^{-14}; if no such distance exists, use $b^2 = 1$. For bandwidth multiplier $a \in \{0.25, 1, 4\}$, the squared bandwidth is $\max(b^2a^2, 10^{-12})$. Form the Gaussian landmark matrix K_{MM}, symmetrize it, and retain eigenvalues exceeding $\max(10^{-10}\lambda_{\max}, 10^{-12})$. If $K_{MM} = V\Lambda V^\top$ on the retained subspace, the nonlinear coordinates are $K_{xM}V\Lambda^{-1/2}$. Concatenate these coordinates with the standardized linear input features; standardize the full resulting basis on training data and fit the same ridge objective. Validation selects a bandwidth–penalty pair using the fixed nested iteration order, so ties are deterministic. The first stage uses $M = 64$; the fresh follow-up uses both 64 and 256.

Because basis columns are standardized and assigned an ordinary Euclidean ridge penalty, this is a finite nonlinear diagnostic with a linear component. It is not an exact kernel-ridge estimator with its standard RKHS norm. Effective dimension can be smaller than input dimension plus M after the eigenvalue cutoff. Increasing M can change the sampled landmark set, median-distance bandwidth, retained rank, and validation-selected hyperparameters. It does not isolate only a dimension parameter while holding the realized basis fixed.

Predictions are clipped to the known target range for both validation and test evaluation, but the ridge objective itself is the un-clipped training least-squares objective. The selected coefficients remain fitted on training data; validation observations are not used in a final combined fit. The secondary capacity selector chooses the lowest validation MSE among the eight complete representation–budget pipelines. Its fixed tie order is ascending budget followed by the configured feature order. The test split chooses neither hyperparameters nor the complete pipeline.

B.4 Airfoil grouping and the scope of its repetitions

The Airfoil snapshot contains 1,503 rows with five covariates and sound pressure as the target. Exact joint equality of the four non-frequency covariates defines 106 operating-setting groups. A fixed permutation with seed 2026103007 allocates 64, 21, and 21 groups to training, validation, and test, giving 905, 295, and 303 rows. All frequency rows within a setting stay together. The training objective weights rows equally; validation and test average within a group before weighting groups equally. The outcomes are reported in squared decibels.

The 24 seeds repeat fitting on this same observed cohort and split. They characterize fitting variability conditional on those data. No primary synthetic-experiment interval is applied to Airfoil, and the 24 fits are not treated as 24 independent draws of natural tasks, test cohorts, or physical operating-condition populations. A population claim would require a justified sampling model or independent cohorts.

C Estimands, Multiplicity, and Descriptive Diagnostics

C.1 The unit of paired inference

For forecast method A and repetition r, the reported loss is

$$\widehat{L}_{r,A} = \frac{1}{512}\sum_{j=1}^{512}\frac{1}{13\cdot 3}\sum_{o=1}^{13}\sum_{h\in\{1,4,12\}}(\widehat{y}_{r,A,j,o,h} - y_{r,j,o,h})^2.$$

For branches it is the mean noisy-target squared error over 2,048 test points. The conditional-mean target loss is a separate secondary diagnostic. Each method and target at a given repetition shares the declared test draws, yielding a paired contrast. The independent units for the primary intervals are the 24 complete train–validation–test repetitions. Overlapping windows, horizons, reference groups, candidate fits, and three target mixtures are not extra replication units.

For each primary paired contrast D_r, let $\overline{D}$ be its sample mean and s_D its unbiased sample standard deviation over 24 repetitions. For family size F, the interval is

$$\overline{D} \;\pm\; t_{23,\,1-0.05/(2F)}\,\frac{s_D}{\sqrt{24}}.$$

The critical values are approximately 3.545808 for $F = 29$ and 3.180663 for $F = 12$. Under independent normal paired differences, each marginal Student interval has its exact nominal coverage, and the Bonferroni union bound gives family coverage at least 95%. Under other laws, the Student coverage is approximate. Twenty-four repetitions do not guarantee an adequate normal approximation. The results are not distribution-free certificates. Dependence between contrasts is allowed by Bonferroni; independence of windows is never used.

The synthetic estimand includes training and validation randomness, as well as finite test-sample variation, under each declared numerical generator. It is not an average over an independently sampled population of forecasting tasks. The sample size of 24 was fixed as a resource decision, not justified by an unreported prospective power calculation.

C.2 Primary controlled contrasts

The first stage compares geometry, normalizer retention, and local-coordinate retention within each of its nine settings:

$$\begin{aligned} G &= R(\phi^{\mathrm{A}}, \mathrm{ridge}) - R(\phi^{\mathrm{K}}, \mathrm{ridge}),\\ N &= R(\phi^{\mathrm{K}}, \mathrm{ridge}) - R([\phi^{\mathrm{K}}, \log Z^{\mathrm{K}}], \mathrm{ridge}),\\ L &= R(\phi^{\mathrm{K}}, \mathrm{ridge}) - R(\Gamma^{\mathrm{K}}_{\mathrm{local}}, \mathrm{ridge}). \end{aligned}$$

Here R denotes the test loss of the indicated complete fitted procedure. Positive values favor the second procedure in each difference. The 27 cellwise contrasts and $G(c,0) - G(c,1)$ at the two curvatures form the 29-member family. On straight branches, the position-target geometry advantage is 0.978026 with simultaneous interval $[0.96255, 0.99350]$. The target interaction is -0.978039 with interval $[-0.99351, -0.96257]$: the advantage is larger when position matters. This direction is not evidence that branch identity favors KAHM.

The normalizer inverse is checked numerically to about 2.8×10^{-16}. Nonetheless, the first-stage Van der Pol full-score RBF MSE is 0.00158, versus 0.01273 for the information-equivalent $[\phi, \log Z]$ coordinates. These secondary fitted-head comparisons illustrate accessibility and regularization differences; they do not estimate the representations' Bayes risks.

C.3 Comparison families and practical margins

The first-stage family contains the 27 G, N, L contrasts over nine settings and the two interactions $I_c = G(c, \lambda = 0) - G(c, \lambda = 1)$. A positive interaction would favor a larger reconstruction advantage for the

branch-identity target. Negative I_c is the opposite direction of this hypothesis, not a literal statement that one fitted method is uniformly harmful. The cell margin is 5% of the mean raw-ridge MSE from two pilot repetitions. Each interaction margin is the mean of its two endpoint cell margins. All pilot outcomes are excluded from confirmation estimates. The margins are recorded design thresholds, not externally validated application tolerances; their scale estimate has only two pilot observations.

The fresh capacity family contains 12 differences: raw minus KAHM local and affine local minus KAHM local, for three systems and two budgets. Each law's margin is 5% of its first-stage mean raw-RBF MSE, using the complete 24 first-stage confirmation repetitions. The margins, candidate list, and 24 fresh replication streams were frozen before phase-4 data were generated. Conditional on the completed first stage, they are fixed for this follow-up. The follow-up is explicitly data-motivated; it is not retroactively part of the initial 29-comparison plan. Its separate 95% family does not imply joint 95% coverage with the first family.

We call a difference a practical benefit at the declared threshold only when its simultaneous lower endpoint exceeds its fixed margin. An interval strictly above zero but not above the margin establishes a positive difference under the interval assumptions without resolving that practical threshold. A negative interval indicates an adverse difference for the candidate. An interval containing zero leaves the direction unresolved. An interval entirely within the fixed band $[-\delta, \delta]$ can support that band; failure to exclude zero alone cannot. Percent changes in the paper are descriptive ratios of means, without an asserted ratio confidence interval.

The capacity family has no primary interaction testing whether the advantage changes with landmark budget. A positive interval at one budget and an unresolved interval at another would not prove a budget interaction. All declared cells, including adverse and unresolved results, are retained. There were no omitted failed prescribed repetitions in the completed archives.

C.4 Reflection, reconstruction, and numerical checks

Reflection is applied to the raw branch input before the frozen scaler and geometry. For a p-coordinate feature vector, the stored-coordinate diagnostic is $\{\mathbb{E}_n\|\Gamma(X) - \Gamma(QX)\|_2^2/p\}^{1/2}$. The standardized diagnostic first divides each coordinate by its training-only standard deviation, replacing values at most 10^{-12} by one. This threshold differs from the fitted heads' 10^{-8} rule. Thus the reported per-coordinate RMS, its standardization, and its finite-sample approximation are not silently identified with the population metric or a known Lipschitz budget in Proposition 5. Values in Table 20 are averages of per-repetition RMS diagnostics, not a single pooled RMS.

The post-hoc numerical check retains all 24 phase-4 Van der Pol banks and all train/validation/test observations. It changes only query-row Gaussian evaluation as in Proposition 7, before multiplication by the unchanged fitted B. The training kernel, regularizer, principal basis, reference values, covariance metric, partition, and scaler are unchanged. Heads are fitted on the stabilized training features and retuned on the same validation split. The 96 outcomes cover two encodings, two budgets, and 24 repetitions. They are descriptive reuse of phase-4 data; no third confirmatory family or new confidence claim is attached.

The independently checked test count of 99,762 zero normalizers refers to query–local-model pairs among 2,236,416 evaluations, not distinct test observations. Of those pairs, 99,687 already had all Gaussian entries equal to floating-point zero; the remaining 75 zeros arose in later arithmetic. The stabilized count was zero. Local-feature losses were effectively unchanged, while full-score losses and some predictions changed. This addresses that particular underflow pathway as an explanation of the local-feature benefit; it is not a proof of numerical robustness of every KAHM encoding or of signed normalization in general.

C.5 Retrospective influence and coordinate-recovery diagnostics

These descriptive checks were added after the original study. They reuse the declared paired repetitions and do not change the primary estimates, margins, or comparison families. For each of the 41 primary contrasts, we compute bias-corrected sample skewness and delete each repetition once. Each deletion recomputes the Student interval with 23 remaining repetitions, 22 degrees of freedom, and the original family size (29 or 12). The range of deletion endpoints is an influence diagnostic, not a confidence interval or an additional simultaneous-coverage claim. Table 13 shows the four Van der Pol comparisons; the complete descriptive

results accompany the executable artifact. All four Van der Pol comparisons retain lower endpoints above the fixed practical margin after any one-repetition deletion. This does not establish a distribution-free mean guarantee or remove the normal-approximation qualification of the primary analysis.

Table 13: Retrospective Van der Pol influence diagnostics. Lower endpoints are multiplied by 10^3; the fixed margin on this scale is 0.148907. Skewness is the bias-corrected Fisher–Pearson sample coefficient. The minimum deletion lower endpoint is the smallest over all 24 one-repetition deletions. The final column counts individual paired differences exceeding the margin; it is not a mean-effect confidence statement.

Control	M	Skewness	Original lower	Min. deletion lower	$D_r > \delta$
Raw	64	-0.07	1.7369	1.7278	24/24
Affine local	64	2.69	0.2755	0.2685	24/24
Raw	256	0.01	0.7550	0.7524	24/24
Affine local	256	0.33	0.1810	0.1786	23/24

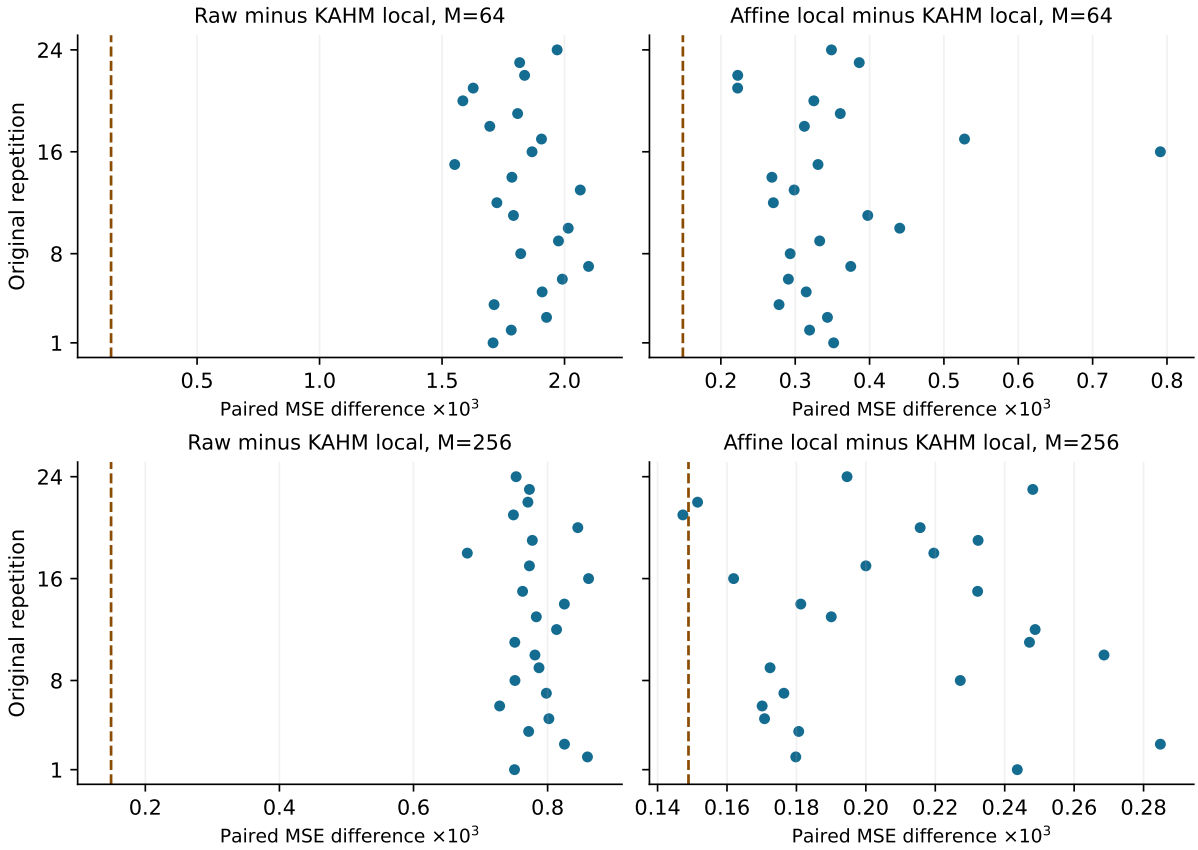


Figure 6: The 24 original paired differences for each Van der Pol capacity comparison, in units of 10^{-3} MSE. The dashed line is the frozen practical margin. No resampling, refitting, or new primary analysis is performed.

We also inspect the 120 first-stage primary banks and 72 capacity banks from a completed computational reproduction using the published seeds. No bank or head is refitted for these diagnostics. Replayed test inputs, targets, and groups are checked against their recorded hashes before the original feature map is evaluated. Let A vertically stack the $P_c^\top$ matrices. Proposition 3 shows that positive gates and full column rank of A suffice to recover the scaled input from the gated local coordinates and gates: division by ϕ_c recovers $P_c^\top(z - \mu_c)$, after which one solves for z. A deficient stack does not establish information loss in the full code, because the gates can carry additional information. Numerical ranks use the threshold $\sigma_1 \max\{\text{rows}(A), d\}\epsilon_{64}$; they are

finite-precision diagnostics, not exact rank proofs. Small singular values and small gates can make coordinate recovery sensitive to perturbations. Test-sample gate minima are not population lower bounds, and these computations do not guarantee a well-conditioned inverse or easy decoding by any particular fitted head.

Table 14: Retrospective diagnostics over 24 stored banks per row. Rank ranges concern the stacked local bases in input dimension d. The smallest singular value and gate entries are minima over the inspected banks (and, for gates, their original test observations); κ_2 is the largest stack condition number. A dash means that not every stack in that row has full numerical column rank. KAHM and affine representations share the basis stack. Computational reproduction supplies no new independent statistical replications.

Phase / setting	Rank / d	Min. σ_d	Max. κ_2	Min. ϕ^{K}	Min. ϕ^{A}
First: Straight branch	1/2	0	—	3.36×10^{-25}	2.56×10^{-20}
First: Curved branch	2/2	2.19×10^{0}	1.39×10^{0}	3.55×10^{-28}	8.97×10^{-29}
First: Nonlinear AR	12/12	6.20×10^{-2}	4.90×10^{1}	2.21×10^{-35}	2.36×10^{-34}
First: Van der Pol	12/12	1.60×10^{-2}	2.20×10^{2}	2.84×10^{-45}	9.43×10^{-20}
First: Duffing	12/12	1.33×10^{-2}	2.80×10^{2}	3.92×10^{-43}	3.11×10^{-7}
Capacity: Nonlinear AR	12/12	7.31×10^{-2}	4.19×10^{1}	9.97×10^{-37}	7.75×10^{-37}
Capacity: Van der Pol	12/12	1.60×10^{-2}	2.19×10^{2}	6.21×10^{-44}	1.56×10^{-16}
Capacity: Duffing	12/12	1.32×10^{-2}	2.84×10^{2}	5.38×10^{-43}	1.86×10^{-8}

D Complete controlled results and diagnostics

Table 15: The six primary branch settings at 1,024 training points: mean ridge test MSE over 24 repetitions, with the primary KAHM advantage G and its interval from the 29-comparison family. The Bayes MSE is 1/300. The affine-locality scoring control reuses the shared references and is secondary.

c	λ	Affine ϕ	KAHM ϕ	Affine locality	G [interval]
0	0	0.003334	0.003347	0.003344	−0.000013 [−0.000031, 0.000005]
0	0.5	0.503448	0.013995	0.003991	0.489453 [0.481962, 0.496944]
0	1	1.002694	0.024668	0.004641	0.978026 [0.962552, 0.993500]
1	0	0.282887	0.281126	0.314394	0.001761 [−0.071260, 0.074781]
1	0.5	0.160813	0.165207	0.167971	−0.004395 [−0.043672, 0.034882]
1	1	0.062366	0.051042	0.045555	0.011324 [0.000882, 0.021767]

Table 16: All nine first-stage primary settings: mean test MSE over 24 repetitions for ridge decoders. The local-coordinate improvement L and its interval belong to the 29-comparison family. Retaining local position substantially improves KAHM prediction in eight settings; KAHM local coordinates do not dominate affine local coordinates.

Setting	KAHM ϕ	KAHM local	Affine local	Raw	L [interval]
$c = 0, \lambda = 0$	0.003347	0.003378	0.003337	0.003338	−0.000031 [−0.000043, −0.000020]
$c = 0, \lambda = 0.5$	0.013995	0.003379	0.003333	0.003334	0.010616 [0.010033, 0.011200]
$c = 0, \lambda = 1$	0.024668	0.003380	0.003333	0.003330	0.021287 [0.020199, 0.022376]
$c = 1, \lambda = 0$	0.281126	0.017982	0.048916	0.671776	0.263144 [0.217187, 0.309101]
$c = 1, \lambda = 0.5$	0.165207	0.010497	0.026756	0.337620	0.154710 [0.122867, 0.186552]
$c = 1, \lambda = 1$	0.051042	0.004188	0.004656	0.003329	0.046854 [0.040400, 0.053307]
Nonlinear AR	0.005300	0.004867	0.004867	0.005053	0.000433 [0.000368, 0.000498]
Van der Pol	0.111108	0.014475	0.011582	0.041340	0.096633 [0.092436, 0.100830]
Duffing	0.053729	0.007560	0.004448	0.006764	0.046168 [0.041729, 0.050608]

Table 17: Post-hoc Van der Pol numerical sensitivity on the same 24 second-stage banks and samples. Stable query evaluation removes observed zero denominators while leaving local-coordinate mean MSE effectively unchanged. Δ_r is the original-minus-stable MSE difference within repetition r; wins count stable predictions beating the raw and affine local controls at the same width. These comparisons are outside the two primary interval families.

Encoding	M	Original MSE	Stable MSE	Max. $\lvert\Delta_r\rvert$	Wins raw; affine
Local	64	0.001026627	0.001026627	1.01×10^{-12}	24/24; 24/24
Local	256	0.000871969	0.000871969	1.69×10^{-11}	24/24; 24/24
Scores	64	0.001571085	0.001565219	8.74×10^{-5}	24/24; 4/24
Scores	256	0.001049909	0.001045801	3.53×10^{-5}	24/24; 17/24

Tables 19 and 20 give descriptive input-geometry summaries. The two complete primary comparison families follow. Their values are generated from the archived outcomes, with each difference, standard error, interval, and frozen margin independently recomputed by the paper-asset script before it writes these tables.

Table 18: Secondary Airfoil static-regression results on one fixed group split, averaged over 24 fitting seeds. Units are dB^2. These seeds do not constitute independent natural-data replications, and the comparison is descriptive.

Representation	Ridge MSE	RBF_{64} MSE
Raw	19.4726	15.6898
Affine ϕ	34.1630	36.0476
KAHM ϕ	31.8586	34.3338
Affine local	22.7200	22.4050
KAHM local	20.9040	20.9313
KAHM scores	24.2168	21.7070

Table 19: Held-out reconstruction errors per standardized input coordinate, averaged over the three blocks and 24 full repetitions. "Best" takes the best local reconstruction separately in each block; "weighted" averages the individual squared errors with that method's affinities. The affine value is lower in all 24 repetitions of each of these five input settings, for both summaries. These are descriptive diagnostics, not the supervised primary endpoint.

Setting	KAHM best	Affine best	KAHM weighted	Affine weighted
Branch $c = 0$	3.276×10^{-3}	2.156×10^{-16}	4.006×10^{-3}	1.548×10^{-8}
Branch $c = 1$	3.583×10^{-2}	2.932×10^{-2}	3.793×10^{-2}	3.238×10^{-2}
Nonlinear AR	1.166×10^{-2}	1.084×10^{-2}	1.305×10^{-2}	1.214×10^{-2}
Van der Pol	4.353×10^{-3}	1.683×10^{-3}	4.495×10^{-3}	1.916×10^{-3}
Duffing	4.877×10^{-3}	5.613×10^{-4}	5.239×10^{-3}	1.226×10^{-3}

Table 20: Branch reflection differences at training size 1,024, averaged over 24 banks. The statistic is a per-coordinate RMS, with and without training-only coordinate scaling. The raw reflection precedes the frozen pipeline. These values neither establish exact information loss for the learned code nor certify a decoder-specific population risk bound.

c	Encoding	Stored-coordinate RMS	Standardized RMS
0	KAHM ϕ	4.894×10^{-1}	1.402×10^{0}
0	Affine ϕ	1.451×10^{-9}	7.533×10^{-9}
0	KAHM local	5.289×10^{-1}	1.418×10^{0}
0	Affine local	4.993×10^{-1}	1.236×10^{0}
1	KAHM ϕ	5.380×10^{-1}	1.427×10^{0}
1	Affine ϕ	5.321×10^{-1}	1.471×10^{0}
1	KAHM local	4.854×10^{-1}	1.442×10^{0}
1	Affine local	5.522×10^{-1}	1.473×10^{0}

Table 21: Complete representation means in the fresh capacity study, with MSE multiplied by 10^3. The full-score KAHM representation is a prespecified secondary control. These point estimates do not add hypotheses to the 12-comparison primary family.

System	M	Raw	Affine local	KAHM local	KAHM scores
Nonlinear AR	64	4.4238	4.9120	4.8795	4.7984
Nonlinear AR	256	4.6958	5.2347	5.1749	4.8256
Van der Pol	64	2.8586	1.3767	1.0266	1.5711
Van der Pol	256	1.6541	1.0780	0.8720	1.0499
Duffing	64	3.4597	3.0549	4.2154	4.7005
Duffing	256	2.8364	2.7981	4.0736	3.3808

D.1 Selected pipelines and realized dimensions

The validation-selected pipeline and the retained nonlinear basis are distinct summaries: the former describes the operational model choice, whereas the latter records the realized dimensions behind the nominal landmark budgets.

Table 22: Secondary validation-only selection among the eight complete capacity-study pipelines. Mean test MSE is multiplied by 10^3. Counts concern independent complete repetitions under each generator, not a new population of forecasting tasks.

System	Selector MSE	Validation selections
Nonlinear AR	4.4238	Raw, 64: 24/24
Van der Pol	0.8720	KAHM local, 256: 24/24
Duffing	2.7923	Affine local, 256: 23/24; Raw, 256: 1/24

Table 23: Retained RBF-plus-linear dimensions after the Nyström eigenvalue cutoff in the fresh capacity study. Means and ranges cover the 24 repetitions in each cell. The same landmark count M does not imply the same realized dimension or function class.

System	M	Representation	Mean dimension	Range
Nonlinear AR	64	Raw	74.88	61–76
Nonlinear AR	64	Affine local	106.00	106–106
Nonlinear AR	64	KAHM local	106.00	106–106
Nonlinear AR	64	KAHM scores	76.71	62–78
Nonlinear AR	256	Raw	189.04	78–268
Nonlinear AR	256	Affine local	297.62	296–298
Nonlinear AR	256	KAHM local	297.50	293–298
Nonlinear AR	256	KAHM scores	148.88	77–219
Van der Pol	64	Raw	76.00	76–76
Van der Pol	64	Affine local	106.00	106–106
Van der Pol	64	KAHM local	106.00	106–106
Van der Pol	64	KAHM scores	78.00	78–78
Van der Pol	256	Raw	268.00	268–268
Van der Pol	256	Affine local	298.00	298–298
Van der Pol	256	KAHM local	272.38	261–285
Van der Pol	256	KAHM scores	231.88	215–251
Duffing	64	Raw	76.00	76–76
Duffing	64	Affine local	106.00	106–106
Duffing	64	KAHM local	105.46	98–106
Duffing	64	KAHM scores	77.96	77–78
Duffing	256	Raw	268.00	268–268
Duffing	256	Affine local	296.92	272–298
Duffing	256	KAHM local	240.38	176–298
Duffing	256	KAHM scores	214.33	164–270

Table 24: Complete first-stage family (29 contrasts), in original MSE units. Intervals use the two-sided 95% Bonferroni paired-replicate Student procedure with 23 degrees of freedom. Under paired normality, each t interval is exact and Bonferroni family coverage is at least 95%; otherwise coverage is approximate. The two stages have separate families.

Setting / budget	Contrast	$\overline{D}$	Simultaneous interval	δ	Assessment
$c = 0, \lambda = 0$	G	-0.000013	$[-0.000031, 0.000005]$	0.000168	unresolved †
$c = 0, \lambda = 0$	N	-0.000008	$[-0.000016, -1.85 \times 10^{-7}]$	0.000168	negative †
$c = 0, \lambda = 0$	L	-0.000031	$[-0.000043, -0.000020]$	0.000168	negative †
$c = 0, \lambda = 0.5$	G	0.489453	[0.481962, 0.496944]	0.000168	practical +
$c = 0, \lambda = 0.5$	N	0.000944	[0.000088, 0.001799]	0.000168	positive
$c = 0, \lambda = 0.5$	L	0.010616	[0.010033, 0.011200]	0.000168	practical +
$c = 0, \lambda = 1$	G	0.978026	[0.962552, 0.993500]	0.000168	practical +
$c = 0, \lambda = 1$	N	0.001938	[0.000255, 0.003621]	0.000168	practical +
$c = 0, \lambda = 1$	L	0.021287	[0.020199, 0.022376]	0.000168	practical +
$c = 1, \lambda = 0$	G	0.001761	$[-0.071260, 0.074781]$	0.033542	unresolved
$c = 1, \lambda = 0$	N	0.069128	[0.028663, 0.109593]	0.033542	positive
$c = 1, \lambda = 0$	L	0.263144	[0.217187, 0.309101]	0.033542	practical +
$c = 1, \lambda = 0.5$	G	-0.004395	$[-0.043672, 0.034882]$	0.016863	unresolved
$c = 1, \lambda = 0.5$	N	0.040663	[0.019789, 0.061538]	0.016863	practical +
$c = 1, \lambda = 0.5$	L	0.154710	[0.122867, 0.186552]	0.016863	practical +
$c = 1, \lambda = 1$	G	0.011324	[0.000882, 0.021767]	0.000168	practical +
$c = 1, \lambda = 1$	N	0.012111	[0.005647, 0.018574]	0.000168	practical +
$c = 1, \lambda = 1$	L	0.046854	[0.040400, 0.053307]	0.000168	practical +
Nonlinear AR	G	-1.89×10^{-7}	$[-0.000050, 0.000049]$	0.000253	unresolved †
Nonlinear AR	N	-0.000016	$[-0.000062, 0.000029]$	0.000253	unresolved †
Nonlinear AR	L	0.000433	[0.000368, 0.000498]	0.000253	practical +
Van der Pol	G	-0.049419	$[-0.060532, -0.038307]$	0.002036	negative
Van der Pol	N	0.013443	[0.005084, 0.021803]	0.002036	practical +
Van der Pol	L	0.096633	[0.092436, 0.100830]	0.002036	practical +
Duffing	G	-0.030948	$[-0.035414, -0.026482]$	0.000338	negative
Duffing	N	0.005558	[0.001721, 0.009395]	0.000338	practical +
Duffing	L	0.046168	[0.041729, 0.050608]	0.000338	practical +
$c = 0$ interaction	I_0	-0.978039	$[-0.993512, -0.962566]$	0.000168	opposite sign
$c = 1$ interaction	I_1	-0.009564	$[-0.082839, 0.063712]$	0.016855	unresolved

†: the entire interval lies within the fixed practical band $[-\delta, \delta]$. An unresolved sign alone does not establish equivalence.

Table 25: Complete fresh capacity family (12 contrasts). All numerical loss quantities are multiplied by 10^3. Intervals use the two-sided 95% Bonferroni paired-replicate Student procedure with 23 degrees of freedom. Under paired normality, each t interval is exact and Bonferroni family coverage is at least 95%; otherwise coverage is approximate. The two stages have separate families.

Setting / budget	Contrast	$\overline{D}$	Simultaneous interval	δ	Assessment
Nonlinear AR / 64	Raw–K	-0.4556	$[-0.5235, -0.3878]$	0.2201	negative
Nonlinear AR / 64	Affine–K	0.0325	$[-0.0031, 0.0680]$	0.2201	unresolved †
Nonlinear AR / 256	Raw–K	-0.4791	$[-0.6013, -0.3569]$	0.2201	negative
Nonlinear AR / 256	Affine–K	0.0598	$[-0.0131, 0.1327]$	0.2201	unresolved †
Van der Pol / 64	Raw–K	1.8320	$[1.7369, 1.9271]$	0.1489	practical +
Van der Pol / 64	Affine–K	0.3501	$[0.2755, 0.4247]$	0.1489	practical +
Van der Pol / 256	Raw–K	0.7822	$[0.7550, 0.8094]$	0.1489	practical +
Van der Pol / 256	Affine–K	0.2060	$[0.1810, 0.2311]$	0.1489	practical +
Duffing / 64	Raw–K	-0.7557	$[-1.0831, -0.4282]$	0.1727	negative
Duffing / 64	Affine–K	-1.1605	$[-1.4707, -0.8503]$	0.1727	negative
Duffing / 256	Raw–K	-1.2372	$[-1.5242, -0.9503]$	0.1727	negative
Duffing / 256	Affine–K	-1.2756	$[-1.5702, -0.9810]$	0.1727	negative

†: the entire interval lies within the fixed practical band $[-\delta, \delta]$. An unresolved sign alone does not establish equivalence.

E Representations and fitted forecasting rules

A history $x \in \mathbb{R}^d$ contains the observations available at a forecast origin; its response $y \in \mathbb{R}^H$ contains the next H observations. For the univariate tasks below, the input dimension d equals the history length L. We fit direct multioutput regressors to historical pairs $\{(x_i, y_i)\}_{i=1}^n$. The construction below specifies which part of the regressor uses KAHM geometry. It does not assume that overlapping forecasting windows are independent. All input transformations, reference sets, and decoder bases are fitted on the training portion of each fit.

E.1 Shared reference geometry

Write $z(x) = D^{-1}(x - \bar{x})$, where $\bar{x}$ and the diagonal scales D are training means and population standard deviations. A standard deviation at most 10^{-12} is replaced by one. Thus this transformation retains every raw coordinate, including coordinates constant in the observed training set. Three independently seeded k-means partitions, with $k \in \{2, 4, 8\}$, use the same seeded subset of at most 512 training histories. Each partition has five initializations and at most 150 iterations. Each cluster supplies at most 24 references sampled without replacement; all its rows are used if there are fewer. For a common seed and training set, the alternative gates use identical partition and reference-selection rules. They are nevertheless fitted as separate computational pipelines.

Index the 14 local models by c, with the partition blocks denoted $\mathcal{C}_b$. Let $Q_c = [q_{c1}, \ldots, q_{cm_c}] \in \mathbb{R}^{d \times m_c}$ contain the training-standardized references, stored after the inherited float32 conversion, and let $\mu_c = m_c^{-1} Q_c \mathbf{1}$. The orthonormal columns of $P_c \in \mathbb{R}^{d \times r_c}$ are leading eigenvectors of the centered reference covariance. The requested rank is $\min(2, d-1, m_c - 1)$; only eigenvalues above double-precision machine epsilon are retained. The inherited implementation further reduces a rank greater than one if the smallest projected coordinate range is below 10^{-3}. A reference set with no usable direction has $r_c = 0$ and uses its center as its reconstruction. Other numerical failures remain recorded failures.

The affine reconstruction and centered local coordinates are

$$a_c(z) = \mu_c + P_c P_c^\top (z - \mu_c), \qquad u_c(z) = P_c^\top (z - \mu_c). \tag{25}$$

The affine and locality controls compute these quantities without fitting or querying any KAHM kernel.

E.2 Reconstruction scores and local gates

KAHM reconstruction. Kernel Affine Hull Machines construct nonlinear reconstructions from local kernel weights (Kumar et al., 2024). We retain the pinned implementation's local autoencoder, rather than asserting equivalence to an independently optimized end-to-end KAHM learner. For $r_c > 0$, let Σ_c be the sample covariance of the columns of $P_c^\top Q_c$. Its Gaussian kernel is

$$k_c(z,q) = \exp\left\{-\frac{(P_c^\top(z-q))^\top \Sigma_c^{-1} P_c^\top (z-q)}{2r_c}\right\}, \qquad (K_c)_{ij} = k_c(q_{ci}, q_{cj}). \tag{26}$$

To specify the inherited local regularizer exactly, put $\nu_c = \|Q_c\|_F^2/(dm_c)$ and initialize $\lambda_0 = 5\nu_c/2$. Its iteration is

$$B_t = (K_c + \lambda_t I)^{-1}, \qquad \lambda_{t+1} = 2\nu_c + \frac{\|Q_c - Q_c(K_c B_t)^\top\|_F^2}{dm_c}. \tag{27}$$

It stops after an update of size at most 10^{-3} or 100 updates, and retains the last computed B_t as B_c. In particular, it does not perform an extra inverse at the newly updated λ_{t+1}. For $k_c(z) = (k_c(z, q_{cj}))_{j=1}^{m_c}$, define

$$v_c(z) = B_c^\top k_c(z), \qquad \widehat{z}_c(z) = \frac{Q_c v_c(z)}{\mathbf{1}^\top v_c(z)}. \tag{28}$$

The weights may be signed. The reconstruction is therefore not generally a convex average. The inherited exact-zero-denominator convention replaces the denominator by one; that convention is an implementation choice, not a definition of a continuous extension at a singularity.

Stable Gaussian evaluation. For queries we compute the analytic log kernel $\ell_{cj}(z) = -\|S_c P_c^\top (z - q_{cj})\|^2/(2r_c)$, where S_c is the stored symmetric square root of the inverse covariance, and use $\widetilde{k}_{cj}(z) = \exp\{\ell_{cj}(z) - \max_j \ell_{cj}(z)\}$ in Equation (28). In exact arithmetic, $S_c^\top S_c = \Sigma_c^{-1}$, and multiplying every kernel entry for one query by the same positive constant cancels from the normalized reconstruction whenever its denominator is nonzero. This calculation avoids underflow caused solely by a large common negative log-kernel offset. It does not prevent signed cancellation, guarantee a well-conditioned denominator, or guarantee equivalence at an exact zero. The implementation retains the zero-denominator convention, records numerical diagnostics, and rejects nonfinite outputs. The historical mode instead exponentiates the unshifted logs through the inherited query routine; it is retained for equivalence checks, while this study uses the shifted evaluation.

Matched folding gates. Given either the KAHM reconstruction $\widehat{z}_c$ or the affine reconstruction a_c, denote it by $r_c^{\mathrm{rec}}(z)$. Define

$$\begin{aligned} \rho_c(z) &= 1 - \exp\{-\|z - r_c^{\mathrm{rec}}(z)\|\}, \qquad \theta_c(z) = \frac{1}{\pi}\arccos\left(\mathrm{clip}_{[-1,1]}\,\frac{z^\top r_c^{\mathrm{rec}}(z)}{\|z\|\,\|r_c^{\mathrm{rec}}(z)\|}\right), \\ s_c(z) &= \sqrt{\{\rho_c(z)^2 + \theta_c(z)^2\}/2}, \qquad \phi_c(z) = \frac{[1 - \mathrm{clip}_{[0,1]}\, s_c(z) + \tau]^\omega}{\sum_{j\in\mathcal{C}_b}[1 - \mathrm{clip}_{[0,1]}\, s_j(z) + \tau]^\omega}, \quad c \in \mathcal{C}_b. \end{aligned} \tag{29}$$

When either norm in the cosine denominator is zero, its cosine is set to zero, so that $\theta_c = 1/2$. The fixed values are $\omega = 16$ and $\tau = 10^{-6}$; normalization is evaluated with log-sum-exp. The comparison between these two gates changes the reconstruction while retaining the score, reference geometry, and local-coordinate construction.

Locality control. The third gate uses the historical native-affine score formula, applied to the same references. With $\epsilon = 10^{-6}$, set

$$t_c = \max\left\{m_c^{-1}\sum_j \|q_{cj} - \mu_c\|^2, \epsilon\right\},$$

$$
\begin{aligned}
e_c &= \max\left\{ m_c^{-1} \sum_j \|q_{cj} - a_c(q_{cj})\|^2, 0.05 t_c, \epsilon \right\}, \\
b_c(z) &= \frac{\|z - a_c(z)\|^2}{e_c} + 0.1 \frac{\|z - \mu_c\|^2}{t_c}, \\
\phi_c(z) &= \frac{\exp[-b_c(z)]}{\sum_{j \in \mathcal{C}_b} \exp[-b_j(z)]}.
\end{aligned} \tag{30}
$$

This distinguishes proximity to the local center from projection residual. Here "native" identifies a score formula; it does not identify a separately tuned native learning algorithm. It supplies a non-KAHM locality alternative to the matched folding-score comparison.

E.3 Local codes and finite forecasting heads

For each gate family g, concatenate all gates and gated local coordinates:

$$
T_g(x) = \big((\phi_c(z(x)))_c, (\phi_c(z(x))u_c(z(x)))_c\big), \qquad T_{\mathrm{raw}+g}(x) = (z(x), T_g(x)). \tag{31}
$$

The stored local width is $14 + \sum_c r_c \le 42$; the actual width is recorded. The raw augmentation prepends all d history coordinates, with no truncation when $d > 28$. The combination of local association and local position is related to coordinate and tangent coding (Yu et al., 2009; Yu & Zhang, 2010); our gates and decoder are the explicit constructions above. The stack of $P_c^\top$ has rank at most 28. A deficient stack alone does not prove information loss in T_g, because the gates also depend on the query. Raw augmentation gives the simpler unconditional reconstruction property stated below, without a rank assumption.

Nyström plus linear basis. Let $v(x)$ denote $z(x)$, $T_g(x)$, or $T_{\mathrm{raw}+g}(x)$, and let $q(x)$ be its coordinatewise training standardization. Select M training rows without replacement as landmarks $a_1, \ldots, a_M$ in q-space. The requested M is 32 or 64, capped by the training size. Set σ^2 to the median positive squared inter-landmark distance and define

$$
k_\sigma(q, a) = \exp\{-\|q - a\|^2/(2\sigma^2)\}, \qquad b(x) = \Big(q(x),\ \mathrm{diag}(\eta_J^{-1/2}) U_J^\top (k_\sigma(q(x), a_j))_{j=1}^M\Big). \tag{32}
$$

Here $U \,\mathrm{diag}(\eta) U^\top$ diagonalizes the landmark Gram matrix, and J retains eigenvalues exceeding $\max(10^{-10}\eta_{\max}, 10^{-12})$ (Williams & Seeger, 2001). Distances at most 10^{-14} are excluded from the bandwidth median; if none remain the squared bandwidth is one, and in all cases it is floored at 10^{-12}. The bandwidth multiplier is fixed to one. Finally, standardize b on training rows to obtain $f(x)$ and the design $F_{i,:} = f(x_i)^\top$. Both head standardizations replace scales below 10^{-8} by one. Raw ridge omits the Nyström block and uses the same centering and scaling convention.

For each horizon h, the fitted decoder solves

$$
\min_{\beta_h, a_h} \ \frac{1}{n} \sum_{i=1}^n [y_{ih} - a_h - f(x_i)^\top \beta_h]^2 + \alpha \|\beta_h\|^2. \tag{33}
$$

Thus the normal equations use $F^\top F/n + \alpha I$, and the intercept is unpenalized. Internally, targets are standardized using training statistics and transformed back after prediction. For fixed α, linearity makes this exactly equivalent in real arithmetic to Equation (33) in the original target units. This is a Euclidean ridge penalty on a standardized finite basis, rather than the canonical Gaussian RKHS norm. Adding local features also changes the Gaussian distances and the resulting Nyström basis; the raw and augmented nonlinear decoder classes need not be nested.

One common α from the ordered grid $(0.01, 1, 100)$ is selected by validation MSE averaged over origins and horizons in original target units, with the first grid entry winning ties. Within a method, geometry, training and validation features, basis construction, and the Gram eigensystem are computed once; all three alphas reuse those quantities. Different method variants share no fitted bank or free preprocessing. The selected configuration is then fitted anew on the admissible pretest training data. Search designs and eigensystems are not retained in the serialized final model. This gives an explicit efficient search whose full computation can be measured.

E.4 Information and finite-decoder risk

The following elementary facts delimit the interpretation of the experiments. They are established information-preservation and linear-smoother algebra, not new KAHM approximation theorems or performance guarantees.

Proposition 8 (Information preserved by raw augmentation)**.** *Condition on a fitted state Θ containing $\bar{x}$, positive diagonal D, and a measurable, finite-valued feature map T_g on the support of X. Then $T_{\mathrm{raw}+g}(X)$ and X generate the same information conditional on Θ. For a square-integrable response Y, their conditional expectations and optimal squared-loss Bayes risks coincide, conditional on Θ. This statement requires neither positive gates nor a full-rank stack of local bases.*

Proof. The augmented code is a measurable function of (X, Θ), and its first d coordinates recover $X = \bar{x} + Dz(X)$. Consequently $\sigma(T_{\mathrm{raw}+g}(X), \Theta) = \sigma(X, \Theta)$. Conditional expectation onto these equal sigma-fields, and hence the minimum squared prediction error, is identical. □

This is an exact-arithmetic statement about the representation, not a conditioning guarantee or a claim that a particular fitted decoder uses every retained coordinate. Empirical gains from raw augmentation must therefore be explained through finite fitting, representation-dependent regularization, or numerical behavior, rather than increased Bayes information relative to the same raw input.

Proposition 9 (Fixed-feature, fixed-alpha risk identity)**.** *Consider one response coordinate, a fixed $\alpha > 0$, and the centered training design F above. Let $\mathcal{G}$ contain the training and query inputs and the randomness used to fit their unsupervised feature map, so F and $f(x_*)$ are $\mathcal{G}$-measurable. Put*

$$w_* = \frac{\mathbf{1}}{n} + F(F^\top F + n\alpha I)^{-1} f(x_*). \tag{34}$$

Let the training response vector be Y, the future response be Y_*, and assume their conditional second moments are finite. Define $\mu = \mathbb{E}[Y \mid \mathcal{G}]$, $\mu_* = \mathbb{E}[Y_* \mid \mathcal{G}]$, $\Sigma = \mathrm{Cov}(Y \mid \mathcal{G})$, $c = \mathrm{Cov}(Y, Y_* \mid \mathcal{G})$, and $v_* = \mathrm{Var}(Y_* \mid \mathcal{G})$. The fitted prediction is $\widehat{Y}_* = w_*^\top Y$, and

$$\mathbb{E}[(\widehat{Y}_* - Y_*)^2 \mid \mathcal{G}] = (w_*^\top \mu - \mu_*)^2 + w_*^\top \Sigma w_* + v_* - 2w_*^\top c. \tag{35}$$

Proof. Because $F^\top \mathbf{1} = 0$, the unpenalized intercept is $\bar{Y}$ and $\widehat{\beta} = (F^\top F + n\alpha I)^{-1} F^\top Y$. Substituting into $\bar{Y} + f(x_*)^\top \widehat{\beta}$ gives Equation (34); the inverse target standardization cancels as described above. Conditional on $\mathcal{G}$, expand the second moment of $w_*^\top Y - Y_*$ as its squared mean plus its variance. The covariance cross term is $-2w_*^\top c$, giving the identity. □

The identity holds without independent training responses or an independent future response. Overlapping windows and serial dependence can affect both Σ and c; neither may be discarded without additional assumptions. Averaging the identity over horizons gives the corresponding average risk. Changing geometry changes w_* and can change all its bias and covariance terms, without a universal ordering between representations. The identity does not automatically describe the full validation-selected procedure: after alpha selection, the smoother depends on observed validation responses. No generalization or selection guarantee is inferred from it.

F Natural-data protocol

Source allocation, task roster, model grids, and analysis are fixed before comparative outcomes. We test matched representations, practical accuracy–cost tradeoffs, and prospective selection on reserved families. Specifications, checksums, and execution freezes accompany the code as internal reproducibility records, not externally timestamped preregistration.

Table 26: Fixed source allocation and forecast regimes. "Selected/all" counts series, not independent source families. Each selected series uses both regimes for its frequency. L is history length, H forecast horizon, and s the declared seasonal period.

Phase	Source snapshot	Frequency	Selected/all
Development	Electricity (Godahewa et al., 2020a)	weekly	4/321
	NN5, with missing values (Godahewa et al., 2020c)	daily	4/111
	Tourism (Godahewa et al., 2020e)	monthly	4/366
	FRED-MD (Godahewa et al., 2020k)	monthly	4/107
Confirmation	Traffic (Godahewa et al., 2020f)	weekly	4/862
	Hospital (Godahewa et al., 2020b)	monthly	4/767
	Saugeen River flow (Godahewa et al., 2020d)	daily	1/1
	US births (Godahewa et al., 2020g)	daily	1/1

Frequency	Short (L, H)	Long (L, H)	s
Monthly	$(12, 3)$	$(24, 6)$	12
Weekly	$(13, 4)$	$(26, 8)$	52
Daily	$(28, 7)$	$(56, 14)$	7

F.1 Sources and chronological tasks

Table 26 gives eight versioned Monash snapshots (Godahewa et al., 2021), chosen by provenance, application diversity, length, and size. Related series, channels, and aggregations share a source family and cannot cross the boundary between development and confirmation. Models are local to each series, including differently dated Tourism series. The supplement retains the records' CC BY 4.0 licenses, versions, attribution, original-source references, and archive hashes.

Training-prefix eligibility requires at least 16 finite windows in each regime and a positive training error scale. A fixed salted hash of source and series ID orders eligible series; we retain the first four, or all if fewer exist, across regimes and capacities. No later loss or availability criterion selects replacements. The 26 series give 52 base tasks; two capacities and seeds 17 and 43 give 208 runs: 128 development and 80 confirmation, with four source families per phase.

For a length-n series indexed from zero, let $a = \lfloor 3n/5 \rfloor$ and $b = \lfloor 4n/5 \rfloor$. Training, validation, and test intervals are $[0, a)$, $[a, b)$, and $[b, n)$. An origin t is the last observed index, with

$$x_t = (y_{t-L+1}, \ldots, y_t), \qquad y_t^+ = (y_{t+1}, \ldots, y_{t+H}). \tag{36}$$

The complete target interval must lie within its split; contexts may include earlier observed values. Stateful controls receive $t + 1$, their first-future index. We retain raw snapshot values, including NN5 missing markers, and discard windows with an unavailable context or target without interpolation. Evenly spaced indices among available origins give at most 64 validation and 64 test windows, and the training cap in Table 27. Every method receives the same evaluation origins.

Before outcomes, length checks reduced the proposed monthly $(48, 6)$ and weekly $(52, 8)$ regimes, which yield zero Hospital and three Traffic training windows. The adopted long regimes yield 21 and 29, respectively. Context and horizon are paired, so their separate effects are not identified. NN5 T88 at $(56, 14)$ retains only seven test origins out of 146 candidates. All task availability counts are recorded.

All candidate preprocessing is fitted on training data, and validation MSE selects hyperparameters. The selected pipeline is then fitted anew on all eligible windows with targets preceding b, subject to its training cap. This refit legitimately includes windows crossing the former training/validation boundary. Parameters are fixed thereafter; earlier realized observations may enter later contexts or state updates. Test outcomes never retune parameters.

Table 27: Capacity caps. These are limits on examples and model size, not equal realized time budgets. A shorter source uses its available examples.

Setting	Training windows	RBF landmarks	Tree leaves/iterations	MLP width/iterations
Small	512	32	15/100	32/200
Medium	1,024	64	31/150	64/300

F.2 Comparators, capacity, and loss

The twelve methods comprise raw ridge and raw RBF heads; affine-, locality-, and KAHM-gated local RBF pipelines; each local pipeline augmented by the full raw history; and seasonal naive, Holt, histogram gradient boosting, and a one-hidden-layer MLP. Section E defines the feature maps and finite RBF head. The primary matched pair is raw RBF (R) versus raw-history plus KAHM RBF (K). The raw-history controls retain the inputs independently of local-basis rank (Proposition 8). All twelve methods remain in the declared practical portfolio.

The geometric bank uses cluster counts $(2, 4, 8)$, requested rank two, at most 24 references per local model, a 512-row fitting cap, $\omega = 16$, and $\tau = 10^{-6}$. Reduced effective ranks and numerical fallbacks are recorded. Each alternative constructs its own representation; affine/locality controls do not fit a KAHM kernel. Within a method, the fixed representation and head statistics are reused across ridge penalties $\{0.01, 1, 100\}$; the bandwidth multiplier is one. Boosting/MLP regularization is chosen from $\{0.01, 1\}$, Holt selects damped or undamped trend, and seasonal naive has no tuned parameter. These modest declared grids do not imply optimal tuning of every comparator.

Seasonal naive can use its declared lag from the observed past even when it exceeds L, using the last finite value for an unavailable lag and period one before a full seasonal lag exists. Holt fits a capped historical segment, forward-fills only within that segment, and assimilates observations strictly before each forecast; an absent online observation causes a state prediction without measurement update. Boosting and MLP fit direct multi-output forecasts without a random internal validation split.

For recorded origins $\mathcal{O}$, the task score is

$$\ell = \frac{1}{|\mathcal{O}|Hq} \sum_{t \in \mathcal{O}} \sum_{h=1}^{H} (\widehat{y}_{t+h} - y_{t+h})^2, \tag{37}$$

Here q is the seasonal-difference mean square in the uncapped initial training prefix, requiring two finite pairs and positive finite q. First differences provide the fallback; a series with neither scale is ineligible. This denominator remains fixed during refitting. Raw MSE, q, predictions, and origin losses are saved and independently checked.

Aggregation gives equal mass to families and then each nested dataset, series, horizon, history, capacity, and seed. These nested observations are not independent source replications. We report family outcomes, dispersion, and leave-one-family-out sensitivity, without broad-population confidence intervals or window-level significance claims.

F.3 Measured pipeline and selector costs

Methods execute sequentially in fresh child processes with one BLAS thread and deterministically shuffled order, limited to 120 seconds per method and 1,800 per task. Wall and process CPU time are separate. Each warm-library scientific pipeline includes data/checksum preparation, array loading, configuration fitting and validation, selection bookkeeping, selected refitting, forecasting, and model serialization. Source preparation is equally allocated across its tasks and charged consistently to alternatives. Shared imports are initialized before measurement; initialization, process launch/IPC, and launch-to-result duration are recorded separately rather than allocated arbitrarily to policies.

Let S_m contain method m's search nodes and F_m its final refit/forecast nodes, including serialization. A validation selector over candidates $\mathcal{A}$, choosing m^*, requires

$$\mathcal{D}_{\text{val}} = \mathcal{D}_{\text{data}} \cup \bigcup_{m \in \mathcal{A}} S_m \cup F_{m^*}, \qquad C = \sum_{v \in \mathcal{D}_{\text{val}}} c_v + c_{\text{decision}}. \tag{38}$$

Set unions count shared dependencies once. A learned selector instead pays for its required metadata/geometry/probe nodes plus $S_{m^*} \cup F_{m^*}$, even when it rejects KAHM. Geometry-only acquisition is conservatively billed through its measured fitted-probe component. Thus policy costs are counterfactual sums of measured required computations, not the cost of running every alternative in the benchmark.

Development-label acquisition also costs the R, K searches, refits, and forecasts, plus each variant's feature/probe nodes. We report this investment separately from regression fitting, online policy costs, and the full research benchmark's elapsed time, without assuming a deployment count for amortization. Summed standalone task costs are conservative where sharing across seeds or capacities could reduce work.

We also record model bytes and process high-water RSS. RSS includes the interpreter, inherited arrays, and earlier process history; it is neither incremental memory nor an additive exact policy-memory reconstruction. No GPU measurement is inferred from CPU timing. Failed attempts remain visible and retain the available timing records. A failed method cannot be replaced or omitted silently; analysis requires the complete declared task/method roster.

F.4 Prospective diagnostic and confirmation gate

The diagnostic predicts benefit before a task's test outcomes, while using its training history and permitted validation information. Its development label is $\log[(\ell_R + \epsilon)/(\ell_K + \epsilon)]$, with $\epsilon = 10^{-12}$. Development test errors may train this cross-task rule; confirmation errors cannot train, standardize, tune, or select it.

We retain four weighted ridge rules: metadata M, M plus geometry G, M plus a validation probe P, and $M + P + G$. Metadata features are $\log(1 + N_{\text{train}})$, $\log(1 + H/L)$, and training-prefix lag-one autocorrelation. Geometry adds normalized KAHM gate entropy and $\log(1 + r)$, where r is the gated affine-projection residual on probe training inputs. The probe fits the matched R, K pair with at most 128 training windows, 16 landmarks, a 128-row bank cap, and penalty one; its feature is the log ratio of scaled validation losses with the same loss floor.

The diagnostic penalty is fixed at one, with an unpenalized intercept. Source-balanced feature standardization and fitting occur inside each development fold, holding out an entire source family. All four variants are then fitted on all development families and frozen before confirmation. The primary incremental comparison is $M + P + G$ against $M + P$, testing whether geometry adds value beyond metadata and a reduced-capacity validation probe. Controls include always R, always K, direct probe selection, validation selection within the matched pair, the six-method raw/practical portfolio, the two-method KAHM portfolio, and the full twelve-method portfolio.

A positive predicted log benefit selects K; ties select R. A fixed 5% relative MSE change defines secondary practical benefit/harm, not a tuned selection threshold. All four variants are reported without choosing one from confirmation performance. A test-set oracle is only a hindsight regret reference. Utility requires improved held-out loss–cost behavior against metadata and probe controls, not merely correlation with retrospective gains.

Before confirmation, saved development predictions are audited against frozen targets and reported errors. The final freeze binds code, dependencies, roster, development records, and diagnostic coefficients. Confirmation cannot run an arbitrary subset; only complete checksum-verified results may be resumed. This is a selected, small collection, not a random sample of forecasting domains or a state-of-the-art survey. Seasonal periods are conventions rather than fitted optimal cycles. In particular, FRED-MD is a fixed-vintage snapshot: its metadata describe transformed series without a complete per-series preprocessing audit (Godahewa et al., 2020k). Our train-only guarantees apply to processing in this extension, not to unverified upstream decisions, historical revisions, or release-time availability. The conclusions must remain conditional on these sources, contexts, grids, and resource settings.

Table 28: Standalone confirmation methods, equally weighted across 4 original source families using the frozen within-source hierarchy. Loss is training-scale-normalized MSE. Wall and CPU seconds cover complete warm-library scientific pipelines. RSS is the averaged maximum recorded process high-water mark, not incremental memory; model size is serialized bytes in KiB. No uncertainty intervals are inferred from dependent tasks.

Method	Scaled MSE	Wall (s)	CPU (s)	RSS (MiB)	Model (KiB)
Raw ridge	0.7798	0.188	0.1879	171.5	5.655
Raw RBF	0.8075	0.1688	0.1687	171.5	37.32
Affine local	0.9449	0.5002	0.4897	171.5	93.2
Locality local	0.8964	0.2898	0.2898	171.5	93.4
KAHM local	0.9354	0.3218	0.3214	171.5	164.6
Raw + affine	0.8458	0.3379	0.3265	171.5	107.8
Raw + locality	0.8462	0.2791	0.279	171.5	107.8
Raw + KAHM	0.8419	0.3874	0.3814	171.5	179.2
Seasonal naive	1.05	0.1614	0.1613	171.5	0.1382
Holt	2.373	0.3449	0.3446	171.5	0.4219
Histogram boosting	0.9555	8.91	8.901	171.5	2591
MLP	0.8785	1.463	1.462	171.5	71.62

Table 29: Confirmation cost transparency for the primary matched pair, with equal source-family weighting. Total is the complete warm-library scientific pipeline. Cleanup is its measured selection-overhead component, including explicit garbage collection; the percentage is the ratio of aggregated component and total times. Launch separately reports the measured isolated-child launch-to-result interval. These are implementation-specific costs, not intrinsic kernel arithmetic or universal complexity ratios.

Method	Total (s)	Cleanup (s)	Cleanup (%)	Launch (s)
Raw RBF	0.16879	0.13808	81.8	0.17748
Raw + KAHM	0.38741	0.18253	47.11	0.40097

G Additional natural-source results and diagnostics

The following tables retain all declared methods, selection policies, source means, capacities, diagnostic variants, and recorded fitting warnings. These are descriptive summaries under the same fixed source hierarchy. They do not pool the natural-source results with the controlled-study confidence families. Full precision, forecasts, targets, origins, selected parameters, and cost components are retained in the anonymous supplement.

Table 30: Frozen-policy confirmation outcomes over 4 source families with the same hierarchical weighting. Gain is raw-RBF scaled MSE minus chosen loss. Harm is the weighted fraction with loss more than 5% above raw RBF. The final column counts selection of the specific raw-plus-KAHM pair member, including in portfolios. Wall cost includes all required probes/searches and decision inference, then the chosen final refit, forecast and model serialization. Offline evidence acquisition and diagnostic fitting are separate.

Policy	Scaled MSE	Wall (s)	Gain	Harm (%)	Raw+K (%)
Always raw	0.8075	0.1688	0	0	0
Always raw + KAHM	0.8419	0.3874	-0.0344	25	100
Validation: matched pair	0.8097	0.4812	-0.002159	5.47	32
Validation: raw portfolio	0.8639	8.338	-0.05638	10.9	0
Validation: KAHM family	0.8406	0.6242	-0.03306	26.6	73.4
Validation: full portfolio	0.8764	9.948	-0.0689	14.8	14.1
Cheap probe	0.8143	0.3465	-0.006771	9.38	50
Metadata	0.816	0.2976	-0.008445	15.6	50
Metadata + geometry	0.816	0.3695	-0.008445	15.6	50
Metadata + probe	0.8071	0.3309	0.0004363	3.12	31.2
Metadata + probe + geometry	0.8071	0.3309	0.0004363	3.12	31.2

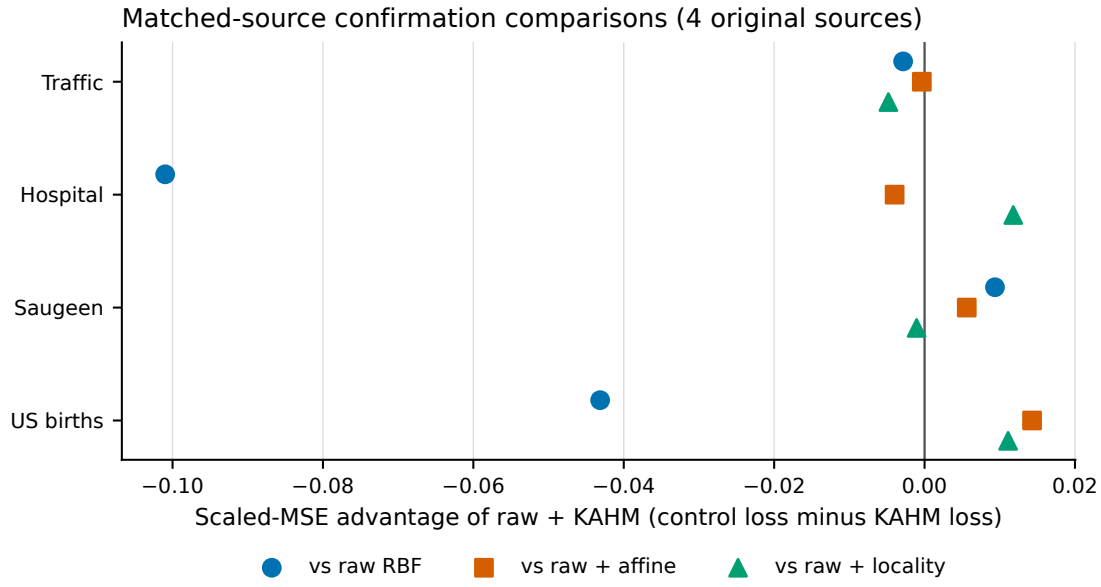


Figure 7: Within-source confirmation comparisons. Positive differences favor raw plus KAHM. Points compare the same hierarchically weighted source means; no window-level uncertainty intervals are inferred. The small KAHM differences against structural controls change sign across sources.

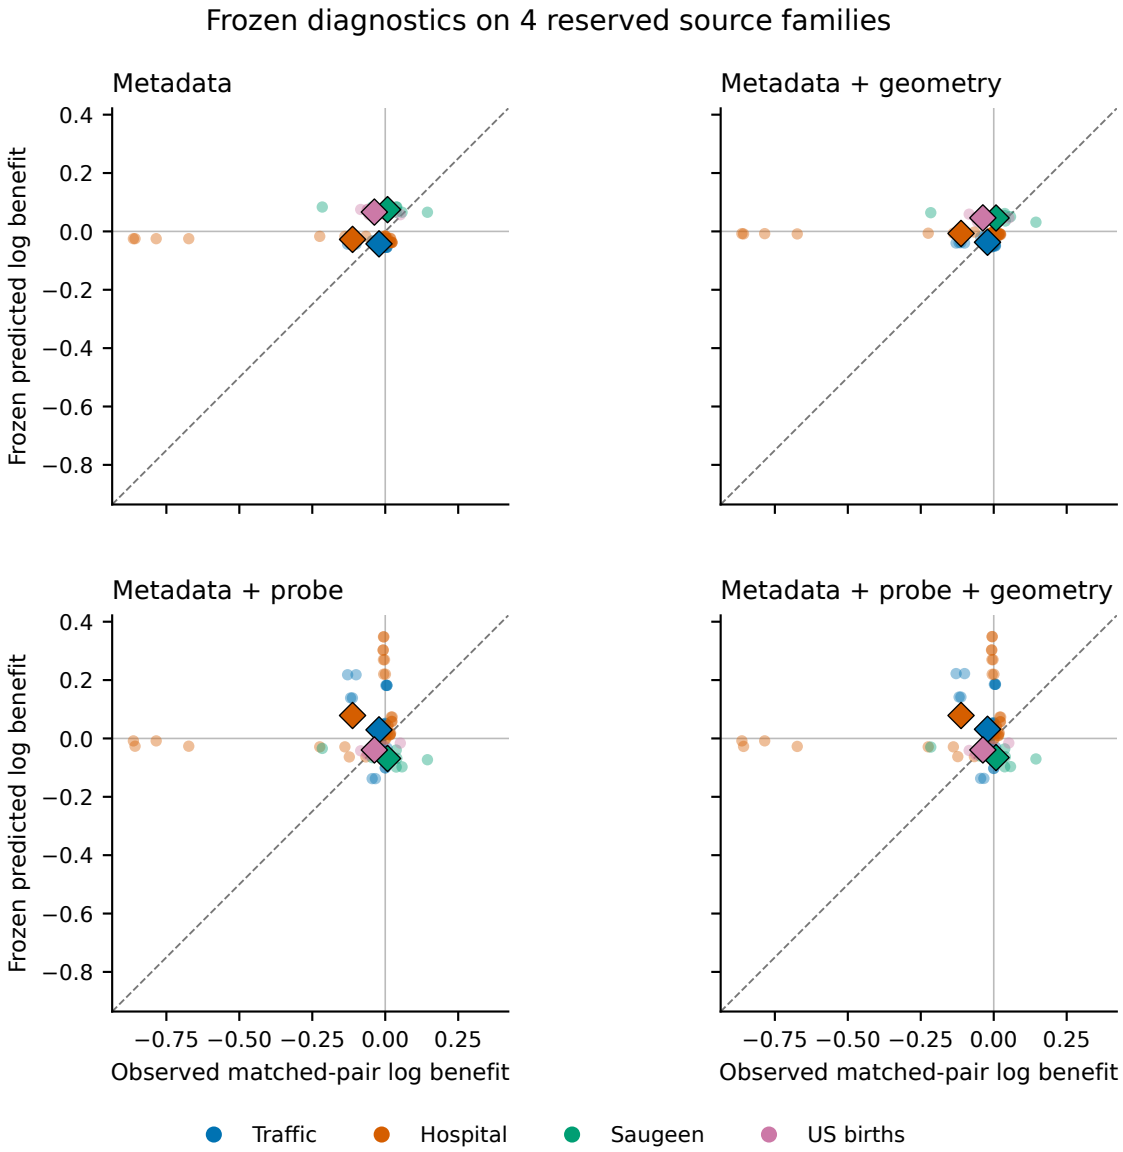


Figure 8: Observed versus frozen predicted log benefit. Points within a source are dependent task runs, and diamonds are source means. No recalibration is fitted on confirmation. Similar decisions can coexist with different estimated benefit magnitudes.

Table 31: Development scaled MSE by original source family. The final column gives equal-source aggregation; source columns retain the declared within-source weights. Development diagnostics use leave-one-source-family-out fits; confirmation diagnostics use the frozen development fit. Always-policy rows duplicate their corresponding standalone methods deliberately.

Method or policy	FRED-MD	NN5	Tourism	Electricity	Equal-source
Raw ridge	0.5601	0.8584	2.865	0.4243	1.177
Raw RBF	10.46	0.7552	3.476	0.4388	3.783
Affine local	2.548	0.8795	3.769	0.4535	1.912
Locality local	23.83	0.8148	3.778	0.4112	7.209
KAHM local	12.23	0.9163	3.636	0.4525	4.309
Raw + affine	1.409	0.7614	3.172	0.4481	1.448
Raw + locality	10.18	0.7474	3.046	0.4418	3.603
Raw + KAHM	4.254	0.7704	3.229	0.4539	2.177
Seasonal naive	2.269	1.089	2.982	0.5507	1.723
Holt	0.2409	1.358	8.228	0.6984	2.631
Histogram boosting	34.02	0.8032	4.786	0.4404	10.01
MLP	1.022	0.8475	2.77	0.4715	1.278
Always raw	10.46	0.7552	3.476	0.4388	3.783
Always raw + KAHM	4.254	0.7704	3.229	0.4539	2.177
Validation: matched pair	5.267	0.7335	3.229	0.4415	2.418
Validation: raw portfolio	0.2409	0.8021	3.014	0.4528	1.127
Validation: KAHM family	4.104	0.7792	3.223	0.4572	2.141
Validation: full portfolio	0.2409	0.8052	3.092	0.4675	1.152
Cheap probe	5.106	0.742	3.25	0.4217	2.38
Metadata	4.254	0.7704	3.229	0.4539	2.177
Metadata + geometry	4.254	0.7704	3.394	0.4539	2.218
Metadata + probe	4.157	0.759	3.338	0.4342	2.172
Metadata + probe + geometry	4.215	0.7704	3.338	0.4342	2.189

Table 32: Development warm-library wall seconds by original source family. The final column gives equal-source aggregation; source columns retain the declared within-source weights. Development diagnostics use leave-one-source-family-out fits; confirmation diagnostics use the frozen development fit. Always-policy rows duplicate their corresponding standalone methods deliberately.

Method or policy	FRED-MD	NN5	Tourism	Electricity	Equal-source
Raw ridge	0.3731	0.1631	0.1888	0.1873	0.2281
Raw RBF	0.1929	0.1912	0.1834	0.1692	0.1842
Affine local	0.3285	0.2805	0.2983	0.2863	0.2984
Locality local	0.5431	0.29	0.2784	0.2649	0.3441
KAHM local	0.3705	0.3696	0.3735	0.3369	0.3626
Raw + affine	0.2923	0.2998	0.2979	0.288	0.2945
Raw + locality	0.3185	0.2967	0.2988	0.2533	0.2918
Raw + KAHM	0.4275	0.3807	0.3252	0.3024	0.3589
Seasonal naive	0.2125	0.177	0.1834	0.1878	0.1902
Holt	0.3224	0.42	0.3682	0.316	0.3567
Histogram boosting	3.086	4.954	1.729	1.819	2.897
MLP	1.278	0.9551	0.8521	0.5508	0.9089
Always raw	0.1929	0.1912	0.1834	0.1692	0.1842
Always raw + KAHM	0.4275	0.3807	0.3252	0.3024	0.3589
Validation: matched pair	0.5562	0.5313	0.4929	0.4301	0.5026
Validation: raw portfolio	4.066	5.306	2.641	2.719	3.683

Method or policy	FRED-MD	NN5	Tourism	Electricity	Equal-source
Validation: KAHM family	0.692	0.6568	0.6115	0.5511	0.6278
Validation: full portfolio	5.861	6.513	4.138	4.075	5.147
Cheap probe	0.4739	0.4615	0.4004	0.3328	0.4172
Metadata	0.4284	0.3815	0.3258	0.3031	0.3597
Metadata + geometry	0.5195	0.465	0.3474	0.3744	0.4266
Metadata + probe	0.5029	0.474	0.2891	0.3411	0.4018
Metadata + probe + geometry	0.5284	0.4828	0.2891	0.341	0.4103

Table 33: Confirmation scaled MSE by original source family. The final column gives equal-source aggregation; source columns retain the declared within-source weights. Development diagnostics use leave-one-source-family-out fits; confirmation diagnostics use the frozen development fit. Always-policy rows duplicate their corresponding standalone methods deliberately.

Method or policy	Traffic	Hospital	Saugeen	US births	Equal-source
Raw ridge	0.5737	0.8461	0.522	1.177	0.7798
Raw RBF	0.5739	0.8228	0.6106	1.223	0.8075
Affine local	0.5796	0.928	0.6462	1.626	0.9449
Locality local	0.5719	0.7702	0.6504	1.593	0.8964
KAHM local	0.5775	0.9029	0.6652	1.596	0.9354
Raw + affine	0.5764	0.9198	0.6068	1.28	0.8458
Raw + locality	0.572	0.9356	0.6002	1.277	0.8462
Raw + KAHM	0.5768	0.9238	0.6012	1.266	0.8419
Seasonal naive	0.6484	0.7848	1.023	1.743	1.05
Holt	0.6842	1.003	0.6079	7.197	2.373
Histogram boosting	0.6524	1.025	0.5386	1.606	0.9555
MLP	0.6811	1.15	0.5365	1.147	0.8785
Always raw	0.5739	0.8228	0.6106	1.223	0.8075
Always raw + KAHM	0.5768	0.9238	0.6012	1.266	0.8419
Validation: matched pair	0.5738	0.8236	0.6042	1.237	0.8097
Validation: raw portfolio	0.6087	1.116	0.5639	1.167	0.8639
Validation: KAHM family	0.577	0.9182	0.6012	1.266	0.8406
Validation: full portfolio	0.6122	1.099	0.5695	1.225	0.8764
Cheap probe	0.5761	0.8211	0.6253	1.235	0.8143
Metadata	0.5739	0.8228	0.6012	1.266	0.816
Metadata + geometry	0.5739	0.8228	0.6012	1.266	0.816
Metadata + probe	0.5761	0.8189	0.6106	1.223	0.8071
Metadata + probe + geometry	0.5761	0.8189	0.6106	1.223	0.8071

Table 34: Confirmation warm-library wall seconds by original source family. The final column gives equal-source aggregation; source columns retain the declared within-source weights. Development diagnostics use leave-one-source-family-out fits; confirmation diagnostics use the frozen development fit. Always-policy rows duplicate their corresponding standalone methods deliberately.

Method or policy	Traffic	Hospital	Saugeen	US births	Equal-source
Raw ridge	0.1454	0.1959	0.1905	0.2204	0.188
Raw RBF	0.1644	0.1636	0.1693	0.1779	0.1688
Affine local	0.2424	0.2732	0.4038	1.082	0.5002
Locality local	0.2311	0.254	0.4021	0.2721	0.2898
KAHM local	0.2579	0.2764	0.3496	0.4035	0.3218

Method or policy	Traffic	Hospital	Saugeen	US births	Equal-source
Raw + affine	0.3969	0.2809	0.354	0.3199	0.3379
Raw + locality	0.2223	0.2752	0.3166	0.3022	0.2791
Raw + KAHM	0.2674	0.4235	0.4676	0.3911	0.3874
Seasonal naive	0.1551	0.164	0.1874	0.1393	0.1614
Holt	0.2759	0.3535	0.4118	0.3386	0.3449
Histogram boosting	1.774	1.39	17.59	14.89	8.91
MLP	0.4046	0.392	2.264	2.79	1.463
Always raw	0.1644	0.1636	0.1693	0.1779	0.1688
Always raw + KAHM	0.2674	0.4235	0.4676	0.3911	0.3874
Validation: matched pair	0.3909	0.5408	0.5273	0.4656	0.4812
Validation: raw portfolio	2.276	2.19	15.94	12.95	8.338
Validation: KAHM family	0.4622	0.6403	0.7116	0.6829	0.6242
Validation: full portfolio	3.595	3.661	17.63	14.9	9.948
Cheap probe	0.3029	0.2768	0.4534	0.3531	0.3465
Metadata	0.1651	0.1644	0.4686	0.3923	0.2976
Metadata + geometry	0.2216	0.2212	0.5797	0.4555	0.3695
Metadata + probe	0.2958	0.457	0.3033	0.2673	0.3309
Metadata + probe + geometry	0.2958	0.457	0.3033	0.2673	0.3309

Table 35: Development capacity comparison. Each capacity changes specified training-window and model-size caps; it is not an equal-time budget. Values are equal-source weighted and retain all prescribed context–horizon settings and seeds.

Method or policy	medium MSE	medium wall (s)	small MSE	small wall (s)
Raw ridge	1.177	0.28	1.177	0.1761
Raw RBF	4.582	0.1846	2.984	0.1838
Affine local	1.989	0.3292	1.836	0.2676
Locality local	8.238	0.4065	6.18	0.2817
KAHM local	3.855	0.3779	4.763	0.3473
Raw + affine	1.394	0.3071	1.501	0.282
Raw + locality	3.879	0.3038	3.327	0.2798
Raw + KAHM	2.332	0.3819	2.022	0.3359
Seasonal naive	1.723	0.2078	1.723	0.1725
Holt	2.631	0.345	2.632	0.3683
Histogram boosting	9.795	3.468	10.23	2.326
MLP	1.253	1.108	1.302	0.7098
Always raw	4.582	0.1846	2.984	0.1838
Always raw + KAHM	2.332	0.3819	2.022	0.3359
Validation: matched pair	2.342	0.5295	2.493	0.4758
Validation: raw portfolio	1.128	4.223	1.127	3.142
Validation: KAHM family	2.261	0.6594	2.021	0.5963
Validation: full portfolio	1.137	5.805	1.166	4.488
Cheap probe	2.297	0.4321	2.463	0.4022
Metadata	2.332	0.3828	2.022	0.3367
Metadata + geometry	2.364	0.4492	2.072	0.404
Metadata + probe	2.337	0.419	2.007	0.3846
Metadata + probe + geometry	2.348	0.4327	2.03	0.388

Table 36: Confirmation capacity comparison. Each capacity changes specified training-window and model-size caps; it is not an equal-time budget. Values are equal-source weighted and retain all prescribed context–horizon settings and seeds.

Method or policy	medium MSE	medium wall (s)	small MSE	small wall (s)
Raw ridge	0.7635	0.1561	0.7961	0.2199
Raw RBF	0.7767	0.1719	0.8383	0.1657
Affine local	0.916	0.3088	0.9738	0.6917
Locality local	0.8908	0.3176	0.902	0.2621
KAHM local	0.9243	0.334	0.9466	0.3097
Raw + affine	0.8233	0.3859	0.8684	0.2899
Raw + locality	0.8363	0.2831	0.8561	0.275
Raw + KAHM	0.8288	0.3732	0.8551	0.4016
Seasonal naive	1.05	0.1621	1.05	0.1607
Holt	2.373	0.333	2.373	0.3569
Histogram boosting	0.9215	12.73	0.9896	5.086
MLP	0.8712	1.956	0.8859	0.9695
Always raw	0.7767	0.1719	0.8383	0.1657
Always raw + KAHM	0.8288	0.3732	0.8551	0.4016
Validation: matched pair	0.7847	0.4538	0.8347	0.5085
Validation: raw portfolio	0.8404	11.6	0.8874	5.074
Validation: KAHM family	0.8281	0.6116	0.8531	0.6369
Validation: full portfolio	0.8541	12.98	0.8987	6.918
Cheap probe	0.7943	0.3749	0.8343	0.3182
Metadata	0.8009	0.3187	0.8311	0.2764
Metadata + geometry	0.8009	0.3779	0.8311	0.3611
Metadata + probe	0.7765	0.2805	0.8377	0.3812
Metadata + probe + geometry	0.7765	0.2805	0.8377	0.3812

Table 37: Estimated-benefit diagnostics with frozen hierarchical weights. These are descriptive log-benefit prediction errors and classification accuracies; they are not calibrated probabilities or interval coverage. No recalibration is fitted on confirmation data.

Diagnostic	Log RMSE	Log bias	Sign (%)	5% class (%)
Development: Metadata	1.035	0.01412	57	49.2
Development: Metadata + geometry	1.037	0.03491	47.7	43
Development: Metadata + probe	1.012	0.03064	52.3	53.9
Development: Metadata + probe + geometry	1.02	0.05091	50.8	43
Confirmation: Metadata	0.1643	0.05835	55.5	59.4
Confirmation: Metadata + geometry	0.1612	0.05269	55.5	75
Confirmation: Metadata + probe	0.1845	0.04069	58.6	73.4
Confirmation: Metadata + probe + geometry	0.1847	0.04196	58.6	71.9

Table 38: One-off diagnostic development costs. Acquisition sums the union of both matched predictors' complete search/final nodes and each variant's metadata/probe/geometry dependencies within every development task. Summing standalone tasks can conservatively repeat preparation across seeds/tasks. Acquire and total denote wall time; CPU covers acquisition. Do not add the four rows: their developmental labels and some features can be shared. Ridge fitting is measured separately; no deployment-count amortization is assumed.

Variant	Acquire (s)	CPU (s)	Ridge (ms)	Total (s)
Metadata	68.49	68.45	6.657	68.5
Metadata + geometry	78.6	78.56	10.04	78.61
Metadata + probe	80.83	80.79	9.035	80.84
Metadata + probe + geometry	80.83	80.79	6.146	80.84

Table 39: Frozen development-only standardization and ridge coefficients, rounded for display. G denotes geometry and P the cheap probe. An absent feature is shown by a dash. Predictions use the unrounded values in the frozen diagnostic JSON and the fixed zero decision threshold.

Feature	Mean	Scale	Meta	Meta+G	Meta+P	Meta+P+G
Intercept	–	–	0.023966	0.023966	0.023966	0.023966
log(1 + training windows)	5.1417	0.66192	0.017096	0.013047	-0.0099182	-0.0089504
log(1 + horizon/history)	0.23442	0.019538	-0.012299	-0.013178	-0.0043432	-0.0045441
Lag-one autocorrelation	0.7189	0.24263	0.0069415	0.001093	-0.014509	-0.012806
KAHM gate entropy	0.074168	0.063288	–	-0.010312	–	-0.0026401
log(1 + affine residual)	0.18213	0.12986	–	-0.013232	–	0.0063025
Probe log-loss ratio	0.25347	0.67921	–	–	0.14611	0.1467

Table 40: Recorded fitting behavior. Search and selected-refit warning events are separated. Counts describe task fits, which include dependent seeds and settings. Warned counts fits with recorded warnings; at cap counts selected refits reaching the recorded iteration limit. Full warning text is retained in the JSON report. No warning-triggered post hoc retuning is applied.

Method	Fits	Warned	Search	Refit	At cap
Development: Raw ridge	128	0	0	0	0
Development: Raw RBF	128	0	0	0	0
Development: Affine local	128	0	0	0	0
Development: Locality local	128	0	0	0	0
Development: KAHM local	128	0	0	0	0
Development: Raw + affine	128	0	0	0	0
Development: Raw + locality	128	0	0	0	0
Development: Raw + KAHM	128	0	0	0	0
Development: Seasonal naive	128	0	0	0	0
Development: Holt	128	0	0	0	0
Development: Histogram boosting	128	0	0	0	0
Development: MLP	128	128	232	105	105
Confirmation: Raw ridge	80	0	0	0	0
Confirmation: Raw RBF	80	0	0	0	0
Confirmation: Affine local	80	0	0	0	0
Confirmation: Locality local	80	0	0	0	0
Confirmation: KAHM local	80	0	0	0	0

Method	Fits	Warned	Search	Refit	At cap
Confirmation: Raw + affine	80	0	0	0	0
Confirmation: Raw + locality	80	0	0	0	0
Confirmation: Raw + KAHM	80	0	0	0	0
Confirmation: Seasonal naive	80	0	0	0	0
Confirmation: Holt	80	0	0	0	0
Confirmation: Histogram boosting	80	0	0	0	0
Confirmation: MLP	80	79	137	68	68

Table 41: Selection at numerical search-grid endpoints. Counts are descriptive; a two-point grid necessarily chooses an endpoint. These observations do not establish the benefit of a larger grid, and confirmation outcomes are not used to retune any method.

Method	Parameter	Choices	Lower	Upper	Declared grid
Development: Raw ridge	alpha	128	84	4	0.01,1,100
Development: Raw RBF	alpha	128	35	4	0.01,1,100
Development: Affine local	alpha	128	45	8	0.01,1,100
Development: Locality local	alpha	128	35	9	0.01,1,100
Development: KAHM local	alpha	128	51	7	0.01,1,100
Development: Raw + affine	alpha	128	32	4	0.01,1,100
Development: Raw + locality	alpha	128	25	5	0.01,1,100
Development: Raw + KAHM	alpha	128	30	4	0.01,1,100
Development: Histogram boosting	regularization	128	78	50	0.01,1
Development: MLP	regularization	128	26	102	0.01,1
Confirmation: Raw ridge	alpha	80	20	56	0.01,1,100
Confirmation: Raw RBF	alpha	80	13	56	0.01,1,100
Confirmation: Affine local	alpha	80	9	58	0.01,1,100
Confirmation: Locality local	alpha	80	9	60	0.01,1,100
Confirmation: KAHM local	alpha	80	8	59	0.01,1,100
Confirmation: Raw + affine	alpha	80	12	59	0.01,1,100
Confirmation: Raw + locality	alpha	80	12	61	0.01,1,100
Confirmation: Raw + KAHM	alpha	80	12	60	0.01,1,100
Confirmation: Histogram boosting	regularization	80	34	46	0.01,1
Confirmation: MLP	regularization	80	5	75	0.01,1

H Reconstructing the numerical evidence

The supplement has separate controlled and natural forecasting entry points, plus an integrated review manifest. Its README gives commands to verify the packaged bytes, independently reconstruct archived losses, replay diagnostics, regenerate paper assets, and compile the anonymous manuscript. The scientific implementations and original outcome records remain unchanged. Documentation and review manifests added after execution are labeled as such; they are not new pre-outcome registrations or external timing attestations.

For the controlled study, full regeneration generates new working files from the archived configurations and retained seed streams, while compact-record auditing checks the existing outcomes. These operations reproduce the same evidence rather than add independent repetitions. The natural study retains both stage freezes, all 208 completed runs, prepared windows, prediction arrays, source snapshot hashes, and original environment/cost records. Its offline audit checks the complete twelve-method roster, targets and forecast origins, all 2,496 losses, and frozen diagnostic outcomes without refitting forecasting models. Replaying a small diagnostic regression can generate different microsecond timing measurements; original measured resource records remain separate from those replay timings.

All eight natural dataset snapshots retain their attribution and licenses. The inherited implementation and template retain required third-party notices. Anonymization omits named study overviews and author-linked locators while preserving the scientific dependency bytes and identifying the scope of the review export. The separately supplied related certificate manuscript is background for the scope comparison, not a source of additional experimental replications or a certificate for the present fitted predictors.

I Bounded sensitivity to geometry scaling

I.1 Execution boundary and estimand

The original experiments in Sections 8 and 9 use training z-score geometry scaling. The sensitivity analysis was specified after inspecting those experiments. Its protocol and execution sources were published and hashed before the sensitivity fits, and both fixed scaler arms were retained. This ordering prevents choosing the sensitivity cells after their outcomes; it does not make the reused natural sources or synthetic draws fresh confirmation evidence. No adoption diagnostic or best-scaler selection rule was refitted.

The intervention replaces only the geometry input scaler by

$$z_j(x) = 2\frac{x_j - m_j}{M_j - m_j} - 1, \qquad m_j = \min_{i\in\mathcal{T}} x_{ij}, \quad M_j = \max_{i\in\mathcal{T}} x_{ij}.$$

The fitting set $\mathcal{T}$ is the exact training input set for that fit, before its geometry subsample. Coordinates with exactly zero training range are mapped to zero for every geometry query, matching the historical implementation. Validation and test queries are not clipped; values can exceed $[-1, 1]$. Raw references and the raw skip retain their original training standardization. Feature standardization, target standardization, loss scales, forecast horizons, data and model seeds, hyperparameter grids, query arithmetic, and the controlled study's known-support output clipping are unchanged.

Changing the scaler inside the geometry pipeline matters. It can alter partitions, truncated principal directions, absolute reconstruction distances, and angles relative to the origin. The historical kernel fit also uses a regularization level depending on the squared reference-coordinate magnitude. Downstream feature standardization does not reverse these nonlinear changes. By contrast, a nonconstant coordinate's positive affine min–max transform followed by refitted z-score standardization cancels in exact arithmetic when threshold-based scale fallbacks are inactive: $[(ax+b)-(a\mu+b)]/(a\sigma) = (x-\mu)/\sigma$ for $a > 0$. The experiment therefore replaces the geometry scaler itself.

I.2 Natural-source execution

All 208 original configurations are reused: 128 on the original development sources and 80 on the four formerly reserved sources. Each configuration runs raw plus affine, raw plus locality, and raw plus KAHM under both scalers, together with unchanged raw ridge and raw RBF references: 1,664 standalone method runs. The local-only natural architectures and the frozen benefit diagnostic are outside this bounded sensitivity. Each fixed arm uses the original validation-only alpha selection; the selected model is then refitted on the original admissible pretest windows. Its scaler is fitted anew on that refit set, without test observations.

The primary descriptive contrast is min–max minus standard raw-plus-KAHM scaled MSE on the four formerly reserved source families. Each mean uses the original source/series/regime/capacity/seed hierarchy. The original development sources are reported separately. Source-wise and leave-one-source-out results describe heterogeneity; neither seeds nor overlapping histories supply additional independent source families. There are no new confirmatory p-values or simultaneous superiority claims.

Methods execute serially in one benchmark worker with one BLAS thread; method order is shuffled deterministically by task identity, independently of outcomes. New warm-library costs include alpha search, selection cleanup, selected refit, prediction, and serialization. Current data loading, launch-to-result wall time, and the additional sensitivity diagnostics are recorded separately; the original source preparation is reused, rather than freshly timed. The launch-to-result field includes child execution and communication, rather than isolating startup overhead. The inherited import timer starts after some adapter dependencies

Method	Standard MSE	Min–max MSE	Change (%)
Raw ridge	1.1769	1.1769	fixed
Raw RBF	3.7827	3.7827	fixed
Raw + affine	1.4475	1.3306	-8.08
Raw + locality	3.6030	3.3309	-7.55
Raw + KAHM	2.1768	2.3444	+7.70

Table 42: The same fixed sensitivity comparison on the four original development sources. Their outcomes remain separate from the formerly reserved sources. Scaled MSE uses the original equal-source hierarchy; change is min–max versus standard in percent. Raw references are fixed, and no scaler is selected from these test outcomes.

have loaded, so it does not measure full cold startup. New cost comparisons use references remeasured in this execution. They must not be formed by dividing a new method time by an old archived baseline time.

I.3 Controlled execution

The sensitivity recreates the exact 24 complete phase-four data/fit draws for each of autoregression, Van der Pol, and Duffing, at 64 and 256 landmarks. All four original representations are retained under both geometry scalers: raw, affine local coordinates, KAHM local coordinates, and KAHM scores. An explicitly added locality-coordinate control uses the historical native-affine locality gates with the same local principal coordinates. Thus 72 paired jobs produce 1,440 head fits. The raw representation is identical across scaler arms. The original target bounds and validation selection rules remain in force.

For each law/capacity cell, the unit of paired dispersion is a complete data/fit draw. Episode losses and horizon errors are retained but are not counted as additional independent fitted-method repetitions. The analysis reports means and paired standard deviations/standard errors descriptively; the original contrast families' confidence statements are not extended to these post-hoc comparisons. Controlled banks are shared across their representations, so controlled execution times are not standalone deployment cost estimates.

I.4 Numerical verification and retained evidence

The standard natural arms and fixed references are checked against all 1,040 corresponding task–method prediction arrays and selected hyperparameters. All 576 original standard controlled method/capacity fits are checked against archived predictions, losses, and selected hyperparameters; 144 controlled raw cross-scaler pairs are checked for equality. The separate audit reconstructs the new natural losses from per-origin forecasts and all controlled losses from the full saved prediction arrays before compact export.

The review supplement retains every natural sensitivity forecast and all controlled per-episode losses, execution records, selected settings, scaler statistics, out-of-range diagnostics, and file digests. Full controlled predictions and fitted banks are regenerated by the supplied runner; their pre-export verification is recorded in the retained full-prediction audit. Replaying the compact controlled losses is distinguished from independently recreating and checking those full prediction arrays. The original studies' scientific sources, freezes, and outcomes remain unchanged.

I.5 Natural heterogeneity and costs

Table 42 keeps the original development outcomes separate. KAHM's development loss increases by 7.70%; the source changes are -1.99% on Electricity, $+2.06\%$ on NN5, -5.20% on Tourism, and $+19.54\%$ on FRED-MD. Removing FRED-MD changes the aggregate scaler effect to a 3.62% reduction. Neither development aggregation should be used to select a scaler on those already inspected outcomes. Table 43 reports both original role groups, and Tables 44 and 45 retain every fixed method.

Source	K_s	K_m	$\Delta\%$	R	A_m	L_m
Original development sources						
Electricity	0.4539	0.4448	-1.99	0.4388	0.4584	0.4387
NN5	0.7704	0.7863	+2.06	0.7552	0.7824	0.7516
Tourism	3.2286	3.0606	-5.20	3.4759	3.0768	3.0986
FRED-MD	4.2545	5.0857	+19.54	10.4610	1.0050	9.0346
Formerly reserved sources						
Traffic	0.5768	0.5759	-0.15	0.5739	0.5750	0.5722
Hospital	0.9238	0.9158	-0.86	0.8228	0.9157	0.8371
Saugeen	0.6012	0.6067	+0.90	0.6106	0.6646	0.6773
US births	1.2659	1.2704	+0.35	1.2228	1.2830	1.3085

Table 43: Source-level scaling sensitivity. K_s and K_m denote raw + KAHM with standard and min–max geometry; R, A_m, and L_m denote raw RBF, raw + min–max affine, and raw + min–max locality. Entries are original-hierarchy scaled MSE; $\Delta\% = 100(K_m/K_s - 1)$. Original role labels identify the historical design, while every newly computed comparison is post-hoc.

Method / geometry scaler	Electricity	NN5	Tourism	FRED-MD
Raw ridge	0.4243	0.8584	2.8648	0.5601
Raw RBF	0.4388	0.7552	3.4759	10.4610
Raw + affine / std.	0.4481	0.7614	3.1717	1.4090
Raw + affine / min–max	0.4584	0.7824	3.0768	1.0050
Raw + locality / std.	0.4418	0.7474	3.0458	10.1769
Raw + locality / min–max	0.4387	0.7516	3.0986	9.0346
Raw + KAHM / std.	0.4539	0.7704	3.2286	4.2545
Raw + KAHM / min–max	0.4448	0.7863	3.0606	5.0857

Table 44: Every fixed sensitivity method on the original development sources. Entries are source-level scaled MSE using the original nested task weights. The two raw references retain their original standardization.

Method / geometry scaler	Traffic	Hospital	Saugeen	US births
Raw ridge	0.5737	0.8461	0.5220	1.1775
Raw RBF	0.5739	0.8228	0.6106	1.2228
Raw + affine / std.	0.5764	0.9198	0.6068	1.2802
Raw + affine / min–max	0.5750	0.9157	0.6646	1.2830
Raw + locality / std.	0.5720	0.9356	0.6002	1.2770
Raw + locality / min–max	0.5722	0.8371	0.6773	1.3085
Raw + KAHM / std.	0.5768	0.9238	0.6012	1.2659
Raw + KAHM / min–max	0.5759	0.9158	0.6067	1.2704

Table 45: Every fixed sensitivity method on the formerly reserved sources. Entries are source-level scaled MSE using the original nested task weights. The two raw references retain their original standardization.

The source-balanced fraction of test input coordinates outside the final refit range is 3.77% on the formerly reserved sources and 21.45% on the original development sources. The corresponding fractions of histories with at least one such coordinate are 33.08% and 49.26%. The largest absolute transformed test coordinate is 3.1990 and 1.8638, respectively. No final natural refit has a constant input coordinate. These diagnostics confirm that unclipped min–max scaling is distinct from enforcing bounded query inputs; a clipped alternative was not tested.

Table 46 gives the new warm method stages. The retained KAHM min–max Saugeen configuration with history 28, horizon 7, medium capacity, and seed 17 takes 6.2914 seconds, including 4.7618 seconds of search and 1.3632 seconds of cleanup. It is included at its original hierarchical weight, without trimming or a timing-based rerun. The single execution cannot distinguish algorithmic cost changes from runtime variation with the precision of a separate repeated timing benchmark.

Method / geometry scaler	Search	Cleanup	Refit	Forecast	Serialize	Total
Raw ridge	0.0065	0.1770	0.0022	0.0001	0.0005	0.1863
Raw RBF	0.0136	0.1557	0.0062	0.0003	0.0005	0.1762
Raw + affine / std.	0.2316	0.1554	0.0530	0.0036	0.0021	0.4457
Raw + affine / min–max	0.0909	0.1639	0.0593	0.0025	0.0012	0.3178
Raw + locality / std.	0.0887	0.1671	0.0612	0.0022	0.0018	0.3210
Raw + locality / min–max	0.0825	0.1557	0.0672	0.0025	0.0029	0.3108
Raw + KAHM / std.	0.1162	0.1594	0.0939	0.0094	0.0015	0.3804
Raw + KAHM / min–max	0.2682	0.1934	0.0845	0.0084	0.0016	0.5561

Table 46: Contemporaneous, source-balanced warm method times (seconds) on the four formerly reserved sources. Each method independently performs its alpha search, selected refit, prediction, serialization, and cleanup. These totals exclude reused data preparation, current input loading, process startup, and additional sensitivity audits. Launch-to-result and audit elapsed times are recorded separately; the inherited partial import timer is not a complete cold-start measure. Every timing, including outliers, is retained. These single-execution observations are implementation-specific and should not be divided by timings from the earlier execution.

I.6 Complete controlled sensitivity

Table 47 includes all ten representation/scaler arms in every law/capacity cell. KAHM local-coordinate mean error changes by $-0.24/-0.32\%$ on autoregression, $-0.18/+0.23\%$ on Van der Pol, and $-2.85/-7.35\%$ on Duffing at 64/256 landmarks. The main mean rankings are unchanged. The score-only KAHM representation is more sensitive on Van der Pol, where min–max raises its error by 6.03% and 4.78%. A secondary ordering consequently reverses at 256 landmarks: standardized KAHM scores have mean MSE 1.0499×10^{-3}, below affine-local 1.0780×10^{-3}, whereas their min–max errors are 1.1001×10^{-3} and 1.0812×10^{-3}, respectively. The persistence claim concerns the main KAHM-local versus raw/control comparisons, not every pair of methods. The retained repetition-level CSVs supply all paired differences and standard errors; the displayed standard deviations describe variability and do not imply a new simultaneous confidence guarantee.

Table 47: Every controlled sensitivity arm, including raw and KAHM scores. Each entry is mean MSE with between-repetition SD in parentheses, multiplied by 10^3, over the same 24 complete draws. Δ is paired min–max-minus-standard mean difference; its parentheses contain paired SD. These are descriptive dispersions on reused draws, not confidence intervals. The raw arms are identical.

Law	M	Features	Standard (SD)	Min–max (SD)	Δ (paired SD)
Nonlinear AR	64	Raw	4.4238 (0.2161)	4.4238 (0.2161)	+0.0000 (0.0000)
Nonlinear AR	64	Affine local	4.9120 (0.3059)	4.8940 (0.2749)	-0.0180 (0.1507)
Nonlinear AR	64	Locality local	4.9306 (0.3008)	4.9414 (0.2705)	+0.0109 (0.1362)
Nonlinear AR	64	KAHM local	4.8795 (0.2769)	4.8678 (0.2601)	-0.0116 (0.0929)
Nonlinear AR	64	KAHM scores	4.7984 (0.2734)	4.8042 (0.2862)	+0.0058 (0.1198)
Nonlinear AR	256	Raw	4.6958 (0.3312)	4.6958 (0.3312)	+0.0000 (0.0000)
Nonlinear AR	256	Affine local	5.2347 (0.3501)	5.1807 (0.4489)	-0.0540 (0.2677)
Nonlinear AR	256	Locality local	5.2540 (0.3511)	5.2577 (0.3890)	+0.0036 (0.1347)
Nonlinear AR	256	KAHM local	5.1749 (0.3303)	5.1584 (0.3832)	-0.0165 (0.1586)
Nonlinear AR	256	KAHM scores	4.8256 (0.2710)	4.8538 (0.3025)	+0.0282 (0.1257)
Van der Pol	64	Raw	2.8586 (0.1574)	2.8586 (0.1574)	+0.0000 (0.0000)
Van der Pol	64	Affine local	1.3767 (0.1578)	1.3482 (0.1225)	-0.0286 (0.0855)
Van der Pol	64	Locality local	1.1324 (0.0737)	1.1240 (0.0805)	-0.0084 (0.0363)
Van der Pol	64	KAHM local	1.0266 (0.0656)	1.0248 (0.0678)	-0.0018 (0.0198)
Van der Pol	64	KAHM scores	1.5711 (0.2109)	1.6658 (0.2221)	+0.0947 (0.1891)
Van der Pol	256	Raw	1.6541 (0.0402)	1.6541 (0.0402)	+0.0000 (0.0000)
Van der Pol	256	Affine local	1.0780 (0.0501)	1.0812 (0.0525)	+0.0032 (0.0297)
Van der Pol	256	Locality local	0.9413 (0.0363)	0.9448 (0.0391)	+0.0036 (0.0191)
Van der Pol	256	KAHM local	0.8720 (0.0293)	0.8740 (0.0277)	+0.0020 (0.0060)
Van der Pol	256	KAHM scores	1.0499 (0.0600)	1.1001 (0.0794)	+0.0502 (0.0735)
Duffing	64	Raw	3.4597 (0.1516)	3.4597 (0.1516)	+0.0000 (0.0000)
Duffing	64	Affine local	3.0549 (0.1764)	2.9981 (0.1357)	-0.0568 (0.1262)
Duffing	64	Locality local	2.8016 (0.1346)	2.8227 (0.1447)	+0.0211 (0.1128)
Duffing	64	KAHM local	4.2154 (0.4775)	4.0951 (0.4723)	-0.1203 (0.4225)
Duffing	64	KAHM scores	4.7005 (0.5431)	4.5547 (0.3330)	-0.1458 (0.4739)
Duffing	256	Raw	2.8364 (0.1029)	2.8364 (0.1029)	+0.0000 (0.0000)
Duffing	256	Affine local	2.7981 (0.1245)	2.7742 (0.1318)	-0.0238 (0.1180)
Duffing	256	Locality local	2.7006 (0.1398)	2.6921 (0.1321)	-0.0085 (0.1001)
Duffing	256	KAHM local	4.0736 (0.4520)	3.7741 (0.3794)	-0.2995 (0.3555)
Duffing	256	KAHM scores	3.3808 (0.2940)	3.3354 (0.2419)	-0.0454 (0.2415)

J Additive forecasting: interpretation and research record

J.1 Oracle residual structure and finite correction

Condition on development data and the fitted maps f_0 and Γ. For $e = Y - f_0(X)$, suppose $\mathbb{E}\|e\|_2^2 < \infty$, let $Z = \Gamma(X)$, and put $q^*(Z) = \mathbb{E}[e \mid Z]$. For any square-integrable $q(Z)$, conditional expectation makes the cross term zero, giving

$$\mathbb{E}\|e - q(Z)\|_2^2 = \mathbb{E}\|e - q^*(Z)\|_2^2 + \mathbb{E}\|q^*(Z) - q(Z)\|_2^2.$$

Taking $q = 0$ and then the infimum over q proves Equation (1). This standard projection argument establishes an oracle notion of residual predictive structure, not its estimability with a finite sample, a specified ridge head, or a given computation budget. The conditional distribution and expectations are those of the evaluation law given the frozen fitted state. A deterministic feature of X cannot create new information absent from

that history; the comparison is with the particular baseline f_0, not with the unrestricted raw-history Bayes predictor.

J.2 Residual alignment for a frozen correction

This subsection records a standard squared-loss calculation; it is not claimed as a new general learning principle. Condition on development data and all random choices used to fit a baseline f_0 and a correction q. Suppose $\mathbb{E}\|Y - f_0(X)\|_2^2 < \infty$ and $\mathbb{E}\|q(X)\|_2^2 < \infty$. Write

$$A = \mathbb{E}\langle Y - f_0(X), q(X)\rangle, \qquad B = \mathbb{E}\|q(X)\|_2^2.$$

Expanding the squared norm yields

$$\mathbb{E}\|Y - f_0(X) - \gamma q(X)\|_2^2 = R(f_0) - 2\gamma A + \gamma^2 B.$$

If $B = 0$, then $q(X) = 0$ almost surely, so $A = 0$ and the correction changes no population forecast. If $B > 0$, minimization over $\gamma \in [0, 1]$ gives $\gamma^* = \mathrm{clip}(A/B, 0, 1)$. A positive weight improves risk precisely when $A > 0$ and $0 < \gamma < 2A/B$. Thus a useful correction must align with the baseline's residual under the evaluation law, with its scale controlled. The same identity holds for a loss averaged across target coordinates after both A and B are divided by their common coordinate count.

This oracle calculation uses population quantities unavailable to the fitted selector. Empirical residual fitting, regularization, and validation introduce estimation and selection effects. Inclusion of $\gamma = 0$ makes the original forecast feasible; it does not imply that the selected test forecast is no worse. In particular, correlation with training residuals does not prove positive A on a new episode or source.

J.3 Distinction from representation-class certificates

The empirical difference in Equation (2) compares two frozen fitted forecasts. The certificate manuscript instead studies the infimum of risk over a declared representation–decoder class, and can exclude that entire class under its assumptions (Anonymous, 2026). The additive study does not transfer such a class-level guarantee to its forecasts. A certificate for a residual component would not automatically certify the complete additive forecast; the baseline and correction together would have to satisfy the declared representation, metric, and sensitivity constraint. Neither mean test differences nor a zero-correction option establishes necessity of the additional features among all possible decoders.

J.4 Extension protocol and source roster

The executable configuration and protocol for this extension are stored in `extensions/forecasting_utility`. They define a distinct study from the original controlled, natural-source, and scaling studies. The execution freeze hashes the configuration, protocol, source and dependency files, archive metadata, and training-prefix-selected roster before full model evaluation. Its purpose is to make subsequent deviations and recomputation auditable; it is not external review or registration.

Table 48: Additional archive collections and the fixed hash-selected roster. Each selected series is evaluated at $M = 16$ and 64. L is history length, H is the number of consecutive direct target steps, and p is the declared seasonal period. The Solar collection has simulation provenance. Source record DOIs, byte hashes, and licenses are retained in the artifact.

Collection	Frequency	L	H	p	Selected series
Weather	Daily	28	7	7	T1476, T1967, T416
Solar Weekly	Weekly	6	2	52	T88, T94, T8
COVID-19 Deaths	Daily	28	7	7	T42, T146, T96
Car Parts, missing	Monthly	6	2	12	T1324, T2368, T857

Weather contains daily Australian weather-station variables, COVID-19 Deaths contains the archived Johns Hopkins death-count series, and Car Parts contains intermittent monthly sales extracted from the

`expsmooth` collection. The exact Monash records are 10.5281/zenodo.4654822, 10.5281/zenodo.4656009, and 10.5281/zenodo.4656022, respectively. Solar Weekly is record 10.5281/zenodo.4656151 and contains aggregated simulated NREL production series. All four downloaded records declare CC BY 4.0. The use of a historical public snapshot does not establish real-time revision-aware evaluation; upstream release vintages and the original producers' measurement pipelines are not reconstructed here.

Training-prefix eligibility requires at least 16 complete available training windows and a positive finite error scale. Hash ordering uses the fixed salt `forecasting-utility-natural-v1` and the source and series identifiers. Complete contexts and targets are required; no future-aware missing-value filling is applied. This defines an available-window forecasting estimand. The scaling denominator uses the uncapped initial training prefix and is unchanged by the selected pretest refit. Periods are stated in Table 48; when the seasonal-difference mean square is unavailable or zero, the first-difference mean square is used. This scale is not a fitted baseline's test error.

The naive forecast uses the seasonal observation when available and the last available observation otherwise; synthetic episodes use persistence. The seasonal lag may extend beyond the finite context supplied to the learned models, particularly for weekly Solar and monthly Car Parts. Thus this practical control shares their targets and forecast origins, but not necessarily their identical finite-history information set; every observation it accesses is available at or before the forecast origin. The practical nonlinear control fits an independent histogram-gradient regressor per target coordinate, with 100 iterations, at most 15 leaves, L_2 penalty 0.01, and early stopping disabled. It receives the same raw histories and split origins, without a separate hyperparameter search. This is one fixed practical control, not a comprehensive comparison with modern neural, pretrained, probabilistic, or multivariate forecasters.

For every model, preprocessing is fitted on the permitted fitting inputs only. An additive correction first receives residuals from the selected raw predictor on those same fitting rows. A natural-data pretest refit rebuilds both the raw predictor and the correction using the chosen settings; thus the final raw component differs from the validation-stage fit but is again held fixed while its correction is fitted. Synthetic fits retain training-only inputs. A final zero-weight correction bypasses geometry at prediction time, but its already incurred selection costs remain charged. Additional candidate searches are therefore observable costs even when the deployed forecast equals the raw baseline. The synthetic zero-weight fit retains its searched correction bank in memory, because the selected training-only object is retained. The natural zero-weight refit omits that bank. Reported serialized bytes describe this actual stored state, not the smallest equivalent deployable model; neither case evaluates the correction during a zero-weight prediction.

Full validation-candidate records, chosen penalties and mixing weights, warnings, split origins, saved forecasts, and wall/CPU timing components are retained. Saved test forecasts permit independent reconstruction of both episode-level synthetic losses and original-unit and scaled archive-source losses. A task or method failure is recorded with its exception and does not silently select a replacement source, seed, or model. The completeness audit distinguishes requested configurations, successful outputs, and failures before producing the manuscript assets.

J.5 Complete controlled comparisons and source-level results

Table 49 retains every incomplete configuration. The failed series is also retained in the original roster and window table. Full-roster geometry and policy losses remain undefined. The separate reporting amendment creates a post-hoc matched-success diagnostic on 22 configurations and 11 series, without changing a fitted model, source, or validation rule. The archive displays below use that diagnostic support unless explicitly marked as full-roster coverage.

The new controlled means in Table 9 are supplemented by every practical control and fixed policy in Table 50. Table 51 gives all 24 primary interval endpoints. The raw and concatenated contrasts form this extension's family only; intervals are not retroactively pooled with the original studies' inference.

Table 49: Every incomplete configuration in the frozen execution. The shared bank requests eight nonempty groups but these training inputs have only seven distinct histories. Concatenated KAHM and additive KAHM, affine, and locality each fail; both dependent policies have no decision. No source substitution, changed cluster count, or silent fallback is applied. The four baseline forecasts are retained.

Source	Series	M	Train rows	Distinct	Failed fits	Failed policies
Car Parts	T1324	16	23	7	4	2
Car Parts	T1324	64	23	7	4	2

Table 50: Remaining controls and declared policies in the same new synthetic factorial. Mean MSE is multiplied by 10^3. The two policies use the fixed 5% validation margin; their test losses are descriptive.

Law	N	M	Raw ridge	Persistence	Boosting	KAHM rule	Geometry rule
Nonlinear AR	32	16	5.4248	8.8523	5.6510	4.8163	4.8163
Nonlinear AR	32	64	5.4248	8.8523	5.6510	5.0133	5.0133
Nonlinear AR	128	16	5.3733	8.8523	4.8297	4.6648	4.6570
Nonlinear AR	128	64	5.3733	8.8523	4.8297	4.4806	4.4806
Van der Pol	32	16	61.0069	290.7804	3.9407	15.6100	12.8539
Van der Pol	32	64	61.0069	290.7804	3.9407	8.2892	7.9561
Van der Pol	128	16	60.8383	290.7804	1.4755	14.4955	11.5577
Van der Pol	128	64	60.8383	290.7804	1.4755	7.4507	7.0588
Duffing	32	16	15.3586	38.7289	7.4754	6.6748	5.2717
Duffing	32	64	15.3586	38.7289	7.4754	5.3159	4.7580
Duffing	128	16	14.8690	38.7289	4.7537	5.8873	4.5908
Duffing	128	64	14.8690	38.7289	4.7537	4.3081	3.6958

Table 51: Every primary new synthetic contrast. Differences and interval endpoints are multiplied by 10^3; positive differences favor additive KAHM. The 24 intervals form their own 95% Bonferroni paired Student family over 12 complete repetitions. The normality approximation is not a distribution-free guarantee or joint coverage claim with earlier studies.

Law	N	M	Control	Δ	Simultaneous interval
Nonlinear AR	32	16	Raw RBF	0.1190	[-0.0325, 0.2706]
Nonlinear AR	32	16	Concat.	0.2326	[0.0750, 0.3902]
Nonlinear AR	32	64	Raw RBF	-0.0024	[-0.0155, 0.0107]
Nonlinear AR	32	64	Concat.	0.3230	[0.0983, 0.5478]
Nonlinear AR	128	16	Raw RBF	0.0947	[-0.0443, 0.2337]
Nonlinear AR	128	16	Concat.	0.0891	[0.0195, 0.1587]
Nonlinear AR	128	64	Raw RBF	0.0000	[-0.0051, 0.0051]
Nonlinear AR	128	64	Concat.	0.2201	[0.1437, 0.2965]
Van der Pol	32	16	Raw RBF	6.4813	[3.8242, 9.1385]
Van der Pol	32	16	Concat.	-8.5175	[-13.2045, -3.8305]
Van der Pol	32	64	Raw RBF	0.9173	[0.3991, 1.4356]
Van der Pol	32	64	Concat.	-5.6375	[-6.7666, -4.5083]
Van der Pol	128	16	Raw RBF	6.0508	[4.0580, 8.0435]
Van der Pol	128	16	Concat.	-6.9265	[-11.4856, -2.3674]
Van der Pol	128	64	Raw RBF	0.9524	[0.6890, 1.2159]
Van der Pol	128	64	Concat.	-5.0420	[-5.7154, -4.3685]
Duffing	32	16	Raw RBF	0.6926	[-0.0149, 1.4001]
Duffing	32	16	Concat.	1.9464	[1.1163, 2.7766]
Duffing	32	64	Raw RBF	0.0200	[-0.0226, 0.0625]
Duffing	32	64	Concat.	-0.2612	[-1.0430, 0.5206]
Duffing	128	16	Raw RBF	0.8065	[0.3672, 1.2458]
Duffing	128	16	Concat.	1.7380	[0.9065, 2.5694]
Duffing	128	64	Raw RBF	0.0548	[-0.0243, 0.1339]
Duffing	128	64	Concat.	-0.2138	[-0.5053, 0.0777]

The new matched-success archive diagnostic is resolved by source in Table 52. Window counts and effective decoder sizes appear in Tables 53 and 54. Counts are shared across methods, and requested Nyström sizes can be capped by short fitting segments. The selected weights and policy decisions in Tables 55 and 56 describe related task configurations, not independent draws of a universal adoption probability. Table 57 retains every leave-one-source-out re-aggregation without selecting the most favorable subset.

Table 52: Post-hoc matched-success scaled MSE by new archive source, averaging capacities within series and then series. The 22 configurations contain three Weather, three Solar, three COVID, and two Car Parts series; the failed Car Parts series is excluded only from this diagnostic. Solar Weekly has simulation provenance. All procedures and both frozen policies are shown.

Procedure	Weather	Solar	COVID	Car Parts
Raw ridge	0.3363	2.1992	0.6404	0.2106
Raw RBF	0.3181	3.0358	33.1371	0.2010
Concatenated KAHM	0.3178	2.9745	1.3490	0.2031
Additive KAHM	0.3213	3.0358	33.0164	0.2038
Additive affine	0.3189	3.0358	33.7662	0.2038
Additive locality	0.3189	2.9891	34.3905	0.5510
Persistence / seasonal naive	0.5793	1.4511	2.4268	0.3676
Histogram gradient boosting	0.4482	1.9788	38.5859	0.2567
KAHM 5% rule	0.3213	3.0358	33.4246	0.2024
All-geometry 5% rule	0.3192	2.9891	33.1917	0.5496

Table 53: Exact available-window counts for all twelve originally selected series, including Car Parts T1324 whose geometric fits fail, after the fixed caps. Inputs and targets are shared by the two capacities and every procedure. Initial training observations set the scale; refit windows stop before the reserved test boundary. These windows are related observations, not independent source replications.

Source	Series	Length	Train	Valid.	Refit	Test	Scale
Weather	T1476	14262	512	64	512	64	Seasonal
Weather	T1967	6810	512	64	512	64	Seasonal
Weather	T416	6811	512	64	512	64	Seasonal
Solar Weekly	T88	52	24	9	34	10	First diff.
Solar Weekly	T94	52	24	9	34	10	First diff.
Solar Weekly	T8	52	24	9	34	10	First diff.
COVID-19 Deaths	T42	212	93	36	135	37	Seasonal
COVID-19 Deaths	T146	212	93	36	135	37	Seasonal
COVID-19 Deaths	T96	212	93	36	135	37	Seasonal
Car Parts	T1324	51	23	9	33	10	Seasonal
Car Parts	T2368	51	23	9	33	10	Seasonal
Car Parts	T857	51	23	9	33	10	Seasonal

Table 54: Actual archive decoder sizes on post-hoc common support after the selected pretest refit. Entries are ranges across three retained series per source, or two for Car Parts. Requested landmarks are capped by available fitting histories; the retained Nyström rank can be smaller still. Raw basis width includes the appended history coordinates. Additive methods preserve this same raw head and add a separate ridge correction.

Source	Requested M	Raw landmarks	Raw rank	Raw width	Concat. rank
Weather	16	16	4–16	32–44	4–16
Weather	64	64	15–60	43–88	15–60
Solar Weekly	16	16	16	22	16
Solar Weekly	64	34	34	40	34
COVID-19 Deaths	16	16	5–16	33–44	5–16
COVID-19 Deaths	64	64	16–62	44–90	16–62
Car Parts	16	16	10–12	16–18	10–12
Car Parts	64	33	17–18	23–24	17–18

Table 55: Selected correction weights before the additional 5% policy gate. Synthetic counts concern 144 configurations and archive counts the 22 successful geometric configurations. Each archive geometry additionally has two failed fits with no selected weight. They characterize the frozen selector; frequencies across related configurations are not independent Bernoulli observations.

Study	Correction	0	0.25	0.5	1
Synthetic	Additive KAHM	10	8	18	108
Synthetic	Additive affine	14	6	11	113
Synthetic	Additive locality	14	6	8	116
Archive	Additive KAHM	13	2	0	7
Archive	Additive affine	11	4	2	5
Archive	Additive locality	6	5	0	11

Table 56: Choices made by both declared 5% validation policies. Archive decisions cover the 22 completed evaluations; each policy also has two failures and no decision on those configurations. Costs include examining rejected corrections; a raw decision is not a free decision.

Study	Rule	Raw	+KAHM	+Affine	+Locality
Synthetic	KAHM 5% rule	72	72	0	0
Synthetic	All-geometry 5% rule	48	5	39	52
Archive	KAHM 5% rule	15	7	0	0
Archive	All-geometry 5% rule	10	1	3	8

Table 57: Descriptive leave-one-source-out sensitivity of the post-hoc common-support additive KAHM comparison. Relative change is additive/raw minus one. These re-aggregations reuse the same four sources and do not create additional evidence or select a preferred aggregate.

Omitted source	Raw RBF	Additive KAHM	Relative change
Car Parts	12.1637	12.1245	-0.32%
COVID-19 Deaths	1.1850	1.1870	+0.17%
Solar Weekly	11.2188	11.1805	-0.34%
Weather	12.1246	12.0853	-0.32%

J.6 Measured accuracy and resource profiles

On this same matched-success support, Table 58 separates model wall time, model CPU time, and data preparation. Figure 9 normalizes each procedure's mean loss and model wall time by the raw RBF comparator measured in this same execution. It does not combine timings from different study stages. The displayed costs refer to complete required model dependencies, including validation selection, and are distinct from a single already-fitted prediction latency.

Table 58: Post-hoc common-support archive resource components, in source-balanced mean seconds per successful task. Model wall time is the main cost measure; preparation-plus-model adds common data preparation. Downloads, imports, artifact I/O, and research analysis remain outside these model measurements. The node-based policy totals charge shared work once. Model KiB describe actual stored state, not minimal storage. These diagnostic averages do not remove failed-attempt records from the artifact.

Procedure	Model wall	Model CPU	Prep.	Prep. + model	Model KiB
Raw ridge	0.0015	0.0015	0.0018	0.0033	3.5
Raw RBF	0.0037	0.0038	0.0018	0.0055	17.9
Concatenated KAHM	0.0691	0.0691	0.0018	0.0709	102.3
Additive KAHM	0.0498	0.0498	0.0018	0.0516	55.6
Additive affine	0.0369	0.0369	0.0018	0.0386	40.7
Additive locality	0.0379	0.0379	0.0018	0.0396	45.1
Persistence / seasonal naive	0.0012	0.0012	0.0018	0.0030	0.1
Histogram gradient boosting	0.6380	0.6378	0.0018	0.6398	616.0
KAHM 5% rule	0.0467	0.0467	0.0018	0.0484	48.0
All-geometry 5% rule	0.0869	0.0869	0.0018	0.0886	39.0

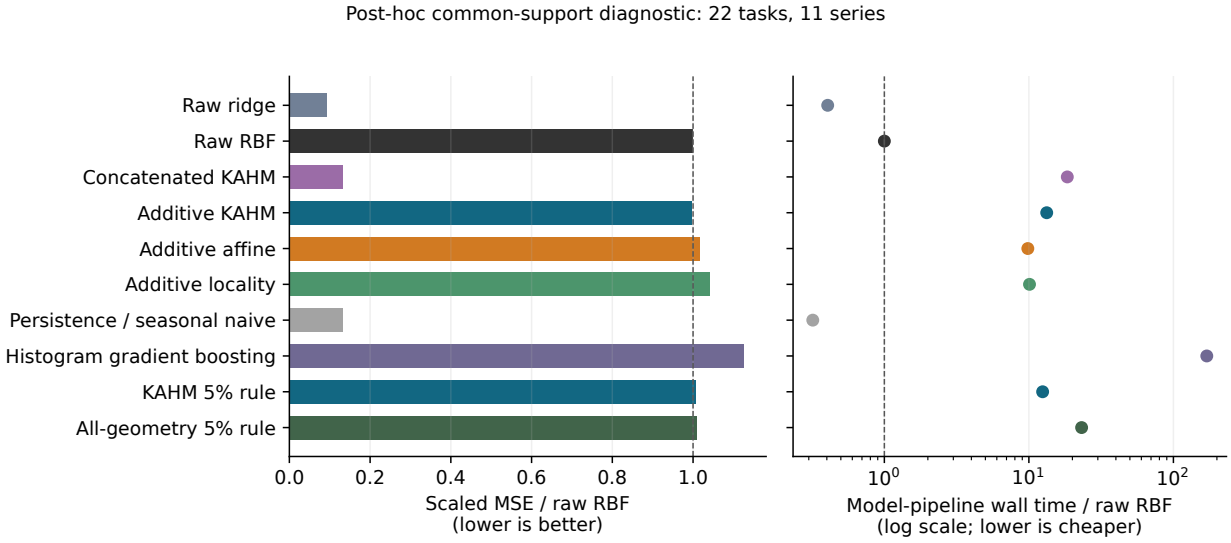


Figure 9: Post-hoc matched-success archive accuracy and cost relative to the raw RBF procedure. Each ratio uses the equal-source aggregate; individual-source heterogeneity is retained in Table 52. The time axis is logarithmic. No confidence interval across windows or application-wide optimality claim is attached to these four-source descriptive comparisons.

J.7 Realized residual alignment

For each saved additive forecast, let $d = \widehat{f}_{\mathrm{add}}(X) - \widehat{f}_{\mathrm{raw}}(X)$, which incorporates the chosen mixing weight. The prespecified descriptive analysis reconstructs $2\,\mathrm{mean}\langle Y - \widehat{f}_{\mathrm{raw}}(X), d\rangle$ and $\mathrm{mean}\|d\|^2$ directly from test

predictions, averaging target coordinates and dividing by the fixed training scale for each archive task in the common-support diagnostic. Their difference equals the realized raw-minus-additive MSE before rounding. The analysis code and independent manuscript builder both verify this equality. Table 59 reports the same source hierarchy used for the main loss comparison.

This decomposition describes how the realized correction aligned with the test residual, including its amplitude cost. It does not identify the oracle conditional mean in Equation (1), explain which representation component caused the alignment, or supply a new out-of-sample guarantee. Test-derived terms are never used to retune the correction, its mixing coefficient, or either adoption policy.

Table 59: Descriptive test residual decomposition on the post-hoc common-support archive subset. For $d = \widehat{f}_{\mathrm{add}} - \widehat{f}_{\mathrm{raw}}$, alignment is $2\,\mathrm{mean}\langle Y - \widehat{f}_{\mathrm{raw}}, d\rangle$ and energy is $\mathrm{mean}\|d\|^2$, averaged over target coordinates and divided by the fixed training scale before hierarchical aggregation. Raw-minus-additive MSE equals alignment minus energy before rounding. These are identities of the saved predictions, not fresh inference or a population certificate.

Source	Correction	Alignment	Energy	Gain
Weather	Additive KAHM	-0.0024712	0.00068791	-0.0031591
Weather	Additive affine	0.00021308	0.00097397	-0.00076088
Weather	Additive locality	-0.0004239	0.00036141	-0.00078531
Solar Weekly	Additive KAHM	0	0	0
Solar Weekly	Additive affine	0	0	0
Solar Weekly	Additive locality	0.10669	0.059975	0.04671
COVID-19 Deaths	Additive KAHM	0.1667	0.045967	0.12074
COVID-19 Deaths	Additive affine	-0.59915	0.029908	-0.62906
COVID-19 Deaths	Additive locality	-1.1003	0.15312	-1.2534
Car Parts	Additive KAHM	-0.00065859	0.0020919	-0.0027505
Car Parts	Additive affine	-0.00064528	0.0021013	-0.0027466
Car Parts	Additive locality	-0.058009	0.29197	-0.34998
Equal-source mean	Additive KAHM	0.040893	0.012187	0.028707
Equal-source mean	Additive affine	-0.1499	0.0082457	-0.15814
Equal-source mean	Additive locality	-0.26301	0.12636	-0.38936

K Target-adapted geometry: theory, protocol, and complete results

K.1 Residual-target transport between fitted baselines

The following proposition makes an elementary consequence of conditional-expectation projection explicit for residual learning. It is not claimed as a new general statistical theorem or a KAHM performance guarantee. Condition on the development state and fix a representation $Z = \Gamma(X)$, final base f_0, and donor f_d. All expectations below use one evaluation law Q with finite second moments. For a fixed positive-definite matrix W, write $\langle a, b\rangle_W = a^\top W b$, $\|a\|_W^2 = a^\top W a$, and $R_W(f) = \mathbb{E}_Q\|Y - f(X)\|_W^2$. The study's equal-horizon mean squared error is obtained with $W = I/H$.

Proposition 10 (Correction gain and donor mismatch)**.** *Put $m_0(Z) = \mathbb{E}_Q[Y - f_0(X) \mid Z]$ and $b_d(Z) = \mathbb{E}_Q[f_0(X) - f_d(X) \mid Z]$. For every fixed square-integrable correction $q(Z)$,*

$$R_W(f_0) - R_W(f_0 + q \circ \Gamma) = \mathbb{E}_Q\|m_0\|_W^2 - \mathbb{E}_Q\|q - m_0\|_W^2. \tag{39}$$

The donor's oracle correction is $q_d(Z) = \mathbb{E}_Q[Y - f_d(X) \mid Z] = m_0(Z) + b_d(Z)$. Consequently,

$$R_W(f_0) - R_W(f_0 + q_d \circ \Gamma) = \mathbb{E}_Q\|m_0\|_W^2 - \mathbb{E}_Q\|b_d\|_W^2, \tag{40}$$

$$R_W(f_0) - R_W(f_0 + \widehat{q} \circ \Gamma) = \mathbb{E}_Q\|m_0\|_W^2 - \mathbb{E}_Q\|b_d + a\|_W^2, \quad a = \widehat{q} - q_d. \tag{41}$$

Furthermore, $\mathbb{E}_Q\|b_d\|_W^2 \le \mathbb{E}_Q\|f_0(X) - f_d(X)\|_W^2$.

Proof. Write $Y - f_0(X) = m_0(Z) + \epsilon$, where $\mathbb{E}_Q[\epsilon \mid Z] = 0$. Conditional orthogonality gives

$$R_W(f_0 + q \circ \Gamma) = \mathbb{E}_Q\|\epsilon\|_W^2 + \mathbb{E}_Q\|m_0 - q\|_W^2.$$

Subtract this equality from its $q = 0$ counterpart to obtain Equation (39). Linearity of conditional expectation yields $q_d = m_0 + b_d$; substituting q_d and then $q_d + a$ proves the next two identities. Conditional Jensen's inequality for the convex quadratic norm proves the final bound. □

The final term in Equation (41) contains $2\mathbb{E}_Q\langle b_d, a\rangle_W$. It cannot be replaced by separate nonnegative mismatch and estimation penalties without another orthogonality argument: approximation error may reinforce or partially cancel the donor discrepancy. Even an exact donor correction can harm the final base when its conditional mismatch exceeds the final base's predictable residual signal.

For fixed donors $f_1, \ldots, f_K$ and deterministic weights $\pi_k \geq 0$ summing to one, let $\bar{f} = \sum_k \pi_k f_k$. Expanding around $\bar{f}$ gives

$$\sum_k \pi_k \mathbb{E}_Q\|Y - f_k(X) - q(Z)\|_W^2 = \mathbb{E}_Q\|Y - \bar{f}(X) - q(Z)\|_W^2 + \sum_k \pi_k \mathbb{E}_Q\|f_k(X) - \bar{f}(X)\|_W^2.$$

The cross term vanishes because the weighted donor deviations sum to zero. Hence the common-law population optimizer is $\mathbb{E}_Q[Y - \bar{f}(X) \mid Z]$, and the proposition applies with $f_d = \bar{f}$. This does not identify a finite OOF fit with that optimizer. Chronological folds can have different laws and sample sizes; a donor index depending on the observation must retain that joint law rather than being replaced by constant mixture weights.

For a fixed realized correction $\delta(X)$, direct expansion also gives

$$R_W(f_0) - R_W(f_0 + \delta) = 2\mathbb{E}_Q\langle Y - f_0(X), \delta(X)\rangle_W - \mathbb{E}_Q\|\delta(X)\|_W^2. \tag{42}$$

The independent audit verifies its empirical counterpart from saved test predictions. It does not estimate the oracle m_0 or b_d. Donor/final disagreement is recorded separately on correction-training rows. The final baseline has seen those rows, so this diagnostic is not an unbiased estimate of future disagreement or predictive risk.

K.2 Exact prospective design and source roster

The executable protocol is `extensions/target_geometry/PROTOCOL.md`; its configuration, numerical dependencies, implementation and prepared roster are hashed before the full run. Development checks use separate seeds and do not enter confirmation. The new synthetic seeds are 11200–11211. For law index l and split index $s = 0, 1, 2$, the inherited generator receives the first state value from `SeedSequence([seed,l,s,9027])`. Each task has 128/64/128 training/validation/test episodes of length 72, history 12, offsets $1, 4, 12$ and stride four, yielding 13 origins per episode. These data retain the earlier numerical observation conventions.

For synthetic OOF targets, episode index modulo four assigns folds. Each donor excludes every row of the queried episodes. Within its remaining episodes, the first 80% of ordered episode IDs fit its inner candidate models and the rest select its penalty. The selected donor is then fitted on all donor episodes. No queried episode or outer-validation target selects that donor's penalty.

For natural series, the first $\lceil 0.4n \rceil$ capped training origins initialize the donor history; the remainder form three contiguous query blocks. If t_b is the first query origin, only donor rows with $t + H \leq t_b$ are allowed. An 80/20 inner chronological split applies the same target-availability condition before inner validation. Fewer than eight inner-fitting rows invokes the predefined donor penalty one. Fewer than eight outer donor rows makes that query block ineligible for *both* residual-target procedures. The fitting sample is otherwise fixed by indices, not by residual values or model success. Fewer than eight eligible correction rows retains the available baselines and sends the correction arms to their declared ridge fallback. An eligible donor fit failure sends its dependent methods to that fallback. An unavailable primary base or required evaluation split is retained as a task failure.

The source records are respectively 10.5281/zenodo.4659727, 10.5281/zenodo.5121965, 10.5281/zenodo.4656626, and 10.5281/zenodo.4656719. All pinned records declare CC BY 4.0; archive/member hashes, attribution, source exclusions and metadata are retained in `extensions/target_geometry/sources/manifest.`

Table 60: New target-geometry archive collections and fixed roster. L is history length, H the number of consecutive target steps, and p the seasonal period. Selection uses only training-prefix eligibility and identifier hashes. These are 12 series from four selected collections, not 12 independent application domains.

Collection	Frequency	L	H	p	Selected series
Australian electricity	Half-hourly	48	12	48	T3, T5, T1
Bitcoin indicators	Daily	28	7	7	sent_addresses, confirmation_time, block_size
Melbourne pedestrian	Hourly	48	6	24	T10, T14, T20
KDD2018 air quality	Hourly	48	6	24	T239, T99, T233

`json`. Bitcoin selections are activity indicators, not price forecasts. New collection identity does not imply a new broad application domain, real-time data-vintage reconstruction, or population representativeness.

Training-prefix eligibility requires 96 finite windows and a positive seasonal-difference mean-square scale, with first-difference fallback. The selection salt is `kahm-target-geometry-new-collections-v1`. Each series uses chronological 60/20/20 splits. Training is capped at 512 windows and validation/test at 64 origins per segment by even index spacing. All targets lie inside their segment; later test histories can contain already observed test values. Missing windows are excluded without interpolation, defining an available-window estimand. The loss scale uses the initial training prefix only. The naive control uses the declared seasonal lag with an available-value fallback; synthetic naive prediction is persistence.

The 18 primary contrasts use 12 paired repetition-level means each. For positive differences favoring the second method, they compare ridge with learned-OOF KAHM; identity-OOF KAHM with learned-OOF KAHM; identity-in-sample KAHM with identity-OOF KAHM; and learned-OOF affine, locality, and RBF-local with learned-OOF KAHM. Intervals use $\bar{d} \pm t_{11,1-0.05/(2\cdot 18)} s_d/\sqrt{12}$ under their stated normal approximation. No joint coverage is asserted with prior study families. Archive results and leave-one-source-out re-aggregations are descriptive; no window-based confidence interval is attached to four selected source collections.

K.3 Implementation, safeguards, and accounting

The metric uniformly samples up to 256 correction rows without replacement using the task seed. All training inputs determine its input standardizer, matching the downstream bank; only eligible OOF residual targets fit its supervised objective. Its donor mask excludes whole synthetic episodes or natural origins separated by at most $L + H$. Queries with no admissible donor are omitted from the proxy; fewer than two admissible queries or donor groups invokes identity. The residual pooled scale is $[\mathrm{mean}_{i,h}(r_{ih} - \bar{r}_h)^2]^{1/2}$, before row subsampling. Constant residuals or absence of positive admissible input distances also invoke identity. Log-sum-exp evaluates kernel probabilities. L-BFGS-B uses `ftol`=10^{-10}, `gtol`=10^{-6}, at most 40 iterations and 20 line-search steps. The source retains the analytic derivative, numerical gradient check, fitted weights, objective values, donor counts, optimizer status and fallback reason. Training-objective improvement is not a forecast accuracy claim.

Each bank caps every requested group count by the number of distinct sampled partition histories. If numerical clustering still has empty groups, all counts are halved down to one, with each reduction recorded. Rank-zero local models use their inherited center reconstruction. Unexpected geometry or correction errors return the fitted ridge forecast with the exception and incurred work retained. A failed supervised metric uses identity; a failed secondary raw RBF also uses ridge. A numerical failure of the secondary jointly fitted head is isolated to that arm and invokes the same ridge fallback. These are predefined procedures for the present study, distinct from the previous study's unchanged fit failures.

KAHM, affine and locality codes import the archived reconstruction and coordinate formulas. The RBF-local gate for local model c uses $\exp\{-\|z - \mu_c\|_2^2/(2s_c)\}$, normalized within its block, where s_c is its reference mean squared radius, floored at 10^{-6}. All four multiply local coordinates by their corresponding affinities. Applying metric weights before re-standardizing each input column would cancel the intended metric; the

implementation instead applies $\mathrm{diag}(e^{\theta/2})$ after the shared standardizer. Identity-weight tests recover archived features on nondegenerate data.

One task and one numerical-library thread execute at a time. Disjoint wall and process-CPU nodes record base search/prediction, donor fitting, metric learning, bank construction and transformations, head search, final prediction and selected-model serialization. Each procedure pays for its required nodes once, including a rejected correction's search. Test feature transformations are conservatively charged even when zero correction bypasses their subsequent use; they consume test inputs only. Imports, data download/preparation, artifact writes and reporting are outside model timing. Serialized bytes describe the retained model state, not an information-theoretic storage minimum.

K.4 Complete comparisons and diagnostic records

The generated displays retain all prescribed primary contrasts and every source rather than selecting favorable outcomes. The independent analyzer recomputes losses from saved targets and predictions, checks the complete task/method roster, validates donor exclusions and selection records, sums charged dependencies, checks zero-correction equality, and verifies Equation (42). Metric objectives, effective groups, selected mixing weights and donor/final disagreement remain diagnostics of the declared procedures. Neither these quantities nor a smaller proxy objective estimates unrestricted Bayes risk, identifies minimum necessary complexity, or certifies a universal KAHM adoption rule.

Primary contrasts and source sensitivity. Figure 10 displays the complete 18-contrast family, with numerical endpoints in Table 61. The three ridge contrasts favor learned-OOF KAHM, while five matched-geometry contrasts favor the simpler control. None establishes a learned-metric or OOF-target increment for KAHM. Table 62 retains the source means, and Table 63 records every series's windows and training loss scale. Individual-series losses are retained in `reports/task_metrics.csv` under the new extension. Learned-OOF KAHM's source-mean reductions relative to ridge are 3.91% for Australian electricity, 1.38% for Bitcoin indicators, 4.37% for pedestrian counts, and 0.85% for air quality. These favorable source aggregates coexist with four individual-series losses. The complete leave-one-source-out display in Table 66 concerns composition sensitivity of this roster, not uncertainty over new collections.

Optimization and residual diagnostics. All 36 synthetic and 12 archive metric fits report optimizer convergence; none invokes identity fallback or reaches the iteration limit. There are no recorded bank group reductions or fitting warnings. Synthetic optimization takes two to three iterations and decreases the regularized objective by a median 1.8741×10^{-6}; the learned maximum-to-minimum weight ratios span 1.0013–1.1054. The synthetic metric therefore remains close to identity under the frozen bandwidth, penalty and diagonal parameterization. Archive optimization takes two to 14 iterations, with median objective decrease 2.9692×10^{-4} and weight ratios 1.0577–16.0000. One pedestrian series reaches the declared ratio cap. These are observed solver statuses and training-objective changes, not guarantees of global optimality, forecasting improvement, or performance of an end-to-end KAHM metric.

The median correction-row donor/final disagreement divided by OOF residual MSE is 0.0024 for synthetic tasks and 0.1047 for archive tasks (Table 64). This descriptive difference documents that the two residual sources need not be interchangeable; it cannot identify the oracle transport penalty in Proposition 10 or attribute observed test differences to that penalty. Validation selects full-strength learned-OOF KAHM correction on 35 of 36 synthetic tasks, with half strength on the remaining task. Archive selections are more restrained: the counts for $\gamma = 0, 1/4, 1/2, 1$ are $1, 4, 6, 1$ (Table 65). The four archive series harmed despite nonzero validation selection confirm that the available zero option does not ensure improvement on future observations.

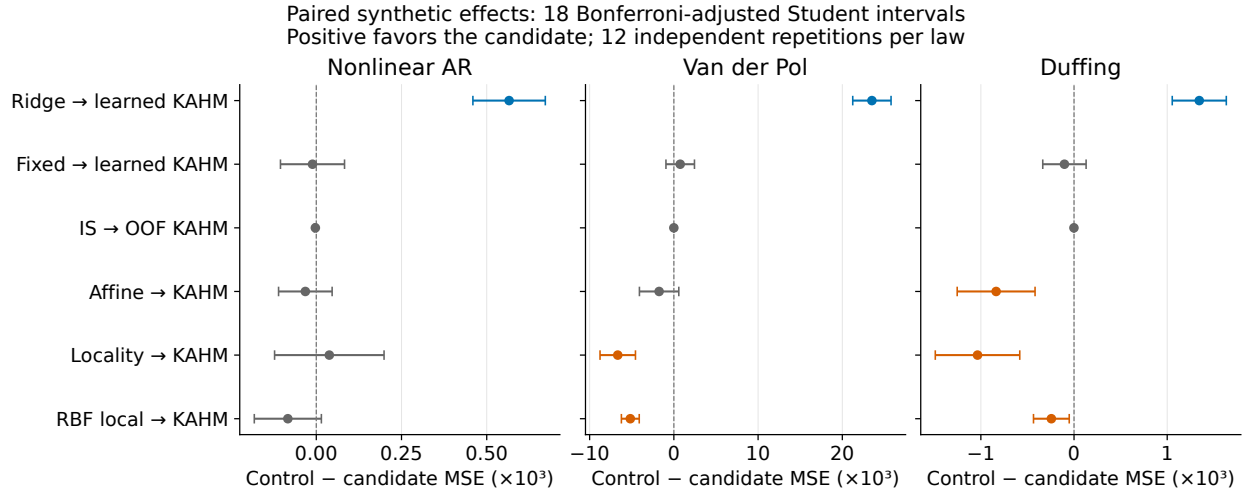


Figure 10: All six prescribed contrasts for each known synthetic law. Points are paired mean differences in MSE, multiplied by 10^3; positive values favor the candidate named to the right of each arrow. Intervals use the common 18-comparison Bonferroni adjustment and 12 independent repetition differences per law. The learned-metric comparison holds OOF targets fixed; the residual-target comparison holds the identity metric fixed. Matched-geometry comparisons use the shared learned metric and OOF targets. Each panel has its own horizontal range, and intervals containing zero are unresolved, not evidence of equal performance.

Table 61: The complete family of 18 prespecified synthetic comparisons. Δ is control minus candidate test MSE; positive values favor the candidate. Intervals use the paired repetition differences, Student's t_{11} quantile, and a two-sided Bonferroni allocation of 0.05/18. Family coverage is approximate because normality of repetition differences is not guaranteed. No claim joins this family to earlier experiments.

Law	Control	Candidate	$\Delta \times 10^3$	Family interval
Nonlinear AR	Raw ridge	Learned, OOF KAHM	0.566	[0.459, 0.672]
Nonlinear AR	Fixed, OOF KAHM	Learned, OOF KAHM	-0.011	[-0.105, 0.083]
Nonlinear AR	Fixed, IS KAHM	Fixed, OOF KAHM	-0.003	[-0.006, 4.07×10^{-4}]
Nonlinear AR	Learned, OOF Affine	Learned, OOF KAHM	-0.032	[-0.111, 0.046]
Nonlinear AR	Learned, OOF Locality	Learned, OOF KAHM	0.038	[-0.122, 0.199]
Nonlinear AR	Learned, OOF RBF local	Learned, OOF KAHM	-0.083	[-0.182, 0.015]
Van der Pol	Raw ridge	Learned, OOF KAHM	23.510	[21.236, 25.785]
Van der Pol	Fixed, OOF KAHM	Learned, OOF KAHM	0.754	[-0.939, 2.447]
Van der Pol	Fixed, IS KAHM	Fixed, OOF KAHM	-0.003	[-0.008, 0.002]
Van der Pol	Learned, OOF Affine	Learned, OOF KAHM	-1.751	[-4.088, 0.586]
Van der Pol	Learned, OOF Locality	Learned, OOF KAHM	-6.661	[-8.765, -4.558]
Van der Pol	Learned, OOF RBF local	Learned, OOF KAHM	-5.169	[-6.229, -4.110]
Duffing	Raw ridge	Learned, OOF KAHM	1.344	[1.054, 1.634]
Duffing	Fixed, OOF KAHM	Learned, OOF KAHM	-0.103	[-0.336, 0.130]
Duffing	Fixed, IS KAHM	Fixed, OOF KAHM	-0.001	[-0.006, 0.004]
Duffing	Learned, OOF Affine	Learned, OOF KAHM	-0.836	[-1.254, -0.418]
Duffing	Learned, OOF Locality	Learned, OOF KAHM	-1.036	[-1.489, -0.583]
Duffing	Learned, OOF RBF local	Learned, OOF KAHM	-0.243	[-0.435, -0.051]

Table 62: Scaled MSE by collection, averaging its three declared series. Collections receive equal weights in the aggregate; neither series nor repeated origins increase the collection count. No confidence intervals are attached to these four descriptive collection means.

Procedure	Electricity	Bitcoin	Pedestrian	Air quality
Raw ridge	0.2879	3.0946	1.2489	0.5704
Raw RBF	0.2969	5.8096	1.0650	0.6216
Persistence / seasonal naive	0.7859	3.3622	1.5349	1.7073
Joint raw + KAHM	0.2760	3.8872	1.0713	0.5773
Fixed, IS KAHM	0.2725	3.0163	1.1943	0.5752
Fixed, IS Affine	0.2753	3.0013	1.1862	0.5708
Fixed, IS Locality	0.2678	3.0174	1.1882	0.5808
Fixed, IS RBF local	0.2885	3.0102	1.1697	0.5631
Fixed, OOF KAHM	0.2778	3.0781	1.1766	0.5741
Fixed, OOF Affine	0.2798	3.0762	1.1636	0.5728
Fixed, OOF Locality	0.2713	3.0559	1.1781	0.5887
Fixed, OOF RBF local	0.2828	3.0424	1.2035	0.5695
Learned, OOF KAHM	0.2766	3.0520	1.1943	0.5656
Learned, OOF Affine	0.2975	3.0369	1.1691	0.5711
Learned, OOF Locality	0.2751	3.0615	1.1597	0.5714
Learned, OOF RBF local	0.2838	3.0506	1.2278	0.5772

Table 63: Exact natural-series roster, selected before forecasts by a salted hash among training-prefix-eligible candidates. L is history length and H the complete forecast path length. Chronological boundaries are 60/20/20; windows with missing inputs or targets are omitted without imputation. At most 512/64/64 windows are retained by the frozen deterministic sampling rule. The loss scale is computed before validation. Bitcoin series are network indicators, not prices.

Collection	Series	L	H	Train/val/test	Loss scale
Australian electricity	T3	48	12	512/64/64	1.43×10^5
Australian electricity	T5	48	12	512/64/64	4182.897
Australian electricity	T1	48	12	512/64/64	4.50×10^5
Bitcoin indicators	sent_addresses	28	7	512/64/64	2.07×10^8
Bitcoin indicators	confirmation_time	28	7	512/64/64	163.705
Bitcoin indicators	block_size	28	7	512/64/64	3.19×10^9
Pedestrian counts	T10	48	6	512/64/64	26088.371
Pedestrian counts	T14	48	6	512/64/64	31655.986
Pedestrian counts	T20	48	6	512/64/64	27784.521
KDD air quality	T239	48	6	512/64/64	102.986
KDD air quality	T99	48	6	512/64/64	226.458
KDD air quality	T233	48	6	512/64/64	441.826

Table 64: Training diagnostics, not independent evidence of test benefit. J is the regularized Gaussian residual-regression proxy shared by all geometric arms. A finite improved iterate may be retained at an iteration limit, separately from optimizer convergence. D is mean squared disagreement between donor and final ridge predictions on the same correction rows; R_{OOF} is their OOF residual MSE. Medians summarize observed tasks and are descriptive. Exact objectives, warnings, weight ratios, missing diagnostics and residual identities are retained in the report CSV files.

Phase	Tasks	Converged	Metric fallback	Median $J_0 - J_*$	Median D/R_{OOF}
Synthetic	36	36	0	1.874×10^{-6}	0.0024
Archive	12	12	0	0.0003	0.1047

Table 65: Validation-selected correction strengths, with counts ordered as $\gamma = 0, 0.25, 0.5, 1$. A zero correction is the exact deployed ridge predictor. A failed arm is recorded separately as a baseline fallback, not as an observed zero-strength validation selection. Selection counts summarize tasks and do not supply an additional inference sample.

Procedure	Synthetic gamma counts	Fallback	Archive gamma counts	Fallback
Fixed, IS KAHM	0 / 0 / 0 / 36	0	1 / 5 / 1 / 5	0
Fixed, IS Affine	0 / 0 / 1 / 35	0	2 / 3 / 2 / 5	0
Fixed, IS Locality	0 / 0 / 1 / 35	0	0 / 3 / 5 / 4	0
Fixed, IS RBF local	0 / 0 / 0 / 36	0	0 / 3 / 5 / 4	0
Fixed, OOF KAHM	0 / 0 / 0 / 36	0	2 / 5 / 2 / 3	0
Fixed, OOF Affine	0 / 0 / 1 / 35	0	3 / 4 / 4 / 1	0
Fixed, OOF Locality	0 / 0 / 1 / 35	0	0 / 7 / 4 / 1	0
Fixed, OOF RBF local	0 / 0 / 0 / 36	0	1 / 4 / 6 / 1	0
Learned, OOF KAHM	0 / 0 / 1 / 35	0	1 / 4 / 6 / 1	0
Learned, OOF Affine	0 / 0 / 1 / 35	0	1 / 4 / 5 / 2	0
Learned, OOF Locality	0 / 0 / 1 / 35	0	1 / 4 / 7 / 0	0
Learned, OOF RBF local	0 / 0 / 0 / 36	0	0 / 5 / 5 / 2	0

Table 66: Descriptive sensitivity to collection composition: each column omits the named collection and recomputes the mean scaled loss over the remaining three collections, divided by the corresponding raw-ridge loss. Values below one favor the procedure. Every omission is shown; none is selected as the primary result. These ratios are not independent replications, confidence intervals, or additional confirmatory tests.

Procedure	Electricity	Bitcoin	Pedestrian	Air quality
Raw ridge	1.000	1.000	1.000	1.000
Raw RBF	1.526	0.941	1.702	1.548
Persistence / seasonal naive	1.344	1.912	1.481	1.227
Joint raw + KAHM	1.127	0.913	1.199	1.130
Fixed, IS KAHM	0.974	0.969	0.977	0.968
Fixed, IS Affine	0.968	0.964	0.973	0.964
Fixed, IS Locality	0.974	0.967	0.978	0.966
Fixed, IS RBF local	0.965	0.959	0.977	0.965
Fixed, OOF KAHM	0.983	0.963	0.994	0.979
Fixed, OOF Affine	0.979	0.957	0.994	0.976
Fixed, OOF Locality	0.981	0.967	0.991	0.973
Fixed, OOF RBF local	0.980	0.976	0.985	0.978
Learned, OOF KAHM	0.979	0.966	0.985	0.977
Learned, OOF Affine	0.972	0.967	0.988	0.972
Learned, OOF Locality	0.975	0.952	0.989	0.971
Learned, OOF RBF local	0.988	0.991	0.990	0.985

L Direct reconstruction protocol and reproducibility

The complete protocol is versioned under `extensions/direct_reconstruction/PROTOCOL.md`. Its scientific freeze contains the model, preparation and execution code, independent analysis, numerical tests, inherited numerical dependencies, exact input roster, source provenance and prepared arrays. The published checkpoint precedes full D evaluation. The preserved pilot under `extensions/forecast_gate_pilot` has its own earlier source freeze and is not relabelled as part of this evaluation.

Chronology and seasonal prediction. Synthetic seeds are 84200–84211 for each law, with the inherited 72-observation episodes and thirteen forecast origins per episode. Development checks use seed 932001, outside the reported roster. Whole-episode inner validation selects the raw baseline in A. For natural data, inner A training targets must have matured by its first validation query. Every outer target lies inside its segment. A history can include observations from the preceding segment because these have already been observed at the forecast origin. No future missing-value imputation or label-based series replacement is used.

Dominick has history 52, offsets $(1, 2, 4)$ and seasonal period 52. Rideshare uses only `price_mean` series, history 24, offsets $(1, 3, 6)$ and period 24. Wikipedia has history 28, offsets $(1, 3, 7)$ and period 7. Sunspot uses the last 4,096 observations independent of their values, history 28, offsets $(1, 3, 7)$ and period one. Each of the first three collections contributes three hash-selected eligible series; sunspot contributes its single series. Every source record, archive checksum, selected identifier, original origin index, split boundary and training-only scale is preserved. Natural row caps are 512/128/128/128. The minimum A eligibility is 96 complete windows with a positive finite scale. A later unavailable segment remains a recorded failure. The three selected rideshare series have no complete B windows, identified during preparation after A-only selection; all three are retained as planned feasibility failures. This precludes a complete four-collection accuracy aggregate.

Seasonal naive predicts each offset from the most recent observed value with the appropriate seasonal phase. For period p this is $y_{t+h-p\lceil h/p\rceil}$, using only indices at or before t. Period one therefore gives persistence. All declared histories include the required seasonal lag. The selected source records are `https://doi.org/10.5281/zenodo.4654802`, `https://doi.org/10.5281/zenodo.5122114`, `https://doi.org/10.5281/zenodo.4656080`, and `https://doi.org/10.5281/zenodo.4654773`; the source manifest retains attribution and archive-license metadata.

Baseline and correction selection. Raw RBF and boosting retain the frozen ridge state for a logged horizon-wise D fallback; a D failure cannot change their C forecast or the C-selected policy. Its baseline cost and serialized bytes are included. Raw ridge uses penalties $10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}, 1, 10, 100$, selected inside A and then refitted on A. The raw RBF reference retains raw standardized history together with at most 64 Nyström landmarks; bandwidth factors $0.5, 1, 2$ multiply the median positive landmark squared-distance scale, and B selects among them and the same seven penalties. Histogram gradient boosting fits 100 iterations with L2 penalty one, learning rate 0.05 or 0.1, and maximum leaves 7 or 15; B selects the grid jointly across horizons without external early stopping, using a separate fitted tree ensemble per target. All local corrections use the same A residual targets, sum-loss penalties $0.01, 0.1, 1$, A-standardized features and unpenalized intercept. C chooses their mixing weights separately by horizon with a strict zero-first rule. A budget exit or nonfinite trial is logged; the best finite incumbent is retained.

The affine gain and locality/RBF anisotropy are deliberately different functional interventions from the KAHM bandwidth. Their common parameter counts, supervision and evaluation ceilings support a matched experiment at that level; they do not prove equal approximation power or equal computation. Likewise, a gate-only arm has three parameters per horizon and a reconstruction/shape arm has six, so their comparison asks whether the additional intervention helps within the declared budget.

Computation and state. Numerical-library thread counts are fixed to one. Warm measured nodes cover the baseline, shared bank, KAHM-specific factors, all paid geometry trials, C selection, and D transformations and predictions. The implementation eagerly prepares fixed gate queries and charges that work even when C selects zero correction or a different bandwidth; the accounting is conservative relative to a possible lazy implementation. Each standalone procedure sums its required dependencies once. Policy costs sum the union of measured candidate dependencies, including their eager query work, not only the selected winner. This

component sum is not a separately timed minimal policy execution. Selected fitted states, their serialized byte sizes and serialization time are retained. Downloads, input preparation, imports and evidence artifact writing lie outside the model pipeline. Absolute times and ratios describe this implementation and host, not intrinsic algorithmic constants. A whole-process high-water RSS is not a per-method memory estimate.

This study does not impose a deployment budget or match alternatives by measured wall time. It also does not test delayed-label updates or drift. The preserved bounded-window ridge prototype maintains a fixed feature map and has a different intercept convention; numerical agreement with batch ridge does not demonstrate useful incremental KAHM geometry. Prediction, update latency and incremental memory remain joint endpoints for a further chronological adaptation study.

Independent evidence checks. The audit verifies frozen inputs and scientific source, reconstructs windows from retained raw episodes or series, recomputes C/D losses, checks all method and candidate rosters, replays strict selection, checks exact zero correction, reconstructs cost dependencies and replays serialized selected predictions. It does not independently refit every optimization trial or turn recorded consistency into external replication. Per-task and per-horizon outputs remain available regardless of the direction of the aggregate comparison.

Bitwise regeneration also depends on the numerical environment. The recorded execution uses NumPy 2.3.5 on an AVX512-capable x86-64 host. A post-execution diagnostic reproduces all four episode batches of one declared Duffing task exactly on that host, but disabling AVX512 dispatch changes some values at floating-point roundoff scale. Package versions and single-thread execution alone therefore do not guarantee identical regenerated bytes on other processors. The frozen exact checks remain unchanged, and the archived input arrays retain their canonical hashes. Selected-state prediction replay has its separately declared numerical tolerance. The preserved diagnostic records this environment limitation; it does not refit models or amend any reported result. A separate raw-RBF state probe crosses the declared 10^{-10} absolute and relative replay tolerances under altered dispatch, while changing its C/D mean squared errors by less than 10^{-14} relatively. Native and one compatible hosted audit pass; these cross-processor failures remain documented rather than silently accepted.

L.1 Complete comparisons and resource records

Table 67: The complete 18-comparison family for reconstruction-trained KAHM. Gain is $100(\overline{L}_{\text{control}} - \overline{L}_{\text{KAHM}})/\overline{L}_{\text{control}}$. Intervals are absolute paired MSE differences, not percentage intervals; their positive direction favors KAHM.

Law	Control	Gain (%)	Difference interval	Outcome
AR	Raw RBF	2.87	[6.65e-06, 0.000278]	positive
AR	Gate KAHM	0.09	[-3.86e-05, 4.71e-05]	unresolved
AR	Reconstruction affine	-0.11	[-0.0001, 8.97e-05]	unresolved
AR	Reconstruction locality	1.11	[-3.46e-05, 0.000142]	unresolved
AR	Reconstruction RBF-local	-0.18	[-9.5e-05, 7.77e-05]	unresolved
AR	Selected non-KAHM	-0.88	[-0.000147, 6.26e-05]	unresolved
VDP	Raw RBF	-31.51	[-0.0042, 0.000112]	unresolved
VDP	Gate KAHM	41.43	[0.00435, 0.00771]	positive
VDP	Reconstruction affine	-12.99	[-0.00181, -0.000155]	negative
VDP	Reconstruction locality	8.26	[-0.00121, 0.00275]	unresolved
VDP	Reconstruction RBF-local	-9.33	[-0.00206, 0.000604]	unresolved
VDP	Selected non-KAHM	-251.52	[-0.0079, -0.0043]	negative
Duffing	Raw RBF	-22.04	[-0.00146, -0.00048]	negative
Duffing	Gate KAHM	5.51	[-5.75e-05, 0.000682]	unresolved
Duffing	Reconstruction affine	-13.74	[-0.000992, -0.000303]	negative
Duffing	Reconstruction locality	-21.83	[-0.0016, -0.000317]	negative
Duffing	Reconstruction RBF-local	-6.73	[-0.00109, 0.00041]	unresolved
Duffing	Selected non-KAHM	-29.32	[-0.00159, -0.000841]	negative

Table 68: Collection-specific scaled MSE for every procedure. Each available collection weights its selected series equally. All three A-selected rideshare series have no complete B windows, so their entries and the planned four-collection aggregate are undefined.

Procedure	Dominick	Rideshare	Sunspot	Wikipedia
Ridge	0.3574	undefined	0.34016	0.45932
Raw RBF	0.34874	undefined	0.22123	0.51905
Boosted trees	0.27423	undefined	0.28535	0.49702
Seasonal naive	0.42346	undefined	0.25627	0.70067
Fixed KAHM	0.37401	undefined	0.34016	0.46804
Fixed affine	0.34612	undefined	0.32203	0.47187
Fixed locality	0.33466	undefined	0.33485	0.45928
Fixed RBF-local	0.35577	undefined	0.34016	0.46267
Gate KAHM	0.38055	undefined	0.34016	0.46787
Gate affine	0.35066	undefined	0.32307	0.49483
Gate locality	0.39325	undefined	0.29447	0.45928
Gate RBF-local	0.34289	undefined	0.29803	0.46245
Reconstruction KAHM	0.31635	undefined	0.34016	0.4593
Reconstruction affine	0.35629	undefined	0.28051	0.50837
Reconstruction locality	0.38436	undefined	0.28051	0.45962
Reconstruction RBF-local	0.33356	undefined	0.28772	0.47022
Selected non-KAHM	0.35628	undefined	0.28051	0.51063

Table 69: Measured complete procedure dependencies and selected model state. Means weight the 36 synthetic tasks equally or the seven available natural tasks equally. Natural loss tables instead weight their three available collections equally. Times include selected-state packing and serialization, and policy search costs count shared dependencies once. State bytes are not peak resident memory.

Procedure	Synthetic time (s)	Natural subset time (s)	Synthetic state (KiB)	Natural subset state (KiB)
Ridge	0.002035	0.00173	0.7686	1.795
Raw RBF	0.01715	0.01298	42.26	57.88
Boosted trees	0.6534	0.655	386.7	383.3
Seasonal naive	8.219e-05	5.728e-05	0.07031	0.07031
Fixed KAHM	0.07743	0.0502	174.5	124.8
Fixed affine	0.04852	0.03264	10.01	16.4
Fixed locality	0.0425	0.02986	10.01	13.88
Fixed RBF-local	0.04199	0.02957	10.04	10.94
Gate KAHM	0.9139	0.734	174.4	132.9
Gate affine	0.8478	0.6936	10.04	16.5
Gate locality	0.8422	0.5606	10.01	14.22
Gate RBF-local	0.8415	0.6556	10.08	13.22
Reconstruction KAHM	10.73	7.929	174.5	104.2
Reconstruction affine	6.973	5.345	10.07	18.61
Reconstruction locality	2.722	2.133	10.01	16.33
Reconstruction RBF-local	2.766	2.184	10.04	17.74
Selected non-KAHM	15.57	12.16	155.9	17.49

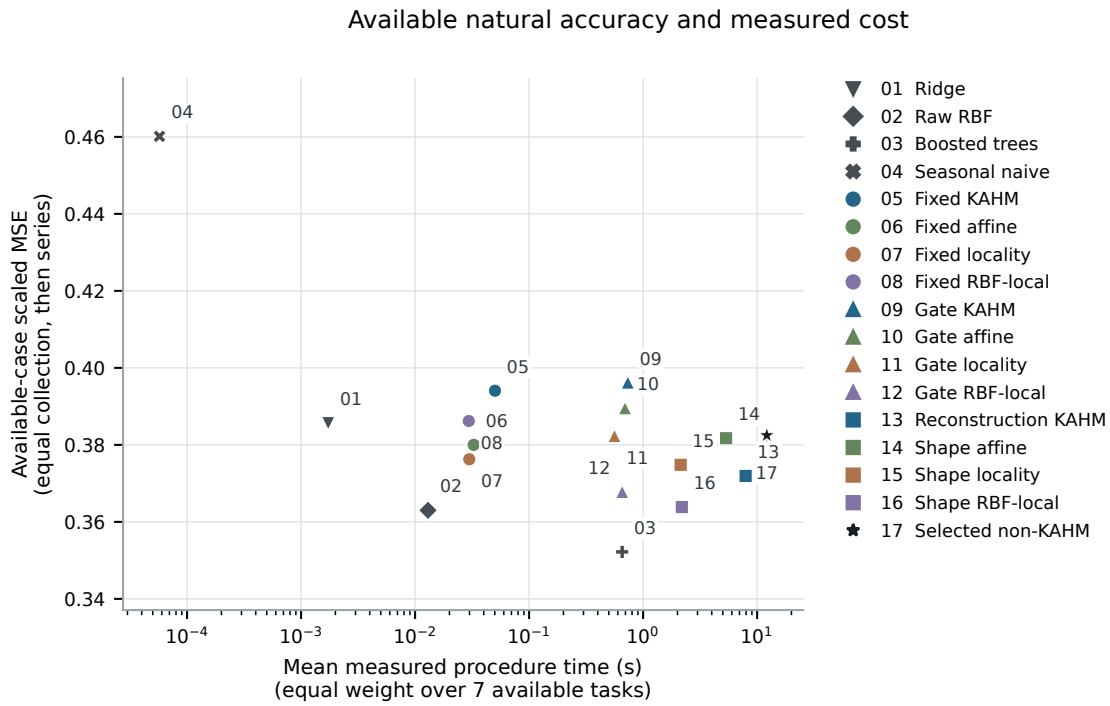


Figure 11: Available-case natural accuracy and implemented cost for all 17 procedures. Accuracy averages equally across three collections; time averages equally across seven feasible task suites, with a logarithmic horizontal scale. The missing rideshare collection is not replaced. This descriptive plot does not establish population uncertainty or an application-specific acceptable-cost threshold.

M Adaptive development: protocol, resources and preserved evidence

Inputs and temporal roles. The eight synthetic streams contain 2,048 retained observations each, after 256 regime-A burn-in observations. Four seeds, 20261101–20261104, pair stationary and recurring schedules by innovations. Histories and horizons are respectively 12 and $(1, 4, 12)$. The retained Dominick series T7830, T25851 and T108533 each contain 393 weekly observations, with histories 52 and horizons $(1, 2, 4)$. The Sunspot input is the finite final 4,096-point crop of the previously selected daily T1 series, starting at original raw index 69,828; histories are 28 and horizons $(1, 3, 7)$. No interpolation is used. The preserved Monash-source archives and their versioned provenance remain part of the development evidence (Godahewa et al., 2021).

At observation time t, the evaluator scores previously issued forecasts whose targets mature at t, releases the newly available labels, updates the model, then issues forecasts for $t + h$. Initial fitting uses common joint-horizon complete rows, and calibration weights are selected before processing the first evaluation observation using only earlier targets. Matured earlier evaluation labels may update the model; the update rule and selected weights remain fixed. This is online causal evaluation, not a model frozen throughout the evaluation half. Scale factors use the fitting prefix only. Losses average origins within horizon, horizons within series, then series within collection; Dominick and Sunspot receive equal weight. The four synthetic seeds, rather than their overlapping forecast windows, are the independent simulation replications. No broad transfer intervals are claimed from the two selected natural collections.

Reference policy and calibration scope. The geometric bank contains four local models of rank at most two. Every 16 observations, an adaptive arm considers one local model in round-robin order, retains half its initial references as anchors, and replaces at most four other references with observed histories assigned to that local model. The affected geometry and all residual heads are rebuilt coherently from their bounded replay. No bandwidth, penalty, history, reference-policy or refresh search is performed. The kernel comparator uses an initial-prefix median-distance bandwidth, regularizer 0.1 and FIFO supports, with recorded inverse-residual checks and rebuilds. Calibration selects only the four possible horizon-specific correction weights stated in Section 7. For the kernel comparator, the correction is its kernel forecast minus the common raw ridge forecast. The same calibration rule therefore selects a ridge–KRR mixture for each horizon: weights one and zero recover KRR and ridge, respectively. All reported method losses include this selection.

Fixed development decision. Advancement requires one complete tier to satisfy all criteria. On recurring streams, adaptive KAHM must reduce mean loss by at least 3% against each of adaptive affine, adaptive RBF-local and kernel ridge, with wins on at least three of four paired seeds against each, and by at least 1% against both fixed KAHM and raw ridge. On the natural aggregate, it must improve each of the three main comparators by at least 1%; one same collection must improve all three by at least 3%, and neither collection may be more than 5% worse than any. KAHM must also meet the per-stream p99 screen, with no unexpected exception or cap violation in any method. These thresholds were fixed before the original run and retained through A1. The recurring gate fails at both tiers, yielding DEFER after technical validity is restored. No accuracy result at one tier is paired with a resource result at the other to claim advancement.

Resource scope. Workers execute serially in fresh processes with one numerical thread and the same CPU affinity. Initialization and calibration are measured separately. The service interval covers history/pair assembly, all matured horizon updates, feature/head rebuilds, kernel inverse audits and prediction; scoring, serialization and state inspection are excluded. Buffer-state samples and whole-worker peak RSS have the distinct scopes stated in Table 70. The 20 ms allowance is a host-specific engineering screen, not an application-derived service-level requirement. Different support sharing across horizons prevents interpreting the tier labels as equal memory or equal computation.

Amendment and evidence provenance. The original implementation used accumulated correction cross-products; large rows entering and leaving a finite window produced cancellation in the reproduced failing state. A1 instead recomputes residuals against the current baseline from the same bounded replay, centers to eliminate the free intercept, equilibrates both data and penalty columns, and solves the augmented ridge

Table 70: Measured service and state by method/tier. P99 is first computed per stream, then maximized across the 12 streams. Other columns also report maxima; they may occur on different streams. Owned NumPy buffers exclude Python objects and temporary work arrays; worker RSS includes interpreter, libraries and evidence storage. Neither is a precise incremental deployment footprint.

Method	Tier	P99 (ms)	Max (ms)	NumPy (KiB)	RSS (MiB)
Raw ridge	Small	0.55	1.77	300.34	150.48
Raw ridge	Large	1.26	4.54	465.72	150.48
Fixed KAHM	Small	4.98	29.01	466.29	150.48
Fixed KAHM	Large	8.61	27.24	685.38	150.48
Adaptive KAHM	Small	9.89	49.10	518.95	150.48
Adaptive KAHM	Large	11.75	23.60	824.52	150.48
Adaptive affine	Small	9.56	24.75	509.83	150.48
Adaptive affine	Large	7.00	13.44	791.39	150.48
Adaptive RBF-local	Small	5.05	12.05	509.83	150.48
Adaptive RBF-local	Large	4.58	8.00	791.39	150.48
Sliding-window KRR	Small	3.15	3.95	477.34	150.48
Sliding-window KRR	Large	3.42	13.49	1011.72	150.48

objective with pivoted QR. It changes arithmetic, not the specified objective or advancement rule. The original 144 runs remain in `extensions/adaptive_development/archives/initial_attempt.zip`. The amended 144 runs must not be counted as an additional 144 independent experimental replications. The saved-evidence audit passes 6,713,837 computational consistency checks, covering chronology, coverage, calibration selection, aggregation, decision gates, resources, shared baselines and matched reference changes. It imports neither the forecasting model nor its analyzer, but remains an internal computational check rather than independent scientific replication.

The development extension preserves the protocol, both source freezes, amendment, numerical diagnostic states, input hashes, all predictions, traces and summaries. The manuscript builder `extensions/tmlr_integration/build_adaptive_assets.py` reconstructs the displayed collection means and resource maxima from saved task records, checks them against the analysis and decision files, and records input/output hashes. It performs no model fitting. The original and A1 execution freezes were local checkpoints; later dissemination of their records cannot retroactively make them public preregistration.

N Reconstruction algebra and bounded residual decoding

The results here concern fixed reference maps and a specified decoder class. They establish identities, conditional distinctness and correction bounds; none is an accuracy theorem for an arbitrary time-series law. The executable companion `extensions/reconstruction_mechanism/algebra.py` evaluates only fabricated reference banks and matrices, independently of forecast outcomes.

N.1 Normalized kernel identities

Let the rows of $Q \in \mathbb{R}^{M\times p}$ be reference histories, P a fixed principal-coordinate basis of rank r, and W the positive projected covariance precision. For row-vector histories the inherited Gaussian kernel is

$$k_i(x) = \exp\left[-\frac{((x-q_i)P)W((x-q_i)P)^\top}{2r}\right].$$

Write $k(x)$ as a row vector, K for the reference Gram matrix and $C = (K+\lambda I)^{-1}$. The KAHM and matched RBF reconstructions are

$$A_K(x) = \frac{k(x)CQ}{k(x)C\mathbf{1}}, \qquad A_R(x) = \frac{k(x)Q}{k(x)\mathbf{1}}. \tag{43}$$

Both use the same references, projected distance and bandwidth. Multiplying $k(x)$ by a common positive scalar cancels from either ratio; this justifies the implemented maximum-log-kernel subtraction.

Proposition 11 (Normalization and target transfer)**.** *Whenever $s(x) = k(x)C\mathbf{1} \neq 0$, the weights $\alpha(x) = k(x)C/s(x)$ sum to one. For any reference target vector y,*

$$\alpha(x)y = \frac{k(x)(K + \lambda I)^{-1}y}{k(x)(K + \lambda I)^{-1}\mathbf{1}}.$$

This is exactly the ratio of two dual kernel-ridge predictions, one trained on y and the other on the constant vector, under the displayed no-additional-intercept convention. Moreover, for an affine scalar function $f(q) = qb + c$,

$$\alpha(x)f(Q) - f(x) = \{A_K(x) - x\}b.$$

Proof. The first statement follows by summing the weights; the remaining identities follow by substitution and $\alpha(x)\mathbf{1} = 1$. □

Directly transferring these weights to future targets is therefore not an independent forecasting mechanism. Likewise, $A_K(x)b$ is normalized kernel ridge on the restricted pseudo-target Qb. The identity $A(x) + \{x - A(x)\} = x$ holds for every reconstruction and creates a linear redundancy if all three are appended without restriction. These observations do not rule out useful basis functions for a restricted decoder.

N.2 When reconstruction departures are redundant

Define the affine reconstruction in row-vector notation by $A_A(x) = \mu + (x - \mu)PP^\top$. With a common locality gate $g(x)$, let $d_K = g(A_K - A_A)$ and $d_R = g(A_R - A_A)$.

Proposition 12 (A sufficient raw-span equivalence)**.** *Suppose $K\mathbf{1} = \kappa\mathbf{1}$ and the augmented reference-coordinate span is invariant under C: $C\mathbf{1} = a\mathbf{1}$, $CQ = QB + \mathbf{1}c^\top$, where $a = (\kappa + \lambda)^{-1}$. Then*

$$A_K = (A_R B + c^\top)/a, \qquad d_K = d_R B/a + gA_A(B/a - I) + gc^\top/a.$$

After redundant coordinate columns are removed, the augmented raw feature spans agree when both include the common gate and gated principal coordinates.

Proof. Substitute the two assumed actions of C into Equation (43). The last two departure terms belong to the common feature span because $gA_A = g\mu + g(x - \mu)PP^\top$. The restriction of an invertible operator to an invariant finite-dimensional subspace is invertible, giving equality of the active augmented spans. □

For example, take one scalar bank $q = (-1, 1)^\top$, $P = 1$, $g = 1$ and $A_A(x) = x$. If the off-diagonal Gram entry is ρ, then

$$A_K = cA_R, \qquad d_K = cd_R + (c - 1)x, \qquad c = \frac{1 + \rho + \lambda}{1 - \rho + \lambda}. \tag{44}$$

Thus $\operatorname{span}(1, x, d_K) = \operatorname{span}(1, x, d_R)$ exactly. The source-compatible sample-variance precision is $1/2$, so $\rho = e^{-1}$; the inherited regularization iteration gives $\lambda = 2.6519665429866075$ and $c = 1.224037566462905$. The saved numerical identity errors on the fabricated grid are below 6×10^{-16}.

These are statements about raw spans. An isotropic ridge penalty is not invariant under a general nonorthogonal coordinate change. Separate nonlinear radial transforms can also destroy the displayed linear relation. The empirical comparison therefore concerns the complete reconstruction, normalization and decoder procedure; it cannot automatically attribute a forecast difference to additional raw function-space capacity.

N.3 An explicit distinct reconstruction basis

Proposition 13 (Irregular scalar references)**.** *Let $q_1 < q_2 < q_3$, $q_1 + q_3 \neq 2q_2$, and use a Gaussian kernel with positive precision t. Suppose $v = C\mathbf{1}$ is componentwise positive. For one bank with gate one and affine reconstruction x,*

$$A_K \notin \operatorname{span}(1, x, A_R), \qquad d_K \notin \operatorname{span}(1, x, d_R).$$

Proof. Set $u = Cq$. The six unordered sums $q_i + q_j$, $i \le j$, are distinct. Products of the Gaussian translates satisfy

$$k_i(x)k_j(x) = e^{-tx^2} e^{-t(q_i^2+q_j^2)/2} e^{t(q_i+q_j)x}.$$

The six real exponentials remaining after the common factor is removed are linearly independent: differentiating a zero linear combination at zero gives a nonsingular Vandermonde system.

Suppose $A_K = cA_R + d$. Cross multiplication and coefficient matching give, with $w = u - dv$, $w_i = cq_iv_i$ and $w_i + w_j = c(q_iv_j + q_jv_i)$. If $c = 0$, invertibility of C implies $q = d\mathbf{1}$, a contradiction. Otherwise $(q_i - q_j)(v_i - v_j) = 0$ forces v to be constant, hence K must have constant row sums. Its middle row instead exceeds either endpoint row, since the Gaussian decreases strictly with distance. This is again a contradiction.

Both reconstructions are bounded on the real line: A_R is a convex combination of the references, while $A_K = (\sum_i k_iv_i(u_i/v_i))/(\sum_i k_iv_i)$ is a convex combination of the fixed values u_i/v_i. Any putative additional linear term in x must consequently have zero coefficient. The statement for departures follows by adding the common coordinate x. □

The explicit fixture $q = (-1, 0, 2)^\top$ has inherited sample-variance precision $3/7$ and $\lambda = 4.498274743339644$. Positivity of $C\mathbf{1}$ can be certified without a query grid. Write $K = I + E$ and $a = 1 + \lambda$. If $a > 2\|E\|_\infty$, the Neumann series gives

$$\|aC\mathbf{1} - \mathbf{1}\|_\infty \le \frac{\|E\|_\infty/a}{1 - \|E\|_\infty/a} < 1.$$

Here $\|E\|_\infty = 1.2314905926823394$, so the condition holds. On 81 fabricated queries in $[-3, 4]$, the maximum least-squares residual of d_K outside the sampled $(1, x, d_R)$ span is 0.05355670997078987. This numerical witness supplements the analytic proof; it does not prove nonredundancy for every high-dimensional bank fitted in the forecasting study.

N.4 A bounded correction with a free intercept

For a feature block of width p_b, use the radial map

$$T_{R_b}(v) = \frac{v}{\sqrt{1 + \|v\|_2^2/R_b^2}}, \qquad R_b = \sqrt{p_b}. \tag{45}$$

It has norm at most R_b. Its Jacobian has tangential eigenvalue $(1 + \|v\|^2/R_b^2)^{-1/2}$ and radial eigenvalue $(1 + \|v\|^2/R_b^2)^{-3/2}$, both in $(0, 1]$, so the map is nonexpansive. Concatenating separately bounded blocks gives $\|\psi(x)\| \le R = (\sum_b R_b^2)^{1/2}$. This does not establish a Lipschitz constant for the preceding history-to-feature map, particularly across the signed-denominator fallback boundary.

Proposition 14 (Centered ridge correction bound)**.** *For residual targets e_i and bounded feature vectors ψ_i, minimize*

$$n^{-1} \sum_{i=1}^{n} (e_i - b - \psi_i^\top w)^2 + \alpha\|w\|^2, \qquad \alpha > 0,$$

with a free intercept. Let $\bar{e}$, $\bar{\psi}$ be the training means, $e_c = e - \bar{e}\mathbf{1}$, and $\sigma_e = \|e_c\|/\sqrt{n}$. Then

$$\|w\| \le \frac{\sigma_e}{2\sqrt{\alpha}}, \qquad |\gamma q(x)| \le |\gamma| \left[|\bar{e}| + (R + \|\bar{\psi}\|) \frac{\sigma_e}{2\sqrt{\alpha}} \right], \quad q(x) = \bar{e} + (\psi(x) - \bar{\psi})^\top w. \tag{46}$$

Proof. Centering eliminates the intercept. If the centered design has singular values s, its coefficient operator has singular values $s/(s^2 + n\alpha) \le 1/(2\sqrt{n\alpha})$. Multiplying by $\|e_c\|$ gives the first inequality. The second follows from Cauchy–Schwarz and $\|\psi(x) - \bar{\psi}\| \le R + \|\bar{\psi}\|$. □

The numerical penalty therefore corresponds to sum-SSE penalty $n\alpha$; using α unchanged in a sum-SSE solve would implement a different procedure. In multiple horizons the bound applies separately to each selected α_h and γ_h. It is generic ridge algebra, not a KAHM-specific performance theorem. It bounds only the correction:

the retained raw ridge baseline and the total forecast error are not globally bounded by it. The reserved study checks the feature, coefficient and correction inequalities on every saved task in addition to its separate error screen.

O Complete reconstruction-departure evaluation

This appendix gives the numerical observation protocol, full method roster, descriptive condition results, stability accounting, selection frequencies and measured resources for Section 5. The frozen implementation and complete arrays are under `extensions/reconstruction_mechanism`. All displays are generated from the completed independent analysis; their source and output hashes are recorded in `generated/reconstruction_mechanism/ASSET_PROVENANCE.json`.

O.1 Observation laws and separation of roles

The linear negative control is

$$y_t = 0.65y_{t-1} - 0.15y_{t-2} + \epsilon_t, \qquad \epsilon_t \overset{\text{iid}}{\sim} \mathcal{N}(0, 0.1^2),$$

with two initial zeros, 256 discarded stored values and 72 retained values beginning at y_{256}. The nonlinear AR uses

$$y_t = \tanh\{1.25y_{t-1} - 0.65y_{t-2} + 0.25\sin(3y_{t-1}) + u_t\}, \qquad u_t \overset{\text{iid}}{\sim} U[-0.1, 0.1],$$

two initial values uniform on $[-0.8, 0.8]$, and 80 discarded stored values. Van der Pol uses $\dot{x} = v$, $\dot{v} = (1 - x^2)v - x$; Duffing uses $\dot{x} = v$, $\dot{v} = -0.2v + x - x^3 + 0.3\cos(1.2t + \varphi)$. The inherited float64 RK4 implementation has step 0.025, observation interval 0.1 and burn time ten. Initial x, v are independent uniform on $[-2, 2]$; φ is uniform on $[0, 2\pi]$. Oscillator observations are $0.95\tanh(x) + U[-0.02, 0.02]$. The numerical integrator and observation map define the tested laws; they are not exact continuous-ODE trajectories.

For each law and repetition, all split episodes are generated once. Additional noise is $\eta s_A Z$, with $\eta \in \{0, 0.1\}$, $Z \overset{\text{iid}}{\sim} \mathcal{N}(0, 1)$ and s_A the population standard deviation of all unaugmented observed A episode values. Underlying episodes and Z arrays are paired across the two levels. The noise changes both input histories and forecast targets. At zero added noise, the inherited oscillator sensor noise remains. On B/C/D, the augmented linear observations are Gaussian conditional on the realized A-estimated amplitude; across repetitions that random amplitude induces a variance mixture. Neither exact stationarity after finite burn-in nor a known-amplitude oracle interpretation of fitted ridge is assumed. The Gaussian additions also preclude carrying over a bounded-loss claim from the earlier bounded observation studies.

The 24 repetition seeds are 946100–946123. Development seed 975001 is excluded. A/B/C/D base episodes and unit-noise arrays are generated from distinct independent random streams; the added-noise amplitude is estimated from A and shared across splits. Row caps and fitting seeds are paired between noise levels. All 13 within-episode origins, at indices $11, 15, \ldots, 59$, use only history through their origin and target offsets $(1, 4, 12)$. There are 958,464 scored target cells per method across the complete roster, but only 24 independent aggregates in the primary inference. No individual origin, horizon or paired-noise task is promoted to an independent replicate.

A fits every scaler, reference bank, kernel factor, raw predictor and decoder. B selects model settings separately for each horizon. C selects each non-ridge mixing coefficient, then one whole non-KAHM procedure. Selected states are serialized before reserved queries are passed to prediction, and targets enter the execution wrapper only after forecasts have been fixed. No parameter or selection is updated on D.

O.2 Fixed settings and complete descriptive losses

The common locality logit is $-\|z - \mu_j\|^2/(2s_j)$, where s_j is the inherited mean squared local radius, floored at 10^{-6}. Softmax normalization occurs separately within the 2-, 4- and 8-model blocks. Principal rank is two, there are at most 24 references per local model, and the A bank cap is 512 rows. The inherited KAHM

reference-energy regularization is unchanged. Reference and query kernels use the same projected covariance precision; the query log-kernel maximum is subtracted before exponentiation for both KAHM and positive RBF ratios.

The inherited history scaler replaces standard deviations at or below 10^{-12} by one. The subsequent A feature scalers use $\max(\mathrm{sd}, 10^{-6})$. Raw ridge/RBF history scalers also use this 10^{-6} floor. Common and departure blocks are radially bounded separately, with no scaling after the transform. The unbounded ablations retain the same bounded common block and omit only the departure radial map. Their failures or successes cannot replace the bounded primary candidate.

Every ridge head uses the mean-SSE objective and the five penalties $10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}, 1$. The equivalent sum-SSE penalty is $n\alpha$, not α. The raw RBF arm concatenates standardized histories with at most 64 Nyström coordinates, then scales those concatenated columns using A alone. Bandwidth factors 0.5, 1 and 2 multiply the median positive landmark squared-distance scale; B selects bandwidth and penalty separately by horizon. Histogram gradient boosting uses 100 iterations, L2 penalty one, learning rates 0.05 or 0.1 and maximum leaves 7 or 15; B again selects separately by horizon. Persistence repeats the latest observed value before its common baseline mixing step. All non-ridge procedures use the same C mixing grid $\{0, 1/4, 1/2, 1\}$, with deterministic tie order.

Table 71: All ten procedures, every declared law and both added-noise levels. Entries are mean horizon-averaged A-variance-normalized D MSE over 24 repetitions; lower is better. The first six columns enter the nonlinear aggregate with equal weight. The final two form the separate linear control. These conditionwise summaries are descriptive. "Unbounded" omits only the departure radial bound. Persistence and raw nonlinear controls include their C-selected blend with ridge.

Procedure	Nonlinear AR		Van der Pol		Duffing		Linear AR	
Added noise η	0	0.1	0	0.1	0	0.1	0	0.1
Raw ridge	0.0216	0.0344	0.0750	0.1361	0.0192	0.0681	0.8951	0.8975
Raw RBF	0.0197	0.0323	0.0131	0.0647	0.0129	0.0442	0.8969	0.8994
Boosted trees	0.0201	0.0323	0.0040	0.0586	0.0133	0.0481	0.8975	0.8997
Persistence blend	0.0219	0.0345	0.0750	0.1362	0.0192	0.0684	0.8955	0.8988
Common basis	0.0190	0.0310	0.0251	0.0686	0.0157	0.0460	0.8959	0.8983
KAHM departure (bounded)	0.0192	0.0314	0.0101	0.0622	0.0129	0.0439	0.8972	0.8990
RBF departure (bounded)	0.0189	0.0309	0.0115	0.0634	0.0133	0.0436	0.8968	0.8989
KAHM departure (unbounded)	0.0198	0.0321	0.0108	0.0619	0.0129	0.0440	0.8975	0.8995
RBF departure (unbounded)	0.0190	0.0310	0.0118	0.0627	0.0127	0.0437	0.8972	0.8993
C-selected non-KAHM policy	0.0192	0.0312	0.0040	0.0590	0.0127	0.0434	0.8978	0.8997

The machine-readable files `horizon_metrics.csv` and `condition_horizon_metrics.csv` retain every method, law, noise level and horizon, including raw MSE and the A-only loss scale. They are not pooled with historical losses that use different normalizations. The `replicate_contrasts.csv` file contains all 24 margin-gap values for each primary contrast, allowing the six lower bounds to be recomputed without importing any forecasting model.

O.3 Stability, numerical safeguards and correction activation

The bounded-feature checks cover 192 tasks for each of three bounded procedures. Coefficient and correction checks additionally distinguish the three horizons, giving 576 checks per procedure for each inequality. The independent analyzer checks the recorded fitted-state bound formulas and recomputes actual D corrections as the saved forecast minus the saved raw ridge forecast. It does not claim to reconstruct the fitted coefficient matrices from summary statistics alone. Table 72 reports maxima over the complete roster; maxima in different columns need not come from the same task or horizon.

The maximum taskwise ratio of KAHM maximum absolute error to ridge maximum absolute error is 1.553, and 0 tasks fail at least one declared stability screen. Local KAHM reconstruction fallback affects 0 A/B/C rows and 0 D rows across all tasks; the corresponding RBF D count is 0. Counts are unions over local models within a task and split, so the same row is not counted again merely because several local maps invoke their guard. The fixed local fallback sets the affected departure to zero. The complete valid analysis requires

Table 72: Observed ratios to the deterministic bounded-feature and ridge-readout limits. Feature ratios concern the common block for the common procedure and the respective departure block for the two appended procedures; the readout bound uses the complete concatenated feature radius. A zero correction with a zero bound contributes ratio zero. "Violations" sums failed feature, coefficient and correction checks at the fixed numerical tolerances. These are implementation checks, not confidence intervals for forecast risk.

Bounded procedure	Feature norm / radius	Coefficient norm / bound	Correction / bound	Violations
Common basis	0.99493	0.56103	0.29634	0
KAHM departure (bounded)	0.99943	0.55231	0.20110	0
RBF departure (bounded)	0.99734	0.44963	0.19674	0

zero wholly failed methods and zero final prediction-cell recoveries; neither is hidden by removing a task or substituting a successful subset.

Table 73: C-selected correction activation. Nonlinear and linear counts have 432 and 144 task/horizon cells, respectively. The four mixing-weight columns combine all 576 cells. A policy choice of raw ridge is counted as zero correction; raw ridge itself has no mixing selection. Nonzero mixing is not an empirical guarantee of D improvement, and no minimum activation frequency was part of the decision.

Procedure	Nonlinear active / 432	Linear active / 144	$\gamma = 0$	$\gamma = 1/4$	$\gamma = 1/2$	$\gamma = 1$
Raw ridge	—	—	—	—	—	—
Raw RBF	427	56	93	52	158	273
Boosted trees	396	48	132	106	175	163
Persistence blend	70	32	474	97	5	0
Common basis	430	56	90	9	66	411
KAHM departure (bounded)	432	54	90	23	79	384
RBF departure (bounded)	431	58	87	14	71	404
KAHM departure (unbounded)	428	51	97	40	107	332
RBF departure (unbounded)	429	61	86	26	75	389
C-selected non-KAHM policy	430	63	83	46	100	347

Table 74: Whole-procedure choices made by the C-selected non-KAHM policy. Each task contributes one choice across all horizons after each candidate's own horizon-wise C mixing selection. Both KAHM arms are excluded. These are validation choices, not choices made from D errors.

C-selected complete procedure	Nonlinear / 144	Linear / 48
Raw ridge	0	1
Raw RBF	19	6
Boosted trees	51	8
Persistence blend	2	20
Common basis	15	4
RBF departure (bounded)	19	1
RBF departure (unbounded)	38	8

O.4 Measured costs and reproducibility limits

Each task runs serially in a fresh process with one assigned CPU and one numerical thread. The charged primitive-node costs exclude diagnostic-only rank calculations; full-suite timings, including diagnostics, are retained separately. Node accounting includes model candidates that are actually evaluated, rather than only the winning hyperparameters. Wall and CPU times depend on the recorded machine and software environment. The peak whole-task process RSS is 173.6 MiB; it includes imports, all ten arms, shared

Table 75: Mean charged resources over all 192 equal-sized task suites. Fit/select includes required A fitting, B selection and C calibration. D prediction covers all 1,664 histories and three horizons. Shared computation nodes are charged once to every procedure requiring them; policy fitting pays the union of its non-KAHM candidates, while its prediction/state follow the selected complete procedure. State denotes serialized selected objects; arrays count their owned NumPy buffers. These are measured implementation costs, not minimum deployment complexity.

Procedure	Fit/select wall (s)	Fit/select CPU (s)	D predict wall (ms)	State (KiB)	Arrays (KiB)
Raw ridge	0.0010	0.0010	0.147	1.10	0.63
Raw RBF	0.0135	0.0135	2.925	65.58	64.28
Boosted trees	0.6452	0.6452	19.046	373.94	335.61
Persistence blend	0.0011	0.0011	0.197	1.15	0.66
Common basis	0.0367	0.0353	5.363	9.00	6.82
KAHM departure (bounded)	0.0833	0.0819	29.245	118.81	114.76
RBF departure (bounded)	0.0658	0.0644	25.758	55.32	51.85
KAHM departure (unbounded)	0.0812	0.0798	26.655	118.81	114.76
RBF departure (unbounded)	0.0642	0.0628	23.810	55.32	51.85
C-selected non-KAHM policy	0.7374	0.7360	15.068	151.36	137.94

diagnostics and evidence arrays, and is not a per-method RAM estimate. Serialized state and owned array buffers omit transient workspace and do not measure online update latency. No cost ceiling was imposed without an application-derived requirement.

The independent analyzer verifies the immutable local source/input freeze, the complete task roster, exact target correspondence, A variance scales, policy predictions, nonfinite/failure accounting and all primary aggregation. The reporting builder separately reconstructs condition and repetition means and all six t lower bounds before producing these displays. Numerical development checks, model replay and independent calculations are consistency checks; they do not constitute a new scientific replication. The protocol is locally prospective, informed by previous results, and explicitly not public preregistration. Neither these known-law repetitions nor the algebraic distinctness certificate establishes a natural-application forecasting claim.