

1. Project Setup

```
PS C:\Users\dhruv\Downloads> ng new angular-docker-app --routing --style=scss

Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.dev/cli/analytics.

Yes

Thank you for sharing pseudonymous usage data. Should you change your mind, the following
command will disable this feature entirely:

  ng analytics disable --global

Global setting: enabled
Local setting: No local workspace configuration file.
Effective status: enabled
/ Do you want to enable Server-Side Rendering (SSR) and Static Site Generation (SSG/Prerendering)? Yes

PS C:\Users\dhruv\Downloads\angular-docker-app> ng serve

Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.dev/cli/analytics.

Yes

Thank you for sharing pseudonymous usage data. Should you change your mind, the following
command will disable this feature entirely:

  ng analytics disable

Global setting: enabled
Local setting: enabled
Effective status: enabled
Browser bundles
Initial chunk files | Names | Raw size |
main.js | main | 48.62 kB |
styles.css | styles | 96 bytes |
| Initial total | 48.72 kB |

Server bundles
Initial chunk files | Names | Raw size |
main.server.mjs | main.server | 49.88 kB |
server.mjs | server | 1.84 kB |
polyfills.server.mjs | polyfills.server | 268 bytes |
```

2. Project Structure

▼ ANGULAR-DOCKER-APP

- > .angular
- > .vscode
- > dist
- > node_modules
- > public
- > src ●
-  .dockerignore U
-  .editorconfig
-  .gitignore
-  .prettierrc
-  angular.json M
-  docker-compose.dev.yml U
-  docker-compose.yml U
-  Dockerfile U
-  Dockerfile.dev U
-  nginx.conf U
-  package-lock.json
-  package.json
-  README.md
-  tsconfig.app.json
-  tsconfig.json
-  tsconfig.spec.json

```
PS C:\Users\dhruv\Downloads\angular-docker-app> docker compose -f docker-compose.dev.yml up --build
#1 [internal] load local bake definitions
#1 reading from stdin 593B done
#1 DONE 0.0s

#2 [internal] load build definition from Dockerfile.dev
#2 transferring dockerfile:
#2 transferring dockerfile: 244B 0.0s done
#2 DONE 0.2s

#3 [internal] load metadata for docker.io/library/node:20-alpine
#3 ...

#4 [auth] library/node:pull token for registry-1.docker.io
#4 DONE 0.0s

#3 [internal] load metadata for docker.io/library/node:20-alpine
#3 DONE 3.5s

#5 [internal] load .dockerignore
#5 transferring context: 101B done
#5 DONE 0.1s

#6 [internal] load build context
#6 DONE 0.0s

#7 [1/6] FROM docker.io/library/node:20-alpine@sha256:fb4cd12c85ee03686f6af5362a0b0d56d50c58a04632e6c0fb8363f609372293
#7 resolve docker.io/library/node:20-alpine@sha256:fb4cd12c85ee03686f6af5362a0b0d56d50c58a04632e6c0fb8363f609372293 0.0s
done
#7 ...
```

```
✔Image angular-docker-app-angular-dev Built
✔Network angular-docker-app_default Created
✔Container angular-dev Created
Attaching to angular-dev
angular-dev |
angular-dev | Warning: This is a simple server for use in testing or debugging Angular applications
angular-dev | locally. It hasn't been reviewed for security issues.
angular-dev |
angular-dev | Binding this server to an open connection can result in compromising your application or
angular-dev | computer. Using a different host than the one passed to the "--host" flag might result in
angular-dev | websocket connection issues.
angular-dev |
angular-dev | > Building...
angular-dev | ✔Building...
angular-dev | Browser bundles
angular-dev | Initial chunk files | Names | Raw size
angular-dev | main.js | main | 48.57 kB |
angular-dev | styles.css | styles | 96 bytes |
angular-dev |
angular-dev | | Initial total | 48.67 kB
angular-dev |
angular-dev | Server bundles
angular-dev | Initial chunk files | Names | Raw size
angular-dev | main.server.mjs | main.server | 49.84 kB |
angular-dev | server.mjs | server | 1.84 kB |
angular-dev | polyfills.server.mjs | polyfills.server | 268 bytes |
angular-dev |
angular-dev | Application bundle generation complete. [14.010 seconds] - 2026-07-15T08:08:36.420Z
angular-dev |
```

```

PS C:\Users\dhruv\Downloads\angular-docker-app> docker compose -f docker-compose.yml up --build -d
#1 [internal] load local bake definitions
#1 reading from stdin 593B done
#1 DONE 0.0s

#2 [internal] load build definition from Dockerfile
#2 transferring dockerfile: 390B 0.1s done
#2 DONE 0.1s

#3 [internal] load metadata for docker.io/library/nginx:1.27-alpine
#3 ...

#4 [auth] library/node:pull token for registry-1.docker.io
#4 DONE 0.0s

#5 [internal] load metadata for docker.io/library/node:20-alpine
#5 ...


#6 [auth] library/nginx:pull token for registry-1.docker.io
#6 DONE 0.0s

#5 [internal] load metadata for docker.io/library/node:20-alpine
#5 DONE 1.7s

#3 [internal] load metadata for docker.io/library/nginx:1.27-alpine
#3 DONE 2.6s

#7 [internal] load .dockerignore
#7 transferring context: 101B 0.0s done
#7 DONE 0.1s

```

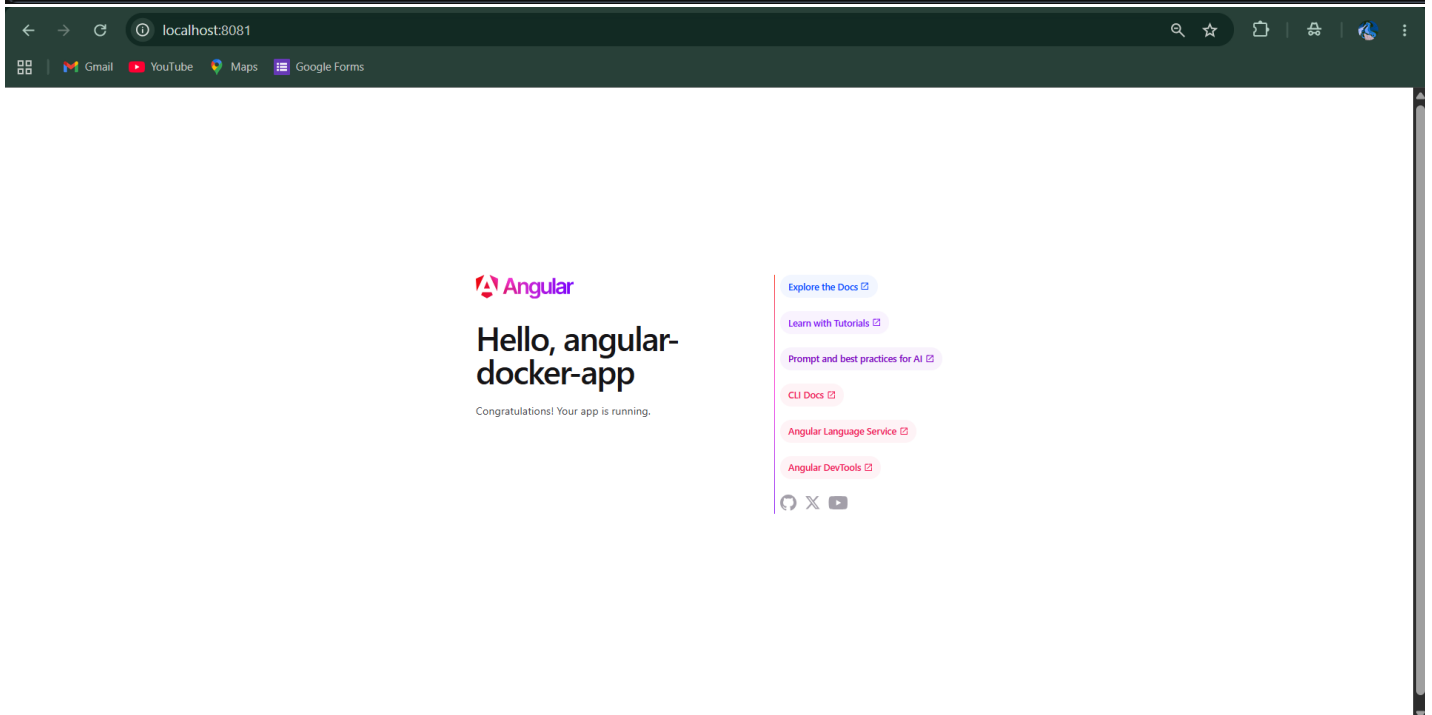

```

PS C:\Users\dhruv\Downloads\angular-docker-app> docker ps
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS        PORTS
eb5702aa995d   angular-docker-app-angular-prod     "/docker-entrypoint..." About a minute ago Up About a minute 0.0.0
.0:8081->80/tcp, [::]:8081->80/tcp   angular-prod
PS C:\Users\dhruv\Downloads\angular-docker-app> docker images | findstr angular-docker-app
angular-docker-app-angular-dev:latest    b067f364bfff6    973MB    212MB
angular-docker-app-angular-prod:latest   d4b9c20aede3     74MB     21.1MB    U
PS C:\Users\dhruv\Downloads\angular-docker-app>

```