

**NAME: MUSKAN SHAH**

**PRN: 23070122279**

**BATCH:2023-2027 (Devops L4)**

**LAB ASSINGMENT: 1.1**

**Foundations of DevOps and VersionControl**

**Git Workflow & Collaboration**

```
Jul 9 9:20 AM
muskan123@muskan:~/devops-test
muskan123@muskan ~
> mkdir devops-test
mkdir: created directory 'devops-test'
muskan123@muskan ~
> cd devops-test/
muskan123@muskan ~/devops-test
> git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint:
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /home/muskan123/devops-test/.git/
muskan123@muskan ~/devops-test {master}
> git clone https://github.com/saahmuskan/test-1.git
Cloning into 'test-1'...
fatal: unable to access 'https://github.com/saahmuskan/test-1.git/': Could not resolve host: github.com
muskan123@muskan ~/devops-test {master}
> git clone https://github.com/saahmuskan/test-1.git
fatal: destination path 'test-1' already exists and is not an empty directory.
muskan123@muskan ~/devops-test {master}
> code
muskan123@muskan ~/devops-test {master}
> |
```

```

</template>

</div>
<div id="js-global-screen-reader-notice" class="sr-only mt-n1" aria-live="polite" aria-atomic="true" ></div>
<div id="js-global-screen-reader-notice-assertive" class="sr-only mt-n1" aria-live="assertive" aria-atomic="true"></div>
</body>
</html>

muskani23@muskan ~/devops-test {master}
> cat /etc/resolv.conf
# This is /etc/systemd/resolved/stub-resolv.conf managed by man:systemd-resolved(8).
# Do not edit.
#
# This file might be symlinked as /etc/resolv.conf. If you're looking at
# /etc/resolv.conf and seeing this text, you have followed the symlink.
#
# This is a dynamic resolv.conf file for connecting local clients to the
# internal DNS stub resolver of systemd-resolved. This file lists all
# configured search domains.
#
# Run "resolvectl status" to see details about the uplink DNS servers
# currently in use.
#
# Third party programs should typically not access this file directly, but only
# through the symlink at /etc/resolv.conf. To manage man:resolv.conf(5) in a
# different way, replace this symlink by a static file or a different symlink.
#
# See man:systemd-resolved.service(8) for details about the supported modes of
# operation for /etc/resolv.conf.

nameserver 127.0.0.53
options edns0 trust-ad
search .
muskani23@muskan ~/devops-test {master}
>

```

[illegible]

```
On branch main

No commits yet


nothing to commit (create/copy files and use "git add" to track)
muskan123@muskan ~/devops-test/test-1 {main}
> echo "# My First Git Repository" > README.md
muskan123@muskan ~/devops-test/test-1 {main}
> ls
README.md
muskan123@muskan ~/devops-test/test-1 {main}
> git add README.md
muskan123@muskan ~/devops-test/test-1 {main}
> git commit -m "Initial commit"
[main (root-commit) 550dc4b] Initial commit
 1 file changed, 1 insertion(+)
 create mode 100644 README.md
muskan123@muskan ~/devops-test/test-1 {main}
>
muskan123@muskan ~/devops-test/test-1 {main}
> git push origin master
error: src refspec master does not match any
error: failed to push some refs to 'https://github.com/saahmuskan/test-1.git'
muskan123@muskan ~/devops-test/test-1 {main}
> git push origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 233 bytes | 233.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/saahmuskan/test-1.git
 * [new branch]      main -> main
muskan123@muskan ~/devops-test/test-1 {main}
> git push origin main
Everything up-to-date
muskan123@muskan ~/devops-test/test-1 {main}
>
```

```

removed 'test-1/.git/hooks/pre-merge-commit.sample'
removed 'test-1/.git/hooks/pre-push.sample'
removed 'test-1/.git/hooks/pre-rebase.sample'
removed 'test-1/.git/hooks/pre-receive.sample'
removed 'test-1/.git/hooks/prepare-commit-msg.sample'
removed 'test-1/.git/hooks/push-to-checkout.sample'
removed 'test-1/.git/hooks/sendemail-validate.sample'
removed 'test-1/.git/hooks/update.sample'
removed directory 'test-1/.git/hooks'
removed 'test-1/.git/info/exclude'
removed directory 'test-1/.git/info'
removed 'test-1/.git/description'
removed directory 'test-1/.git/objects/pack'
removed directory 'test-1/.git/objects/info'
removed directory 'test-1/.git/objects'
removed directory 'test-1/.git/refs/heads'
removed directory 'test-1/.git/refs/tags'
removed directory 'test-1/.git/refs'
removed 'test-1/.git/HEAD'
removed 'test-1/.git/config'
removed directory 'test-1/.git'
removed directory 'test-1'
muskan123@muskan ~/devops-test {master}
> git clone https://github.com/saahmuskan/test-1.git
Cloning into 'test-1'...
warning: You appear to have cloned an empty repository.
muskan123@muskan ~/devops-test {master}
> cd test-1
muskan123@muskan ~/devops-test/test-1 {main}
> pwd
/home/muskan123/devops-test/test-1
muskan123@muskan ~/devops-test/test-1 {main}
> git status
On branch main

No commits yet

```

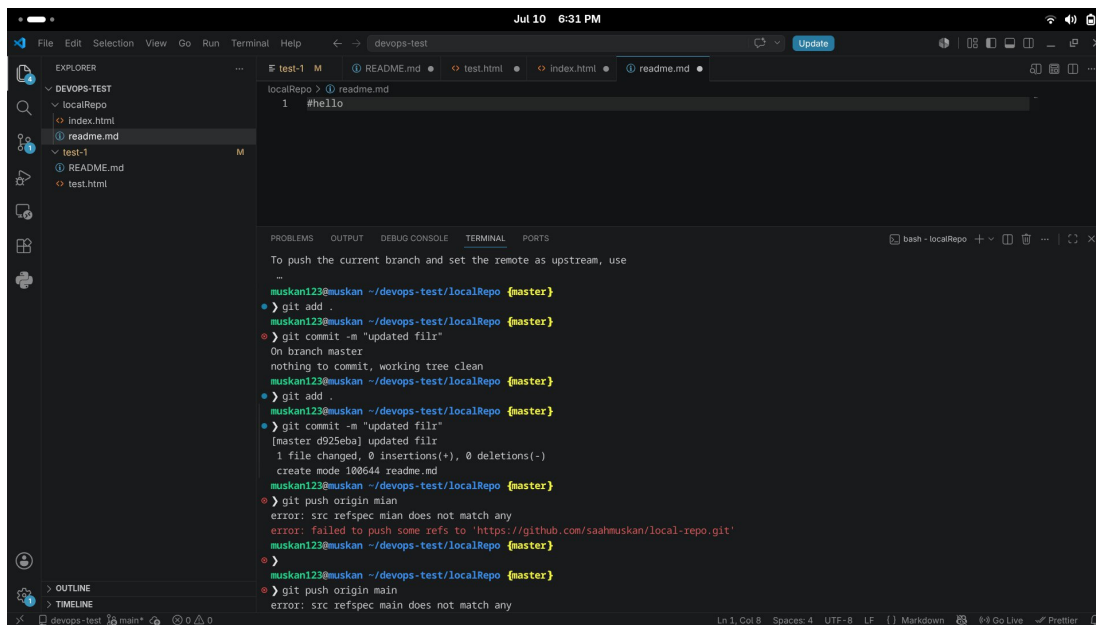


The screenshot shows the Visual Studio Code interface. The Explorer view on the left shows the project structure with folders 'DEVOPS-TEST', 'localRepo', and 'test-1'. The 'test-1' folder contains 'README.md' and 'test.html'. The main editor area shows the 'test.html' file with the content '1 #hello'. The terminal window at the bottom shows the following commands and output:

```

To push the current branch and set the remote as upstream, use
...
muskan123@muskan ~/devops-test/localRepo {master}
> git add .
muskan123@muskan ~/devops-test/localRepo {master}
> git commit -m "updated fillr"
On branch master
nothing to commit, working tree clean
muskan123@muskan ~/devops-test/localRepo {master}
> git add .
muskan123@muskan ~/devops-test/localRepo {master}
> git commit -m "updated fillr"
[master d925eba] updated fillr
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 readme.md
muskan123@muskan ~/devops-test/localRepo {master}
> git push origin main
error: src refspec main does not match any
error: failed to push some refs to 'https://github.com/saahmuskan/local-repo.git'
muskan123@muskan ~/devops-test/localRepo {master}
>
muskan123@muskan ~/devops-test/localRepo {master}
> git push origin main
error: src refspec main does not match any

```

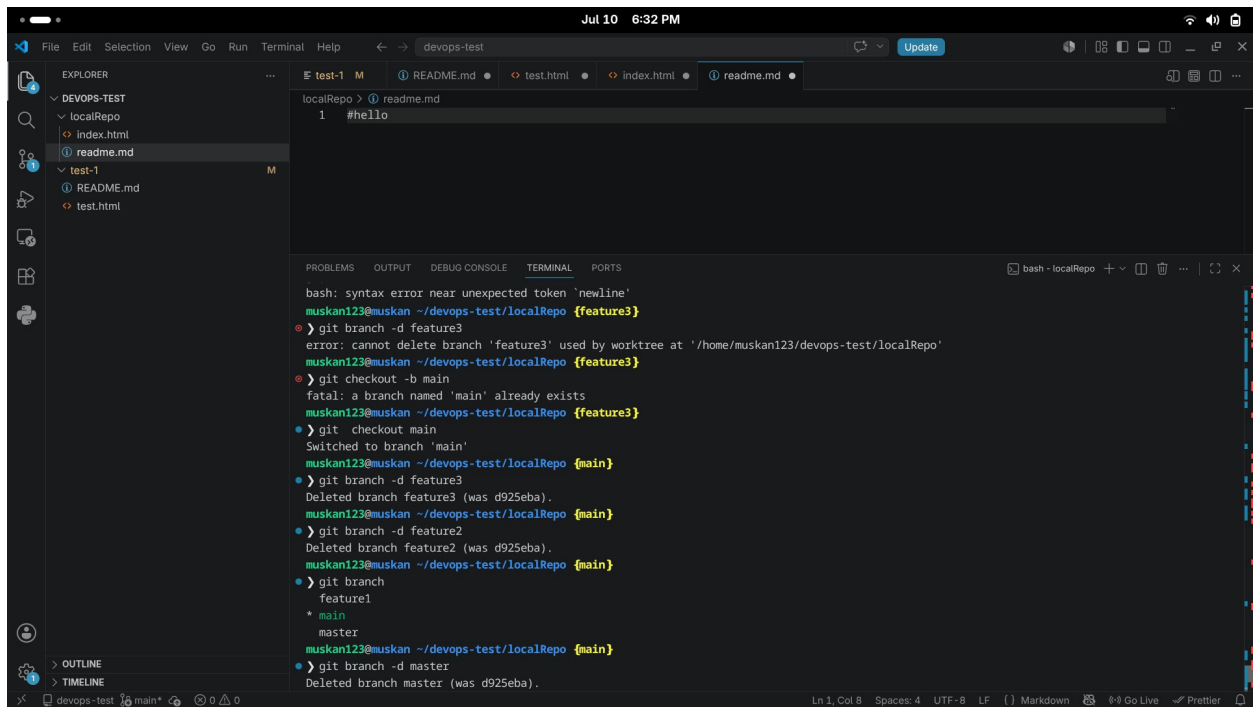

Jul 10 6:32 PM

File Edit Selection View Go Run Terminal Help

devops-test

test-1 M README.md test.html index.html readme.md

localRepo > readme.md


```
1 #hello
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

bash: syntax error near unexpected token `newline'

```
muskan123@muskan ~/devops-test/localRepo {feature3}
> git branch -d feature3
error: cannot delete branch 'feature3' used by worktree at '/home/muskan123/devops-test/localRepo'
muskan123@muskan ~/devops-test/localRepo {feature3}
> git checkout -b main
fatal: a branch named 'main' already exists
muskan123@muskan ~/devops-test/localRepo {feature3}
> git checkout main
Switched to branch 'main'
muskan123@muskan ~/devops-test/localRepo {main}
> git branch -d feature3
Deleted branch feature3 (was d925eba).
muskan123@muskan ~/devops-test/localRepo {main}
> git branch -d feature2
Deleted branch feature2 (was d925eba).
muskan123@muskan ~/devops-test/localRepo {main}
> git branch
feature1
* main
master
muskan123@muskan ~/devops-test/localRepo {main}
> git branch -d master
Deleted branch master (was d925eba).
```

Ln 1, Col 8 Spaces: 4 UTF-8 LF () Markdown Go Live Prettier

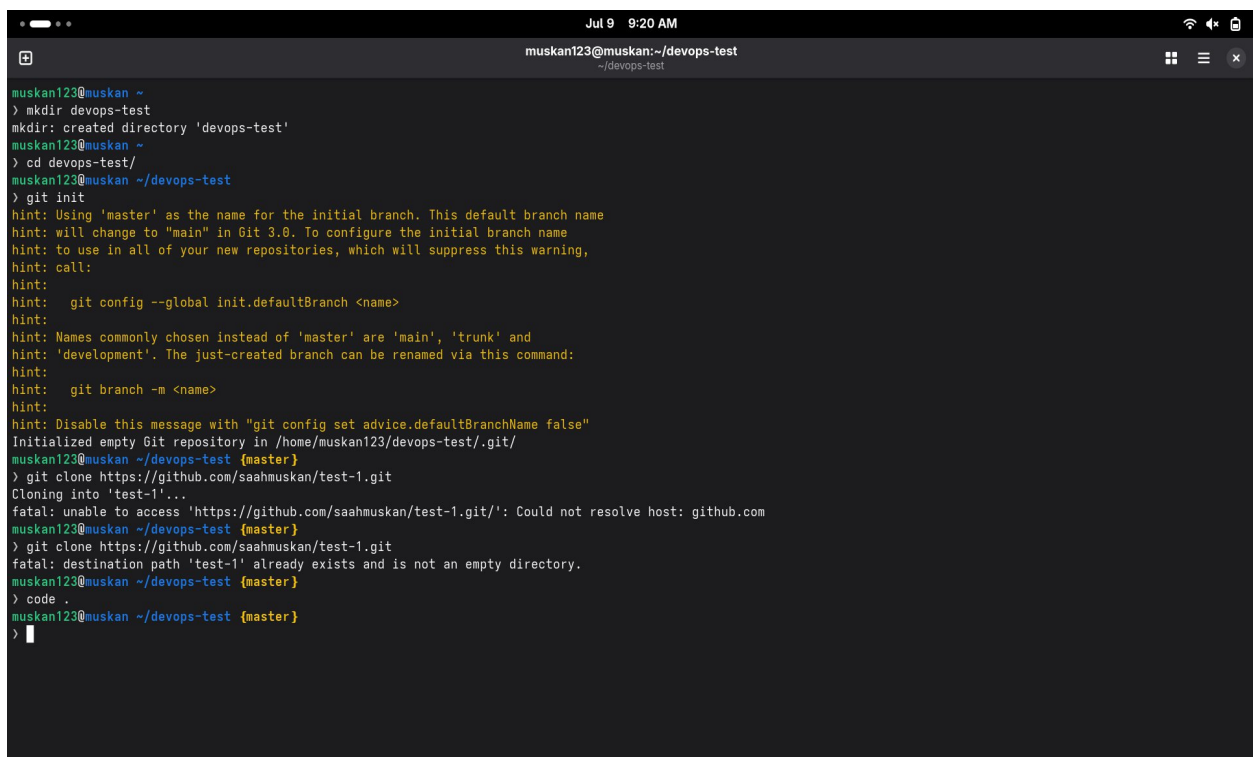

Jul 9 9:20 AM

muskan123@muskan: ~/devops-test

```
muskan123@muskan ~
> mkdir devops-test
mkdir: created directory 'devops-test'
muskan123@muskan ~
> cd devops-test/
muskan123@muskan ~/devops-test
> git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint:
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /home/muskan123/devops-test/.git/
muskan123@muskan ~/devops-test {master}
> git clone https://github.com/saahmuskan/test-1.git
Cloning into 'test-1'...
fatal: unable to access 'https://github.com/saahmuskan/test-1.git/': Could not resolve host: github.com
muskan123@muskan ~/devops-test {master}
> git clone https://github.com/saahmuskan/test-1.git
fatal: destination path 'test-1' already exists and is not an empty directory.
muskan123@muskan ~/devops-test {master}
> code .
muskan123@muskan ~/devops-test {master}
>
```

