

LAB 05

LOOP INSTRUCTION & PROCEDURES



STUDENT NAME

ROLL NO

SEC

SIGNATURE & DATE

MARKS AWARDED: _____

NATIONAL UNIVERSITY OF COMPUTER AND EMERGING SCIENCES
(NUCES), KARACHI

Lab Session 05: LOOP INSTRUCTION & PROCEDURES

Objectives:

- Loop Instruction
- Built-in-Procedure

Branching Instructions:

Branching is the most direct method of modifying the instruction flow. A transfer of control, or branch, is a way of altering the order in which statements are executed. There are two basic types of transfers:

- Unconditional
- Conditional

Unconditional Transfer:

The unconditional jump instruction (jmp) unconditionally transfers control to the instruction located at the target address i.e. there is no need to satisfy any condition for the jump to take place. The general format is:

JMP destination

When the CPU executes an unconditional transfer, the offset of destination is moved into the instruction pointer, causing execution to continue at the new location.

Syntax:

Label:

.....

.....

.....

JMP Label

Conditional Transfer:

In these types of instructions, the processor must check for the particular condition. If it is true, then only the jump takes place else the normal flow in the execution of the statements is maintained. There are many instructions for conditional jumping, that we will explore in later labs. For this lab, our focus is only on LOOP instruction.

Loop Instruction:

The LOOP instruction, formally known as Loop According to ECX Counter, repeats a block of statements a specific number of times. ECX is automatically used as a counter and is decremented each time the loop repeats.

Syntax:

LOOP destination

The execution of the LOOP instruction involves two steps: First, it subtracts 1 from ECX. Next, it compares ECX to zero. If ECX is not equal to zero, a jump is taken to the label identified by destination. Otherwise, if ECX equals zero, no jump takes place, and control passes to the instruction following the loop.

Syntax:

MOV ECX, #COUNT

Label:

.....

.....



LOOP Label

Example 01:

```

INCLUDE Irvine32.inc
.code
main PROC
    mov ax,0
    mov ecx,5
    L1:
        Inc ax
        call dumpregs
    loop L1
    exit
main ENDP
END main

```

Example 02:

```

INCLUDE Irvine32.inc
.data
    intArray WORD 100h, 200h, 300h, 400h, 500h
.code
main PROC
    mov esi, 0
    mov eax, 0
    mov ecx, LENGTHOF intArray
    call dumpregs
    L1:
        mov ax, intArray[esi]
        add esi, TYPE intArray
        call dumpregs
    loop L1
    exit
main ENDP
END main

```

Nested Loops

When creating a loop inside another loop, special consideration must be given to the outer loop counter in ECX. You can save it in a variable.

Syntax:

```

MOV ECX, #COUNT1
LABEL1:
    MOV VAR1, ECX
    .....
    MOV ECX, #COUNT2
    LABEL2:
        MOV VAR2, ECX
        .....
        MOV ECX, VAR2
    LOOP LABEL2

```



```
.....  
    MOV ECX,VAR1  
    LOOP LABEL1
```

Example 03:

```
INCLUDE Irvine32.inc  
.code  
main PROC  
    mov eax, 0  
    mov ebx, 0  
    mov ecx, 5  
L1:  
    inc eax  
    mov edx, ecx  
    call dumpregs  
    mov ecx, 10  
L2:  
    inc ebx  
    call dumpregs  
    loop L2  
    mov ecx, edx  
    loop L1  
    call DumpRegs  
    exit  
main ENDP  
END main
```

Procedure in Irvine32 Library:

Some of the procedures available in Irvine32 library are:

1. **Clrscr:**
Clears the console window and locates the cursor at the above left corner.
2. **Crlf:**
Writes the end of line sequence to the console window.
3. **DumpRegs:**
Displays the EAX, EBX, ECX, EDX, ESI, EDI, ESP:EIP and EFLAG registers.
4. **DumpMem (ESI=Starting OFFSET, ECX=LengthOf, EBX=Type):**
Writes the block of memory to the console window in hexadecimal.
5. **WriteBin:**
Writes an unsigned 32-bit integer to the console window in ASCII binary format.
6. **WriteChar:**
Writes a single character to the console window.
7. **WriteDec:**
Writes an unsigned 32-bit integer to the console window in decimal format.
8. **WriteHex:**
Writes a 32-bit integer to the console window in hexadecimal format.
9. **WriteInt:**
Writes a signed 32-bit integer to the console window in decimal format.



10. **WriteString (EDX= OFFSET String):**
Write a null-terminated string to the console window.
11. **ReadChar:**
Waits for single character to be typed at the keyboard and returns that character.
12. **ReadDec:**
Reads an unsigned 32-bit integer from the keyboard.
13. **ReadHex:**
Reads a 32-bit hexadecimal integers from the keyboard, terminated by the enter key.
14. **ReadInt:**
Reads a signed 32-bit integer from the keyboard, terminated by the enter key.
15. **ReadString (EDX=OFFSET String, ECX=SIZEOF):**
Reads a string from the keyboard, terminated by the enter key.
16. **SetTextColor (Background= Upper AL, Foreground= Lower AL):**
Sets the foreground and background colors of all subsequent text output to the console.
17. **GetTextColor (Background= Upper AL, Foreground= Lower AL):**
Returns the active foreground and background text colors in the console window.
18. **MsgBox (EDX=OFFSET String, EBX= OFFSET Title):**
Displays a pop-up message box.
19. **MsgBoxAsk (EDX=OFFSET String, EBX= OFFSET Title):**
Displays a yes/no question in a pop-up message box.
20. **WaitMsg:**
Display a message and wait for the Enter key to be pressed.
21. **Delay:**
Pauses the program execution for a specified interval (in milliseconds).
22. **getDateTime:**
Gets the current date and time from system
23. **GetMaxXY (DX=col, AX=row):**
Gets the number of columns and rows in the console window buffer.
24. **Gotoxy (DH=row , DL=col):**
Locates the cursor at a specific row and column in the console window. By default X coordinate range is 0-79 and Y coordinate range is 0-24.
25. **Randomize:**
Seeds the random number generator with a unique value.

Color and Its Value							
Color	Value	Color	Value	Color	Value	Color	Value
Black	0	Red	4	Gray	8	Light Red	C
Blue	1	Magenta	5	Light Blue	9	Light Magenta	D
Green	2	Brown	6	Light Green	A	Yellow	E
Cyan	3	Light Gray	7	Light Cyan	B	White	h

Example 04:

WriteDec: The integer to be displayed is passed in EAX

WriteString: The offset of string to be written is passed in EDX

WriteChar: The character to be displayed is passed in AL

INCLUDE Irvine32.inc

.data

Dash BYTE " - ", 0



```
.code
main PROC
    mov ecx, 1FFh
    mov eax, 1
    mov edx, OFFSET Dash
L1:
    call WriteDec           ; EAX is written as a decimal number
    call WriteString        ; EDX points to string
    call WriteChar          ; AL is the character
    call Crlf
    inc EAX                 ; next character
    Loop L1
    exit
main ENDP
END main
```

Example 05:**DumpMem:** Pass offset of array in ESI, length of array in ECX & type in EBX

```
INCLUDE Irvine32.inc
.data
    arrayD SDWORD 12345678h, 8A4B2000h, 3434h, 7AB9h
.code
main PROC
    ; Display an array using DumpMem.
    mov esi, OFFSET arrayD      ; starting OFFSET
    mov ebx, TYPE arrayD        ; doubleword = 4 bytes
    mov ecx, LENGTHOF arrayD    ; number of units in arrayD
    call DumpMem                ; display memory
    call Crlf                   ; new line
    call DumpRegs
    exit
main ENDP
END main
```

Example 06:**ReadInt:** Reads the signed integer into EAX**WriteInt:** Signed integer to be written is passed in EAX**WriteHex:** Hex value to be written is passed in EAX**WriteBin:** Binary value to be written is passed in EAX

```
INCLUDE Irvine32.inc
.data
    COUNT = 4
    prompt BYTE "Enter a 32-bit signed integer: ", 0
.code
main PROC
    ; Ask the user to input a sequence of signed integers
    mov ecx, COUNT
```



```

L1:
    mov edx, OFFSET prompt
    call WriteString
    call ReadInt          ; input integer into EAX
    call Crlf             ; new line
    ; Display the integer in decimal, hexadecimal, and binary
    call WriteInt         ; display in signed decimal
    call Crlf
    call WriteHex         ; display in hexadecimal
    call Crlf
    call WriteBin         ; display in binary
    call Crlf
    call Crlf
    Loop L1               ; repeat the loop
    exit
main ENDP
END main

```

Example 07:

SetTextColor: Background & foreground colors are passed to EAX

```

INCLUDE Irvine32.inc
.data
    str1 BYTE "Sample string in color", 0
.code
main PROC
    mov eax, yellow + (blue*16)
    call SetTextColor
    mov edx, OFFSET str1
    call WriteString
    call DumpRegs
    exit
main ENDP
END main

```

Example 08:

MsgBox: Offset of content string is passed in EDX. Offset of caption is passed in EBX.

```

INCLUDE Irvine32.inc
.data
    caption BYTE "Dialog Title", 0
    HelloMsg BYTE "This is a pop-up message box.", 0ah
    BYTE "Click OK to continue...", 0
.code
main PROC
    mov ebx, 0                ; no caption
    mov edx, OFFSET HelloMsg ; contents
    call MsgBox

```



```
    mov ebx, OFFSET caption          ; caption
    mov edx, OFFSET HelloMsg        ; contents
    call MsgBox
    exit
main ENDP
END main
```

Example 09:


MsgBoxAsk: Offset of question string is passed in EDX. Offset of caption is passed in EBX. Selected value is returned in EAX (If : YES equal to 6 OR If: NO equal to 7)

```
INCLUDE Irvine32.inc
.data
    caption BYTE "Survey Completed",0
    question BYTE "Thank you for completing the survey.", 0ah
    BYTE "Would you like to receive the results?", 0
.code
main PROC
    mov ebx, OFFSET caption
    mov edx, OFFSET question
    call MsgBoxAsk
    ;(check return value in EAX)
    call DumpRegs
    mov ebx, OFFSET caption
    mov edx, OFFSET question
    call MsgBoxAsk
    ;(check return value in EAX)
    call DumpRegs
    exit
main ENDP
END main
```



Lab Exercise:

1. Initialize an array named Source and use a loop with indexed addressing to copy a string represented as an array of bytes with a null terminator value in an array named as target.
2. Use a loop with direct or indirect addressing to reverse the elements of an integer array in place. Do not copy elements to any other array. Use SIZEOF, TYPE and LENGTHOF operators to make program flexible.
3. Write a program that uses a loop to calculate the first ten numbers of Fibonacci sequence.
4. Write a nested Loop Program that give following output.

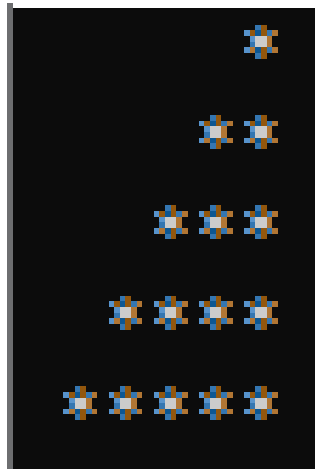

5. Write a program that enquire user about the quantity of Fibonacci sequence numbers to be display.
6. Implement task4 but user give input for number of lines for that triangle.

LAB 5

Task 1 Code + Output

```
1 Title Task 1
2 Include Irvine32.inc
3 .data
4 source byte "Hello My Name Is Mohsin",0
5 target byte "-",0
6 original byte "Source:",0
7
8 .code
9 main PROC
10 mov edx,offset original
11 call writestring
12 mov edx,offset source
13 call writestring
14
15 mov esi,0
16 mov ecx,lengthof source
17
18 l1:
19 mov al, source[esi*type target]
20 mov target[esi*type target],al
21 inc esi
22 loop l1
23
24 call crlf
25 mov edx,offset target
26 call writestring
27
28 exit
29 main ENDP
30 end main
```

Microsoft Visual Studio Debug Console

```
Source:Hello My Name Is Mohsin
Hello My Name Is Mohsin
D:\Uni\3rd Semester\Coal\Lab03\Project1\Debug\Project1.exe (process 26244) exited with code 0.
Press any key to close this window . . .
```

Task 2 Code + Output

```
1 Title Task2
2 Include Irvine32.inc
3
4 .data
5 arr byte 1,2,3,4,5
6 i dword ?
7 j dword ?
8
9 .code
10 main PROC
11 mov j, lengthof arr
12 dec j
13
14 mov i,0
15 mov ecx,lengthof arr/2
16 l1:
17 mov esi,i
18 mov al,arr[esi]
19 mov esi,j
20 mov bl,arr[esi]
21 xchg al,bl
22 mov esi,i
23 mov arr[esi],al
24 mov esi,j
25 mov arr[esi],bl
26
27 inc i
28 dec j
29 loop l1
30
31
32 mov esi,0
33 mov eax,0
```

Microsoft Visual Studio Debug Console

```
5
4
3
2
1
D:\Uni\3rd Semester\Coal\Lab03\Project1\Debug\Project1.exe (process 28352) exited with code 0.
Press any key to close this window . . .
```

Task 3 Code + Output

LAB 5

```
1 Title Task 3
2 Include Irvine32.inc
3
4 .code
5 main PROC
6
7 mov ecx,9
8 mov ebx,0h ;prev
9 mov edx,0h
10 mov eax,edx
11 call writedec
12 call crlf
13 mov eax,1h ;curr
14 l1:
15 mov edx,eax
16 add eax,ebx
17 call writedec
18 call crlf
19 mov ebx,edx
20
21 loop l1
22
23
24
25 exit
26 main ENDP
27 end main
```

Microsoft Visual Studio Debug Console

0

1

2

3

5

8

13

21

34

55

D:\Uni\3rd Semester\Coat\Lab03\Project1\Debug\Project1.exe (process 17308) exited with code 0.
Press any key to close this window . . .

Task 4 Code + Output

```
1 Title Task4
2 Include Irvine32.inc
3
4 .data
5 star BYTE "*",0
6 space BYTE " ",0
7 temp DWORD ?
8
9
10
11 .code
12 main PROC
13
14 mov ecx,5
15 mov ebx,0
16 l1:
17 mov temp,ecx
18
19 l2:
20 mov edx,offset space
21 call writestring
22 loop l2
23
24 inc ebx
25 mov ecx,ebx
26 l3:
27 mov edx,offset star
28 call writestring
29 loop l3
30
31 call crlf
32 mov ecx,temp
33 loop l1
```

Microsoft Visual Studio Debug Console

*

**

D:\Uni\3rd Semester\Coat\Lab03\Project1\Debug\Project1.exe (process 27116) exited with code 0.
Press any key to close this window . . .

Task 5 Code + Output

LAB 5

```
1 Title Task 5
2 Include Irvine32.inc
3
4 .data
5 prompt byte "Enter The Number Of Fibonacci Numbers:",0
6 num dword ?
7
8 .code
9 main PROC
10
11 mov edx,offset prompt
12 call writestring
13 call readdec
14 mov num,edx
15 dec num
16
17 mov ecx,num
18 mov ebx,0h ;prev
19 mov edx,0h
20 mov eax,edx
21 call writedec
22 call crlf
23 mov eax,1h ;curr
24 l1:
25 mov edx,eax
26 add eax,ebx
27 call writedec
28 call crlf
29 mov ebx,edx
30
31 loop l1
32
33
```

Microsoft Visual Studio Debug Console

Enter The Number Of Fibonacci Numbers:10

0
1
2
3
5
8
13
21
34
55

D:\Uni\3rd Semester\Coal\Lab03\Project1\Debug\Project1.exe (process 26924) exited with code 0.
Press any key to close this window . . .

Task 6 Code + Output

```
1 Title Task6
2 Include Irvine32.inc
3
4 .data
5 star BYTE "s",0
6 space BYTE " ",0
7 temp DWORD ?
8 prompt BYTE "Enter The Number Of Rows:",0
9 row DWORD ?
10
11 .code
12 main PROC
13 mov edx,offset prompt
14 call writestring
15 call readint
16 mov row,edx
17
18 mov ecx,row
19 mov ebx,0
20 l1:
21 mov temp,ecx
22
23 l2:
24 mov edx,offset space
25 call writestring
26 loop l2
27
28 inc ebx
29 mov ecx,ebx
30 l3:
31 mov edx,offset star
32 call writestring
33 loop l3
```

Microsoft Visual Studio Debug Console

Enter The Number Of Rows:10

*
**

D:\Uni\3rd Semester\Coal\Lab03\Project1\Debug\Project1.exe (process 23084) exited with code 0.
Press any key to close this window . . .