

Pf post lab task 07

Q1: ATM transaction:

```
#include <stdio.h>

int main()
{
    int count=0;
    int saved_amount=50000;
    int remaining_amount;
    int withdraw;

    do{
        printf("enter the withdraw amount\n");
        scanf("%d", &withdraw);
        if(withdraw>50000)
        {
            printf("insufficiecnt balance\n");
            return 0;
        }
        saved_amount= saved_amount-withdraw;
        count++;
        printf("remainin amoint is %d\n", saved_amount);
        printf("total number of transcition is %d\n", count);
    } while(withdraw<50000)
}
```

C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe

```
enter the withdraw amount
10000
remainin amoint is 40000
total number of transction is 1
enter the withdraw amount
10000
remainin amoint is 30000
total number of transction is 2
enter the withdraw amount
10000
remainin amoint is 20000
total number of transction is 3
enter the withdraw amount
10000
remainin amoint is 10000
total number of transction is 4
enter the withdraw amount
3000
remainin amoint is 7000
total number of transction is 5
enter the withdraw amount
```

Q2: students marks:

```
#include <stdio.h>
```

```
int main() {
```

```
    float mark;
```

```
    float total = 0.0;
```

```
    int count = 0;
```

```
    printf("Enter student marks (0 - 100). Enter -1 to stop:\n");
```

```
    while (1) {
```

```
        printf("Enter mark: ");
```

```
scanf("%f", &mark);

if (mark == -1) {
    break;
}

if (mark >= 0 && mark <= 100) {
    total += mark;
    count++;
} else {
    printf("Invalid mark! Please enter a value between 0 and 100.\n");
}
}

printf("\n--- Final Summary ---\n");
printf("Total Students Processed : %d\n", count);
printf("Total Marks : %.2f\n", total);
if (count > 0) {
    printf("Average Marks: %.2f\n", total / count);
} else {
    printf("Average Marks: N/A (No valid marks entered)\n");
}

return 0;
}
```

```
C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe
Enter student marks (0 - 100). Enter -1 to stop:
Enter mark: 20
Enter mark: 20
Enter mark: 30
Enter mark: -1

--- Final Summary ---
Total Students Processed : 3
Total Marks           : 70.00
Average Marks: 23.33

-----
Process exited after 7.541 seconds with return value 0
Press any key to continue . . .
```

Q3: Moblie recharge:

```
#include <stdio.h>
```

```
int main() {
```

```
    float recharge;
```

```
    float total_balance = 0.0;
```

```
    int count = 0;
```

```
    printf("Enter recharge amounts (> 0). Enter 0 or a negative number to  
stop.\n\n");
```

```
    while (1) {
```

```
        printf("Enter recharge amount: ");
```

```
        scanf("%f", &recharge);
```

```
        if (recharge <= 0) {
```

```
            break;
```

```
        }
```

```
        total_balance += recharge;
```

```
count++;  
if (total_balance > 5000.0) {  
    printf("\nRecharge Limit Reached!\n");  
    break;  
}  
}  
printf("\n--- Summary ---\n");  
printf("Total Recharged Amount : $%.2f\n", total_balance);  
printf("Number of Recharge Attempts: %d\n", count);  
return 0;  
}
```

Q4: online shopping system:

```
#include <stdio.h>  
  
int main()  
{  
    int price;  
    int another;  
    int total_price=0;  
    int count=0;  
    float discount;  
    int final_bill;  
    do{  
        printf("enter the price of the item\n");
```

```

scanf("%d", &price);

printf("do you want the another item: 1.for yes: 2.for no\n");

scanf("%d", &another);

total_price += price;

count++;

if(total_price>10000){

    discount= total_price*0.1;

    final_bill= total_price - discount;

}

} while(another!=0);

printf("total price is %d\n", total_price);

printf("total number of the item is %d\n", count);

printf("total bill after the discount is %f\n", discount);

printf("total bill is %d", final_bill);

}

```

```

C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe
6 enter the price of the item
7 5000
8 do you want the another item: 1.for yes: 2.for no
9 1
10 enter the price of the item
11 6000
12 do you want the another item: 1.for yes: 2.for no
13 0
14
15 total price is 11000
16 total number of the item is 2
17 total bill after the discount is 1100.000000
18 total bill is 9900
19 -----
20 Process exited after 7.018 seconds with return value 0
21 Press any key to continue . . .
22
23
24
25
26
27
28
29

```

Q5: restaurant billing system:

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int price;
```

```
    int another;
```

```
    float discount;
```

```
    int total_bill=0;
```

```
    int final_bill=0;
```

```
    do {
```

```
        printf("enter the price\n");
```

```
        scanf("%d", &price);
```

```
        printf("do you want another item: 1.for yes 0.for no\n");
```

```
        scanf("%d", &another);
```

```
        total_bill+=price;
```

```
        if(total_bill>5000)
```

```
        {
```

```
            discount= total_bill*0.05;
```

```
        }
```

```
    final_bill = total_bill-discount;
```

```
    } while(another==1);
```

```
    printf("==bill list==\n");
```


```
    printf("total bill is %d\n", total_bill);
```

```

        printf("discount is %f\n", discount);

        printf("final bill is %d", final_bill);
    }

```

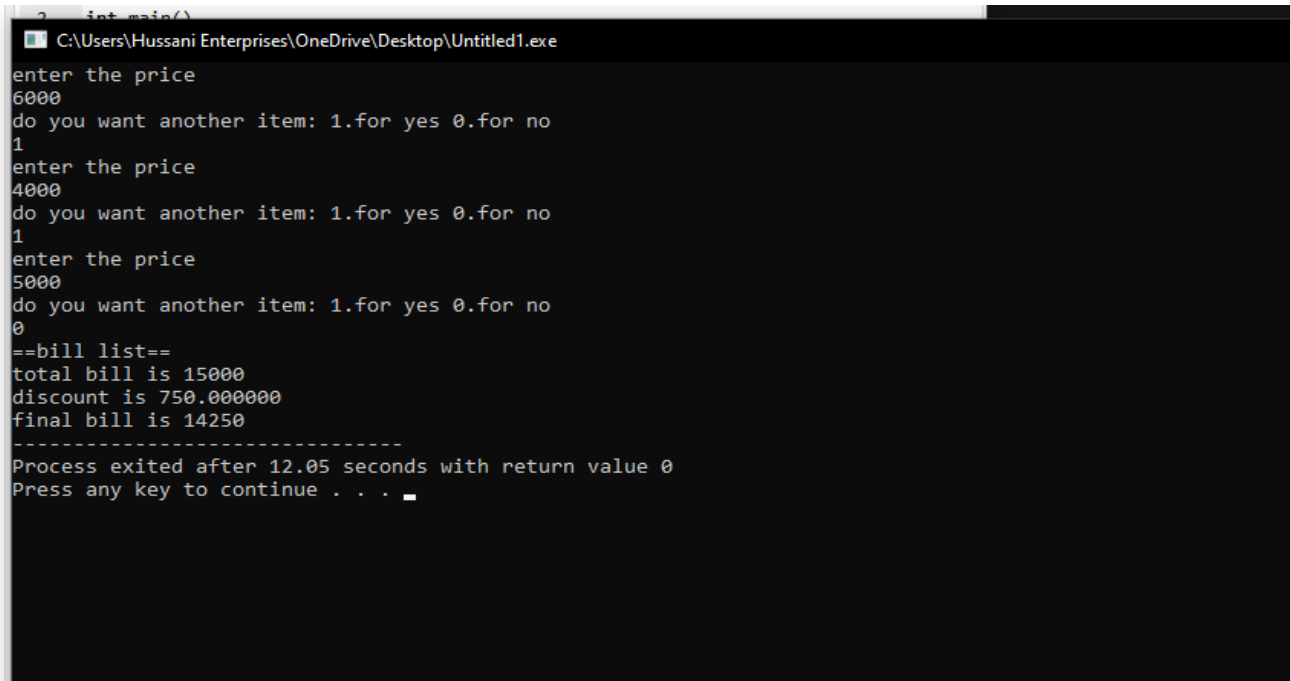

```

C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe
enter the price
6000
do you want another item: 1.for yes 0.for no
1
enter the price
4000
do you want another item: 1.for yes 0.for no
1
enter the price
5000
do you want another item: 1.for yes 0.for no
0
==bill list==
total bill is 15000
discount is 750.000000
final bill is 14250
-----
Process exited after 12.05 seconds with return value 0
Press any key to continue . . .

```

Q6:login attempts:

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int correct_pin=1234;
```

```
    int pin;
```

```
    int remaining_attempt=3;
```


```
    while(remaining_attempt>0)
```

```
    {
```

```

printf("enter the correct pin:\n");
scanf("%d", &pin);
if(pin!=correct_pin){
    printf("wrong password try again\n");
}
if(pin==correct_pin)
{
    printf("login successful\n");
    return 0;
}
remaining_attempt--;
printf("remaining_attempt is %d:\n", remaining_attempt);
}
printf("account locked\n");
}

```

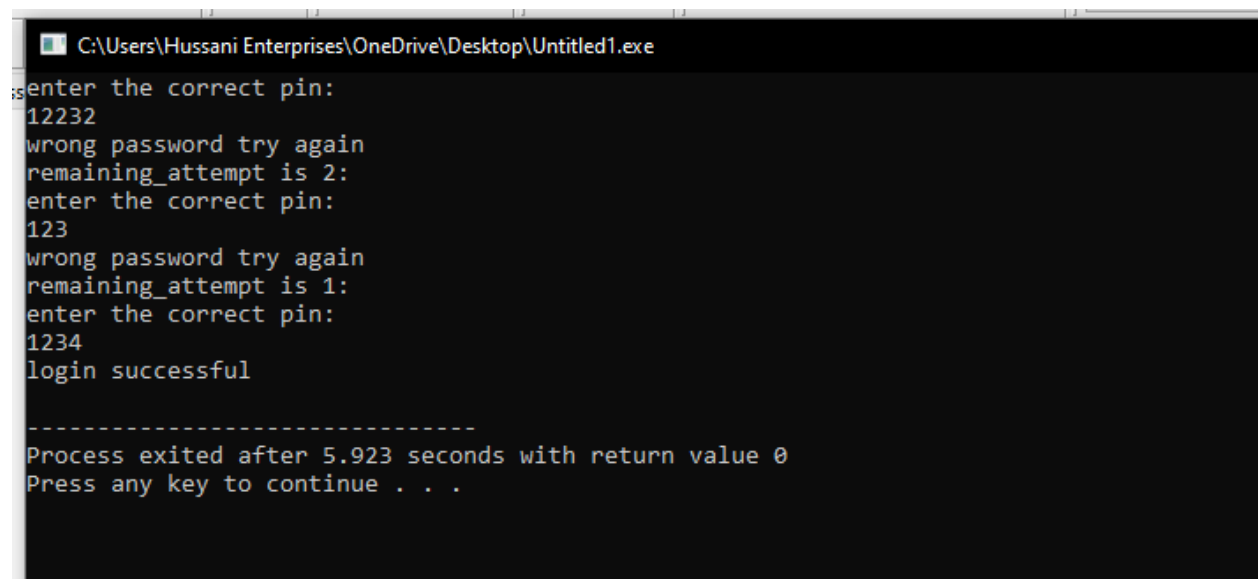

```

C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe
enter the correct pin:
12232
wrong password try again
remaining_attempt is 2:
enter the correct pin:
123
wrong password try again
remaining_attempt is 1:
enter the correct pin:
1234
login successful

-----
Process exited after 5.923 seconds with return value 0
Press any key to continue . . .

```

Q7: student marks analysis:

```
#include <stdio.h>
```

```
int main() {
```

```
    float marks[5];
```

```
    float total = 0.0, average;
```

```
    float highest, lowest;
```

```
    printf("Enter the marks for 5 students:\n");
```

```
    for (int i = 0; i < 5; i++) {
```

```
        printf("Student %d: ", i + 1);
```

```
        scanf("%f", &marks[i]);
```

```
    }
```

```
    highest = marks[0];
```

```
    lowest = marks[0];
```

```
    for (int i = 0; i < 5; i++) {
```

```
        total += marks[i];
```

```
        if (marks[i] > highest) {
```

```
            highest = marks[i];
```

```
        }
```

```
        if (marks[i] < lowest) {
```


```
            lowest = marks[i];
```

```
        }
```

```
    }
```

```
    average = total / 5.0;
```

```
printf("\n Analysis Results \n");  
printf("Total Marks: %.2f\n", total);  
printf("Average Marks: %.2f\n", average);  
printf("Highest Marks: %.2f\n", highest);  
printf("Lowest Marks: %.2f\n", lowest);  
return 0;  
}
```

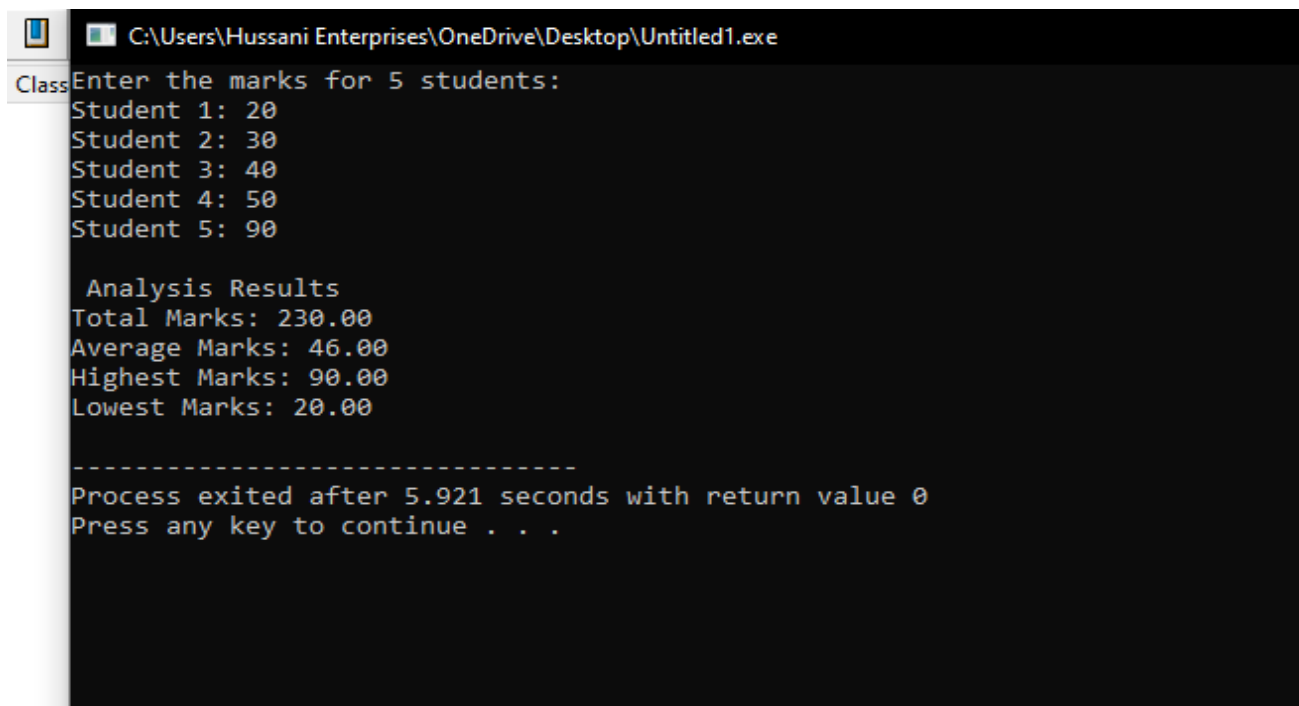

```
Class C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe  
Enter the marks for 5 students:  
Student 1: 20  
Student 2: 30  
Student 3: 40  
Student 4: 50  
Student 5: 90  
  
Analysis Results  
Total Marks: 230.00  
Average Marks: 46.00  
Highest Marks: 90.00  
Lowest Marks: 20.00  
  
-----  
Process exited after 5.921 seconds with return value 0  
Press any key to continue . . .
```

Q8:shopping cart:

```
#include <stdio.h>
```

```
int main() {
```

```
    float price[5], total = 0, discount = 0, finalAmount;
```

```
    int i;
```

```
    for (i = 0; i < 5; i++) {
```

```
        printf("Enter price of product %d: ", i + 1);
```

```
        scanf("%f", &price[i]);
```

```
        total = total + price[i];
```

```
    }
```

```
    if (total > 10000) {
```

```
        discount = total * 0.10;
```

```
    }
```

```
    finalAmount = total - discount;
```

```
    printf("\nOriginal Total = %.2f", total);
```

```
    printf("\nDiscount = %.2f", discount);
```

```
    printf("\nFinal Amount = %.2f\n", finalAmount);
```

```
    return 0;
```

```
}
```

```
File Edit View Project Layout Tools Debug Window Help
C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe
Enter price of product 1: 20
Enter price of product 2: 30
Enter price of product 3: 40
Enter price of product 4: 50
Enter price of product 5: 60

Original Total = 200.00
Discount = 0.00
Final Amount = 200.00

-----
Process exited after 8.906 seconds with return value 0
Press any key to continue . . .
```

Q9: electricity bill analysis:

```
#include <stdio.h>
```

```
int main() {
```

```
    int units[5], i;
```

```
    int totalUnits = 0;
```

```
    int highest, lowest;
```

```
    float bill, surcharge, totalAmount = 0;
```

```
    for (i = 0; i < 5; i++) {
```

```
        printf("Enter units for household %d: ", i + 1);
```

```
        scanf("%d", &units[i]);
```

```
    }
```

```
    highest = units[0];
```

```
    lowest = units[0];
```

```
    for (i = 0; i < 5; i++) {
```

```
        totalUnits = totalUnits + units[i];
```

```
    if (units[i] > highest) {  
        highest = units[i];  
    }  
    if (units[i] < lowest) {  
        lowest = units[i];  
    }  
    bill = units[i] * 10;  
    if (units[i] > 500) {  
        surcharge = bill * 0.05;  
        bill = bill + surcharge;  
    }  
    printf("\nHousehold %d Bill = %.2f", i + 1, bill);  
    totalAmount = totalAmount + bill;  
}  
printf("\n\nTotal Units = %d", totalUnits);  
printf("\nHighest Units = %d", highest);  
printf("\nLowest Units = %d", lowest);  
printf("\nTotal Amount Collected = %.2f\n", totalAmount);  
return 0;  
}
```

```
C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe
Enter units for household 1: 200
Enter units for household 2: 220
Enter units for household 3: 300
Enter units for household 4: 400
Enter units for household 5: 340

Household 1 Bill = 2000.00
Household 2 Bill = 2200.00
Household 3 Bill = 3000.00
Household 4 Bill = 4000.00
Household 5 Bill = 3400.00

Total Units = 1460
Highest Units = 400
Lowest Units = 200
Total Amount Collected = 14600.00

-----
Process exited after 11.92 seconds with return value 0
Press any key to continue . . .
```

Q10: Shoe Shop Price Analysis:

```
#include <stdio.h>
```

```
int main() {
```

```
    float price[5], total = 0, average;
```

```
    float highest, lowest;
```

```
    int i;
```

```
    for (i = 0; i < 5; i++) {
```

```
        printf("Enter price of shoe pair %d: ", i + 1);
```

```
        scanf("%f", &price[i]);
```

```
    }
```

```
highest = price[0];
```

```
lowest = price[0];
```

```
for (i = 0; i < 5; i++) {
```

```
    total = total + price[i];
```

```
    if (price[i] > highest) {
```

```
        highest = price[i];
```

```
    }
```

```
    if (price[i] < lowest) {
```

```
        lowest = price[i];
```

```
    }
```

```
}
```

```
average = total / 5;
```


```
printf("\nHighest Price = %.2f", highest);
```

```
printf("\nLowest Price = %.2f", lowest);
```

```
printf("\nTotal Price = %.2f", total);
```

```
printf("\nAverage Price = %.2f\n", average);
```

```
return 0;  
}
```

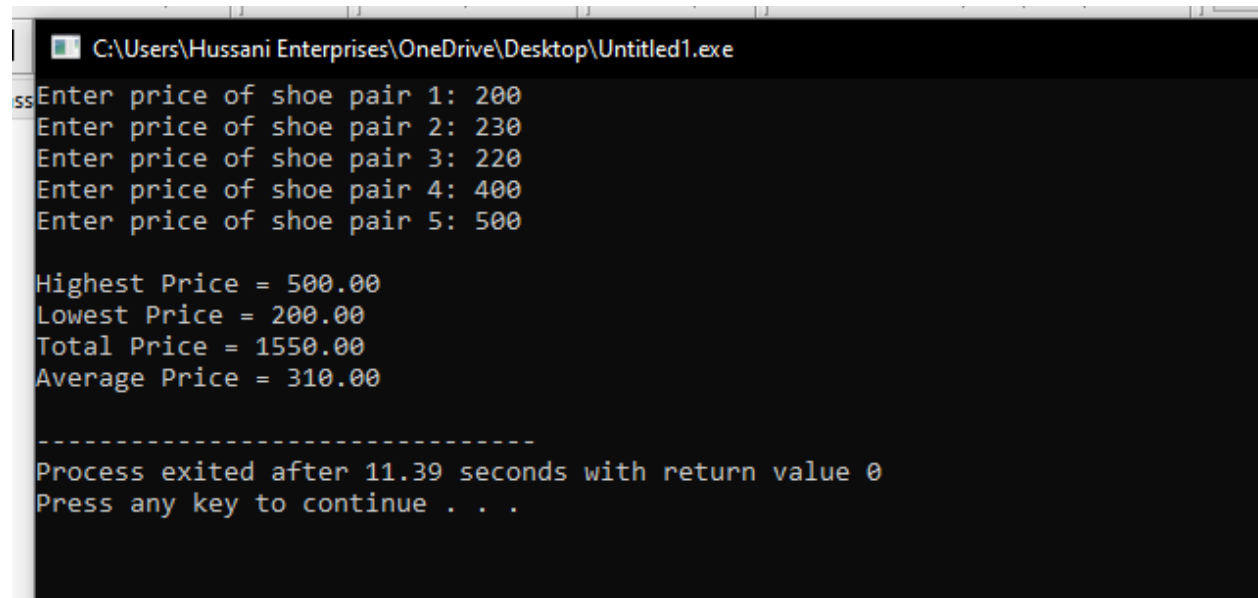

```
C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe  
Enter price of shoe pair 1: 200  
Enter price of shoe pair 2: 230  
Enter price of shoe pair 3: 220  
Enter price of shoe pair 4: 400  
Enter price of shoe pair 5: 500  
  
Highest Price = 500.00  
Lowest Price = 200.00  
Total Price = 1550.00  
Average Price = 310.00  
  
-----  
Process exited after 11.39 seconds with return value 0  
Press any key to continue . . .
```

Q11: electricity bill system:

```
#include <stdio.h>
```

```
int main() {
```

```
    int units[5];
```

```
    float bill, surcharge, totalAmount = 0;
```

```
    int i;
```

```
    for (i = 0; i < 5; i++) {
```

```
        printf("Enter units for household %d: ", i + 1);
```

```
scanf("%d", &units[i]);
```

```
bill = units[i] * 10;
```

```
if (units[i] > 500) {
```

```
    surcharge = bill * 0.05;
```

```
    bill = bill + surcharge;
```

```
}
```

```
printf("Bill = %.2f\n", bill);
```

```
totalAmount = totalAmount + bill;
```

```
}
```

```
printf("\nTotal Amount Collected = %.2f\n",  
totalAmount);
```

```
return 0;
```

}

```
C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe
Enter units for household 1: 200
Bill = 2000.00
Enter units for household 2: 300
Bill = 3000.00
Enter units for household 3: 400
Bill = 4000.00
Enter units for household 4: 450
Bill = 4500.00
Enter units for household 5: 540
Bill = 5670.00

Total Amount Collected = 19170.00

-----
Process exited after 8.197 seconds with return value 0
Press any key to continue . . .
```

Q12: SHOE PRICE AVERAGE

#include <stdio.h>

int main() {

float price[5], total = 0, average;


int i;

for (i = 0; i < 5; i++) {

printf("Enter price of shoe %d: ", i + 1);

scanf("%f", &price[i]);

```
    total = total + price[i];  
}  
  
average = total / 5;  
  
printf("\nTotal Price = %.2f", total);  
printf("\nAverage Price = %.2f\n", average);  
  
return 0;  
}
```

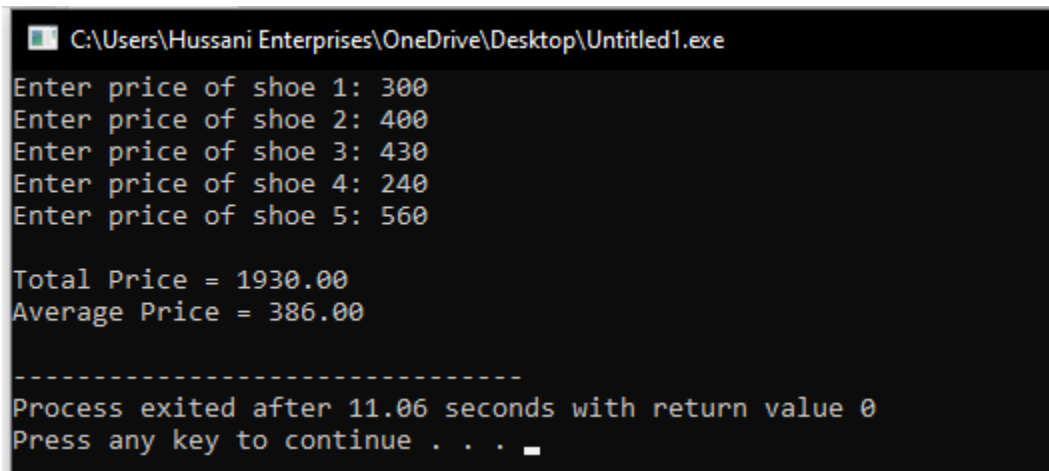

```
C:\Users\Hussani Enterprises\OneDrive\Desktop\Untitled1.exe  
Enter price of shoe 1: 300  
Enter price of shoe 2: 400  
Enter price of shoe 3: 430  
Enter price of shoe 4: 240  
Enter price of shoe 5: 560  
  
Total Price = 1930.00  
Average Price = 386.00  
  
-----  
Process exited after 11.06 seconds with return value 0  
Press any key to continue . . .
```

