

Q1:

```
#include <stdio.h>
```

```
int main()
```

```
{
```


```
    for(int i=2; i<=20; i+=2)
```

```
    {
```

```
        printf("%d\n", i);
```

```
    }
```

```
}
```

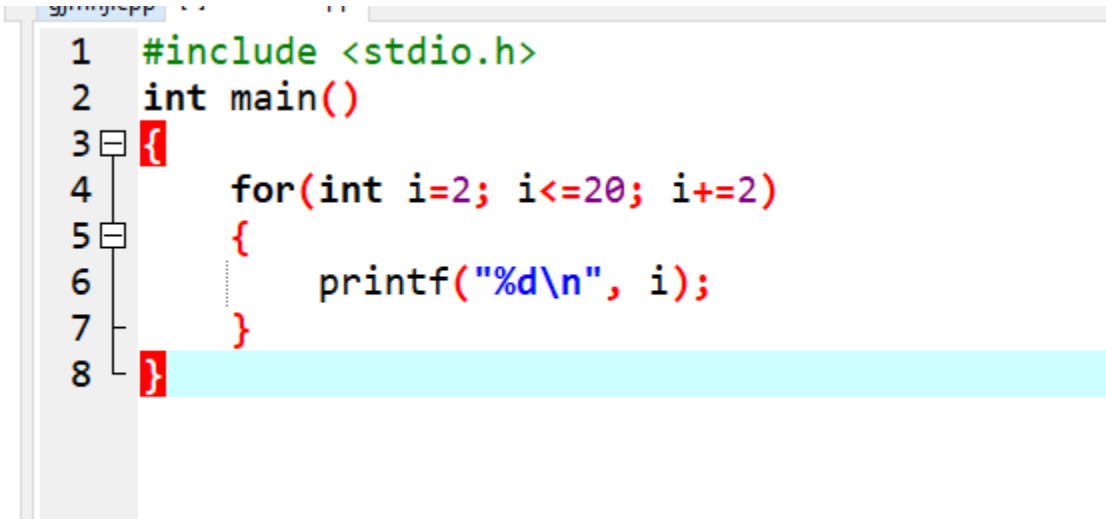

```
1  #include <stdio.h>
2  int main()
3  {
4      for(int i=2; i<=20; i+=2)
5      {
6          printf("%d\n", i);
7      }
8  }
```

Q2;'

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int num =9;
```

```
    while(num>=4)
```

```
    {
```

```
        printf("%d\n",num*num);
```

```
        num--;
```

```
    }
```

```
}
```

```
1  #include <stdio.h>
2  int main()
3  {
4      int num =9;
5      while(num>=4)
6      {
7          printf("%d\n",num*num);
8          num--;
9      }
10
11 }
```

Q3;

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int num=1;
```

```
    while(num!=0){
```

```
        printf("\nenter the num\n");
```


```
        scanf("\n%d", &num);
```

```
        printf(" cube is %d*%d*%d", num*num*num );
```

```
}
```

```
printf("\nzero entered\n");
```

```
}
```

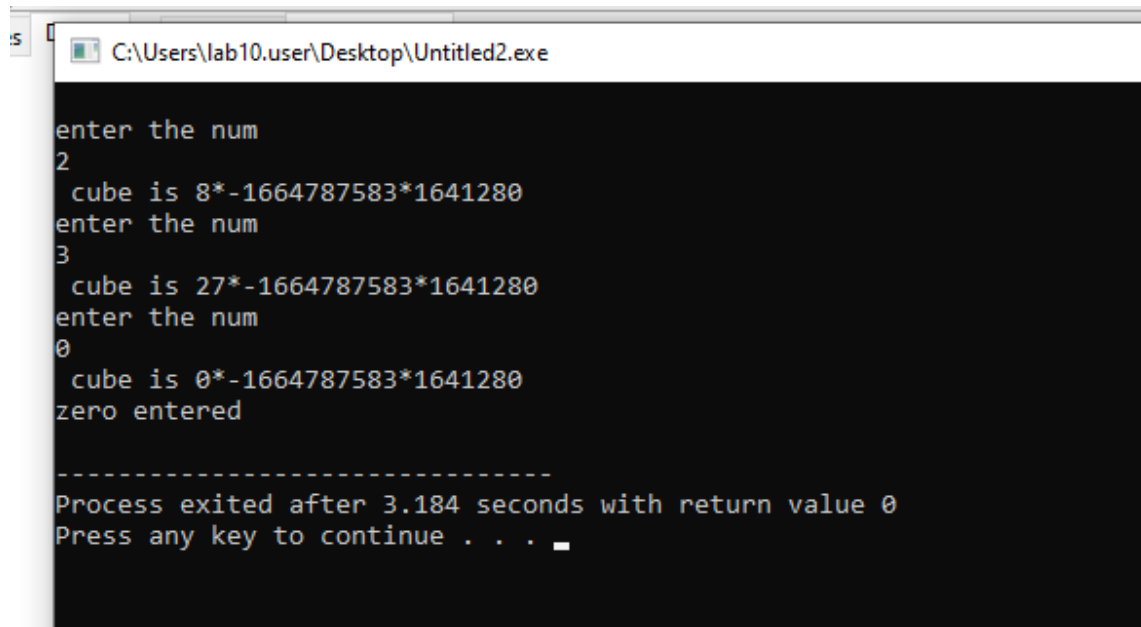

```
C:\Users\lab10.user\Desktop\Untitled2.exe

enter the num
2
cube is 8*-1664787583*1641280
enter the num
3
cube is 27*-1664787583*1641280
enter the num
0
cube is 0*-1664787583*1641280
zero entered

-----
Process exited after 3.184 seconds with return value 0
Press any key to continue . . .
```

Q4;

#include <stdio.h>

int main()

{

int marks;

int another=1;

int sum=0,count;

```
do{  
    printf("enter the marks\n");  
    scanf("%d", &marks);  
  
    printf("any another student marks\n1.for  
yes\n2.for no\n");  
    scanf("%d", &another);  
  
    count++;  
    sum+=marks;  
}while(another==1);  
  
printf("\nsum is %d", sum);  
printf("\ntotal number is %d", count);  
  
}
```

```
enter the marks
23
any another student marks
1.for yes
2.for no
1
enter the marks
23
any another student marks
1.for yes
2.for no
1
enter the marks
23
any another student marks
1.for yes
2.for no
1
sum is 69
total number is 4
-----
Process exited after 7.688 seconds with return value 0
Press any key to continue . . .

18      sum+=marks;
```

Q5;

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
int day, temp, high,count;
```

```
int sum=0;
```

```
for (int i=1; i<=7;i++)
```

```
{
```

```
    printf("enter the temp at day %d\n", i);
```

```
scanf("%d", &temp);
```

```
sum+=temp;
```

```
count++;
```

```
day++;
```

```
}
```

```
printf("total sum of temp is %d", sum);
```

```
printf("\ntotal day %d\n", count);
```

```
}
```

```
C:\Users\lab10.user\Desktop\Untitled4.exe
enter the temp at day 1
2
enter the temp at day 2
2
enter the temp at day 3
2
enter the temp at day 4
2
enter the temp at day 5
2
enter the temp at day 6
2
enter the temp at day 7
2
total sum of temp is 14
total day 7

-----
Process exited after 2.603 seconds with return value 0
Press any key to continue . . .
```

Q6;

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int saving;
```

```
    int sum=0;
```

```
    int count =0;
```

```
do{  
    printf("enter the amount saved\n");  
    scanf("%d", &saving);  
    sum += saving;  
    count++;  
  
} while(saving>0);  
  
printf("\ntotal saving is %d\n", sum);  
  
printf("\ntotal num of saving %d\n", count);  
  
printf("saving is zero\n");  
}
```

```
C:\Users\lab10.user\Desktop\Untitled4.exe
enter the amount saved
1
enter the amount saved
1
enter the amount saved
11
enter the amount saved
0

total saving is 13

total num of saving 4
saving is zero

-----
Process exited after 3.541 seconds with return value 0
Press any key to continue . . .
```

Q7;

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
int price, bill, another;
```

```
char item[50];
```

```
int sum=0;
```

```
int count=0;
```

```
do{
```

```
    printf("enter the item\n");
```

```
    scanf("%s", &item);
```

```
printf("enter the the price\n");
```

```
scanf("%d", &price);
```

```
printf("enter the total bill\n");
```

```
scanf("%d", &bill);
```

```
printf("do you want the another order\n1.for  
yes\n2.for no\n");
```

```
scanf("%d", &another);
```

```
sum+= bill;
```


```
count++;
```

```
} while(another==1);
```

```
printf("total bill is %d\n", bill);
```

```
printf("total number of item is %d", count);
```

}

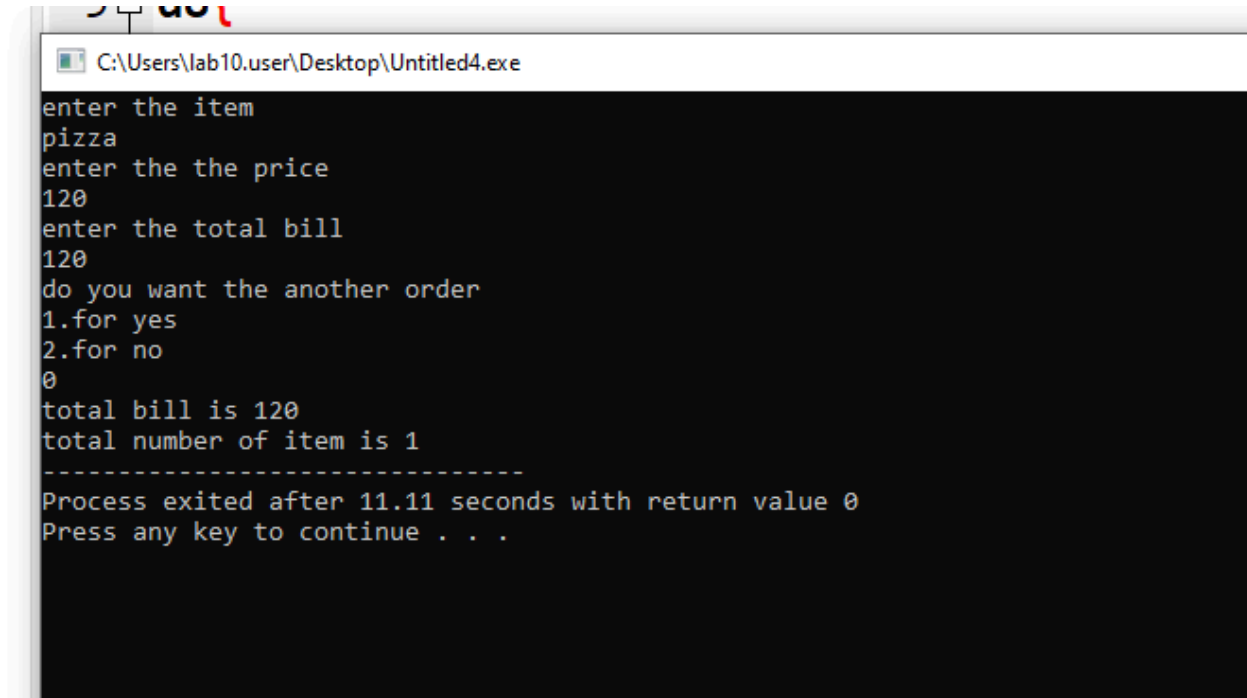

```
C:\Users\lab10.user\Desktop\Untitled4.exe
enter the item
pizza
enter the the price
120
enter the total bill
120
do you want the another order
1.for yes
2.for no
0
total bill is 120
total number of item is 1
-----
Process exited after 11.11 seconds with return value 0
Press any key to continue . . .
```

Q8;

#include <stdio.h>

int main()

{

int salary [6];

int count=0;

```
for(int i=0; i<6;i++)  
{  
    printf("enter the salary of %d employee", i+1);  
    scanf("%d",&salary[i]);
```

```
    if (salary[i]>50000)  
    {  
  
        count++;  
    }  
}
```

```
for(int i=0; i<6;i++)  
  
    {  
  
        printf("%d ", salary[i]);  
  
    }  
  
    printf("employee with salary greater than 50k :  
%d", count);
```

}

```
C:\Users\lab10.user\Desktop\Untitled4.exe
enter the salary of 1 employee1
enter the salary of 2 employee1
enter the salary of 3 employee1
enter the salary of 4 employee1
enter the salary of 5 employee1
enter the salary of 6 employee11
1 1 1 1 1 11 employee with salary greater than 50k : 0
-----
Process exited after 3.055 seconds with return value 0
Press any key to continue . . .
```