

Tutorial of Simple QSAR calculation by MolAICal

Qifeng Bai

Email: molaical@yeah.net

Homepage: <https://molaical.github.io>

Lanzhou University

Lanzhou, Gansu 730000, P. R. China

1. Introduction

The quantitative structure-activity relationship (QSAR) models are regression or classification models used in drug design. In this tutorial, the simple regression model of QSAR is introduced based on the ligands of signal transducer and activator of transcription 3 (STAT3) protein which is considered as a potential drug target of cancer. Here, the MolAICal soft package (<https://molaical.github.io>) is employed for this tutorial.

2. Materials

2.1. Software requirement

1) MolAICal: <https://molaical.github.io>

2) Notepad++: <https://notepad-plus-plus.org>

Note: Chinese users can download Notepad++ from searching Baidu if they cannot access the official site of Notepad++

2.2. Example files

1) All the necessary tutorial files are downloaded from:

<https://github.com/MolAICal/tutorials/tree/master/006-QSAR>

3. Procedure

MolAICal supplies two modules for molecular descriptor calculation based on PaDEL-Descriptor [1] and Mordred [2]. PaDEL-Descriptor is free for all (e.g. personal, academic, non-profit, non-commercial, government, commercial, etc) to use. Mordred (Copyright (c) 2015-2017, Hirotomo Moriwaki) uses the BSD 3-Clause "New" or "Revised" License (see: <https://github.com/mordred-descriptor/mordred/blob/develop/LICENSE>).

3.1. Calculate molecular descriptor

[Go to 006-QSAR/mordred](#)

Option 1: calculating molecular descriptor in Mordred by MolAICal. The command is as below:

```
#> molaical.exe -tool mordred -i example.smi
```

Note: "example.smi" is a file that contains molecular SMILES strings.

It will generate two files named "with3D-descriptors.csv" and "without3D-descriptors.csv". "with3D-descriptors.csv" contains 2D and 3D molecular descriptor, while "without3D-descriptors.csv" contains 2D molecular descriptor without 3D molecular descriptor.

[Go to 006-QSAR/PaDEL](#)

Option 2: calculate molecular descriptor in PaDEL by MolAICal

```
#> molaical.exe -tool padel -f sdf -i sdf
```

It will produce two files named “2DDescriptor_md1.csv” and “3DDescriptor_md1.csv” which contain 2D and 3D molecular descriptors, respectively.

Warning: “sdf” is a folder that contains SDF format molecular files. For **PaDEL** descriptor calculation, it should **run on the local machine**, if the job is run on the remote machine, it may be no results because it needs to start X11 window server that cannot be started by default in the remote machine. Besides, PaDEL occupies much memory when calculating descriptors. So users can calculate the suitable number of molecules at one time, and then, merge all the results. For example, 50 molecules are calculated at one time. For more commands about PaDEL-Descriptor, please see MolAICal manual.

Option 3: If you want to try a limited set of descriptors (e.g., within 200 descriptors) or explore the descriptors available in RDKit:

[Go to 006-QSAR/rdkit](#)

1) Input SMILES file and output RDKit descriptors in CSV file without 3D descriptors

```
#> molaical.exe -tool rdkit -i molecules.smi -o descriptors_no3D.csv
```

2) Input SMILES file and output RDKit descriptors in CSV file including 3D descriptors

```
#> molaical.exe -tool rdkit -i molecules.smi -o descriptors_3D.csv -n true
```

Note: MolAICal can output descriptors from one SMILES string. For more detailed information, please check the manual of MolAICal. For detailed explanations of RDKit descriptors, please refer to Google search, the official documentation, and the source code of RDKit. For example, users can search descriptor "VSA_EState" on Google. Besides, open source code of RDKit, such as “rdkit-master”, in the Linux console:

```
#> grep -rn "VSA_EState"
```

And then find the corresponding codes and documents for descriptor "VSA_EState".

3.2. Prepare files for QSAR

Here, “3DDescriptor_md1.csv” which is produced by PaDEL-Descriptor is employed for this tutorial.

1) Open “3DDescriptor_md1.csv” with Excel and set parameters as shown in Figure 1.

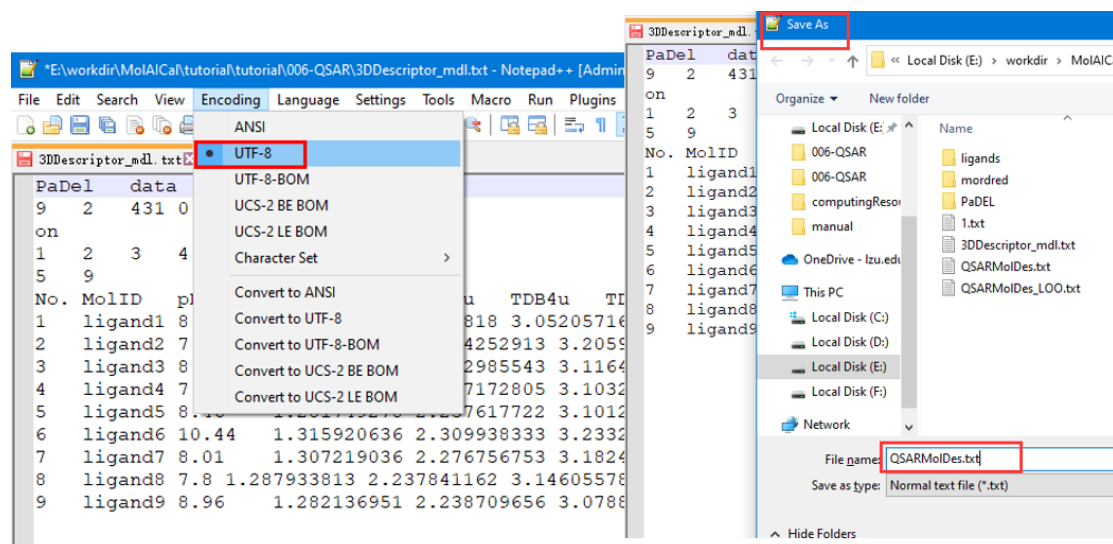


Figure 2. Saving file in UTF-8 format

Notice: Sometimes, Excel cannot save a file in UTF-8 format. So Notepad++ is used for UTF-8 format conversion. If users' Excel can change the file in UTF-8 format, Notepad++ can be omitted.

3.3. QSAR calculations

Running command as below:

```
#> molaical.exe -qsar GA -i QSARMolDes.txt
```

Or

```
#> molaical.exe -qsar GA -i QSARMolDes_LOO.txt
```

If you want to know more parameters for QSAR, please check the manual of MolAlCal. This tutorial just contains 9 ligands. When Q2 is enough for your research, you can stop the QSAR running by keyboard shortcut "Ctrl + C". The results are stored in the file "QSAROutFile.dat". Open "QSAROutFile.dat" and the information is as below:

```
***** The 1th model *****
The Q^2-LOO is: 0.8542
R^2 fitting is: 0.9473
R^2 adjusted is: 0.9210
RSS is: 0.4042
The formula is: y = 0.68376 + (1.12498) * H0p + (2.45137) * Mor26e + (0.79399) * ESpm06d
The standard errors of b0 to b3 corresponding to formula is: 1.83351, 2.17332, 0.25011, 0.23398
The standard error of the regression (sigma) is: 0.2595
The experiment values, predicted values, calculated values by LOO validation and residuals:
8.0      8.1138      8.1743      -0.1138
7.12     7.2904     7.4440     -0.1704
8.43     8.5246     8.5705     -0.0946
7.96     7.7950     7.6441     0.1650
8.46     8.7477     8.8000     -0.2877
10.44    10.5084    10.7288    -0.0684
8.01     7.8877     7.8584     0.1223
7.8      7.9168     8.3305     -0.1168
8.96     8.5185     8.3828     0.4415
9.24     9.1171     9.0764     0.1229
```

Notice: if users want to explain the molecular descriptors, they can refer to the document in <https://github.com/MolAlCal/documents/tree/master/manual/descriptors-instructions>

Consideration: If the value of Y corresponds to the output values of binary classification or multi-label classification, this tutorial can be applied to the training tasks for binary classification or multi-label classification with appropriate data processing. For example, pKd values are replaced with 0 and 1. After training, a predicted value greater than 0.5 is designated as label 1, while one less than or equal to 0.5 is designated as label 0.

References

1. Yap CW. PaDEL-descriptor: an open source software to calculate molecular descriptors and fingerprints. J Comput Chem. 2011;32(7):1466-74. Epub 2011/03/23. doi: 10.1002/jcc.21707. PubMed PMID: 21425294.
2. Moriwaki H, Tian YS, Kawashita N, Takagi T. Mordred: a molecular descriptor calculator. J Cheminform. 2018;10(1):4. Epub 2018/02/08. doi: 10.1186/s13321-018-0258-y. PubMed PMID: 29411163; PubMed Central PMCID: PMC5801138.