Practical → 4

Q] Create tables salesman having schema, salesman (sales_id, salesman_name, salesman_address, sales_done)
customer (customer_id, customer_name, customer_address))
Establish 1 to M relationship between two tables and insert atleast 5 records and display 5 records in table execute following queries.

1] Find the avg salesdone
2] Find the customers staying in Mumbai
3] Create index on salesman name
4] Drop index created
5] Find salesman name who has done maximum sale.

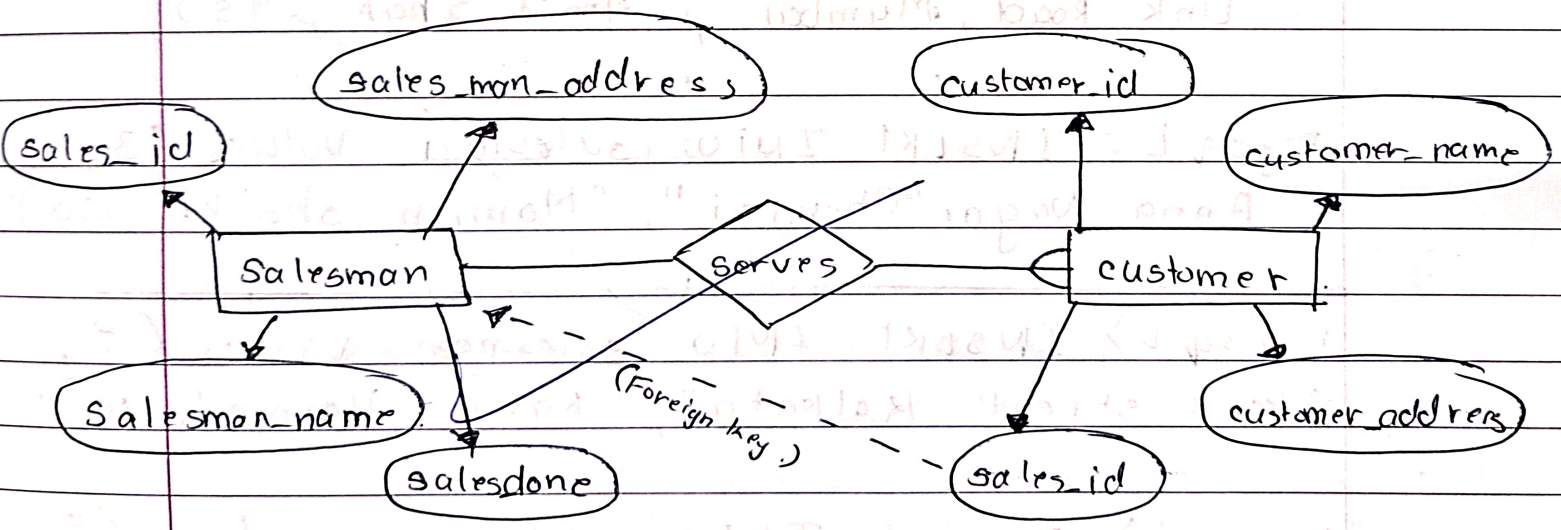

* Creating database.

mysql> Create database salesdb;
mysql> use salesdb;

* Creating table salesman.

mysql> create table salesman (
sales_id int primary key,
sales_man_address varchar (90),
salesman_name varchar (50),
sales_done int);

* Inserting values into salesman

mysql> INSERT INTO salesman Values(1, "MG Road Pune", "Ramesh kumar", 120);

mysql> INSERT INTO salesman Values (2, "Link Road, Mumbai", "Amit Shah", 95);

mysql> INSERT INTO salesman values (3, "Anna Nagar, Chennai", "Momin shaikh", 150);

mysql> INSERT INTO salesman values (4, "Park street, Kolkata", "Rahul Verma", 80);

mysql> INSERT INTO salesman values (5, "Banjara Hills, Hyderabad", "Nikhil Rao", 110);

* Displaying table salesman.

mysql> select * From salesman;

sales_id	sales_man_address	salesman_name	sales_done
1	MG Road, Pune	Ramesh kumar	120
2	Link Road, Mumbai	Amit shah	95
3	Anna Nagar, Chennai	Momin shaikh	150
4	Park street, Kolkata	Rahul Verma	80
5	Banjara Hills, Hyderabad	Nikhil Rao	110

* Creating table customer.

mysql> Create table customer (
customer_id int primary key,
customer_name varchar (60),
customer_address varchar (90),
sales_id int
);

* Inserting values into customer.

mysql> INSERT INTO customer values (101, "Ayesha khan", "Camp area, Pune", 1);

mysql> INSERT INTO customer values (102, "Rohit Mehta", "Andheri West, Mumbai", 2);

mysql> INSERT INTO customer values (103, "Neha Sharma", "Indira Nagar, Bengaluru", 3);

mysql> INSERT INTO customer values (104, "Imran Shaikh", "Andheri West, Mumbai", 4);

mysql> INSERT INTO customer values (105, "Pooja Patel", "Narangpura, Ahmedabad", 5);

* Displaying table.

mysql> select * from customer;

customer_id	customer_name	customer_address	sales_id
101	Ayesha khan	Camp area, Pune	1
102	Rohit Mehta	Andheri west, Mumbai	2
103	Neha Sharma	Indira Nagar, Bangaluru	3
104	Imran Shaikh	Andheri West, Mumbai	4
105	Pooja Patel	Narangpura, Ahmedabad	5

* Find the customers staying in Mumbai

mysql> select * from customer where customer_address = "Andheri West, Mumbai";

customer_id	customer_name	customer_address	sales_id
102	Rohit Mehta	Andheri west, Mumbai	2
104	Imran Shaikh	Andheri West, Mumbai	4

* Creating index on salesman name.

mysql> create index idx_salesman_name on salesman_name ~~)~~ (salesman_name);

* Drop index created.

mysql> drop index idx_salesman_name on salesman;

* Find the avg salesdone.

mysql> select avg (sales_done) as avg_salesman from salesman;

avg_salesman
111.000

* Find salesman name who has done maximum sale.

mysql> select salesman_name from salesman where sales_done = (select max (sales_done) from salesman);

salesman_name
Momin shaikh