Name: Momna khuram

Sap Id: 55430

Task 1:

Login:

```
<!DOCTYPE html>
<html>
<head>
    <link rel="stylesheet"href ="style.css">
    <meta charset="UTF-8" />
    <title>login page</title>
</head>
<body>
    <div class="main"
<form>
<h3>LOGIN FORM</h3>
<label>Email:</label>
<br>
<input type="text" placeholder="username" required>
<br>
<label>Password:</label>
<br>
<input type="password" placeholder="Enter your password" required>
</form>
 Don't have an account <a href="signup.html">Sign-up Here</a>
<button>login</button>
```

```
</div>
</body>
</html>
```



Signup:

```
<label>Username:</label>
    <input type="text" name="username" required>
    <label>Email:</label>
    <input type="email" name="email" required>
    <label>Password:</label>
    <input type="password" name="password" required>
    <label>Confirm Password:</label>
    <input type="password" name="confirm_password" required>
    <button type="submit">Register</button>
     Already have an account <a href="login.html">Login Here</a>
</form>
<button>login
</div>
</body>
</html>
```

Styling.css

```
body {

font-family: 'Times New Roman', Times, serif;
```

```
background-color: rgb(240, 240, 241);
   margin: 0;
   padding: 0;
   background-color: rgba(87, 139, 191, 0.79);
   overflow: hidden;
   display: flex;
    justify-content: space-between;
   align-items: center;
   padding: 10px 20px;
.navbar .logo {
   color: rgb(0, 0, 0);
   font-size: 24px;
    font-weight: bold;
   width: 30%;
   margin: 30px auto;
   padding: 15px;
   background: white;
   box-shadow: 0px 0px 10px rgba(0, 0, 0, 0.1);
   border-radius: 8px;
   text-align: center;
form {
   gap: 8px;
```

```
margin-bottom: 10px;
    font-size: 22px;
    font-weight: bold;
label {
    font-weight: bold;
   font-size: 16px;
   text-align: left;
input[type="text"],
input[type="email"],
input[type="password"] {
   width: 100%;
   padding: 8px;
   margin-top: 3px;
   border-radius: 5px;
    font-size: 14px;
    font-weight: bold;
button {
   background-color: rgba(86, 160, 235, 0.79);
    font-size: 16px;
    font-weight: bold;
   padding: 8px;
   border: none;
   border-radius: 5px;
   margin-top: 8px;
button:hover {
```


```
background-color: rgba(65, 131, 218, 0.9);

}

p {
    margin-top: 8px;
    font-size: 14px;
    font-weight: bold;
}

p a {
    color: blue;
    text-decoration: none;
    font-weight: bold;
}

p a:hover {
    text-decoration: underline;
}
```

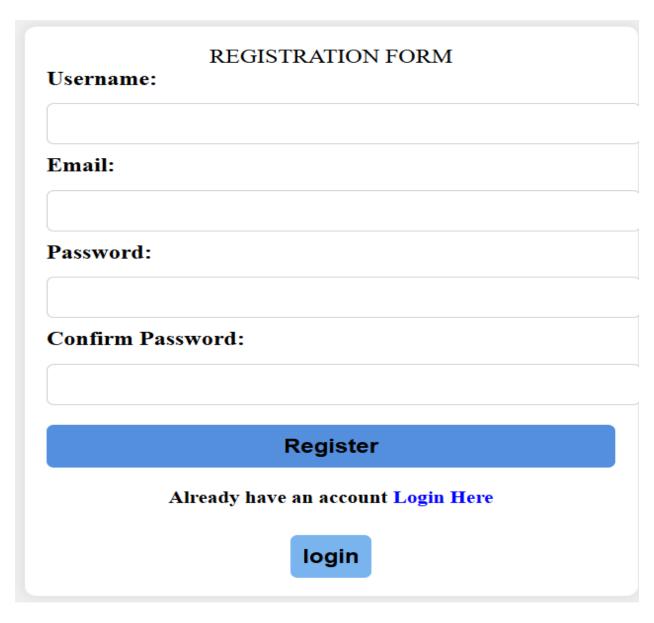

Task 2:

Index.Html:

```
<meta name="viewport" content="width=device-width, initial-</pre>
scale=1.0">
    <title>MyWebsite</title>
    <style>
        .slider {
            width: 100%;
            max-width: 800px;
            height: 400px;
            overflow: hidden;
            position: relative;
            margin: auto;
        .slides {
            display: flex;
            width: 500%;
            transition: transform 0.5s ease-in-out;
        .slides img {
            width: 100%;
            height: auto;
        .prev, .next {
            position: absolute;
            top: 50%;
            transform: translateY(-50%);
            background-color: rgba(0, 0, 0, 0.5);
            color: white;
```

```
border: none;
           padding: 10px;
           cursor: pointer;
       .prev { left: 10px; }
       .next { right: 10px; }
   </style>
</head>
<body>
   <nav class="navbar">
       <div class="logo">MyWebsite</div>
       <a href="#">Home</a>
           <a href="#">Services</a>
           <a href="#">Contact</a>
           <a href="login.html">Sign In</a>
           <a href="signup.html">Sign Up</a>
       </nav>
   <div class="slider">
       <div class="slides">
           <img src="images.html/image2.jpg" alt="slide 2">
           <img src="images.html/image4.jpg" alt="slide 3">
           <img src="C:\Users\INFOTECH\OneDrive\Desktop\web app</pre>
development\images.html\image3.jpg" alt="slide 4">
           <img src="C:\Users\INFOTECH\OneDrive\Desktop\web app</pre>
development\images.html\image3.jpg" alt="slide 5">
```

```
<img src="images.html/image2.jpg" alt="slide 3">
        </div>
        <button class="prev" onclick="prevSlide()">&#10094;</button>
        <button class="next" onclick="nextSlide()">&#10095;</button>
    </div>
    <script>
        let index = 0;
        function showSlide(n) {
            let slides = document.querySelector('.slides');
            let totalSlides = document.querySelectorAll('.slides
img').length;
            if (n >= totalSlides) index = 0;
            if (n < 0) index = totalSlides - 1;</pre>
            slides.style.transform = `translateX(${-index * 100}%)`;
        function nextSlide() {
            index++;
            showSlide(index);
        function prevSlide() {
            index--;
            showSlide(index);
        setInterval(nextSlide, 3000); // Auto-slide every 3 seconds
    </script>
</body>
```

Style.css:

```
body{
font-family: 'Times New Roman', Times, serif;
background-color: rgb(240, 240, 241);
margin: 0;
padding: 0;
}
.navbar{
  background-color: rgba(219, 201, 40, 0.79);
  overflow: hidden;
  display:flex;
  justify-content: space-between;
  align-items: center;
  padding: 10px 20px;
}
.navbar.logo{
```

```
color: rgb(0, 0, 0);
font-size:24px;
font-weight: bold;
```



```
<!DOCTYPE html>
<html lang="en">
<head>
    <link rel="stylesheet" href="style.css">
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-</pre>
scale=1.0">
    <title>Website Layout</title>
    <style>
        body {
            font-family: Arial, sans-serif;
            margin: 0;
            padding: 0;
            background-color: #f2f2f2;
        .header {
            background-color: #4f4f4f;
    color: white;
    text-align: center;
    padding: 20px;
    font-size: 24px;
    font-weight: bold;
    position: relative;
    display: flex;
    align-items: center;
    justify-content: center;
```

```
.header .logo {
   position: absolute;
   left: 10px;
   top: 50%;
   transform: translateY(-50%);
   width: 80px;
        .footer {
            background-color: #4f4f4f;
            color: white;
           text-align: center;
            padding: 20px;
            font-size: 24px;
           font-weight: bold;
       }
        .container {
            display: flex;
            justify-content: space-between;
            align-items: center;
            background-color: #ccc;
            padding: 20px;
       .left, .right {
           width: 20%;
           text-align: center;
```

```
.left a {
            display: block;
            color: blue;
            text-decoration: none;
            margin: 10px 0;
        .middle {
            width: 55%;
            background-color: #e0e0e0;
            padding: 20px;
        }
    </style>
</head>
<body>
    <div class="header">
    <img src="C:\Users\INFOTECH\OneDrive\Desktop\web app</pre>
development\images.html\Riphahlogo.jpg"alt="Logo" class="Logo"width="
100px">
    Web App Development
</div>
    <div class="container">
        <div class="left">
            Courses:
            <a href="#">WAD</a>
            <a href="#">Enterprise</a>
            <a href="#">Database</a>
        </div>
```

```
<div class="middle">
            <h3>How to Understand Backend Development?</h3>
            >Backend development is responsible for handling server-
side logic, databases, and APIs. To become a backend developer, you
should learn programming languages like Python, Node.js, PHP, or Java.
Understanding databases such as MySQL, MongoDB, or PostgreSQL is also
essential.
        </div>
        <div class="right">
            <img src="C:\Users\INFOTECH\OneDrive\Desktop\web app</pre>
development\images.html\Riphahlogo.jpg" alt="Logo" width="150px">
        </div>
    </div>
    <div class="footer">Understanding Backend Development</div>
</body>
</html>
```