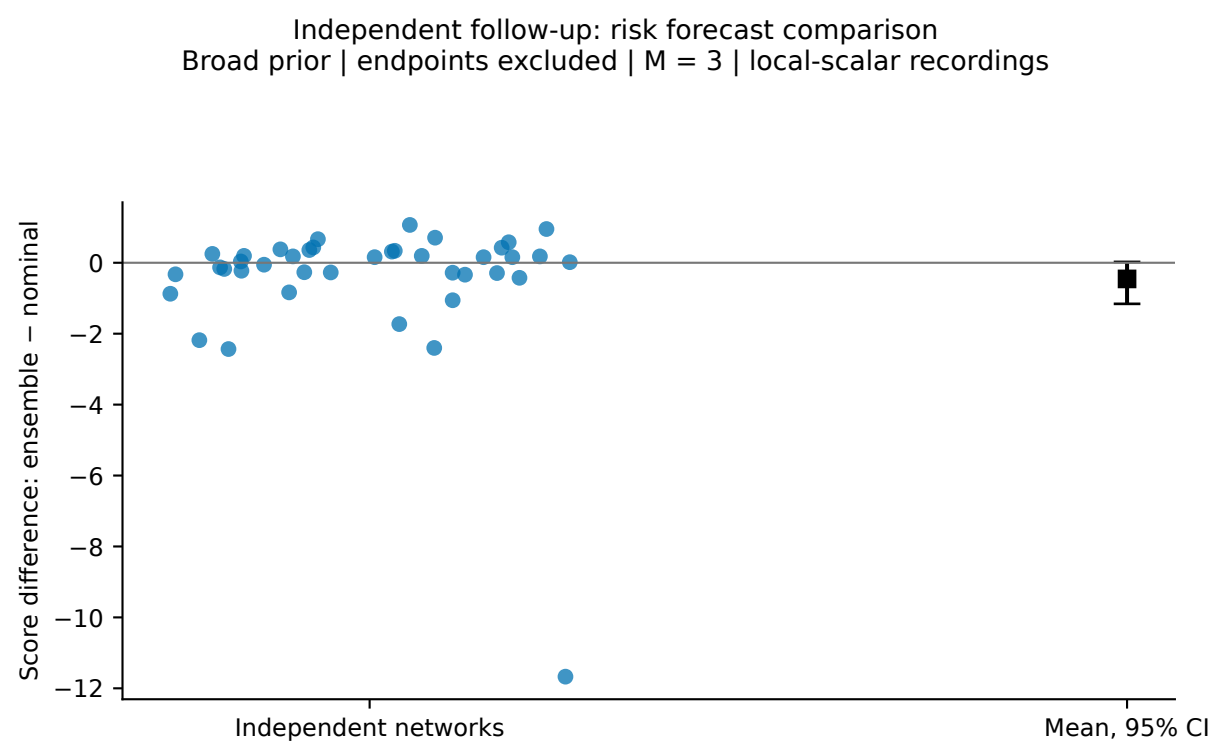

n = 40 independent networks; 3 truths × 3 noise draws × 3 readouts per network.
Identical recording sets and point predictions; negative score difference favors ensemble.
95% paired network-cluster bootstrap CI; all networks retained.