
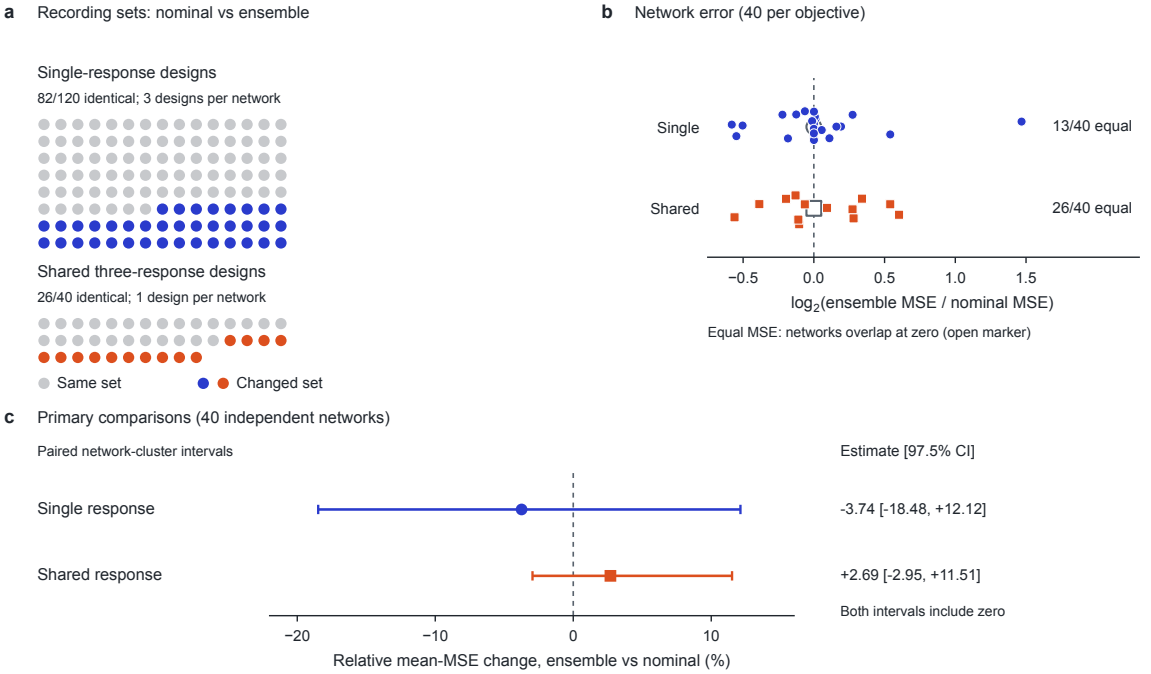


Recording decisions and response error in simulated networks.

a, Each dot is one design: 120 single-response designs (3 per network) and 40 shared designs (1 per network). Grey denotes the same recording set under both criteria.
b, Each coloured mark is a network-level MSE ratio; vertical jitter separates marks and has no scientific units. Open markers aggregate exact zero ratios (13/40, 26/40).
c, Relative effect = 100 x (mean ensemble MSE / mean nominal MSE - 1), not the mean of network percentage changes. Prespecified paired network-cluster 97.5% intervals include zero. Known connectivity; N = 12; recording budget = 3; endpoints excluded.

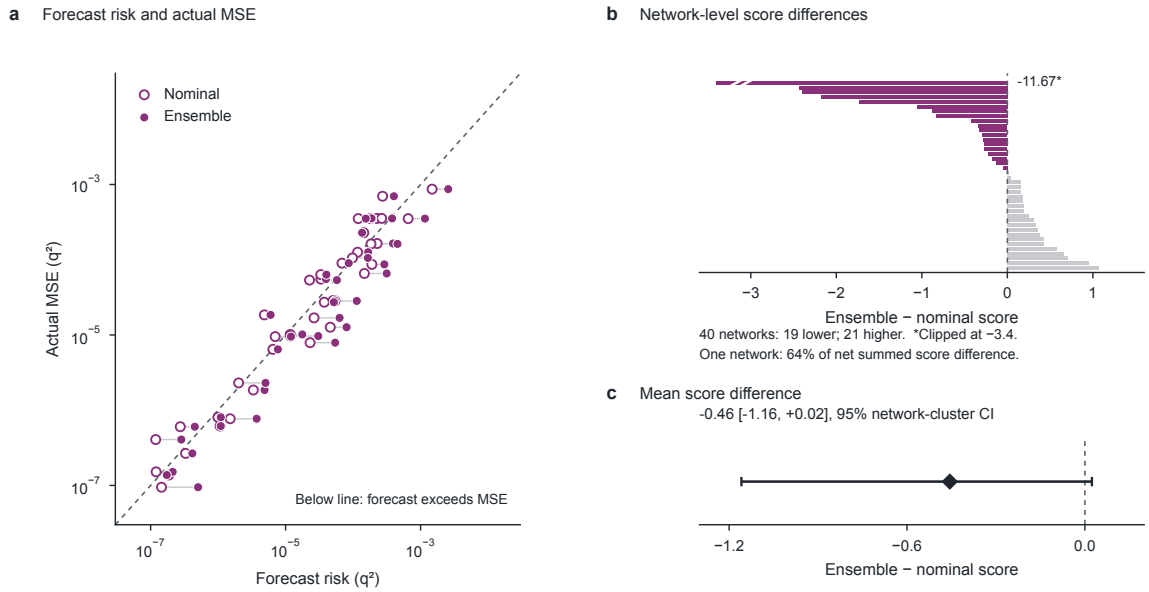

Risk forecasts for fixed predictions in 40 new simulated networks.

a, Each connected pair shares the same network and observed response MSE; only the risk forecast changes. Ensemble denotes prior-averaged local risk. The identity line is descriptive and does not test calibration. b, Network means of case scores S(v,e) = log(v) + e^2/v; lower scores are better. Differences are ensemble minus nominal. All 40 values are retained; the -11.67 bar is clipped at -3.4 and marked explicitly. That network contributes about 64% of the SIGNED total difference (-18.23), not of the absolute differences. c, Frozen mean difference and paired network-cluster 95% interval; it includes zero. Shown values are rounded; exact source values are unchanged.