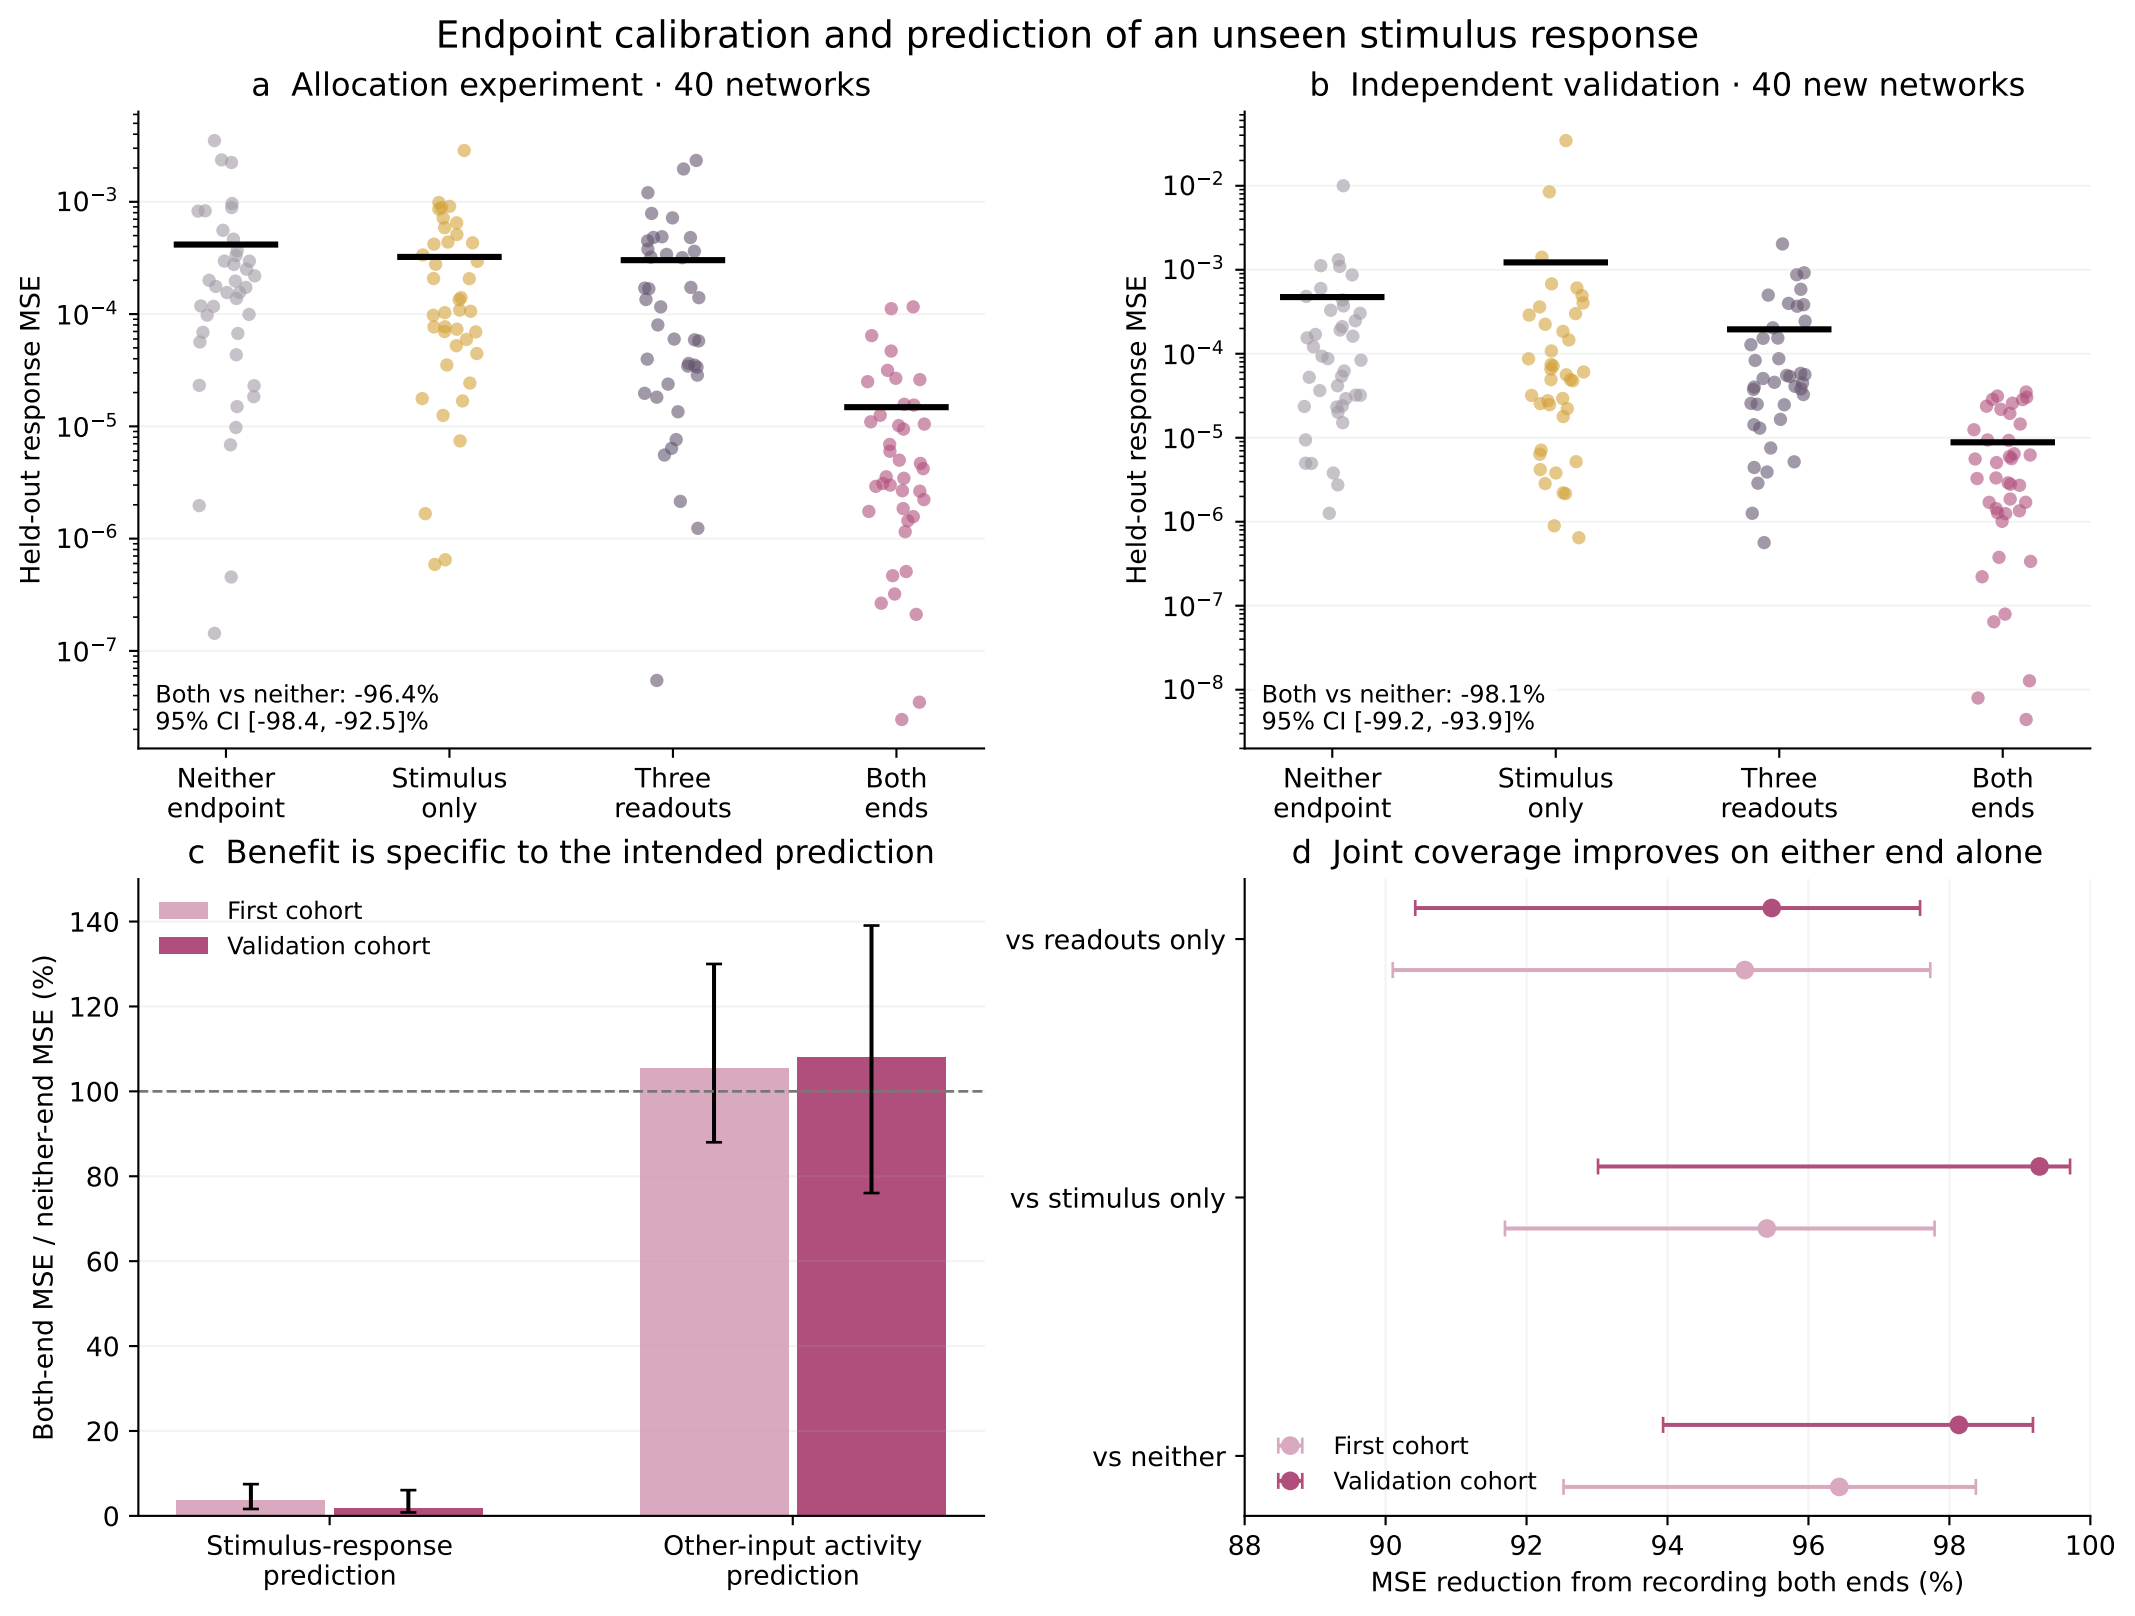
Endpoint calibration and prediction of an unseen stimulus response
a Allocation experiment · 40 networks
Held-out response MSE
Both vs neither: -96.4%
95% CI [-98.4, -92.5]%
Neither endpoint
Stimulus only
Three readouts
Both ends
b Independent validation · 40 new networks
Held-out response MSE
Both vs neither: -98.1%
95% CI [-99.2, -93.9]%
Neither endpoint
Stimulus only
Three readouts
Both ends
c Benefit is specific to the intended prediction
First cohort
Validation cohort
Both-end MSE / neither-end MSE (%)
Stimulus-response prediction
Other-input activity prediction
d Joint coverage improves on either end alone
vs readouts only
vs stimulus only
vs neither
First cohort
Validation cohort
MSE reduction from recording both ends (%)