Endpoint information constrains intervention-response prediction

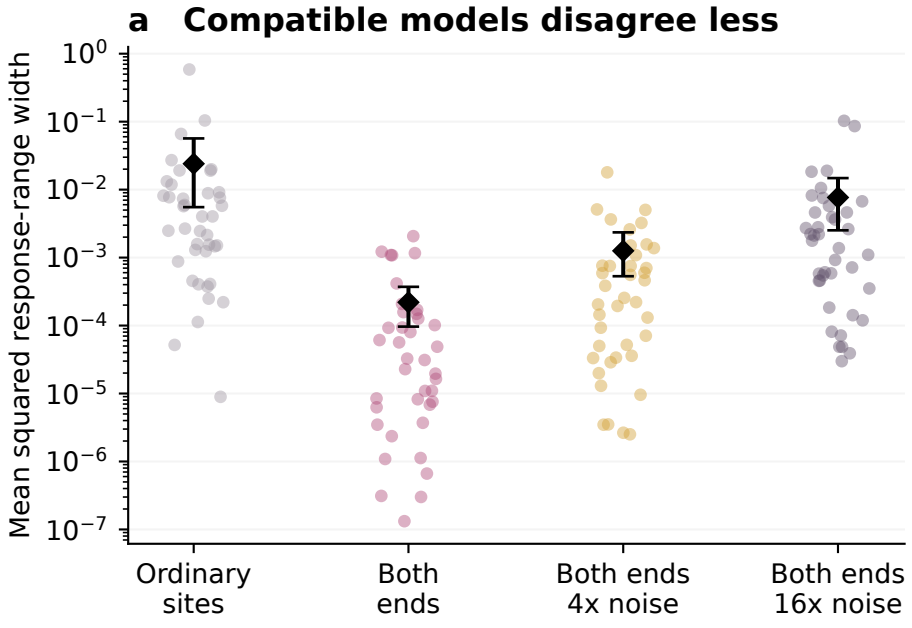

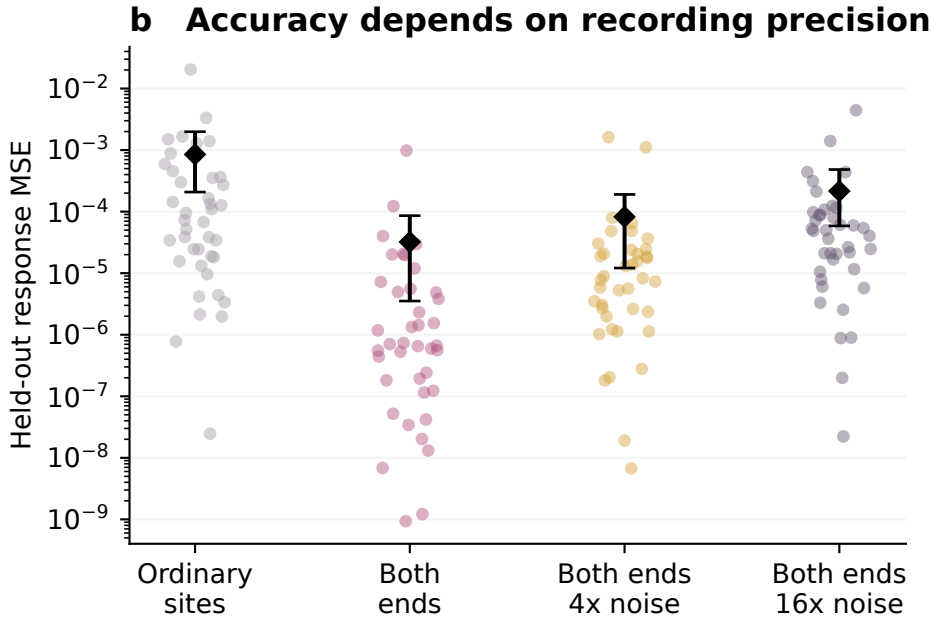

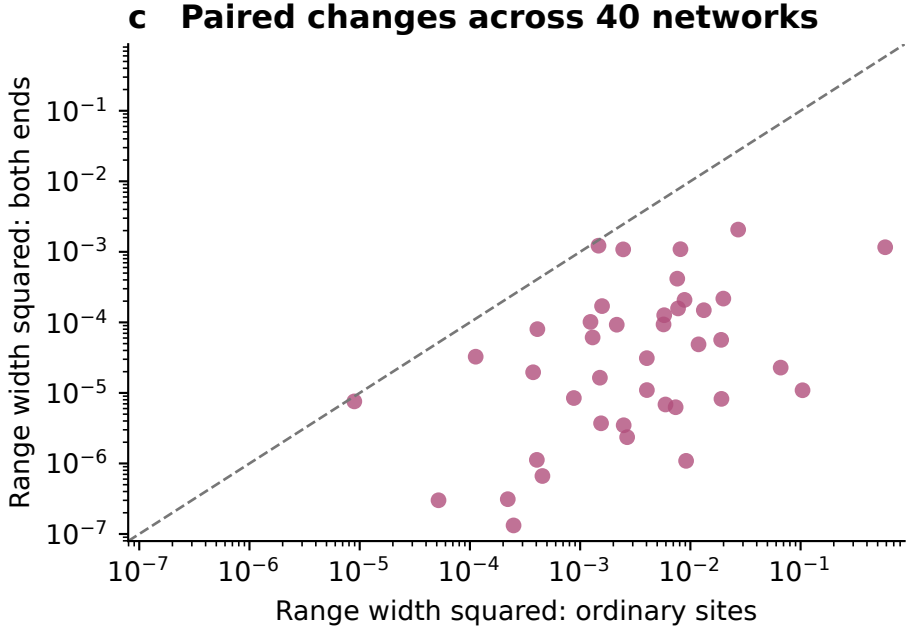

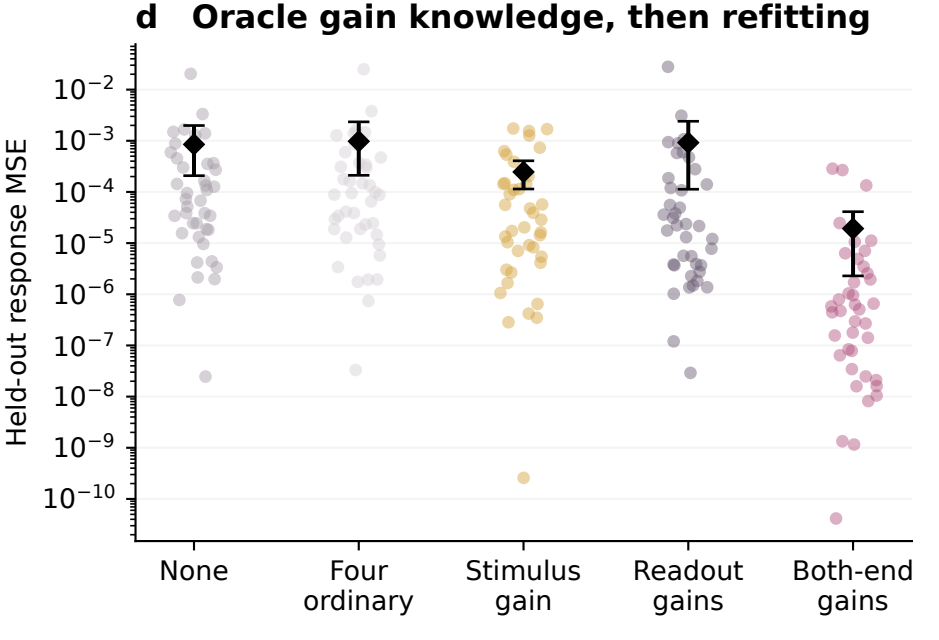

Dots: independent networks. Diamonds: arithmetic means and 95% bootstrap intervals.
Response ranges use a common MAP-objective allowance of 2; they are numerical feasible spans, not confidence intervals.