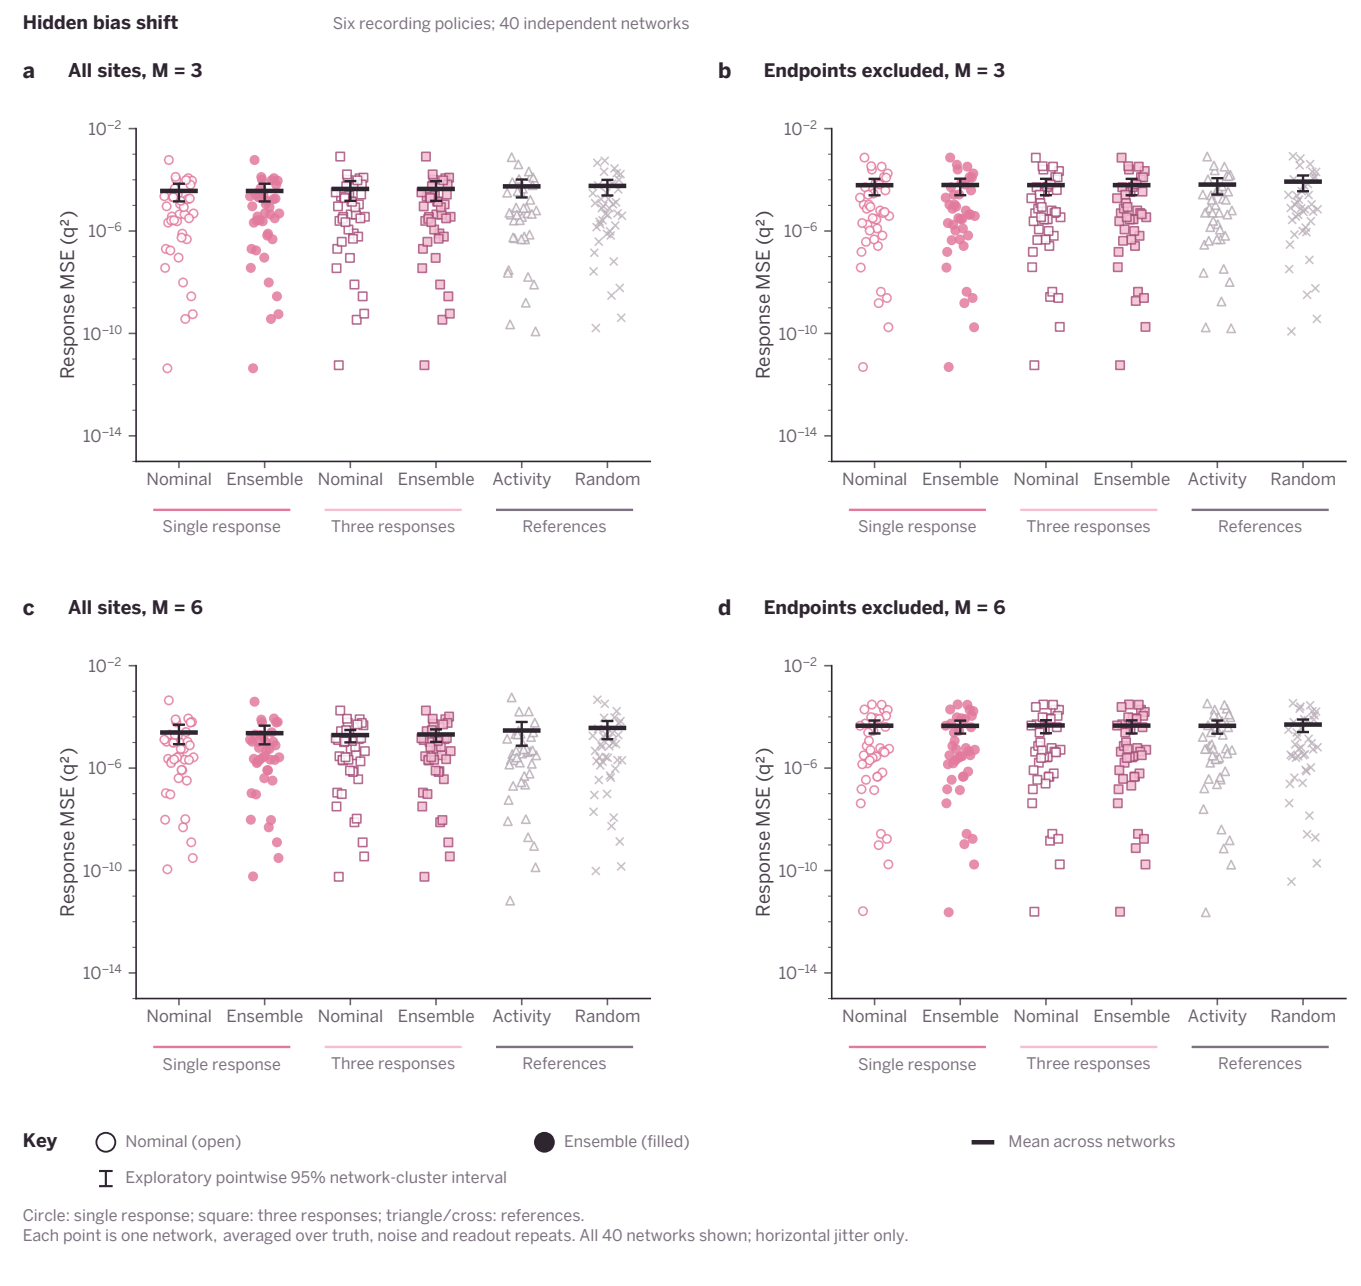
Hidden bias shift
Six recording policies; 40 independent networks
a
All sites, M = 3
b
Endpoints excluded, M = 3
c
All sites, M = 6
d
Endpoints excluded, M = 6
Response MSE (q²)
10⁻²
10⁻⁶
10⁻¹⁰
10⁻¹⁴
Nominal
Ensemble
Nominal
Ensemble
Activity
Random
Single response
Three responses
References
Key
Nominal (open)
Ensemble (filled)
Mean across networks
Exploratory pointwise 95% network-cluster interval
Circle: single response; square: three responses; triangle/cross: references.
Each point is one network, averaged over truth, noise and readout repeats. All 40 networks shown; horizontal jitter only.