a **Response ambiguity**

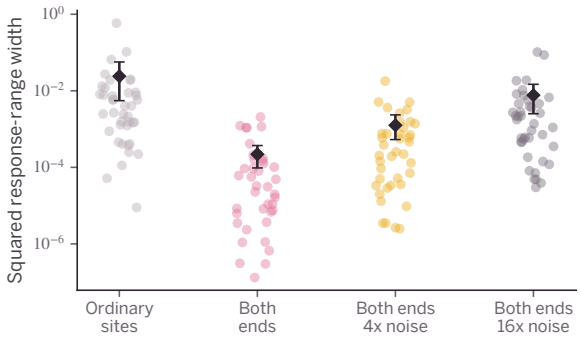

b **Recording precision**

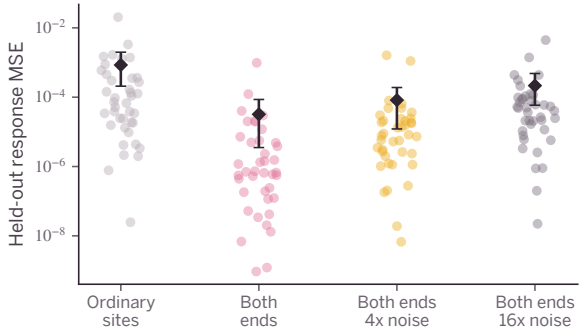

c **Paired response ranges**

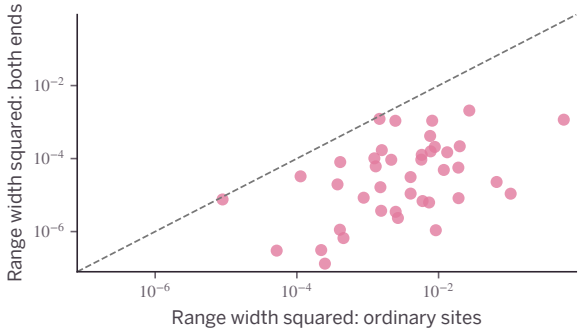

d **Gain information, then refitting**

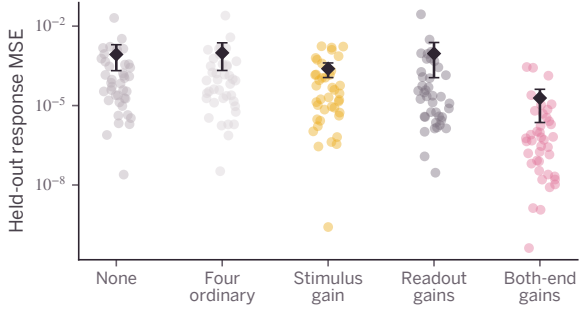

Dots: independent networks. Diamonds: arithmetic means and 95% bootstrap intervals.
Response ranges use a common MAP-objective allowance of 2; they are numerical feasible spans, not confidence intervals.