## Rewi aka Ryu's Blog

Just a few lines of code.

## HOWTO: Install and use browscap respectively get\_browser() for PHP on Ubuntu (Debian)

NOVEMBER 20, 2012 <u>LEAVE A COMMENT (HTTPS://REWGAZ.WORDPRESS.COM/2012/11/20/HOWTO-INSTALL-AND-USE-BROWSCAP-RESPECTIVELY-GET\_BROWSER-FOR-PHP-ON-UBUNTU-DEBIAN/#RESPOND)</u>

PHP Manual: <a href="http://php.net/manual/en/function.get-browser.php">http://php.net/manual/en/function.get-browser.php</a>)

\$browser = get\_browser(\$\_SERVER['HTTP\_USER\_AGENT'], true);
print r(\$browser);


Download: <a href="mailto:php\_browscap.ini">php\_browscap.ini</a> (<a href="http://tempdownloads.browserscap.com/">http://tempdownloads.browserscap.com/</a>) (<a href="http://tempdownloads.browserscap.com/">http://tempdownloads.browserscap.com/</a>)

You can put the file anywhere. I placed it here: /etc/php5/apache2/php browscap.ini

Edit your: php.ini

[browscap]

; <a href="http://php.net/browscap">http://php.net/browscap</a> (http://php.net/browscap) browscap = "/etc/php5/apache2/php\_browscap.ini"

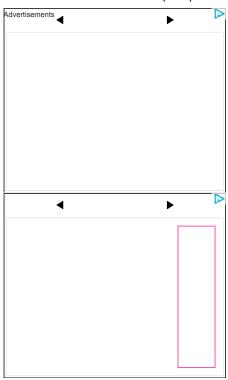

FILED UNDER PHP, UNIX/LINUX

TAGGED WITH BROWSCAP, DEBIAN, GET\_BROWSER, PHP, UBUNTU

Create a free website or blog at WordPress.com.