

Selenium 4 New Architecture

W3C WebDriver Protocol

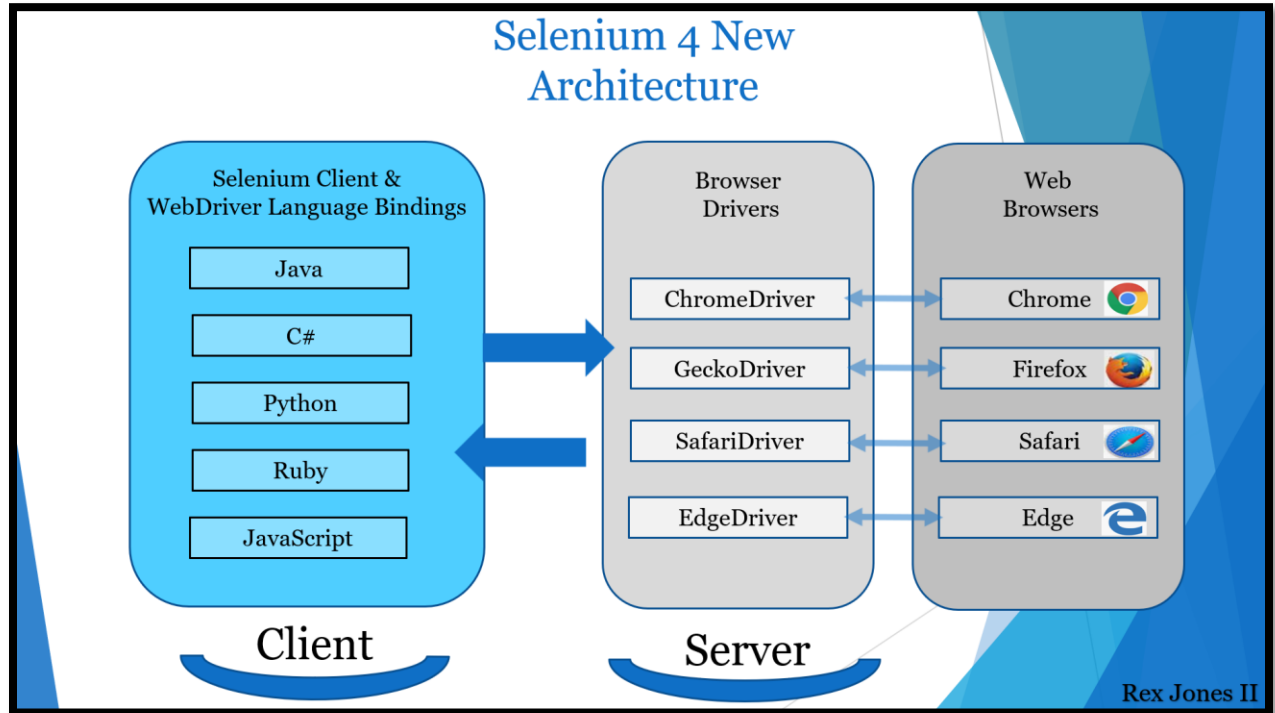


Table of Contents

W3C WebDriver Protocol.....	2
Components.....	2
Direct.....	2
Remote.....	4
Advantages.....	5
Standards	5
Stability	5
Actions API	6
Mobile Automation.....	6
Cloud Platforms.....	6

W3C WebDriver Protocol


The W3C WebDriver Protocol has at least 3 advantages. #1 It provides standards #2 It provides stability and #3 It provides an updated Actions API that is supplied with better resources. I will talk about all 3 and get straight to the point.

If you are interested in more videos, you can subscribe to my YouTube channel and click the bell icon. You can also follow me on Twitter, connect with me on LinkedIn and Facebook. I will also place the transcript and presentation slides on GitHub.

In this session, I am going to speak about the Selenium 4 Components, Advantages, Mobile Automation, and Cloud Platforms.

Components

Starting with the components, Selenium has moved from 3 to 4 because of the W3C WebDriver Protocol. This is an example of Selenium 3 which includes the JSON Wire Protocol. The objective of JSON Wire Protocol was to transfer information from the client to the server. That information was processed over HTTP by sending HTTP Requests and receiving HTTP Responses.

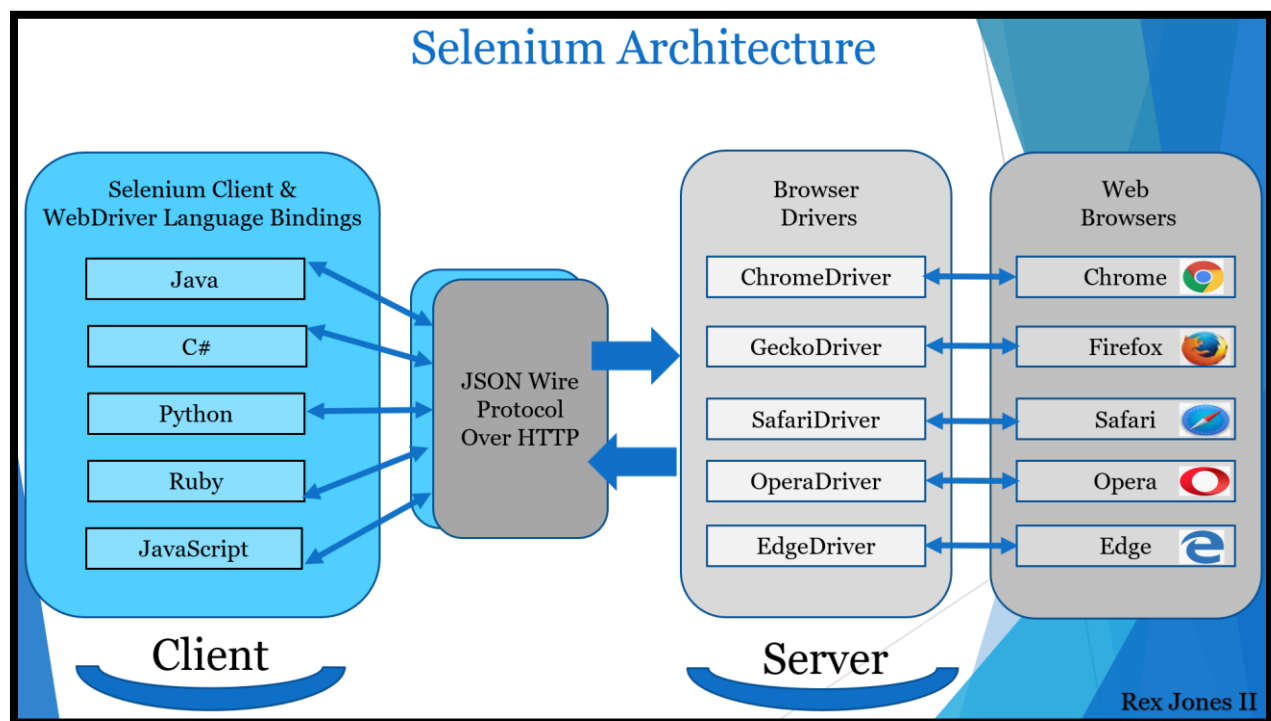


Direct

With Selenium 4, the JSON Wire Protocol has been removed from the new architecture. Now, there is direct communication between the Browser Drivers and Selenium Client & WebDriver Language Bindings. The 1st component has 2 parts combined into one. Selenium Client is a separate part and


WebDriver Language Bindings is a different part. Selenium is an API that have commands for automating our browser. WebDriver has only 1 job and that job is talk to the browser through a driver.

Each language has their own bindings. Bindings mean the same commands written for Java is also written for C#, Python, Ruby, and JavaScript. You may have noticed that Selenium added support for the W3C protocol starting at version 3.8. According to Simon Stewart, in this Selenium 4 Webinar with BrowserStack, he mentioned the versions of Selenium since 3.8 have spoken to both JSON Wire Protocol and W3C Protocol. After running your Test Script, look for INFO: Detected dialect: W3C to see if your Selenium version is speaking to W3C. Both of these screenshots show W3C for Selenium 3.8 and Selenium 4. If not W3C then it will show OSS which means Open Source Software.

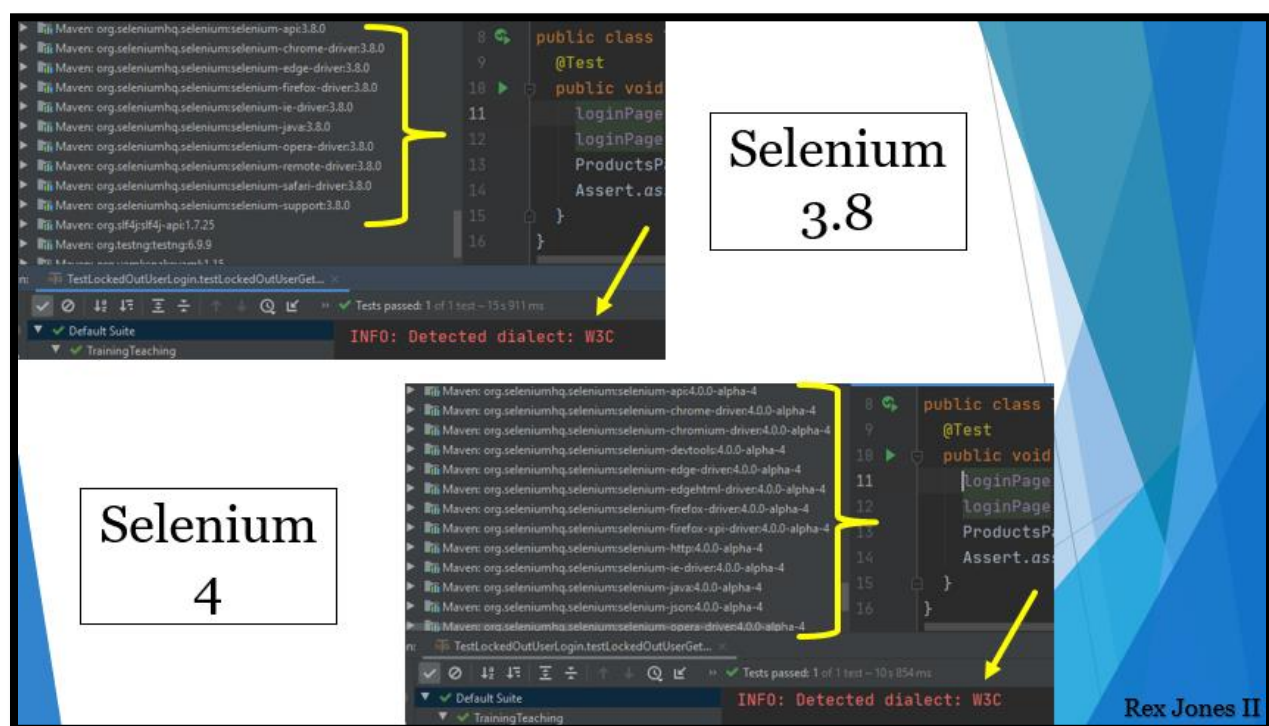

Back to our diagram, we see the 2nd component is Browser Drivers and it have 2 functions. The first function is to receive a request from Selenium Client & WebDriver Language Bindings then pass that request to the browser. A driver also known as a proxy is responsible for controlling the browser. The second function is to return a response from the browser back to the Selenium Client & WebDriver Language Bindings. All of the drivers use the W3C WebDriver Protocol and most of them are created by the browser vendors.


When it comes to the 3rd component Web Browsers. This is where all of the Selenium Commands are performed. The browser receives a request, performs the request, and sends back a response to the driver. Also, notice how Opera is not available as a driver or browser. In reality, they are still available but I did not add them because the WebDriver implementations are no longer under development so native support has been removed for Opera and Phantom JS.

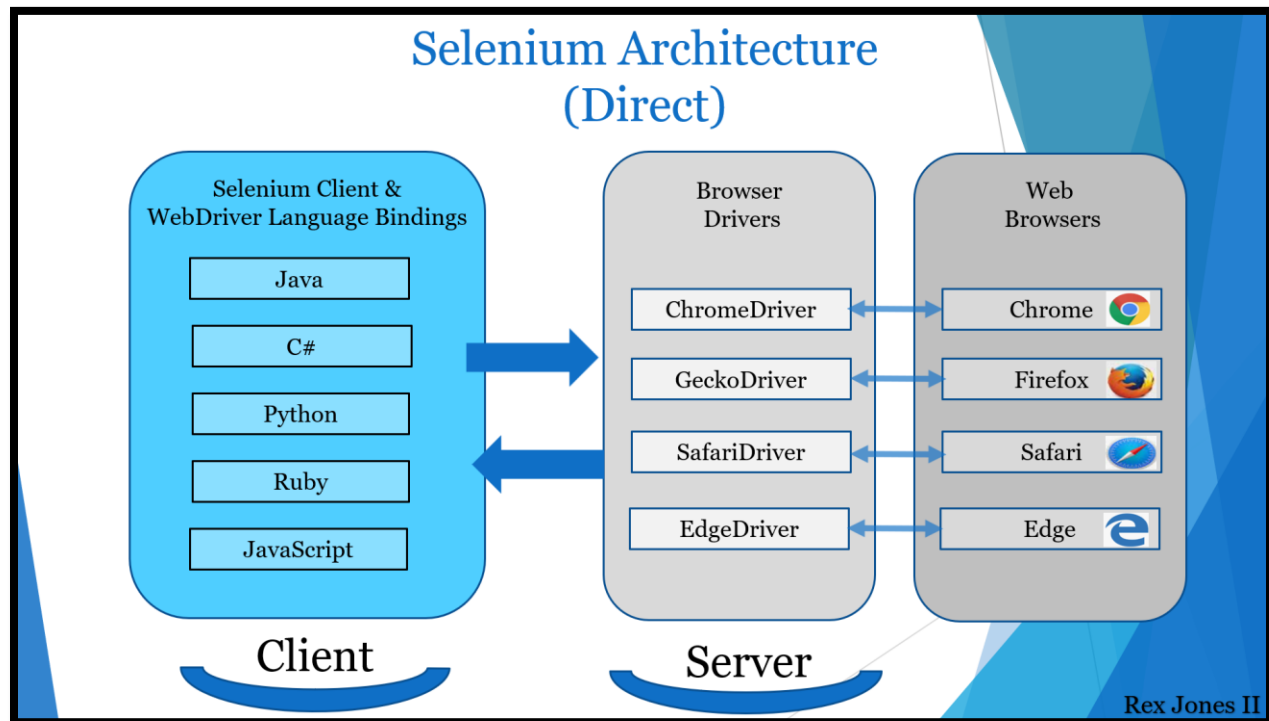

Remote

Remote is another form of communication to the browser. It can happen through the RemoteWebDriver or Selenium Server. The RemoteWebDriver is a class that implements the WebDriver Interface. With Selenium 4, FirefoxDriver and SafariDriver continue to extend RemoteWebDriver. However, ChromeDriver and EdgeDriver no longer extend RemoteWebDriver but they extend ChromiumDriver. In the introduction, I showed how ChromiumDriver, FirefoxDriver, InternetExplorerDriver, OperaDriver, and SafariDriver all extend RemoteWebDriver. We see 3 of the boxes (RemoteWebDriver, Browser Drivers, and Web Browsers) are gray because they all run on the same system.

The Selenium Server is different. It's a way to communicate remotely when talking to the driver but not on the same system as the driver. That's why Selenium Server is a different color. We start the server by using the Selenium Standalone jar file. After it starts, the server directs our Test Scripts to a remote web browser.

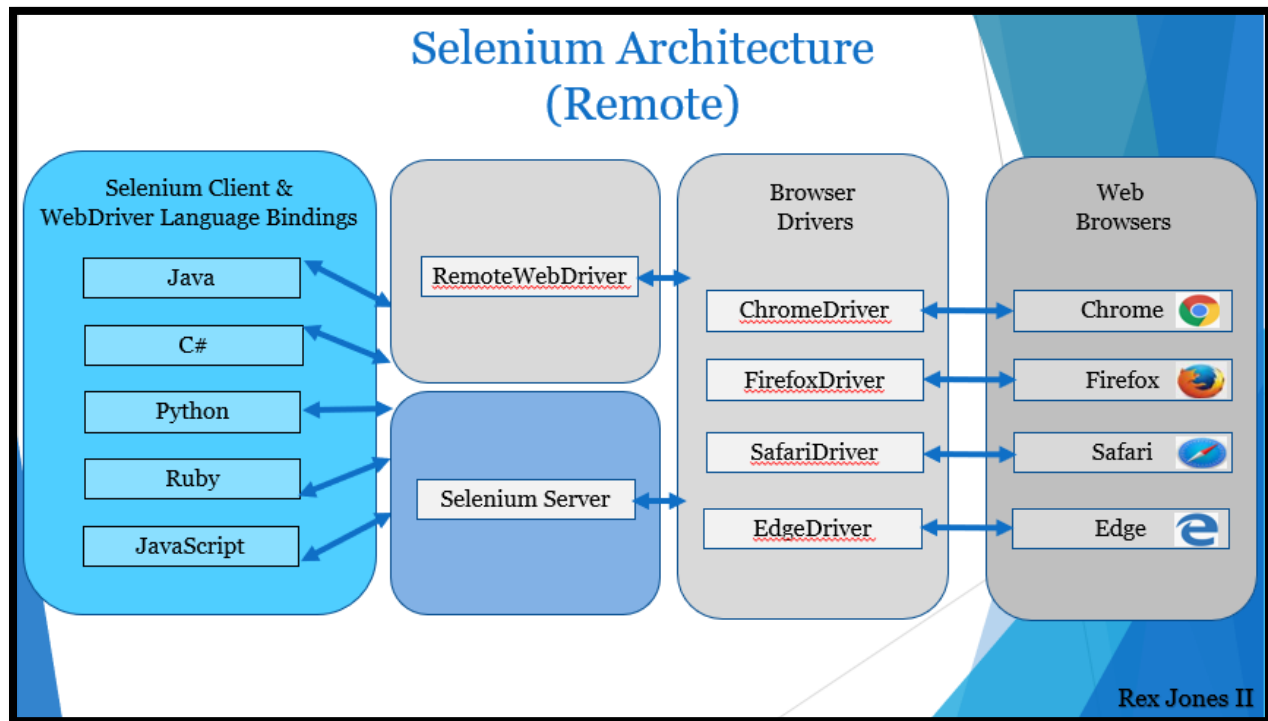

Advantages

Standards

For W3C WebDriver Protocol, the advantages are Standards, Stability, and Actions. W3C stands for World Wide Web Consortium which is an international group of people that create long term standards for the web. With that 1st advantage of standards, our Test Scripts run consistently on each browser. There were times with Selenium 3 that some commands performed offbeat on different browsers. Since Selenium 4 is compliant with W3C WebDriver, there is no more required encoding and decoding of the API request.

Stability

The second advantage is stability. I believe backward compatibility is the main benefit of stability. Per Simon Stewart, they are fully aware that some people will want to use the old JSON Wire Protocol. So, the Java Bindings and the Selenium Server will provide mechanisms for people to use the old JSON Wire Protocol. They know, we have spent time, we have spent effort, and we have been dedicated to building up our Test Suite. Therefore, our Test Suite will remain smooth for Selenium 4. No changes to our Test Scripts unless an API has been marked deprecated. Deprecated API's like the FindsBy Interfaces have been removed from Selenium 4. As a result, the WebDriver API's are going to continue working like there was never a change to Selenium.

Actions API

The updated Actions API is the third advantage. With this API, we can handle keyboard and mouse events like double clicking an element. It's an advantage because Selenium 4 offers a way to perform more than 1 action at the same time like pressing 2 keys. That's an advantage for UI Automation.

Mobile Automation

For Mobile Automation, Appium is the tool used for automating mobile applications. We see on Appium.io site, the introduction shows native, mobile web, and hybrid application on iOS mobile, Android mobile, and Windows desktop platforms. The Appium client library have implemented elements of the W3C Protocol.

Cloud Platforms

Also, Cloud Platforms such as SauceLabs and BrowserStack support W3C WebDriver. However, the format of their capabilities will change. You can go to their site to see what capabilities need to be updated. Here's the page for BrowserStack with an Introduction section, talk about Why changes are being made, What does it mean to me, Updating the Selenium tests, and an Example section that show how capabilities are passed with W3C Protocol. SauceLabs have a page that shows W3C Capabilities Support with sections: What You Will Need, Verifying the Capabilities, W3C WebDriver-Compliant, Instantiating WebDriver with W3C, and Common Test Script Configuration Errors To Avoid. That's it for the W3C WebDriver Protocol. Don't forget to Connect and Subscribe. Next, I will demo the Relative Locators which locate elements based on their relationship to another element.

Contact

- ✓ YouTube <https://www.youtube.com/c/RexJonesII/videos>
- ✓ Facebook <http://facebook.com/JonesRexII>
- ✓ Twitter <https://twitter.com/RexJonesII>
- ✓ GitHub <https://github.com/RexJonesII/Free-Videos>
- ✓ LinkedIn <https://www.linkedin.com/in/rexjones34/>